

VALID FROM 1 APRIL 2026

GEBERIT SANITARY AND BATHROOM CATALOGUE 2026/2027

**KNOW
HOW
INSTALLED**



Geberit Kombifix	11
Geberit Duofix	35
Geberit GIS	101
Concealed Cisterns	137
Exposed Cisterns	147
Fill Valves and Flush Valve Systems	161
Actuator plates and WC flush controls	171
Urinal flush controls	255
Waste fittings and traps for WCs, urinals and bidets	297
Taps	313
Waste fittings and traps for washplaces and kitchen sinks	359
Showers	389
Waste fittings and traps for showers and bathtubs	417
Floor Drainage Systems	435
Geberit ONE	453
Geberit Xeno²	521
Geberit Acanto	547
Geberit iCon	587
Geberit Aniara	651
Geberit Smyle	665
Geberit Selnova Square	697
Geberit Selnova	729
Geberit Selnova Compact	763
Geberit Selnova Comfort	767
Geberit Bastia	779
Geberit VariForm	793
Geberit Option	813
Geberit Bambini	825
Geberit Publica	859
Geberit AquaClean shower toilets	869
Geberit Monolith sanitary modules	903
Urinals	925
Showers	977
Bathtubs	1023
Additional product solutions	1033
Appendix	1045



GEBERIT AND FSC™

The Forest Stewardship Council (FSC) promotes responsible and environmentally friendly forest management worldwide. Geberit uses FSC™ (C134279) certified wood in its bathroom furniture. Look out for products with the FSC label.

Responsibility for FSC™ C134279 certified products

Geberit International AG | Schachenstrasse 77 | CH-8645 Jona | Switzerland

GEBERIT ACTUATOR PLATES PRODUCT RANGE 2026

The actuator plate range from Geberit is simply and clearly structured. You will find perfectly coordinated design families for WCs and urinals in square and round shapes - from economical to exclusive.

ACTUATOR PLATES

SIGMA



SQUARE

01



Sigma01

10



Sigma10



ROUND



Sigma01



Sigma10



Sigma10 IR

OMEGA



SQUARE



Omega10
NEW



ROUND



Omega01
NEW

URINAL FLUSH CONTROLS

TYPE



SQUARE

01



Type01

10



Type01 IR



ROUND



Type01



Type10



Type01 IR



Type10 IR

20



Sigma20

40



Sigma40

50



Sigma50


60

70



Sigma70

80



Sigma80



Sigma20



Sigma40



Sigma50



Omega20



Omega60



Omega20

40



Type40

50



Type50



Type40 IR




Type40





Type40 IR

GEBERIT ONE

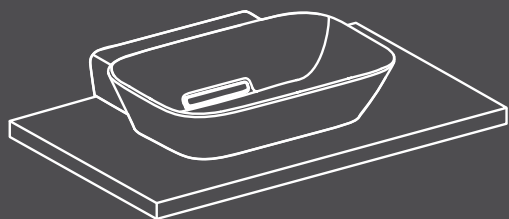


GEBERIT ACANTO

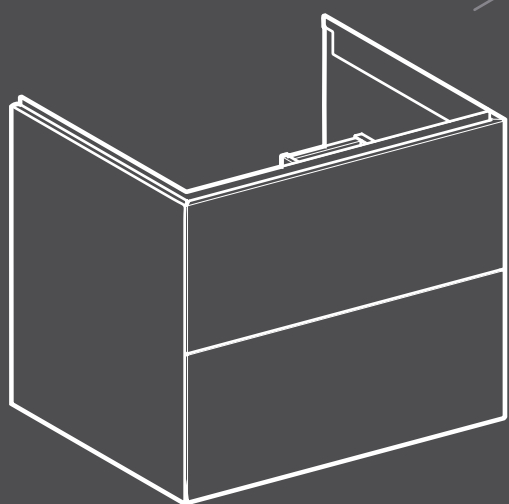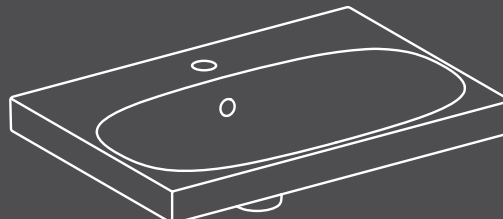

PUSH-TO-OPEN



Versions with one and two drawers.
Coated or melamine

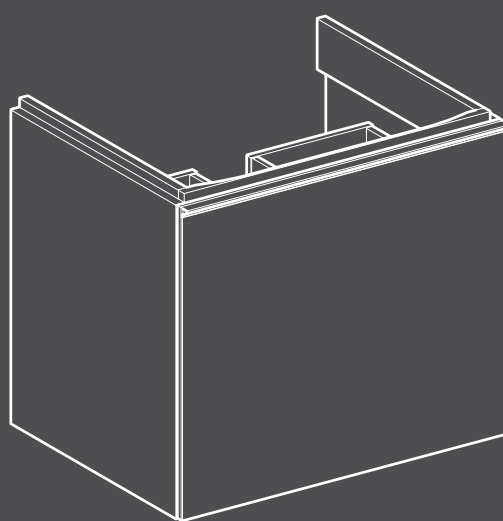

DRAWER WITH HANDLES

One full-front drawer with inner drawer.
Coated, melamine or glass

GEBERIT ICON

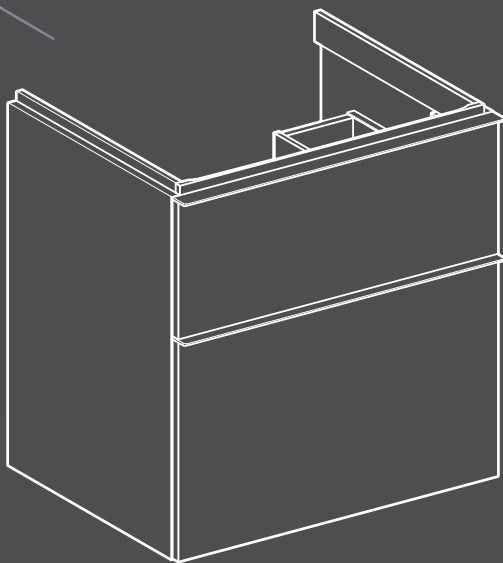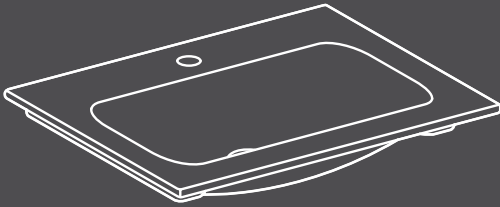


DRAWER WITH HANDLES
Versions with one and two drawers.
Coated or melamine

THE NEW GEBERIT WASHPLACE RANGE

**MIX &
MATCH**

Geberit Mix & Match opens up brand-new possibilities when it comes to washplace design. Washbasins, bathroom furniture and accessories from the Geberit ONE, Acanto and iCon series, plus mirrors from the Option series, can be combined in a modular way and across all series – the possibilities are almost endless. Added flexibility in consultations means you can fulfil virtually all customer wishes. The range is rounded off by a wide selection of accessories.

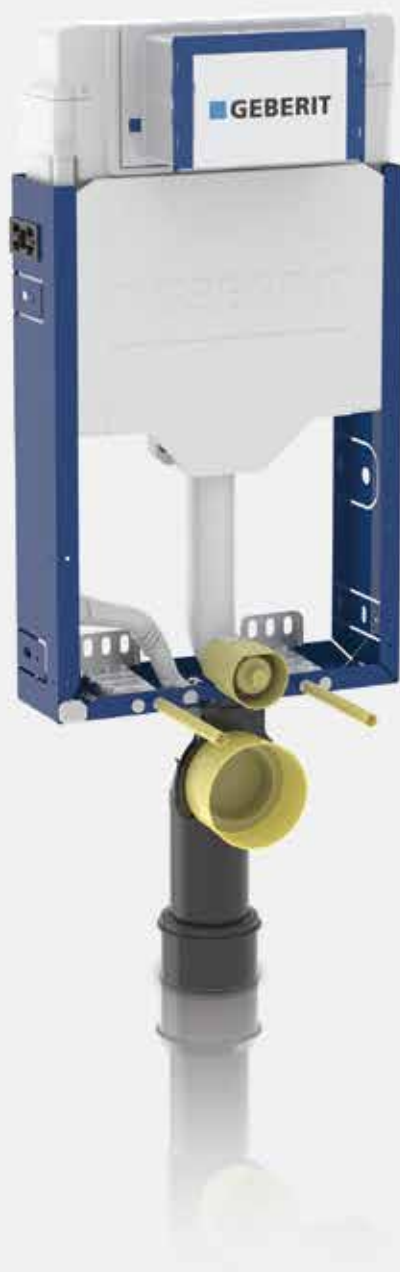



Geberit Kombifix






Installation elements	12
Elements for WCs	12
Accessory overview – Geberit Kombifix elements for WCs.....	12
Elements for washbasins	25
Elements for bidets	25
Elements for urinals	26
Accessory overview – Geberit Kombifix elements for urinals.....	26
Elements for showers	31
Accessories	32
For fastenings.....	32

Installation elements

Elements for WCs

Accessory overview – Geberit Kombifix elements for WCs


Geberit International Sales, version: December 2025

	Actuator plates of the Sigma series	Actuator plates of the Omega series	Actuator plates of the Alpha series	Geberit Kombifix set of leg supports	Geberit Kombifix set of studs with foot plate
					
				457.888.26.1	457.872.26.1
				→ p. 33	→ p. 33
110.350.00.5 Geberit Kombifix element for wall-hung WC, 108 cm, with Sigma concealed cistern 12 cm	✓			✓	✓
110.340.00.5 Geberit Kombifix element for wall-hung WC, 108 cm, with Sigma concealed cistern 12 cm, with leg supports	✓				✓
110.792.00.1 Geberit Kombifix element for wall-hung WC, 109 cm, with Sigma concealed cistern 8 cm	✓			✓	✓
110.789.00.1 Geberit Kombifix element for wall-hung WC, 109 cm, with Sigma concealed cistern 8 cm, with leg supports	✓				✓
110.020.00.1 Geberit Kombifix element for wall-hung WC, 106 cm, with Omega concealed cistern 12 cm		✓		✓	✓
110.001.00.1 Geberit Kombifix element for wall-hung WC, 82 cm, with Omega concealed cistern 12 cm		✓		✓	✓
110.011.00.1 Geberit Kombifix element for wall-hung WC, 98 cm, with Omega concealed cistern 12 cm		✓		✓	✓
110.174.00.1 Geberit Kombifix element for wall-hung WC, 109 cm, with Alpha concealed cistern 8 cm, with leg supports			✓		✓
110.175.00.1 Geberit Kombifix element for wall-hung WC, 109 cm, with Alpha concealed cistern 8 cm			✓	✓	✓
110.212.00.1 Geberit Kombifix element for wall-hung WC, 82 cm, with Alpha concealed cistern 12 cm			✓	✓	✓
110.231.00.2 Geberit Kombifix element for wall-hung WC, 106 cm, with Alpha concealed cistern 12 cm, with leg supports			✓		✓
110.233.00.2 Geberit Kombifix element for wall-hung WC, 106 cm, with Alpha concealed cistern 12 cm			✓	✓	✓

✓ Compatible



Geberit Kombifix element for wall-hung WC, 108 cm, with Sigma concealed cistern 12 cm

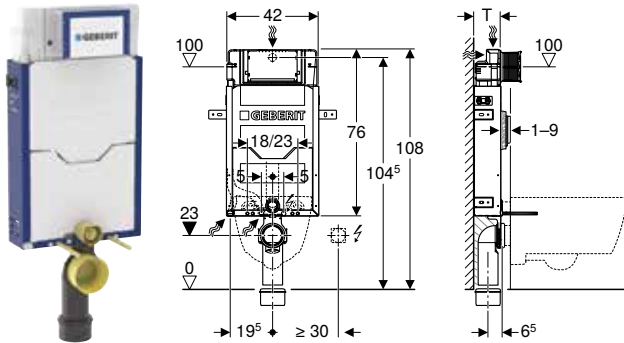

Application purposes

- For masonry walls
- For installation in part or room-height prewall installations
- For wall-hung WCs with connection dimensions in accordance with EN 33:2011
- For single flush, dual flush or stop-and-go flush

Technical data

Flow pressure	0.1–10 bar
Flush volume, factory setting	6 l / 3 l
Flush volume large, adjustment range	4 l / 4.5 l / 6 l / 7.5 l
Flush volume small, adjustment range	2–4 l
Product material	Steel
Height-adjustable	No

Characteristics

- Powder-coated mounting frame
- Mounting frame with four fixing brackets
- Fastening for connection bend can be mounted without tools from front
- Concealed cistern with front actuation
- Concealed cistern, fully insulated against condensation
- Immediate post flush possible with factory setting
- Tool-free installation and maintenance work on concealed cistern
- Water supply connection on the rear or top centre
- Protection box for service opening can be cut to length
- With conduit pipe for feed pipe for Geberit AquaClean shower toilets and for connection cable
- Fastening option for electrical connection

Scope of delivery

- Water supply connection R 1/2", compatible with MasterFix and MeplaFix, with integrated angle stop valve and hand wheel
- Protection box for service opening
- Connection set for WC, \varnothing 90 mm
- Connection bend made of PE-HD, \varnothing 90 mm
- Adapter socket made of PE-HD, \varnothing 90 / 110 mm
- Filling segment
- 2 protection plugs
- 2 threaded rods M12
- Fastening material

Art. no.	B [cm]	H [cm]	T [cm]
110.350.00.5	42	108	12


Accessories

- Accessory overview – Geberit Kombifix elements for WCs → p. 12



- Actuator plate has to be ordered separately

Geberit Kombifix element for wall-hung WC, 108 cm, with Sigma concealed cistern 12 cm, with leg supports

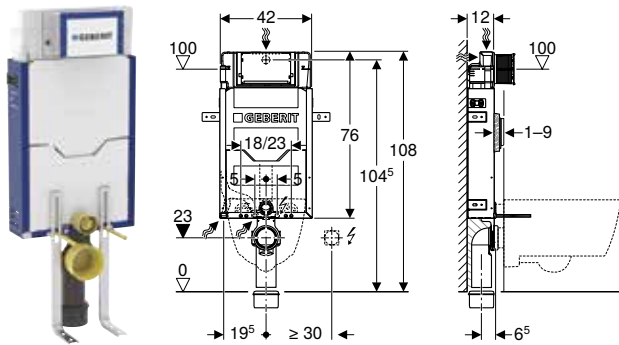

click & scan

Application purposes

- For masonry walls
- For installation in part or room-height prewall installations
- For wall-hung WCs with connection dimensions in accordance with EN 33:2011
- For single flush, dual flush or stop-and-go flush

Technical data

Flow pressure	0.1–10 bar
Flush volume, factory setting	6 l / 3 l
Flush volume large, adjustment range	4 l / 4.5 l / 6 l / 7.5 l
Flush volume small, adjustment range	2–4 l
Product material	Steel
Height-adjustable	No

Characteristics

- Powder-coated mounting frame
- Mounting frame with four fixing brackets
- Fastening for connection bend can be mounted without tools from front
- Concealed cistern with front actuation
- Concealed cistern, fully insulated against condensation
- Immediate post flush possible with factory setting
- Tool-free installation and maintenance work on concealed cistern
- Water supply connection on the rear or top centre
- Protection box for service opening can be cut to length
- With conduit pipe for feed pipe for Geberit AquaClean shower toilets and for connection cable
- Fastening option for electrical connection

Scope of delivery

- Water supply connection R 1/2", compatible with MasterFix and MeplaFix, with integrated angle stop valve and hand wheel
- Protection box for service opening
- Connection set for WC, \varnothing 90 mm
- Connection bend made of PE-HD, \varnothing 90 mm
- Adapter socket made of PE-HD, \varnothing 90 / 110 mm
- Filling segment
- 2 feet
- 2 protection plugs
- 2 threaded rods M12
- Fastening material

Art. no.	B [cm]	H [cm]	T [cm]
110.340.00.5	42	108	12

Accessories


- Accessory overview – Geberit Kombifix elements for WCs → p. 12



- Actuator plate has to be ordered separately



Geberit Kombifix element for wall-hung WC, 109 cm, with Sigma concealed cistern 8 cm

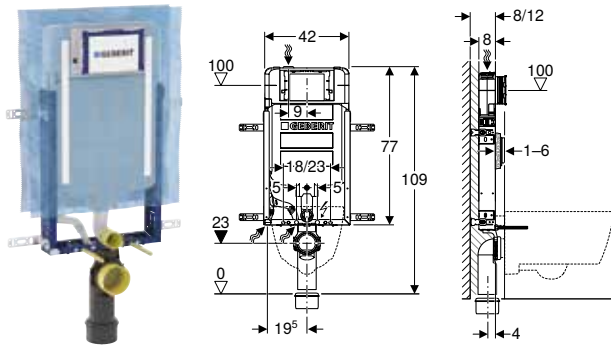

click & scan

Application purposes

- For masonry walls
- For installation in part or room-height prewall installations
- For wall-hung WCs with connection dimensions in accordance with EN 33:2011
- For single flush, dual flush or stop-and-go flush

Technical data

Flow pressure	0.1–10 bar
Flush volume, factory setting	6 l / 3 l
Flush volume large, adjustment range	4 l / 4.5 l / 6 l / 7.5 l
Flush volume small, adjustment range	2–4 l
Product material	Steel
Height-adjustable	No

Characteristics

- Range 2016
- Powder-coated mounting frame
- Mounting frame with four fastening brackets
- Premounted direct plastering netting
- Fixing bracket coordinated with solid walls with 8 or 12 cm wall thickness
- Fastening for connection bend can be mounted without tools from front
- Concealed cistern with front actuation
- Concealed cistern, fully insulated against condensation
- Immediate post flush possible with factory setting
- Tool-free installation and maintenance work on concealed cistern
- Water supply connection on the top left
- Protection box for service opening can be cut to length, suitable for surface-even actuator plates
- With conduit pipe for feed pipe for Geberit AquaClean shower toilets and for connection cable
- Fastening option for electrical connection

Scope of delivery

- Water supply connection R 1/2", compatible with MasterFix and MeplaFix, with integrated angle stop valve and hand wheel
- Protection box for service opening
- 4 fixing brackets
- Connection set for WC, \varnothing 90 mm
- Connection bend 90° made of PE-HD, \varnothing 90 mm
- Adapter socket made of PE-HD, \varnothing 90 / 110 mm
- 2 protection plugs
- 2 threaded rods M12
- Fastening material

Art. no.	B [cm]	H [cm]	T [cm]
110.792.00.1	42	109	8

Accessories


- Accessory overview – Geberit Kombifix elements for WCs → p. 12



- Actuator plate has to be ordered separately

New

Geberit Kombifix element for wall-hung WC, 109 cm, with Sigma concealed cistern 8 cm, with leg supports

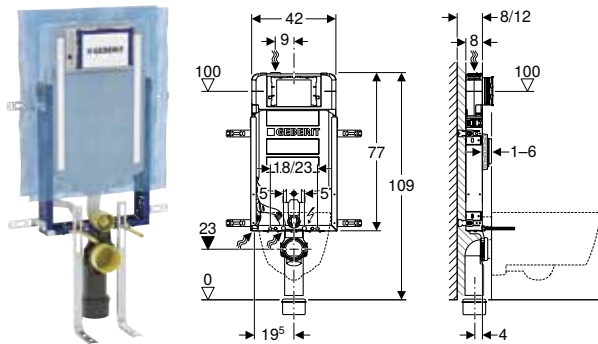

click & scan

Application purposes

- For masonry walls
- For installation in part or room-height prewall installations
- For wall-hung WCs with connection dimensions in accordance with EN 33:2011
- For single flush, dual flush or stop-and-go flush

Technical data

Flow pressure	0.1–10 bar
Flush volume, factory setting	6 l / 3 l
Flush volume large, adjustment range	4 l / 4.5 l / 6 l / 7.5 l
Flush volume small, adjustment range	2–4 l
Product material	Steel
Height-adjustable	Yes

Characteristics

- Range 2016
- Powder-coated mounting frame
- Mounting frame with four fastening brackets
- Premounted direct plastering netting
- Fixing bracket coordinated with solid walls with 8 or 12 cm wall thickness
- Fastening for connection bend can be mounted without tools from front
- Concealed cistern with front actuation
- Concealed cistern, fully insulated against condensation
- Immediate post flush possible with factory setting
- Tool-free installation and maintenance work on concealed cistern
- Water supply connection on the top left
- Protection box for service opening can be cut to length, suitable for surface-even actuator plates
- With conduit pipe for feed pipe for Geberit AquaClean shower toilets and for connection cable
- Fastening option for electrical connection

Scope of delivery

- Water supply connection R 1/2", compatible with MasterFix and MeplaFix, with integrated angle stop valve and hand wheel
- Protection box for service opening
- 4 fixing brackets
- Connection set for WC, \varnothing 90 mm
- Connection bend 90° made of PE-HD, \varnothing 90 mm
- Adapter socket made of PE-HD, \varnothing 90 / 110 mm
- 2 feet
- 2 protection plugs
- 2 threaded rods M12
- Fastening material

Art. no.

110.789.00.1


Available as of April 2027

Accessories

- Accessory overview – Geberit Kombifix elements for WCs → p. 12



Geberit Kombifix element for wall-hung WC, 82 cm, with Omega concealed cistern 12 cm

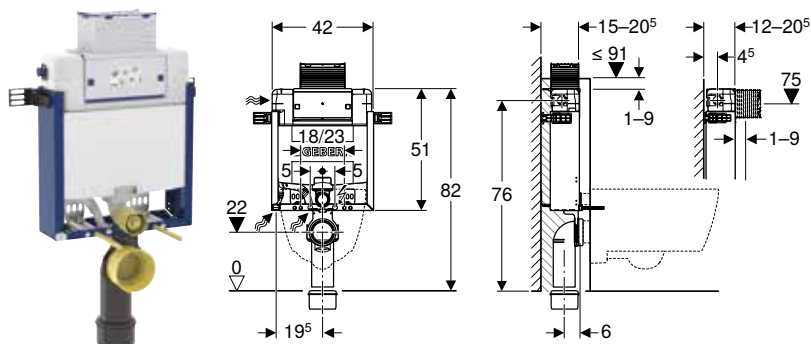

click & scan

Application purposes

- For masonry walls
- For installation in part-height prewall installations
- For wall-hung WCs with connection dimensions in accordance with EN 33:2011
- For dual flush

Technical data

Flow pressure	0.1–10 bar
Flush volume, factory setting	6 l / 3 l
Flush volume large, adjustment range	4 l / 4.5 l / 6 l / 7.5 l
Flush volume small, adjustment range	2–4 l
Flow rate at 300 kPa / 3 bar	0.16 l/s
Product material	Steel
Height-adjustable	No

Characteristics

- Powder-coated mounting frame
- Mounting frame with four fixing brackets
- Adjustable installation depth, 12–20.5 cm
- Fastening for connection bend can be mounted without tools from front
- Concealed cistern with top or front actuation
- Concealed cistern, fully insulated against condensation
- Immediate post flush possible with factory setting
- Tool-free installation and maintenance work on concealed cistern
- Water supply connection on the left or rear left
- Protection box for service opening can be cut to length
- With conduit pipe for feed pipe for Geberit AquaClean shower toilets and for connection cable
- Fastening option for electrical connection

Scope of delivery

- Water supply connection R 1/2", compatible with MasterFix and MeplaFix, with integrated angle stop valve and hand wheel
- Protection box for service opening
- Connection set for WC, ø 90 mm
- Connection bend made of PE-HD, ø 90 mm
- Adapter socket made of PE-HD, ø 90 / 110 mm
- 2 protection plugs
- 2 threaded rods M12
- Fastening material

Art. no.	B [cm]	H [cm]	T [cm]
110.001.00.1	42	82	12


Accessories

- Accessory overview – Geberit Kombifix elements for WCs → p. 12



- Actuator plate has to be ordered separately

Geberit Kombifix element for wall-hung WC, 98 cm, with Omega concealed cistern 12 cm

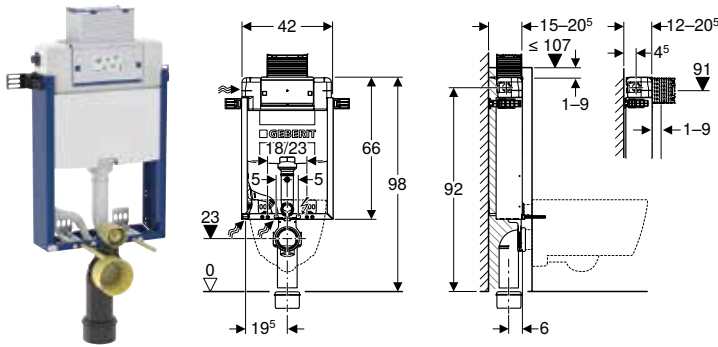

click & scan

Application purposes

- For masonry walls
- For installation in part-height prewall installations
- For wall-hung WCs with connection dimensions in accordance with EN 33:2011
- For dual flush

Technical data

Flow pressure	0.1–10 bar
Flush volume, factory setting	6 l / 3 l
Flush volume large, adjustment range	4 l / 4.5 l / 6 l / 7.5 l
Flush volume small, adjustment range	2–4 l
Flow rate at 300 kPa / 3 bar	0.16 l/s
Product material	Steel
Height-adjustable	No

Characteristics

- Powder-coated mounting frame
- Mounting frame with four fixing brackets
- Adjustable installation depth, 12–20.5 cm
- Fastening for connection bend can be mounted without tools from front
- Concealed cistern with top or front actuation
- Concealed cistern, fully insulated against condensation
- Immediate post flush possible with factory setting
- Tool-free installation and maintenance work on concealed cistern
- Water supply connection on the left or rear left
- Protection box for service opening can be cut to length
- With conduit pipe for feed pipe for Geberit AquaClean shower toilets and for connection cable
- Fastening option for electrical connection

Scope of delivery

- Water supply connection R 1/2", compatible with MasterFix and MeplaFix, with integrated angle stop valve and hand wheel
- Protection box for service opening
- Connection set for WC, \varnothing 90 mm
- Connection bend made of PE-HD, \varnothing 90 mm
- Adapter socket made of PE-HD, \varnothing 90 / 110 mm
- 2 protection plugs
- 2 threaded rods M12
- Fastening material

Art. no.	B [cm]	H [cm]	T [cm]
110.011.00.1	42	98	12

Accessories


- Accessory overview – Geberit Kombifix elements for WCs → p. 12



- Actuator plate has to be ordered separately



Geberit Kombifix element for wall-hung WC, 106 cm, with Omega concealed cistern 12 cm

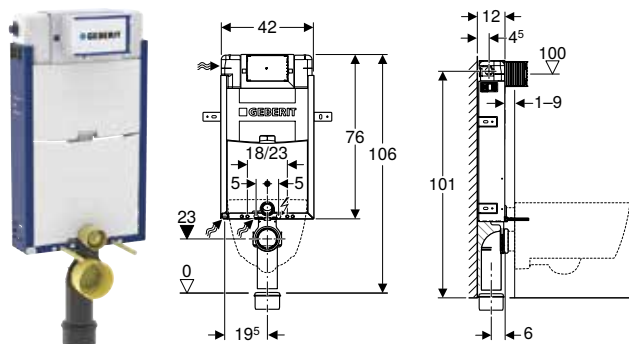

click & scan

Application purposes

- For masonry walls
- For installation in part or room-height prewall installations
- For wall-hung WCs with connection dimensions in accordance with EN 33:2011
- For dual flush

Technical data

Flow pressure	0.1–10 bar
Flush volume, factory setting	6 l / 3 l
Flush volume large, adjustment range	4 l / 4.5 l / 6 l / 7.5 l
Flush volume small, adjustment range	2–4 l
Flow rate at 300 kPa / 3 bar	0.16 l/s
Product material	Steel
Height-adjustable	No

Characteristics

- Powder-coated mounting frame
- Mounting frame with four fixing brackets
- Fastening for connection bend can be mounted without tools from front
- Concealed cistern with front actuation
- Concealed cistern, fully insulated against condensation
- Immediate post flush possible with factory setting
- Tool-free installation and maintenance work on concealed cistern
- Water supply connection on the left or rear left
- Protection box for service opening can be cut to length
- With conduit pipe for feed pipe for Geberit AquaClean shower toilets and for connection cable
- Fastening option for electrical connection

Scope of delivery

- Water supply connection R 1/2", compatible with MasterFix and MeplaFix, with integrated angle stop valve and hand wheel
- Protection box for service opening
- Connection set for WC, ø 90 mm
- Connection bend made of PE-HD, ø 90 mm
- Adapter socket made of PE-HD, ø 90 / 110 mm
- Filling segment
- 2 protection plugs
- Sound insulation set
- 2 threaded rods M12
- Fastening material

Art. no.	B [cm]	H [cm]	T [cm]
110.020.00.1	42	106	12


Accessories

- Accessory overview – Geberit Kombifix elements for WCs → p. 12



- Actuator plate has to be ordered separately

Geberit Kombifix element for wall-hung WC, 82 cm, with Alpha concealed cistern 12 cm

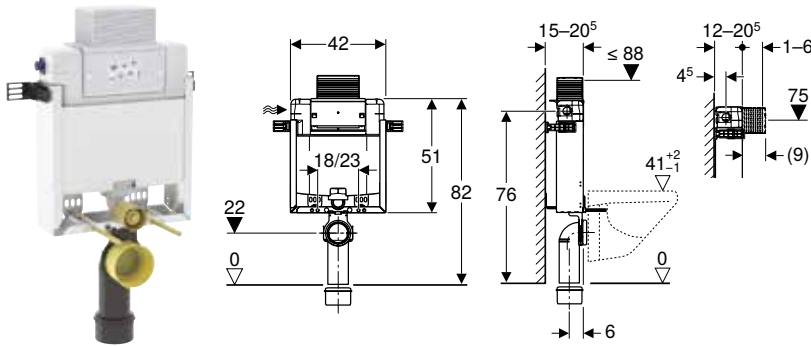

Application purposes

- For masonry walls
- For installation in part-height prewall installations
- For wall-hung WCs with connection dimensions in accordance with EN 33:2011
- For dual flush

Technical data

Flow pressure	0.1–10 bar
Flush volume, factory setting	6 l / 3 l
Flush volume large, adjustment range	4 l / 4.5 l / 6 l / 7.5 l
Flush volume small, adjustment range	2–4 l
Product material	Steel
Height-adjustable	No

Characteristics

- Zinc-plated mounting frame
- Mounting frame with four fastening brackets
- Adjustable installation depth, 12–20.5 cm
- Fastening for connection bend can be mounted without tools from front
- Concealed cistern with top or front actuation
- Concealed cistern, fully insulated against condensation
- Immediate post flush possible with factory setting
- Water supply connection on the left or rear left
- Protection box for service opening can be cut to length

Scope of delivery

- Water supply connection R 1/2", compatible with MasterFix and MeplaFix, with integrated angle stop valve and hand wheel
- Protection box for service opening
- Connection set for WC, ø 90 mm
- Connection bend made of PE-HD, ø 90 mm
- Adapter socket made of PE-HD, ø 90 / 110 mm
- 2 protection plugs
- 2 threaded rods M12
- Fastening material

Art. no.	B [cm]	H [cm]	T [cm]
110.212.00.1	42	82	12

Accessories


- Accessory overview – Geberit Kombifix elements for WCs → p. 12



- Actuator plate has to be ordered separately



Geberit Kombifix element for wall-hung WC, 106 cm, with Alpha concealed cistern 12 cm

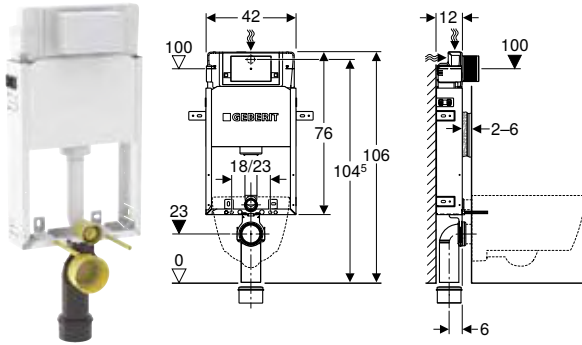

click & scan

Application purposes

- For masonry walls
- For installation in part or room-height prewall installations
- For wall-hung WCs with connection dimensions in accordance with EN 33:2011
- For dual flush

Technical data

Flow pressure	0.1–10 bar
Flush volume, factory setting	6 l / 3 l
Flush volume large, adjustment range	4 l / 4.5 l / 6 l / 7.5 l
Flush volume small, adjustment range	2–4 l
Product material	Steel
Height-adjustable	No

Characteristics

- Zinc-plated mounting frame
- Mounting frame with four fastening brackets
- Fastening for connection bend can be mounted without tools from front
- Concealed cistern with front actuation
- Concealed cistern, fully insulated against condensation
- Immediate post flush possible with factory setting
- Water supply connection on the rear or top centre
- Protection box for service opening can be cut to length

Scope of delivery

- Water supply connection unit R 1/2", compatible with MasterFix and MeplaFix, with integrated angle stop valve and adapter ring
- Protection box for service opening
- Connection set for WC, \varnothing 90 mm
- Connection bend made of PE-HD, \varnothing 90 mm
- Adapter socket made of PE-HD, \varnothing 90 / 110 mm
- 2 protection plugs
- 2 threaded rods M12
- Fastening material

Art. no.	B [cm]	H [cm]	T [cm]
110.233.00.2	42	106	12


Accessories

- Accessory overview – Geberit Kombifix elements for WCs → p. 12



- Actuator plate has to be ordered separately

Geberit Kombifix element for wall-hung WC, 106 cm, with Alpha concealed cistern 12 cm, with leg supports

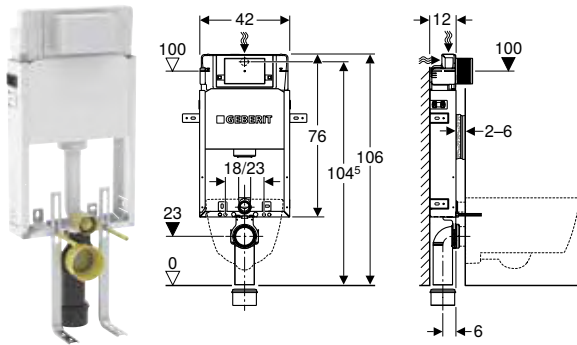

click & scan

Application purposes

- For masonry walls
- For installation in part or room-height prewall installations
- For wall-hung WCs with connection dimensions in accordance with EN 33:2011
- For dual flush

Technical data

Flow pressure	0.1–10 bar
Flush volume, factory setting	6 l / 3 l
Flush volume large, adjustment range	4 l / 4.5 l / 6 l / 7.5 l
Flush volume small, adjustment range	2–4 l
Product material	Steel
Height-adjustable	No

Characteristics

- Zinc-plated mounting frame
- Mounting frame with four fastening brackets
- Fastening for connection bend can be mounted without tools from front
- Concealed cistern with front actuation
- Concealed cistern, fully insulated against condensation
- Immediate post flush possible with factory setting
- Water supply connection on the rear or top centre
- Protection box for service opening can be cut to length

Scope of delivery

- Water supply connection unit R 1/2", compatible with MasterFix and MeplaFix, with integrated angle stop valve and adapter ring
- Protection box for service opening
- Connection set for WC, \varnothing 90 mm
- Connection bend made of PE-HD, \varnothing 90 mm
- Adapter socket made of PE-HD, \varnothing 90 / 110 mm
- 2 feet
- 2 protection plugs
- 2 threaded rods M12
- Fastening material

Art. no.	B [cm]	H [cm]	T [cm]
110.231.00.2	42	106	12

Accessories


- Accessory overview – Geberit Kombifix elements for WCs → p. 12



- Actuator plate has to be ordered separately



Geberit Kombifix element for wall-hung WC, 109 cm, with Alpha concealed cistern 8 cm

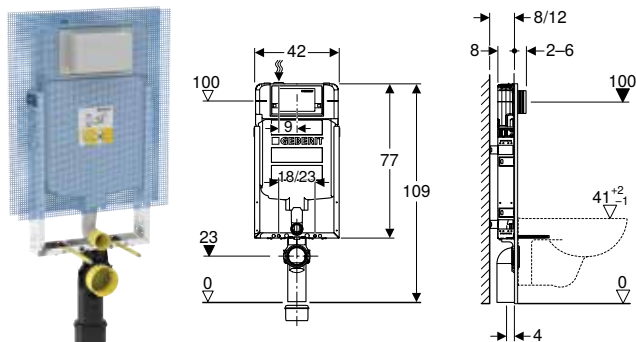

click & scan

Application purposes

- For masonry walls
- For installation in part or room-height prewall installations
- For wall-hung WCs with connection dimensions in accordance with EN 33:2011
- For dual flush

Technical data

Flow pressure	0.1–10 bar
Flush volume, factory setting	6 l / 3 l
Flush volume large, adjustment range	4 l / 4.5 l / 6 l / 7.5 l
Flush volume small, adjustment range	2–4 l
Product material	Steel
Height-adjustable	No

Characteristics

- Zinc-plated mounting frame
- Mounting frame with four fastening brackets
- Premounted direct plastering netting
- Fixing bracket coordinated with solid walls with 8 or 12 cm wall thickness
- Fastening for connection bend can be mounted without tools from front
- Concealed cistern with front actuation
- Concealed cistern, fully insulated against condensation
- Immediate post flush possible with factory setting
- Water supply connection on the top left
- Protection box for service opening can be cut to length

Scope of delivery

- Water supply connection R 1/2", compatible with MasterFix and MeplaFix, with integrated angle stop valve and hand wheel
- Protection box for service opening
- Connection set for WC, \varnothing 90 mm
- Connection bend made of PE-HD, \varnothing 90 mm
- Adapter socket made of PE-HD, \varnothing 90 / 110 mm
- 2 protection plugs
- 2 threaded rods M12
- Fastening material

Art. no.	B [cm]	H [cm]	T [cm]
110.175.00.1	42	109	8


Accessories

- Accessory overview – Geberit Kombifix elements for WCs → p. 12



- Actuator plate has to be ordered separately

Geberit Kombifix element for wall-hung WC, 109 cm, with Alpha concealed cistern 8 cm, with leg supports

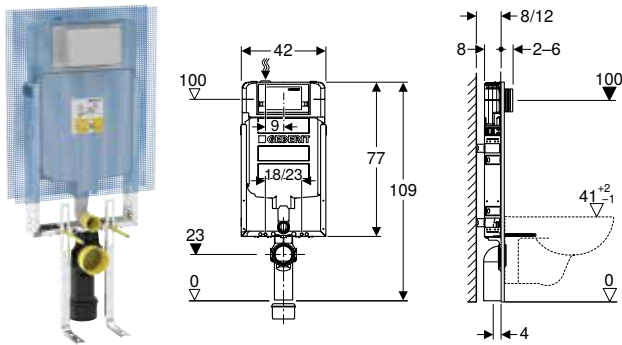

Application purposes

- For masonry walls
- For installation in part or room-height prewall installations
- For wall-hung WCs with connection dimensions in accordance with EN 33:2011
- For dual flush

Technical data

Flow pressure	0.1–10 bar
Flush volume, factory setting	6 l / 3 l
Flush volume large, adjustment range	4 l / 4.5 l / 6 l / 7.5 l
Flush volume small, adjustment range	2–4 l
Product material	Steel
Height-adjustable	No

Characteristics

- Zinc-plated mounting frame
- Mounting frame with four fastening brackets
- Premounted direct plastering netting
- Fixing bracket coordinated with solid walls with 8 or 12 cm wall thickness
- Fastening for connection bend can be mounted without tools from front
- Concealed cistern with front actuation
- Concealed cistern, fully insulated against condensation
- Immediate post flush possible with factory setting
- Water supply connection on the top left
- Protection box for service opening can be cut to length

Scope of delivery

- Water supply connection R 1/2", compatible with MasterFix and MeplaFix, with integrated angle stop valve and hand wheel
- Protection box for service opening
- Connection set for WC, \varnothing 90 mm
- Connection bend made of PE-HD, \varnothing 90 mm
- Adapter socket made of PE-HD, \varnothing 90 / 110 mm
- 2 protection plugs
- 2 threaded rods M12
- Set of leg supports
- Fastening material

Art. no.	B [cm]	H [cm]	T [cm]
110.174.00.1	42	109	8

Accessories

- Accessory overview – Geberit Kombifix elements for WCs → p. 12




- Actuator plate has to be ordered separately



Elements for washbasins

Geberit Kombifix element for washbasin, deck-mounted tap

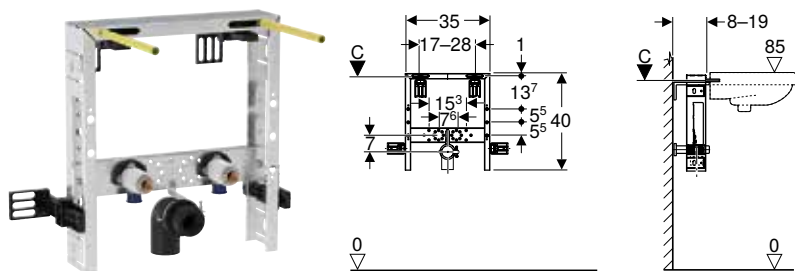

click & scan

Application purposes

- For masonry walls
- For installation in part or room-height prewall installations
- For installation of washbasins
- For deck-mounted taps

Characteristics

- Zinc-plated mounting frame
- Mounting frame with four fixing brackets
- Adjustable installation depth, 8–19 cm
- Fastening for connection bend, sound-absorbing
- Tap crossbar height-adjustable


Scope of delivery

- 2 elbow tap connectors Rp 1/2" / R 1/2", compatible with MF
- 2 sound insulation bases
- 2 insulating sleeves
- Connection bend made of PE-HD, \varnothing 50 mm
- Seal \varnothing 44 / 32 mm
- 2 threaded rods M10
- Fastening material

Art. no.	B [cm]	H [cm]	T [cm]
457.430.00.1	35	40	8

Elements for bidets

Geberit Kombifix element for bidet, universal

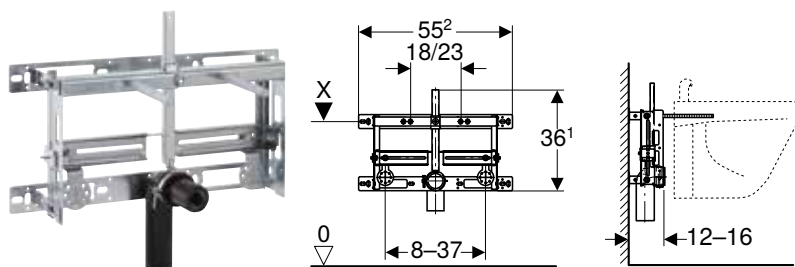

click & scan

Application purposes

- For masonry walls
- For installation in part or room-height prewall installations

Scope of delivery

- Connection bend made of PE-HD, \varnothing 50 mm
- Seal \varnothing 44 / 32 mm
- 2 threaded rods M12
- Fastening material

Characteristics


- Zinc-plated mounting frame
- Mounting frame with four fastening brackets
- Adjustable installation depth, 12–16 cm
- Fastening distance for wall-hung bidet 18 or 23 cm
- Height-adjustable bidet fastening
- Fastening for connection bend, height-adjustable and sound-absorbing
- Tap attachments adjustable in width and height

Art. no.	B [cm]	H [cm]	T [cm]
457.893.00.1	55.2	36.1	12

Accessories

- Geberit elbow tap connector 90° with male thread MF 1/2"

Geberit Kombifix element for bidet

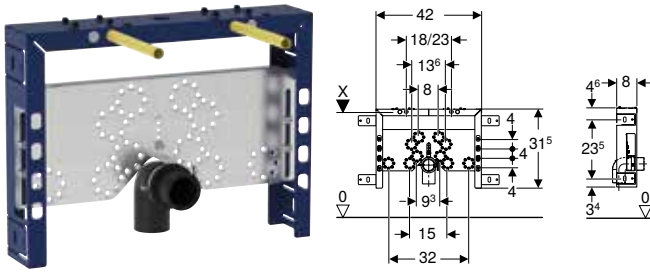

Application purposes

- For masonry walls
- For installation in part or room-height prewall installations

Characteristics

- Powder-coated mounting frame
- Mounting frame with four fastening brackets
- Installation depth 8 cm
- Fastening distance for wall-hung bidet 18 or 23 cm
- Height-adjustable bidet fastening
- Fastening for connection bend, sound-absorbing
- Tap crossbar height-adjustable

Scope of delivery

- Connection bend made of PE-HD, \varnothing 50 mm
- Seal \varnothing 44 / 40 mm
- 2 threaded rods M12
- Fastening material

Art. no.	B [cm]	H [cm]	T [cm]
457.608.00.5	42	31.5	8

Accessories

- Geberit elbow tap connector 90° with male thread MF 1/2"

Elements for urinals

Accessory overview – Geberit Kombifix elements for urinals


Geberit International Sales, version: December 2025

	Urinal flush controls with electronic flush actuation, battery operation	Urinal flush controls with electronic flush actuation, mains operation	Urinal flush controls with pneumatic flush actuation	Geberit urinal flush control with electronic flush actuation, mains operation, surface-mounted, hidden	Geberit urinal flush control with electronic flush actuation, battery operation, surface-mounted, hidden	Geberit inlet crossbar for urinal, with spray head	Geberit Kombifix set of studs with foot plate
				116.076.00.1	116.077.00.1	242.042.00.1	457.872.26.1
				→ p. 283	→ p. 284	→ p. 93	→ p. 33
457.611.00.1 Geberit Kombifix element for urinal, 109–127 cm, universal	✓	✓	✓			✓	✓
457.606.00.1 Geberit Kombifix element for urinal, 109–127 cm, universal, for spray head	✓	✓	✓			✓	✓
457.689.00.1 Geberit Kombifix element for urinal, 109–127 cm, universal, for hidden urinal flush control						✓	✓
457.686.00.1 Geberit Kombifix element for urinal, 109–127 cm, universal, for exposed flushing valve				✓	✓		✓

✓ Compatible



Geberit Kombifix element for urinal, 109–127 cm, universal

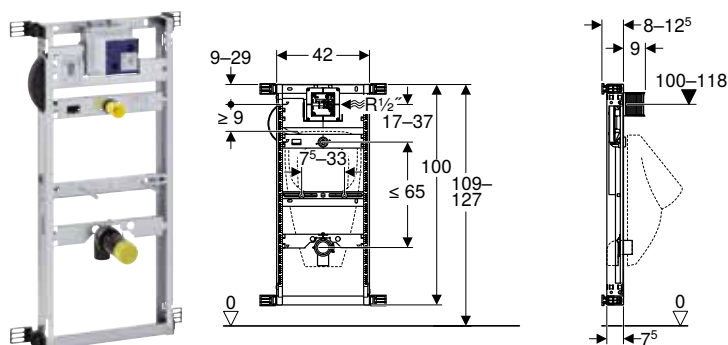

click & scan

Application purposes

- For masonry walls
- For installation in part or room-height prewall installations

Technical data

Flow pressure	1–8 bar
Water test pressure max.	16 bar
Test pressure air / inert gas max.	3 bar
Flow rate at 100 kPa / 1 bar without flow limiter	0.3 l/s
Flow rate at 100 kPa / 1 bar with flow limiter	0.24 l/s

Scope of delivery

- Water supply connection R 1/2"
- Protection box for service opening
- Urinal trap ø 50 mm, with seal on urinal
- Connection bend made of PE-HD, ø 50 / 63 mm
- Seal ø 57 / 50 mm
- 2 protection plugs
- 2 threaded rods M8
- Fastening material

Characteristics

- Zinc-plated mounting frame
- Mounting frame with four fixing brackets
- Water supply connection compatible with MasterFix and MeplaFix
- Elbow connector can be mounted without tools
- Premounted stop valve with throttle
- Flush hose can be bent
- Flush hose with guide to prevent standing water
- Fastening for inlet ø 32 mm, height-adjustable
- Fastening for connection bend, height-adjustable and sound-absorbing
- Urinal fasteners M8 width- and height-adjustable
- Crossbars with centring marks, adjustable without tools
- Can be refitted with accessories to fit urinals with spray head

Art. no.	B [cm]	H [cm]	T [cm]
457.611.00.1	42	100	8

Can be combined with

- Geberit urinal flush control with electronic flush actuation, mains operation, Type 10 cover plate, round → p. 260
- Geberit urinal flush control with electronic flush actuation, mains operation, Type 01 cover plate, round → p. 258
- Geberit urinal flush control with electronic flush actuation, battery operation, Type 10 cover plate, round → p. 268
- Geberit urinal flush control with electronic flush actuation, battery operation, Type 01 cover plate, round → p. 266
- Geberit urinal flush control with electronic flush actuation, mains operation, Type 40 cover plate, round → p. 261
- Geberit urinal flush control with electronic flush actuation, mains operation, Type 40 cover plate, square → p. 263
- Geberit urinal flush control with electronic flush actuation, battery operation, Type 40 cover plate, round → p. 269
- Geberit urinal flush control with electronic flush actuation, battery operation, Type 40 cover plate, square → p. 271
- Geberit urinal flush control with electronic flush actuation, mains operation, Type 01 cover plate, square → p. 259
- Geberit urinal flush control with electronic flush actuation, battery operation, Type 01 cover plate, square → p. 267
- Geberit urinal flush control with electronic flush actuation, mains operation, Type 40 cover plate, round, customised finish → p. 262
- Geberit urinal flush control with electronic flush actuation, mains operation, Type 40 cover plate, square, customised finish → p. 264
- Geberit urinal flush control with electronic flush actuation, battery operation, Type 40 cover plate, round, customised finish → p. 270
- Geberit urinal flush control with electronic flush actuation, battery operation, Type 40 cover plate, square, customised finish → p. 272
- Geberit urinal flush control with pneumatic flush actuation, Type 50 actuator plate, square, customised → p. 280
- Geberit urinal flush control with pneumatic flush actuation, Type 10 actuator plate, round → p. 275
- Geberit urinal flush control with pneumatic flush actuation, Type 01 actuator plate, round → p. 273
- Geberit urinal flush control with pneumatic flush actuation, Type 50 actuator plate, square → p. 280
- Geberit urinal flush control with pneumatic flush actuation, Type 40 actuator plate, round → p. 276
- Geberit urinal flush control with pneumatic flush actuation, Type 40 actuator plate, square → p. 278
- Geberit urinal flush control with pneumatic flush actuation, Type 01 actuator plate, square → p. 274
- Geberit urinal flush control with pneumatic flush actuation, Type 40 actuator plate, round, customised finish → p. 277
- Geberit urinal flush control with pneumatic flush actuation, Type 40 actuator plate, square, customised finish → p. 279


Accessories

- Accessory overview – Geberit Kombifix elements for urinals → p. 26



- For urinals with spray head, the Geberit inlet crossbar for urinal (art. no. 242.042.00.1) is required in addition

Geberit Kombifix element for urinal, 109–127 cm, universal, for spray head

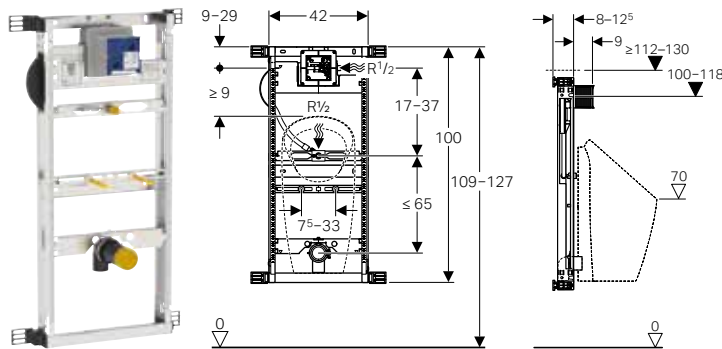

Application purposes

- For masonry walls
- For installation in part or room-height prewall installations
- For Preda urinals
- For Selva urinals
- For Tamina urinals
- For Narva urinals

Technical data

Flow pressure	1–8 bar
Water test pressure max.	16 bar
Test pressure air / inert gas max.	3 bar
Flow rate at 100 kPa / 1 bar without flow limiter	0.3 l/s
Flow rate at 100 kPa / 1 bar with flow limiter	0.24 l/s

Characteristics

- Zinc-plated mounting frame
- Mounting frame with four fixing brackets
- Connection positions for Preda urinal prepared
- Water supply connection compatible with MasterFix and MeplaFix
- Elbow connector can be mounted without tools
- Premounted stop valve with throttle
- Flush hose can be bent
- Flush hose with guide to prevent standing water
- Fastening for connection bend, height-adjustable and sound-absorbing
- Urinal fasteners M8 width- and height-adjustable
- Crossbars with centring marks, adjustable without tools
- Markings for connection positions of Preda and Selva urinals

Scope of delivery

- Water supply connection R 1/2"
- Protection box for service opening
- Urinal trap \varnothing 50 mm, with seal on urinal
- Connection bend made of PE-HD, \varnothing 50 / 63 mm
- Seal \varnothing 57 / 50 mm
- 2 protection plugs
- 2 threaded rods M8
- Fastening material

Art. no.	B [cm]	H [cm]	T [cm]
457.606.00.1	42	100	8

Can be combined with


- Geberit Narva urinal, inlet from the rear, outlet to the rear or downwards
- Geberit Preda urinal for concealed flush control
- Geberit Selva urinal for concealed flush control
- Geberit Tamina urinal for concealed flush control
- Geberit urinal flush control with electronic flush actuation, mains operation, Type 10 cover plate, round → p. 260
- Geberit urinal flush control with electronic flush actuation, mains operation, Type 01 cover plate, round → p. 258
- Geberit urinal flush control with electronic flush actuation, battery operation, Type 10 cover plate, round → p. 268
- Geberit urinal flush control with electronic flush actuation, battery operation, Type 01 cover plate, round → p. 266
- Geberit urinal flush control with electronic flush actuation, mains operation, Type 40 cover plate, round → p. 261
- Geberit urinal flush control with electronic flush actuation, mains operation, Type 40 cover plate, square → p. 263
- Geberit urinal flush control with electronic flush actuation, battery operation, Type 40 cover plate, round → p. 269
- Geberit urinal flush control with electronic flush actuation, battery operation, Type 40 cover plate, square → p. 271
- Geberit urinal flush control with electronic flush actuation, mains operation, Type 01 cover plate, square → p. 259
- Geberit urinal flush control with electronic flush actuation, battery operation, Type 01 cover plate, square → p. 267
- Geberit urinal flush control with electronic flush actuation, mains operation, Type 40 cover plate, round, customised finish → p. 262
- Geberit urinal flush control with electronic flush actuation, mains operation, Type 40 cover plate, square, customised finish → p. 264
- Geberit urinal flush control with electronic flush actuation, battery operation, Type 40 cover plate, round, customised finish → p. 270
- Geberit urinal flush control with electronic flush actuation, battery operation, Type 40 cover plate, square, customised finish → p. 272
- Geberit urinal flush control with pneumatic flush actuation, Type 50 actuator plate, square, customised → p. 280
- Geberit urinal flush control with pneumatic flush actuation, Type 10 actuator plate, round → p. 275
- Geberit urinal flush control with pneumatic flush actuation, Type 01 actuator plate, round → p. 273
- Geberit urinal flush control with pneumatic flush actuation, Type 50 actuator plate, square → p. 280
- Geberit urinal flush control with pneumatic flush actuation, Type 40 actuator plate, round → p. 276
- Geberit urinal flush control with pneumatic flush actuation, Type 40 actuator plate, square → p. 278
- Geberit urinal flush control with pneumatic flush actuation, Type 01 actuator plate, square → p. 274
- Geberit urinal flush control with pneumatic flush actuation, Type 40 actuator plate, round, customised finish → p. 277
- Geberit urinal flush control with pneumatic flush actuation, Type 40 actuator plate, square, customised finish → p. 279

Accessories

- Accessory overview – Geberit Kombifix elements for urinals → p. 26



Geberit Kombifix element for urinal, 109–127 cm, universal, for hidden urinal flush control

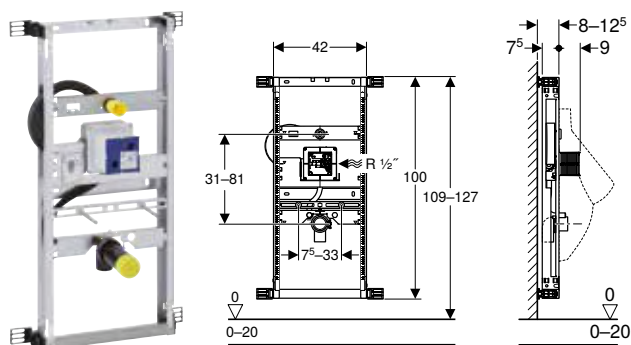

click & scan

Application purposes

- For masonry walls
- For installation in part or room-height prewall installations
- For Geberit urinal flush controls for covered installation, vandal-resistant

Technical data

Flow pressure	1–8 bar
Water test pressure max.	16 bar
Test pressure air / inert gas max.	3 bar
Flow rate at 100 kPa / 1 bar without flow limiter	0.3 l/s
Flow rate at 100 kPa / 1 bar with flow limiter	0.24 l/s

Characteristics

- Zinc-plated mounting frame
- Mounting frame with four fixing brackets
- Water supply connection compatible with MasterFix and MeplaFix
- Elbow connector can be mounted without tools
- Premounted stop valve with throttle
- Service opening behind urinal
- Flexible flush hose with guide and built-in check valve
- Equipped with conduit pipe to connect the sensor in the trap to the urinal flush control
- Fastening for inlet \varnothing 32 mm, height-adjustable
- Fastening for connection bend, height-adjustable and sound-absorbing
- Urinal fasteners M8 width- and height-adjustable
- Crossbars with centring marks, adjustable without tools
- Can be refitted with accessories to fit urinals with spray head

Scope of delivery

- Water supply connection R 1/2"
- Protection box for service opening
- Connection bend made of PE-HD, \varnothing 50 / 63 mm
- Seal \varnothing 57 / 50 mm
- 2 protection plugs
- 2 threaded rods M8
- Fastening material

Art. no.	B [cm]	H [cm]	T [cm]
457.689.00.1	42	100	8

Can be combined with

- Geberit urinal flush control with electronic flush actuation, mains operation, concealed installation, hidden → p. 265


Accessories

- Accessory overview – Geberit Kombifix elements for urinals → p. 26



- For urinals with spray head, the Geberit inlet crossbar for urinal (art. no. 242.042.00.1) is required in addition

Geberit Kombifix element for urinal, 109–127 cm, universal, for exposed flushing valve

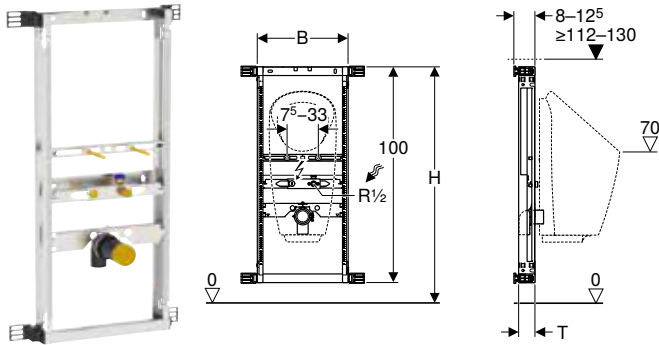

click & scan

Application purposes

- For masonry walls
- For installation in part or room-height prewall installations
- For installation of urinals with integrated control
- For installation of waterless urinals
- For Preda urinals
- For Selva urinals
- For Tamina urinals
- For Narva urinals
- For exposed flushing valves
- For exposed urinal flush controls, hidden

Characteristics

- Zinc-plated mounting frame
- Mounting frame with four fixing brackets
- Connection positions for Preda urinal prepared
- Water supply connection compatible with MasterFix and MeplaFix
- Elbow connector can be mounted without tools
- Fastening for inlet Rp 1/2", adjustable in height and sideways (central and 5–10 cm left or right)
- Fastening for connection bend, height-adjustable and sound-absorbing
- Urinal fasteners M8 width- and height-adjustable
- Crossbars with centring marks, adjustable without tools
- Markings for connection positions of Preda and Selva urinals

Scope of delivery

- Water supply connection R 1/2"
- Sealing washer
- Urinal trap \varnothing 50 mm, with seal on urinal
- Connection bend made of PE-HD, \varnothing 50 / 63 mm
- Seal \varnothing 57 / 50 mm
- 2 protection plugs
- 2 threaded rods M8
- Fastening material

Art. no.	B [cm]	H [cm]	T [cm]
457.686.00.1	42	109–127	8–12.5

Can be combined with

- Geberit urinal flush control with electronic flush actuation, mains operation, surface-mounted, hidden → p. 283
- Geberit urinal flush control with electronic flush actuation, battery operation, surface-mounted, hidden → p. 284
- Geberit pressure flushing valve for urinal with electronic flush actuation, battery operation, for surface mounting → p. 285
- Geberit Preda urinal with integrated control, mains operation
- Geberit Selva urinal with integrated control, mains operation
- Geberit Preda urinal with integrated control, battery operation
- Geberit Selva urinal with integrated control, battery operation
- Geberit Preda urinal with integrated control, generator operation
- Geberit Selva urinal with integrated control, generator operation
- Geberit Preda urinal for integrated control
- Geberit Selva urinal for integrated control
- Geberit Tamina urinal with integrated control, mains operation
- Geberit Tamina urinal with integrated control, battery operation
- Geberit Tamina urinal with integrated control, generator operation
- Geberit Tamina urinal for integrated control
- Geberit Narva urinal, inlet from the rear, outlet to the rear or downwards


Accessories

- Accessory overview – Geberit Kombifix elements for urinals → p. 26



Elements for showers

Geberit Kombifix element for shower, with CleanWall wall drain, for screed height at inlet 90–200 mm

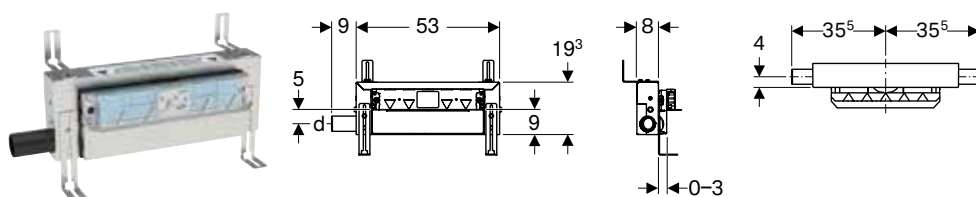

click & scan

Application purposes

- For drainage of floor-even showers
- For solid walls, drywalls, or prewalls in solid and drywall construction
- For composite seals
- For screed height ≥ 90 mm at inlet

Technical data

Depth of water seal (mm)	50 mm
--------------------------	-------

Characteristics

- Quality-monitored in accordance with EN 1253-3
- Plaster thickness 5–30 mm
- Suitable for tile structures on floor 2–26 mm
- Suitable for tile structures on wall 2–35 mm
- Height-adjustable element
- Adjustable sealing level for tension-free sealing connection
- Lateral drainage connection
- Premounted sealing fleece
- Sealing fleece, 10 cm circumferential, for connecting sealing systems
- Adjustable inlet height of trap

Scope of delivery

- Straight connector made of PE-HD, \varnothing 50 mm
- Protection box cover with integrated outlet sheet
- Fastening material

Art. no.	DN	d, \varnothing [mm]	Discharge rate [l/s]	B [cm]	H [cm]	T [cm]
457.534.00.1	50	50	0.8	53	19.3	8

To order additionally

- Ready-to-fit set


Accessories

- Geberit ready-to-fit set for CleanWall wall drain, cover made of stainless steel, screwable → p. 413
- Geberit ready-to-fit set for CleanWall wall drain, cover made of plastic → p. 413
- Geberit ready-to-fit set for CleanWall wall drain, tile-bearing, frameless → p. 414
- Geberit ready-to-fit set for CleanWall wall drain, tile-bearing, multi-piece → p. 414



- Natural stone tiles in the shower area may discolour

Geberit Kombifix element for shower, with CleanWall wall drain, for screed height at inlet 65–90 mm

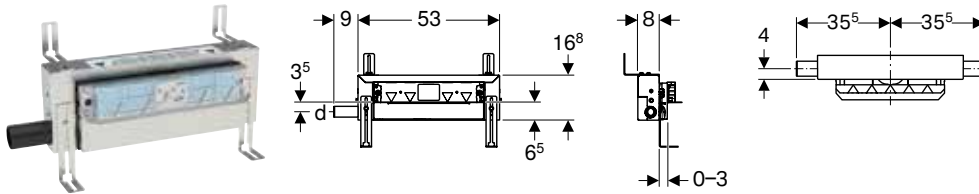

Application purposes

- For drainage of floor-even showers
- For solid walls, drywalls, or prewalls in solid and drywall construction
- For composite seals
- For screed height ≥ 65 mm at inlet

Technical data

Depth of water seal (mm)	30 mm
--------------------------	-------

Characteristics

- Plaster thickness 5–30 mm
- Suitable for tile structures on floor 2–26 mm
- Suitable for tile structures on wall 2–35 mm
- Height-adjustable element
- Adjustable sealing level for tension-free sealing connection
- Lateral drainage connection
- Premounted sealing fleece
- Sealing fleece, 10 cm circumferential, for connecting sealing systems
- Adjustable inlet height of trap

Scope of delivery

- Straight connector made of PE-HD, \varnothing 40 mm
- Protection box cover with integrated outlet sheet
- Fastening material

Art. no.	DN	d, \varnothing [mm]	Discharge rate [l/s]	B [cm]	H [cm]	T [cm]
457.536.00.1	40	40	0.4	53	16.8	8

To order additionally

- Ready-to-fit set

Accessories

- Geberit ready-to-fit set for CleanWall wall drain, cover made of plastic \rightarrow p. 413
- Geberit ready-to-fit set for CleanWall wall drain, cover made of stainless steel, screwable \rightarrow p. 413
- Geberit ready-to-fit set for CleanWall wall drain, tile-bearing, frameless \rightarrow p. 414
- Geberit ready-to-fit set for CleanWall wall drain, tile-bearing, multi-piece \rightarrow p. 414



- Natural stone tiles in the shower area may discolour

Accessories

For fastenings

Geberit filling segment for Sigma concealed cistern 12 cm



Characteristics

- 2025 range

Art. no.


457.801.00.2



click & scan



Geberit Kombifix set of leg supports

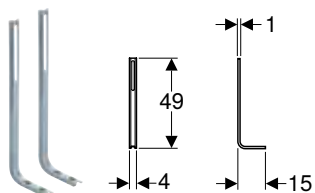

click & scan

Application purposes

- For masonry walls
- For freestanding positioning of Geberit Kombifix installation elements
- For Geberit Kombifix elements for wall-hung WC or bidet
- For floor constructions 0–12 cm

Scope of delivery

- Set of 2 pieces


Characteristics

- Zinc-plated

Art. no.

457.888.26.1

Geberit Kombifix set of studs with foot plate

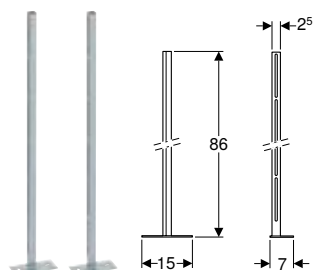

click & scan

Application purposes

- For masonry walls
- For freestanding positioning of Geberit Kombifix installation elements
- For floor constructions 0–25 cm

Scope of delivery

- 2 studs with foot plate
- 2 slotted flat irons
- Fastening material


Characteristics

- Zinc-plated

Art. no.

457.872.26.1

Geberit sound insulation set for wall-hung WC

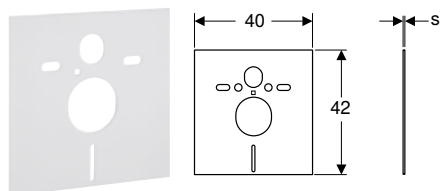

click & scan

Application purposes

- For structure-borne sound insulation of WCs and bidets
- For WCs and bidets with fastening distance 18 or 23 cm

Scope of delivery

- 2 washers
- 2 sound insulation sleeves
- Sound insulation mat

Art. no.

s
[mm]

156.050.00.1

6



Geberit Duofix




System walls	36
Support systems.....	36
Panellings.....	38
Accessories.....	40
Installation elements	42
Elements for WCs	42
Accessory overview – Geberit Duofix elements for WCs	43
Elements for washbasins	54
Accessory overview – Geberit Duofix elements for washbasins.....	55
Assortment overview – Geberit Duofix element for washbasin for bathroom furniture	56
Elements for bidets	68
Elements for urinals	70
Accessory overview – Geberit Duofix elements for urinals	71
Elements for showers with wall drain	77
Elements for showers and bathtubs	81
Accessory overview – Geberit Duofix elements for showers and bathtubs	81
Elements for taps	82
Elements for loads	84
Accessories.....	89

System walls

Support systems

Geberit Duofix system rail

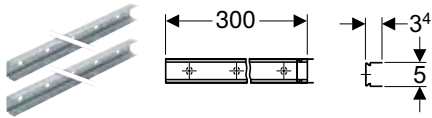

click & scan

Application purposes

- For creating Geberit Duofix system walls
- For mounting on floors, ceilings and walls

Scope of delivery

- Set of 2 pieces

Characteristics


- 2025 range
- Zinc-plated
- Corrosion-resistant
- Inherently stable

Art. no.	B [cm]	H [cm]	T [cm]
111.979.00.1	300	3.4	5

Accessories

- Geberit set of wood screws with dowels → p. 41

Geberit Duofix sound insulation tape

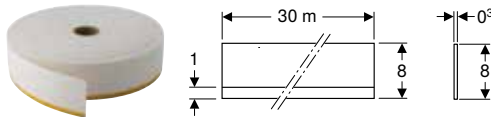

click & scan

Application purposes

- For structure-borne sound decoupling between panels and building structure
- For avoiding uncontrollable formation of cracks


Characteristics

- Single-sided self-adhesive
- Permanently elastic
- Vinyl foam tape
- Closed-cell

Art. no.

111.889.00.1

Geberit Duofix room-height stud

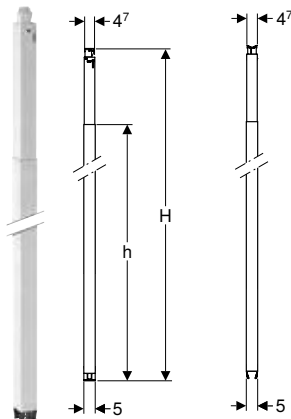

click & scan

Application purposes

- For creating Geberit Duofix system walls
- For fastening Geberit Duofix installation elements and crossbars
- For installation as intermediate stud or lateral connecting stud
- For ceilings with an inclination of up to 50°
- For ceiling recesses up to 25 mm
- For wall heights up to 4 m

Characteristics


- 2025 range
- Can be installed without tools
- Zinc-plated
- Corrosion-resistant
- Height can be adjusted telescopically by a maximum of 60 cm
- No connection to rear wall or installation wall required
- Fastening of Geberit Duofix elements to the stud without additional parts

Art. no.	B [cm]	H [cm]	h [cm]	T [cm]
111.085.00.1	5	220-280	211	5
111.086.00.1	5	260-320	251	5
111.087.00.1	5	300-360	291	5
111.088.00.1	5	340-400	331	5



- For ceiling lowerings of 5-25 mm with fire and sound insulation requirements, use the panel strips, bonded set (art. no. 111.288.00.1)

Geberit Duofix part-height stud

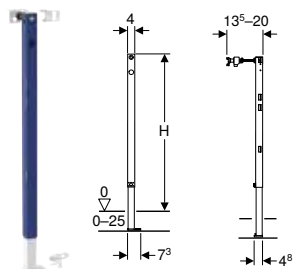

click & scan

Application purposes

- For creating part-height Geberit Duofix system walls
- For metal and wood frame walls
- For installation as intermediate stud or lateral connecting stud
- For floor constructions 0-25 cm

Scope of delivery

- 2 rail clips
- Wall anchor
- Fastening material

Characteristics


- 2025 range
- Alternative fastening point for wall anchors
- Rotatable foot plates
- Inherently stable
- Powder-coated
- Corrosion-resistant
- Foot plate depth suitable for installation in U-profiles UW 50 and UW75 and Geberit Duofix system rails
- Galvanised non-slip leg supports protected against corrosion

Art. no.	B [cm]	H [cm]	T [cm]
111.825.00.2	4	82-112	7.3
111.079.00.2	4	112-144	7.3

Accessories

- Geberit Duofix set of foot extensions 20 cm length → p. 95

Geberit Duofix set of wall anchors for single and system installation

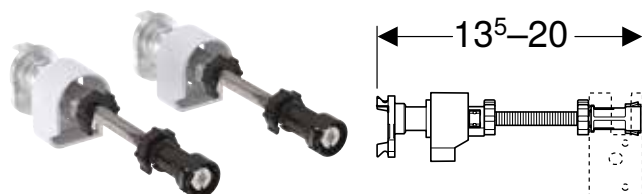

click & scan

Application purposes

- For tool-free fastening of Geberit Duofix installation elements to Duofix system rails
- For fastening Geberit Duofix installation elements in front of dry-walls and solid walls
- For placing and fastening panelling in part-height prewall installations

Scope of delivery

- Set of 2 pieces

Characteristics


- 2025 range
- Compatible with Geberit Duofix installation system from the 2025 series and older series
- Can be adjusted in depth from the front, infinitely variable, with fast adjustment
- Fastening in Geberit Duofix system rail without tools by quarter-turn on the twist-in aid
- Reversible twist-in aid for flush wall support for installation without Geberit Duofix system rails
- Wall anchor 180° can be rotated when mounted directly on the wall without Geberit Duofix system rails
- Threaded rod M10, zinc-plated

Art. no.
111.080.00.1

Accessories

- Geberit Duofix set of wall anchor extensions → p. 91

Geberit Duofix stud for drywall construction, room-height

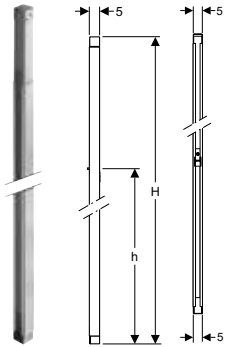

click & scan

Application purposes

- For drywall construction
- For installation in room-height installation walls
- For fastening Geberit Duofix installation elements and crossbars
- For installation as intermediate stud or lateral connecting stud
- For installation in U-profiles UW 50

Scope of delivery

- Fixing bracket
- Fastening material


Characteristics

- Zinc-plated
- Height-adjustable
- Connection of Geberit Duofix installation elements with fixing bracket
- No connection to rear wall or installation wall required
- Can be installed without tools

Art. no.	B [cm]	H [cm]	H1 [cm]	H2 [cm]	h [cm]	T [cm]
111.826.00.1	5	220	220	280	214	5
111.827.00.1	5	260	260	320	254	5

Panellings

Geberit Duofix panel



click & scan

Application purposes

- For single-layer panelling of Geberit Duofix system walls
- For horizontal panelling
- For areas exposed to small and moderate water action
- For use in the water action classes W0-I and W1-I, according to DIN 18534
- Not suitable for standard panel screws

Characteristics

- Screwable with Geberit panel screws
- Impregnated
- Environmentally compatible
- Non-combustible
- Building material class A2, non-combustible, in accordance with DIN 4102
- Type H2 according to EN 520+A1

Technical data

Product material	Plasterboard
Compressive strength	3.5 N/mm ²

Art. no.	B [cm]	H [cm]	T [cm]	Weight of main element [kg]
111.808.00.1	200	60	1.8	18.7


Accessories

- Geberit filler → p. 40
- Geberit panel screw → p. 39
- Geberit panel screw, in magazine → p. 39



- Geberit panel screws must be used to screw in the panels

Geberit Duofix aqua panel Pro

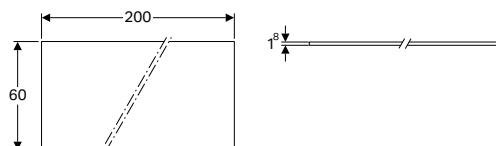

click & scan



Application purposes

- For single-layer panelling of Geberit Duofix system walls
- For horizontal panelling
- For areas exposed to high and very high water action
- For use in all four water action classes W0-I, W1-I, W2-I and W3-I, according to DIN 18534
- Not suitable for standard panel screws

Technical data

Product material	Calcium silicate
Compressive strength	9.3 N/mm ²

Characteristics

- Screwable with Geberit panel screws
- Cement-bonded mineral structural panel
- Water-resistant
- Resistant against mould
- Building material class A1, non-combustible, in accordance with DIN 4102
- Self-supporting
- Dimensionally stable
- Can be processed with woodworking tools as saws and drilling machines
- Circumferential chamfered edges 45°

Art. no.	B [cm]	H [cm]	T [cm]	Weight of main element [kg]
111.578.00.1	60	200	1.8	20.74

Accessories

- Geberit filler for aqua panel Pro → p. 40
- Geberit panel screw → p. 39
- Geberit panel screw, in magazine → p. 39



- Geberit panel screws must be used to screw in the panels

Geberit panel screw



Application purposes

- For fastening Geberit panels and Geberit aqua panels Pro to Geberit Duofix system walls and Geberit GIS support systems

Technical data

Product material	Steel
------------------	-------

Art. no.	B [cm]	H [cm]	T [cm]
461.030.00.1	0.82	0.82	3.8

Characteristics

- Self-drilling screw, 4.2 x 35 mm
- Self-tapping thread
- Steel, hardened and phosphatised
- Flared head with crosshead Phillips PH 2



click & scan

Geberit panel screw, in magazine



Application purposes

- For fastening Geberit panels and Geberit aqua panels Pro to Geberit Duofix system walls and Geberit GIS support systems
- For quick-fit auto-feed screwdriver

Technical data

Product material	Steel
------------------	-------

Art. no.	B [cm]	H [cm]	T [cm]
461.031.00.1	0.82	0.82	3.8

Characteristics

- Self-drilling screw, 4.2 x 35 mm
- Self-tapping thread
- Steel, hardened and phosphatised
- Flared head with crosshead Phillips PH 2
- Plastic magazine for 50 panel screws



click & scan

Geberit filler



click & scan

Application purposes

- For filling Geberit panels

Characteristics

- Impregnated
- Environmentally compatible
- Powdery

Technical data

Product material	Calcium sulphate
------------------	------------------

Art. no.	B [cm]	H [cm]	T [cm]
464.015.00.1	22.6	30	10

Geberit filler for aqua panel Pro



click & scan

Application purposes

- For filling Geberit aqua panels Pro in areas exposed to high and very high water action

Characteristics

- Environmentally compatible
- Water-resistant
- Powdery


Technical data

Product material	Calcium sulphate
------------------	------------------

Art. no.	B [cm]	H [cm]	T [cm]
464.044.00.1	22.6	30	10

Accessories

Geberit Duofix clip for pipe fixation

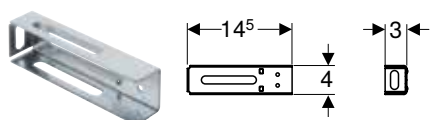

click & scan

Application purposes

- For fastening to Geberit Duofix stands
- For sliding bracket fastenings
- For discharge pipes up to \varnothing 110 mm (DN 100)
- For fastening supply lines

Scope of delivery

- Fastening material

Characteristics

- Zinc-plated

Art. no.

111.891.00.1

Geberit Duofix corner bracket



click & scan

Application purposes

- For installation in part or room-height Geberit Duofix system walls
- For bracing inside corner elbows
- For creating 90° angles with Geberit Duofix system walls

Scope of delivery

- Fastening material


Characteristics

- Zinc-plated

Art. no.

111.841.00.1

Geberit Duofix set of twist-in fastening brackets

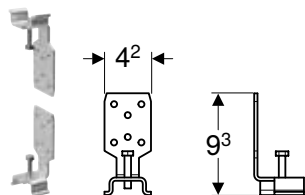

click & scan

Application purposes

- For securing the precise position of Geberit Duofix studs, room-height in the system rails

Scope of delivery

- 2 twist-in fastening brackets
- Fastening material


Characteristics

- Can be turned later into Geberit Duofix system rail
- Screwable to Geberit Duofix stud, room-height
- Zinc-plated
- Fixing bracket specific for left and right turning

Art. no.

111.029.00.1

Geberit set of wood screws with dowels

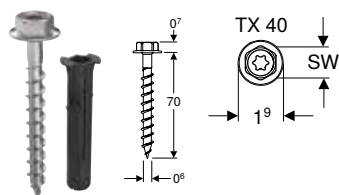

click & scan

Application purposes

- For fastening Geberit Duofix system rails

Scope of delivery

- Bolt
- Dowel

Characteristics

- Hexalobular socket TX 40

Art. no.

111.089.00.1

SW
[mm]

13

Geberit void dowel made of metal



click & scan

Application purposes

- For fastening Geberit GIS mounting brackets to panels with paneling thickness of 18–25 mm
- For fastening Geberit Duofix system rails to panels with panelling thickness of 18–25 mm

Scope of delivery

- Screw M6

Characteristics

- Zinc-plated

Art. no.





465.029.00.1

Installation elements

Elements for WCs

Accessory overview – Geberit Duofix elements for WCs

Geberit International Sales, version: December 2025








	Geberit set of support brackets for WC ceramic appliances with small contact surfaces	Geberit Duofix set of wall anchors for single installation, corner construction	Geberit Duofix set of wall anchors for single installation	Geberit Duofix set of wall anchors for single and system installation	
	111.847.00.1	111.835.00.1	111.815.00.1	111.080.00.1	
					
	→ p. 96	→ p. 90	→ p. 89	→ p. 37	
Actuator plates of the Sigma series					
111.950.00.6 Geberit Duofix element for wall-hung WC, 112 cm, with Sigma concealed cistern 12 cm	✓	✓	✓	✓	
111.900.00.6 Geberit Duofix element for wall-hung WC, 112 cm, with Sigma concealed cistern 12 cm and Power & Connect box	✓	✓	✓	✓	
111.350.00.6 Geberit Duofix element for wall-hung WC, 112 cm, with Sigma concealed cistern 12 cm, barrier-free	✓	✓	✓	✓	
111.923.00.6 Geberit Duofix Bambini element for wall-hung WC for children, 97 cm, with Sigma concealed cistern 12 cm	✓	✓	✓	✓	
111.796.00.2 Geberit Duofix element for wall-hung WC, 114 cm, with Sigma concealed cistern 8 cm		✓		✓	
Actuator plates of the Omega series					
111.060.00.2 Geberit Duofix element for wall-hung WC, 112 cm, with Omega concealed cistern 12 cm	✓	✓	✓	✓	
111.030.00.2 Geberit Duofix element for wall-hung WC, 98 cm, with Omega concealed cistern 12 cm	✓	✓	✓	✓	
111.003.00.2 Geberit Duofix element for wall-hung WC, 82 cm, with Omega concealed cistern 12 cm	✓	✓	✓	✓	
Actuator plates of the Alpha series					
458.212.00.2 Geberit Duofix element for wall-hung WC, 82 cm, with Alpha concealed cistern 12 cm, 6 / 3 litres	✓				
458.233.00.3 Geberit Duofix element for wall-hung WC, 112 cm, with Alpha concealed cistern 12 cm, 6 / 3 litres	✓				

✓ Compatible


¹⁾ The Power & Connect box is already included in the scope of delivery

²⁾ It is not possible to combine an electronic WC flush control with Geberit AquaClean.



	Geberit Duofix Basic set of wall anchors for single installation	Set of wall anchors for single installation, for Geberit Duofix element for wall-hung WC, with concealed cistern 8 cm	Geberit Duofix fastening material for stud clearance 50–57.5 cm	Geberit Duofix set of foot extensions 20 cm length	Geberit Duofix set of leg supports with large foot plate, for floor constructions 25–45 cm	Geberit Duofix set of foot fastener on rear wall	Geberit set of Power & Connect box and power supply unit for element for wall-hung WC
	111.839.00.2	111.013.00.1	111.869.00.1	111.848.00.2	111.221.00.2	111.064.00.1	116.098.00.6
							
	→ p. 90	→ p. 90	→ p. 94	→ p. 95	→ p. 95	→ p. 96	→ p. 250
		✓	✓	✓		✓	✓
		✓	✓	✓		✓	✓ ¹⁾
			✓	✓		✓	✓ ²⁾
				✓		✓	
		✓	✓	✓			
			✓	✓		✓	✓
				✓		✓	✓
	✓			✓		✓	
	✓		✓	✓		✓	

Geberit Duofix element for wall-hung WC, 112 cm, with Sigma concealed cistern 12 cm and Power & Connect box

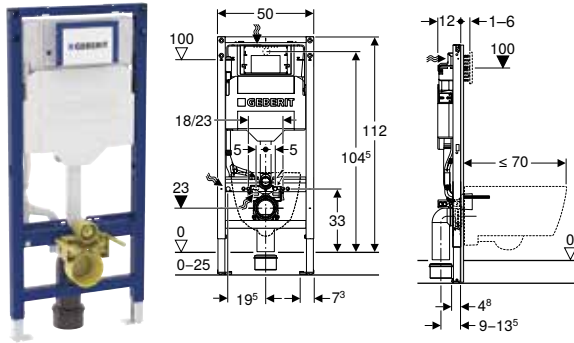

Application purposes

- For metal and wood frame walls
- For Geberit Duofix system walls
- For installation in part- or room-height prewalls
- For installation in room-height partition walls
- For floor constructions 0–25 cm
- For wall-hung WCs
- For hidden mains connection behind the WC ceramic appliance
- Not suitable for fire protection sets for Geberit Duofix element for wall-hung WC or fire protection for flush pipe and connection bend

Technical data

Flow pressure	0.1–10 bar
Flush volume, factory setting	6 l / 3 l
Flush volume large, adjustment range	4 l / 4.5 l / 6 l / 7.5 l
Flush volume small, adjustment range	2–4 l
Flow rate at 300 kPa / 3 bar	0.16 l/s
Product material	Steel
Height-adjustable	Yes

Scope of delivery

- Water supply connection R 1/2", compatible with MasterFix and MeplaFix, with integrated angle stop valve and hand wheel
- Protection box for service opening
- Connection set for WC, \varnothing 90 mm
- Connection bend 90° made of PE-HD, \varnothing 90 mm
- Adapter socket made of PE-HD, \varnothing 90 / 110 mm
- Power & Connect box, with intermediate bottom with terminal
- Conduit pipe, length 0.32 m, for connection of Geberit AquaClean
- Protection cover for Power & Connect box
- Fastening and protection material

Characteristics

- 2025 range
- Statically self-supporting frame, protected against corrosion with powder coating
- Frame for wall-hung WCs with connection dimensions as per EN 33 and projection up to 70 cm
- With pull-out plate for lateral fastening above the element on metal or wood profiles or on Geberit Duofix system studs
- Alternative fastening point for wall anchors
- Rotating foot plates, suitable for installation in U profiles UW 50 and UW 75
- Foot plates that can be mounted in Geberit Duofix system rail without tools, without additional components
- Galvanised non-slip leg supports protected against corrosion
- Connection bend can be mounted without tools at different depths, adjustable range 45 mm
- Geberit Sigma concealed cistern 12 cm, fully insulated against condensation
- For front actuation, suitable for single, dual and stop-and-go flushes
- Immediate post flush possible with factory setting
- Tool-free installation and maintenance work on concealed cistern
- Water supply connection on the rear or top centre
- Protection box for service opening, can be cut to length, protects against moisture and dirt
- With conduit pipe for feed pipe for Geberit AquaClean shower toilets and for connection cable
- Prepared for installation of a 12 V power supply unit behind the WC ceramic appliance

Art. no.	B [cm]	H [cm]	T [cm]
111.900.00.6	50	112	12

To order additionally

- Geberit power supply unit for Power & Connect box → p. 249


Accessories

- Accessory overview – Geberit Duofix elements for WCs → p. 43



- Actuator plate has to be ordered separately

Geberit Duofix element for wall-hung WC, 112 cm, with Sigma concealed cistern 12 cm

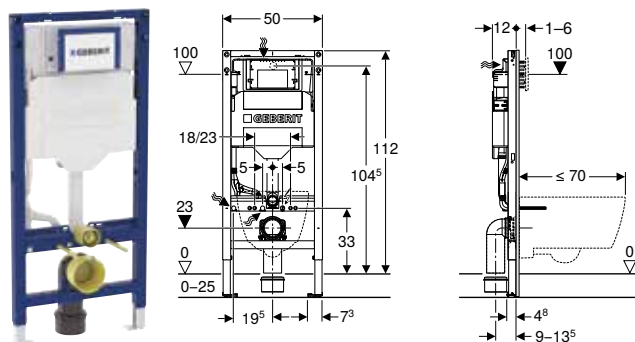

click & scan



Application purposes

- For metal and wood frame walls
- For Geberit Duofix system walls
- For installation in part- or room-height prewalls
- For installation in room-height partition walls
- For floor constructions 0–25 cm
- For wall-hung WCs

Technical data

Flow pressure	0.1–10 bar
Flush volume, factory setting	6 l / 3 l
Flush volume large, adjustment range	4 l / 4.5 l / 6 l / 7.5 l
Flush volume small, adjustment range	2–4 l
Product material	Steel
Height-adjustable	Yes

Scope of delivery

- Water supply connection R 1/2", compatible with MasterFix and MeplaFix, with integrated angle stop valve and hand wheel
- Protection box for service opening
- Connection set for WC, \varnothing 90 mm
- Connection bend 90° made of PE-HD, \varnothing 90 mm
- Adapter socket made of PE-HD, \varnothing 90 / 110 mm
- Fastening and protection material

Characteristics

- 2025 range
- Statically self-supporting frame, protected against corrosion with powder coating
- Frame for wall-hung WCs with connection dimensions as per EN 33 and projection up to 70 cm
- With pull-out plate for lateral fastening above the element on metal or wood profiles or on Geberit Duofix system studs
- Alternative fastening point for wall anchors
- Rotating foot plates, suitable for installation in U profiles UW 50 and UW 75
- Foot plates that can be mounted in Geberit Duofix system rail without tools, without additional components
- Galvanised non-slip leg supports protected against corrosion
- Connection bend can be mounted without tools at different depths, adjustable range 45 mm
- Geberit Sigma concealed cistern 12 cm, fully insulated against condensation
- For front actuation, suitable for single, dual and stop-and-go flushes
- Immediate post flush possible with factory setting
- Tool-free installation and maintenance work on concealed cistern
- Water supply connection on the rear or top centre
- Protection box for service opening, can be cut to length, protects against moisture and dirt
- With conduit pipe for feed pipe for Geberit AquaClean shower toilets and for connection cable
- Fastening for electrical connection and Power & Connect Box

Art. no.	B [cm]	H [cm]	T [cm]
111.950.00.6	50	112	12


Accessories

- Accessory overview – Geberit Duofix elements for WCs → p. 43



- Actuator plate has to be ordered separately
- Replaces art. no. 111.300.00.5

Geberit Duofix element for wall-hung WC, 112 cm, with Sigma concealed cistern 12 cm, barrier-free

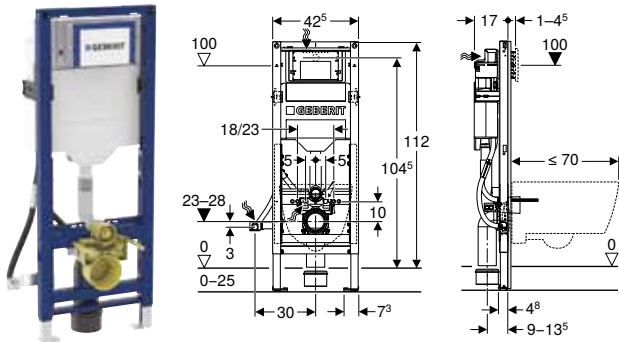

click & scan

Application purposes

- For metal and wood frame walls
- For Geberit Duofix system walls
- For installation in part- or room-height prewalls
- For installation in room-height partition walls
- Suitable for barrier-free construction
- For floor constructions 0–25 cm
- For wall-hung WCs
- For hidden connection in WC ceramic appliances
- Not suitable for fire protection sets for Geberit Duofix element for wall-hung WC or fire protection for flush pipe and connection bend

Technical data

Flow pressure	0.1–10 bar
Flush volume, factory setting	6 l / 3 l
Flush volume large, adjustment range	4 l / 4.5 l / 6 l / 7.5 l
Flush volume small, adjustment range	2–4 l
Flow rate at 300 kPa / 3 bar	0.16 l/s
Product material	Steel
Height-adjustable	Yes

Scope of delivery

- Water supply connection R 1/2", compatible with MasterFix and MeplaFix, with integrated angle stop valve and hand wheel
- Protection box for service opening
- Connection set for WC, \varnothing 90 mm
- Connection bend 90° made of PE-HD, \varnothing 90 mm
- Adapter socket made of PE-HD, \varnothing 90 / 110 mm
- Power & Connect box, with intermediate bottom with terminal
- Conduit pipe, length 0.32 m, for connection of Geberit AquaClean
- Protection cover for Power & Connect box
- Fastening and protection material

Characteristics

- 2025 range
- Statically self-supporting frame, protected against corrosion with powder coating
- Frame for wall-hung WCs with connection dimensions as per EN 33 and projection up to 70 cm
- Adjustable installation height of WC during the installation phase, 41–46 cm
- Frame width reduced for placement of support handles next to the element
- With pull-out plate for lateral fastening above the element on metal or wood profiles or on Geberit Duofix system studs
- Rotating foot plates, suitable for installation in U profiles UW 50 and UW 75
- Foot plates that can be mounted in Geberit Duofix system rail without tools, without additional components
- Galvanised non-slip leg supports protected against corrosion
- Connection bend can be mounted without tools at different depths, adjustable range 45 mm
- Geberit Sigma concealed cistern 12 cm, fully insulated against condensation
- For front actuation, suitable for single, dual and stop-and-go flushes
- Immediate post flush possible with factory setting
- Tool-free installation and maintenance work on concealed cistern
- Water supply connection on the rear or top centre
- Protection box for service opening, can be cut to length, protects against moisture and dirt
- With conduit pipe for feed pipe for Geberit AquaClean shower toilets or for connection cable
- Prepared for installation of a 12 V power supply unit behind the WC ceramic appliance

Art. no.	B [cm]	H [cm]	T [cm]
111.350.00.6	42.5	112	17

To order additionally

- Geberit power supply unit for Power & Connect box → p. 249


Accessories

- Accessory overview – Geberit Duofix elements for WCs → p. 43



- Actuator plate has to be ordered separately
- When using the Power & Connect box, it is not possible to combine an electronic WC flush control with Geberit AquaClean
- Power & Connect Box included in the scope of delivery from April 2026

Geberit Duofix Bambini element for wall-hung WC for children, 97 cm, with Sigma concealed cistern 12 cm

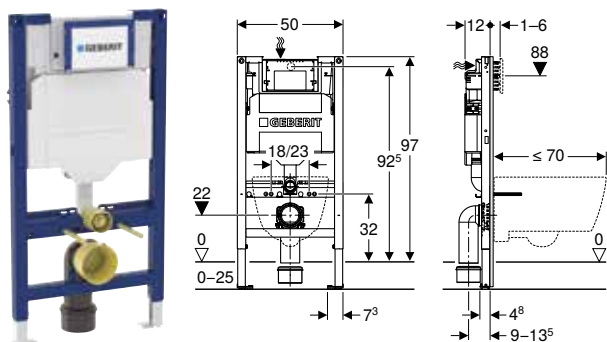

Application purposes

- For metal and wood frame walls
- For Geberit Duofix system walls
- For installation in part- or room-height prewalls
- For installation in room-height partition walls
- For installation in Geberit GIS support systems for prewalls
- For floor constructions 0–25 cm
- For wall-mounted WCs for children
- For actuator plate for Bambini WC

Technical data

Flow pressure	0.1–10 bar
Flush volume, factory setting	6 l / 3 l
Flush volume large, adjustment range	4 l / 4.5 l / 6 l / 7.5 l
Flush volume small, adjustment range	2–4 l
Flow rate at 300 kPa / 3 bar	0.16 l/s
Product material	Steel
Height-adjustable	Yes

Scope of delivery

- Water supply connection R 1/2", compatible with MasterFix and MeplaFix, with integrated angle stop valve and hand wheel
- Protection box for service opening
- Connection set for WC, \varnothing 90 mm
- Connection bend 90° made of PE-HD, \varnothing 90 mm
- Adapter socket made of PE-HD, \varnothing 90 / 110 mm
- 2 fixing brackets for studs
- Fastening and protection material

Art. no.	B [cm]	H [cm]	T [cm]
111.923.00.6	50	97	12

Can be combined with

- Geberit Sigma01 actuator plate, round, dual flush, for Bambini WC → p. 176
- Geberit Bambini wall-hung WC for children, washdown, Rimfree, for WC seat
- Geberit Bambini wall-hung WC for children, washdown, for WC seat

Accessories

- Accessory overview – Geberit Duofix elements for WCs → p. 43




- Actuator plate has to be ordered separately

Characteristics

- 2025 range
- Statically self-supporting frame, protected against corrosion with powder coating
- Frame for wall-hung WCs with connection dimensions as per EN 33 and projection up to 70 cm
- Rotating foot plates, suitable for installation in U profiles UW 50 and UW 75
- Foot plates that can be mounted in Geberit Duofix system rail without tools, without additional components
- Galvanised non-slip leg supports protected against corrosion
- Connection bend can be mounted without tools at different depths, adjustable range 45 mm
- Geberit Sigma concealed cistern 12 cm, fully insulated against condensation
- Front actuation
- Immediate post flush possible with factory setting
- Tool-free installation and maintenance work on concealed cistern
- Water supply connection on the rear or top centre
- Protection box for service opening, can be cut to length, protects against moisture and dirt

Geberit Duofix element for wall-hung WC, 114 cm, with Sigma concealed cistern 8 cm

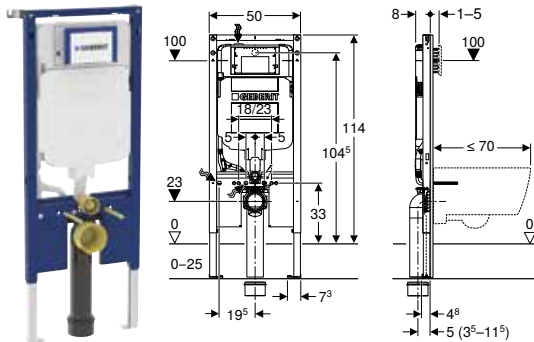

click & scan

Application purposes

- For metal and wood frame walls
- For Geberit Duofix system walls
- For installation in part- or room-height prewalls
- For installation in room-height partition walls
- For floor constructions 0–25 cm
- For wall-hung WCs

Technical data

Flow pressure	0.1–10 bar
Flush volume, factory setting	6 l / 3 l
Flush volume large, adjustment range	4 l / 4.5 l / 6 l / 7.5 l
Flush volume small, adjustment range	2–4 l
Product material	Steel
Height-adjustable	Yes

Scope of delivery

- Water supply connection R 1/2", compatible with MasterFix and MeplaFix, with integrated angle stop valve and hand wheel
- Protection box for service opening
- 2 wall anchors
- Connection set for WC, \varnothing 90 mm
- Connection bend 90° made of PE-HD, \varnothing 90 mm
- Adapter socket made of PE-HD, \varnothing 90 / 110 mm
- Fastening and protection material

Characteristics

- 2025 range
- Statically self-supporting frame, protected against corrosion with powder coating
- Frame for wall-hung WCs with connection dimensions as per EN 33 and projection up to 70 cm
- With pull-out plate for lateral fastening above the element on metal or wood profiles or on Geberit Duofix system studs
- Alternative fastening point for wall anchors
- Rotating foot plates, suitable for installation in U profiles UW 50 and UW 75
- Foot plates that can be mounted in Geberit Duofix system rail without tools, without additional components
- Galvanised non-slip leg supports protected against corrosion
- Connection bend can be mounted without tools at different depths, adjustable range 80 mm
- Interrupted crossbar enables a front flush depth for the vertical outlet bend
- Waste connector bend, extended, for connection in floor
- Geberit Sigma concealed cistern 8 cm, fully insulated against condensation
- For front actuation, suitable for single, dual and stop-and-go flushes
- Immediate post flush possible with factory setting
- Tool-free installation and maintenance work on concealed cistern
- Water supply connection on the top left
- Protection box for service opening, can be cut to length, protects against moisture and dirt
- With conduit pipe for feed pipe for Geberit AquaClean shower toilets and for connection cable
- Fastening option for electrical connection

Art. no.	B [cm]	H [cm]	T [cm]
111.796.00.2	50	114	8


Accessories

- Accessory overview – Geberit Duofix elements for WCs → p. 43



- Actuator plate has to be ordered separately

Geberit Duofix element for wall-hung WC, 82 cm, with Omega concealed cistern 12 cm

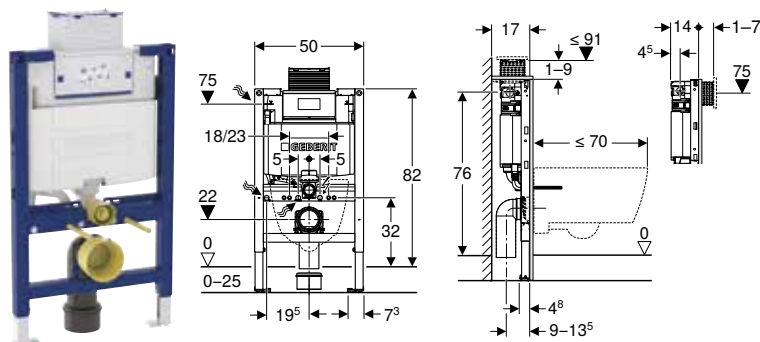

click & scan



Application purposes

- For metal and wood frame walls
- For Geberit Duofix system walls
- For installation in part-height prewalls
- For floor constructions 0–25 cm
- For wall-hung WCs

Technical data

Flow pressure	0.1–10 bar
Flush volume, factory setting	6 l / 3 l
Flush volume large, adjustment range	4 l / 4.5 l / 6 l / 7.5 l
Flush volume small, adjustment range	2–4 l
Flow rate at 300 kPa / 3 bar	0.16 l/s
Product material	Steel
Height-adjustable	Yes

Scope of delivery

- Water supply connection R 1/2", compatible with MasterFix and MeplaFix, with integrated angle stop valve and hand wheel
- Protection box for service opening
- Connection set for WC, \varnothing 90 mm
- Connection bend 90° made of PE-HD, \varnothing 90 mm
- Adapter socket made of PE-HD, \varnothing 90 / 110 mm
- Fastening and protection material

Characteristics

- 2025 range
- Statically self-supporting frame, protected against corrosion with powder coating
- Frame for wall-hung WCs with connection dimensions as per EN 33 and projection up to 70 cm
- Frame with \varnothing 9 mm drilling holes for fastening in wood frame construction
- Rotating foot plates, suitable for installation in U profiles UW 50 and UW 75
- Foot plates that can be mounted in Geberit Duofix system rail without tools, without additional components
- Galvanised non-slip leg supports protected against corrosion
- Connection bend can be mounted without tools at different depths, adjustable range 45 mm
- Geberit Omega concealed cistern 12 cm, fully insulated against condensation
- For top or front actuation, suitable for dual flush
- Immediate post flush possible with factory setting
- Tool-free installation and maintenance work on concealed cistern
- Water supply connection on the left or rear left
- Protection box for service opening, can be cut to length, protects against moisture and dirt
- With conduit pipe for feed pipe for Geberit AquaClean shower toilets and for connection cable
- Fastening for electrical connection and Power & Connect Box

Art. no.	B [cm]	H [cm]	T [cm]
111.003.00.2	50	82	14


Accessories

- Accessory overview – Geberit Duofix elements for WCs → p. 43



- Actuator plate has to be ordered separately

Geberit Duofix element for wall-hung WC, 98 cm, with Omega concealed cistern 12 cm

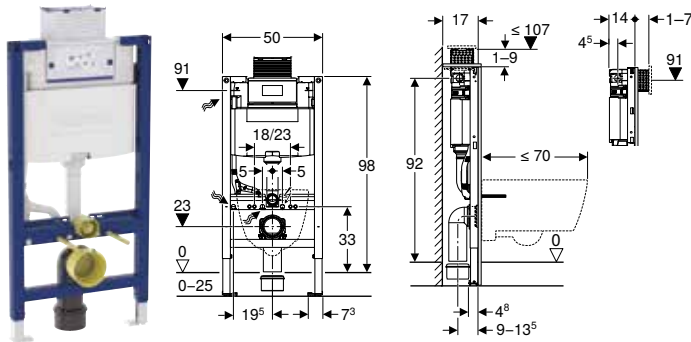

click & scan

Application purposes

- For metal and wood frame walls
- For Geberit Duofix system walls
- For installation in part-height prewalls
- For floor constructions 0–25 cm
- For wall-hung WCs

Technical data

Flow pressure	0.1–10 bar
Flush volume, factory setting	6 l / 3 l
Flush volume large, adjustment range	4 l / 4.5 l / 6 l / 7.5 l
Flush volume small, adjustment range	2–4 l
Flow rate at 300 kPa / 3 bar	0.16 l/s
Product material	Steel
Height-adjustable	Yes

Scope of delivery

- Water supply connection R 1/2", compatible with MasterFix and MeplaFix, with integrated angle stop valve and hand wheel
- Protection box for service opening
- Connection set for WC, \varnothing 90 mm
- Connection bend 90° made of PE-HD, \varnothing 90 mm
- Adapter socket made of PE-HD, \varnothing 90 / 110 mm
- Fastening and protection material

Characteristics

- 2025 range
- Statically self-supporting frame, protected against corrosion with powder coating
- Frame for wall-hung WCs with connection dimensions as per EN 33 and projection up to 70 cm
- Frame with \varnothing 9 mm drilling holes for fastening in wood frame construction
- Rotating foot plates, suitable for installation in U profiles UW 50 and UW 75
- Foot plates that can be mounted in Geberit Duofix system rail without tools, without additional components
- Galvanised non-slip leg supports protected against corrosion
- Connection bend can be mounted without tools at different depths, adjustable range 45 mm
- Geberit Omega concealed cistern 12 cm, fully insulated against condensation
- For top or front actuation, suitable for dual flush
- Immediate post flush possible with factory setting
- Tool-free installation and maintenance work on concealed cistern
- Water supply connection on the left or rear left
- Protection box for service opening, can be cut to length, protects against moisture and dirt
- With conduit pipe for feed pipe for Geberit AquaClean shower toilets and for connection cable
- Fastening for electrical connection and Power & Connect Box

Art. no.	B [cm]	H [cm]	T [cm]
111.030.00.2	50	98	14


Accessories

- Accessory overview – Geberit Duofix elements for WCs → p. 43



- Actuator plate has to be ordered separately

Geberit Duofix element for wall-hung WC, 112 cm, with Omega concealed cistern 12 cm

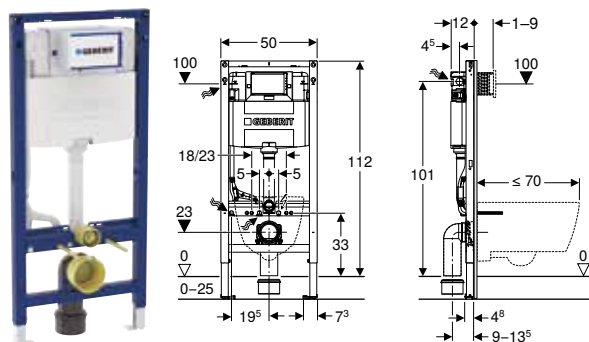

click & scan



Application purposes

- For metal and wood frame walls
- For Geberit Duofix system walls
- For installation in part- or room-height prewalls
- For installation in room-height partition walls
- For floor constructions 0–25 cm
- For wall-hung WCs

Technical data

Flow pressure	0.1–10 bar
Flush volume, factory setting	6 l / 3 l
Flush volume large, adjustment range	4 l / 4.5 l / 6 l / 7.5 l
Flush volume small, adjustment range	2–4 l
Flow rate at 300 kPa / 3 bar	0.16 l/s
Product material	Steel
Height-adjustable	Yes

Scope of delivery

- Water supply connection R 1/2", compatible with MasterFix and MeplaFix, with integrated angle stop valve and hand wheel
- Protection box for service opening
- Connection set for WC, \varnothing 90 mm
- Connection bend 90° made of PE-HD, \varnothing 90 mm
- Adapter socket made of PE-HD, \varnothing 90 / 110 mm
- Fastening and protection material

Characteristics

- 2025 range
- Statically self-supporting frame, protected against corrosion with powder coating
- Frame for wall-hung WCs with connection dimensions as per EN 33 and projection up to 70 cm
- With pull-out plate for lateral fastening above the element on metal or wood profiles or on Geberit Duofix system studs
- Alternative fastening point for wall anchors
- Rotating foot plates, suitable for installation in U profiles UW 50 and UW 75
- Foot plates that can be mounted in Geberit Duofix system rail without tools, without additional components
- Galvanised non-slip leg supports protected against corrosion
- Connection bend can be mounted without tools at different depths, adjustable range 45 mm
- Geberit Omega concealed cistern 12 cm, fully insulated against condensation
- For front actuation, suitable for dual flush
- Immediate post flush possible with factory setting
- Tool-free installation and maintenance work on concealed cistern
- Water supply connection on the left or rear left
- Protection box for service opening, can be cut to length, protects against moisture and dirt
- With conduit pipe for feed pipe for Geberit AquaClean shower toilets and for connection cable
- Fastening for electrical connection and Power & Connect Box

Art. no.	B [cm]	H [cm]	T [cm]
111.060.00.2	50	112	12


Accessories

- Accessory overview – Geberit Duofix elements for WCs → p. 43



- Actuator plate has to be ordered separately

Geberit Duofix element for wall-hung WC, 82 cm, with Alpha concealed cistern 12 cm, 6 / 3 litres

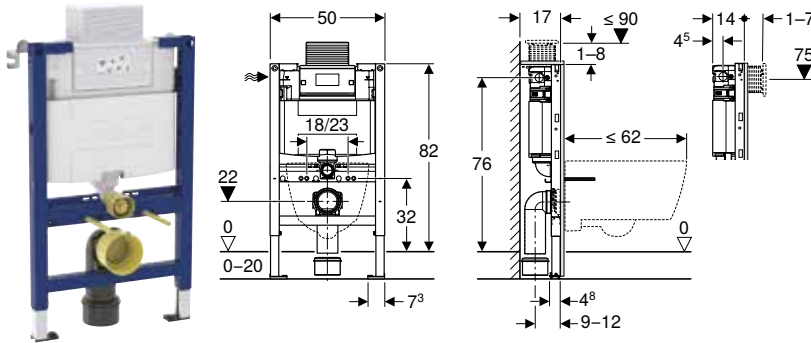

click & scan

Application purposes

- For metal and wood frame walls
- For installation in part-height prewalls
- For floor constructions 0–20 cm
- For wall-hung WCs

Technical data

Flow pressure	0.1–10 bar
Flush volume, factory setting	6 l / 3 l
Flush volume large, adjustment range	4 l / 4.5 l / 6 l / 7.5 l
Flush volume small, adjustment range	2–4 l
Product material	Steel
Height-adjustable	Yes

Scope of delivery

- Water supply connection R 1/2", compatible with MasterFix and MeplaFix, with integrated angle stop valve and hand wheel
- Protection box for service opening
- 2 wall anchors
- Connection set for WC, \varnothing 90 mm
- Connection bend 90° made of PE-HD, \varnothing 90 mm
- Adapter socket made of PE-HD, \varnothing 90 / 110 mm
- Fastening and protection material

Characteristics

- 2025 range
- Statically self-supporting frame, protected against corrosion with powder coating
- Frame for wall-hung WCs with connection dimensions as per EN 33 and projection up to 62 cm
- Frame with \varnothing 9 mm drilling holes for fastening in wood frame construction
- Foot plates made of plastic
- Foot plate depth suitable for installation in U-profiles UW 50
- Galvanised leg supports protected against corrosion
- Geberit Alpha concealed cistern 12 cm fully insulated against condensation
- For top or front actuation, suitable for dual flush
- Immediate post flush possible with factory setting
- Water supply connection on the left
- Protection box for service opening, can be cut to length, protects against moisture and dirt

Art. no.	B [cm]	H [cm]	T [cm]
458.212.00.2	50	82	14


Accessories

- Accessory overview – Geberit Duofix elements for WCs → p. 43



- Actuator plate has to be ordered separately

Geberit Duofix element for wall-hung WC, 112 cm, with Alpha concealed cistern 12 cm, 6 / 3 litres

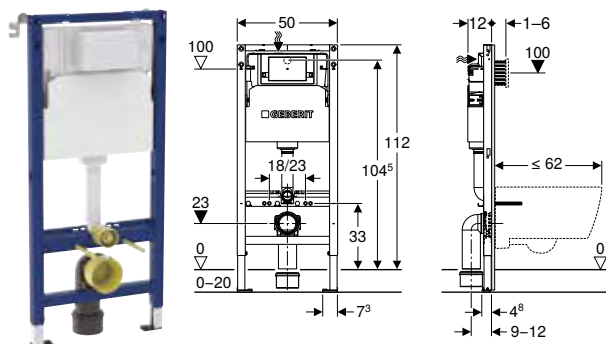

click & scan



Application purposes

- For metal and wood frame walls
- For installation in part- or room-height prewalls
- For installation in room-height partition walls
- For floor constructions 0–20 cm
- For wall-hung WCs

Technical data

Flow pressure	0.1–10 bar
Flush volume, factory setting	6 l / 3 l
Flush volume large, adjustment range	4 l / 4.5 l / 6 l / 7.5 l
Flush volume small, adjustment range	2–4 l
Product material	Steel
Height-adjustable	Yes

Scope of delivery

- Water supply connection unit R 1/2", compatible with MasterFix and MeplaFix, with integrated angle stop valve and adapter ring
- Protection box for service opening
- 2 wall anchors
- Connection set for WC, \varnothing 90 mm
- Connection bend 90° made of PE-HD, \varnothing 90 mm
- Adapter socket made of PE-HD, \varnothing 90 / 110 mm
- Fastening and protection material

Art. no.	B [cm]	H [cm]	T [cm]
458.233.00.3	50	112	12

Accessories

- Accessory overview – Geberit Duofix elements for WCs → p. 43



- Actuator plate has to be ordered separately








Characteristics

- 2025 range
- Statically self-supporting frame, protected against corrosion with powder coating
- Frame for wall-hung WCs with connection dimensions as per EN 33 and projection up to 62 cm
- Alternative fastening point for wall anchors
- Foot plates made of plastic
- Foot plate depth suitable for installation in U-profiles UW 50
- Galvanised leg supports protected against corrosion
- Geberit Alpha concealed cistern 12 cm fully insulated against condensation
- For front actuation, suitable for dual flush
- Immediate post flush possible with factory setting
- Water supply connection on the rear or top centre
- Protection box for service opening, can be cut to length, protects against moisture and dirt

Elements for washbasins

Accessory overview – Geberit Duofix elements for washbasins

Geberit International Sales, version: December 2025

	Geberit washbasin taps for concealed function box	Geberit ready-to-fit set for washbasin with concealed trap	Geberit Duofix fastening for washbasins with fastening distance 38–58 cm	Geberit Duofix set of wall anchors for single installation	Geberit Duofix set of wall anchors for single and system installation	Geberit DuofixBasic set of wall anchors for single installation	Geberit Duofix set of foot fastener on rear wall	
		115.416.xx.1/ 115.415.00.1	111.868.00.1	111.815.00.1	111.080.00.1	111.839.00.2	111.064.00.1	
								
		→ p. 91	→ p. 94	→ p. 89	→ p. 37	→ p. 90	→ p. 96	
111.434.00.2 Geberit Duofix element for washbasin, 112 cm, deck-mounted tap			✓	✓	✓		✓	
111.266.00.2 Geberit Duofix element for washbasin, 112 cm, slim design, deck-mounted tap				✓	✓		✓	
111.490.00.2 Geberit Duofix element for washbasin, 82–98 cm, deck-mounted tap			✓	✓	✓		✓	
111.274.00.2 Geberit Duofix element for washbasin, 112–130 cm, slim design, wall-mounted tap, concealed				✓	✓		✓	
111.480.00.2 Geberit Duofix element for washbasin, 112 cm, deck-mounted tap, with concealed trap		✓	✓	✓	✓		✓	
111.489.00.2 Geberit Duofix element for washbasin, 82–98 cm, deck-mounted tap, with concealed trap		✓	✓	✓	✓		✓	
111.553.00.2 Geberit Duofix element for washbasin, 112 cm, electronic deck-mounted tap with concealed function box	✓			✓	✓		✓	
111.563.00.2 Geberit Duofix element for washbasin, 112 cm, electronic deck-mounted tap with concealed function box, with concealed trap	✓			✓	✓		✓	
111.560.00.2 Geberit Duofix element for washbasin, 130 cm, electronic wall-mounted tap with concealed function box	✓			✓	✓		✓	
111.562.00.2 Geberit Duofix element for washbasin, 130 cm, electronic wall-mounted tap with concealed function box, with concealed trap	✓			✓	✓		✓	
111.069.00.2 Geberit Duofix element for washbasin, 112–130 cm, Geberit ONE wall-mounted tap with concealed function box				✓	✓		✓	
111.271.00.2 Geberit Duofix element, 130 cm, for electronic wall-mounted tap with concealed function box, for ablution	✓			✓			✓	

✓ Compatible



	Geberit Duofix fastening material for stud clearance 50–57.5 cm	Geberit Duofix set of foot extensions 20 cm length	Geberit cover collar for concealed ball valve	Geberit turn handle set for concealed ball valve	Geberit cover plate for concealed function box	Geberit cover plate for concealed function box and concealed trap	Geberit cover plate, surface-even, for concealed function box	Geberit sealing set for Piave and Brenta washbasin taps, wall-mounted, with concealed function box
	111.869.00.1	111.848.00.2	610.090.21.1	610.089.21.1	116.425.11.1	116.426.11.1	116.421.00.1	116.422.00.1
	→ p. 94	→ p. 95	→ p. 99	→ p. 99	→ p. 354	→ p. 354	→ p. 354	→ p. 356
	✓	✓						
		✓						
	✓	✓						
		✓						
	✓	✓						
	✓	✓						
	✓	✓			✓			
	✓	✓				✓		
	✓	✓			✓		✓	✓
	✓	✓				✓		✓
	✓	✓			✓		✓	
	✓	✓			✓		✓	✓

Assortment overview – Geberit Duofix element for washbasin for bathroom furniture

Geberit International Sales, October 2025

Mirror cabinet / washbasin / double washbasin / furniture cabinet	Nominal width in cm	60	75	90	105	120	135
Installation box for Geberit ONE mirror cabinet, height 90 cm	111.941.00.1	✓					
	111.942.00.1		✓				
	111.943.00.1			✓			
	111.944.00.1				✓		
	111.945.00.1					✓	
Geberit Duofix crossbar for element fastening, for stud clearance from 60 cm	111.041.00.1	✓					
	111.042.00.1		✓				
	111.043.00.1			✓			
	111.044.00.1				✓		
	111.045.00.1					✓	
	111.046.00.1						✓
Geberit Duofix element for washbasin, 112 cm, slim design, deck-mounted tap	111.266.00.2	✓				✓ ³⁾	✓ ³⁾
Geberit Duofix element for washbasin, 112–130 cm, slim design, wall-mounted tap, concealed	111.274.00.2	✓				✓ ³⁾	✓ ³⁾
Assortment with Geberit Duofix element for washbasin, standard model		✓ ¹⁾	✓	✓	✓	✓ ³⁾¹⁾	✓ ³⁾¹⁾
Geberit Duofix mounting plate for washbasin with washbasin cabinet and one washbasin tap, concentric	111.951.00.1	✓ ²⁾					
	111.952.00.1		✓				
	111.953.00.1			✓			
	111.954.00.1				✓		
	111.955.00.1					✓	
Geberit Duofix mounting plate for washbasin with washbasin cabinet and one washbasin tap eccentric	111.055.00.1			✓	✓		
Geberit Duofix mounting plate for washbasin with washbasin cabinet and two washbasin taps	111.056.00.1					✓	✓
Geberit Duofix fastening for central drain between two elements for washbasin	111.027.00.1					✓	✓


Compatible with series Geberit ONE and iCon – for other series and third-party products, the effective detail connection dimension of the products must be checked before the final selection

¹⁾ When using Geberit Duofix element for washbasin, standard model with width 50 cm, there are limited positioning options for furniture substructure mounting next to element, compared to element, slim design with 44 cm width

²⁾ Suitable for Geberit Duofix element for washbasin, slim design, with width 44 cm

³⁾ Use of two Duofix installation elements for two outlet taps

Geberit Duofix element for washbasin, 112 cm, slim design, deck-mounted tap

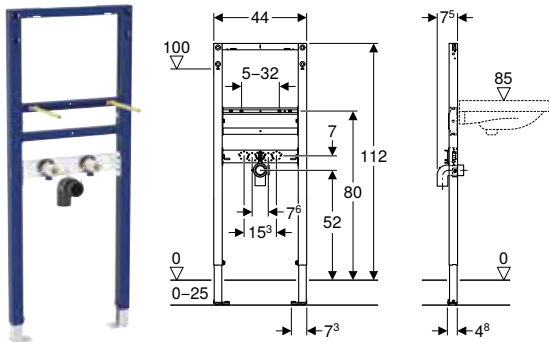

Application purposes

- For metal and wood frame walls
- For Geberit Duofix system walls
- For installation in part- or room-height prewalls
- For installation in room-height partition walls
- For floor constructions 0–25 cm
- For installation of washbasins
- For deck-mounted taps

Scope of delivery

- 2 elbow tap connectors Rp 1/2" / R 1/2", compatible with MF
- 2 sound insulation bases
- 2 insulating sleeves
- Connection bend made of PE-HD, \varnothing 50 mm
- Seal \varnothing 44 / 32 mm
- Fastening material

Characteristics


- 2025 range
- Allows more positioning options for furniture substructure mounting next to element, compared to element with 50 cm width
- Statically self-supporting frame, protected against corrosion with powder coating
- With pull-out plate for lateral fastening above the element on metal or wood profiles or on Geberit Duofix system studs
- Alternative fastening point for wall anchors
- Rotating foot plates, suitable for installation in U profiles UW 50 and UW 75
- Foot plates that can be mounted in Geberit Duofix system rail without tools, without additional components
- Galvanised non-slip leg supports protected against corrosion
- Fastening distance washbasin 5–32 cm
- Threaded rods adjustable in depth with 18 or 28 cm fastening distance
- Fastening for connection bend, height-adjustable and sound-absorbing
- Crossbar for tap adjustable in height and depth

Art. no.	B [cm]	H [cm]	T [cm]
111.266.00.2	44	112	7.5

Accessories

- Accessory overview – Geberit Duofix elements for washbasins → p. 55

Geberit Duofix element for washbasin, 112 cm, electronic deck-mounted tap with concealed function box

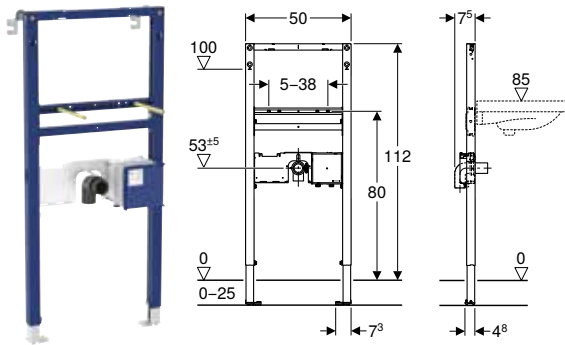

click & scan

Application purposes

- For metal and wood frame walls
- For masonry walls
- For Geberit Duofix system walls
- For installation in part- or room-height prewalls
- For installation in room-height partition walls
- For floor constructions 0–25 cm
- For installation of washbasins
- For Piave and Brenta washbasin taps, deck-mounted, with concealed function box

Scope of delivery

- 2 wall anchors
- Connection bend made of PE-HD, \varnothing 50 mm
- Seal \varnothing 44 / 32 mm
- Protection box with cover, for concealed housing
- Fastening material

Characteristics

- 2025 range
- Statically self-supporting frame, protected against corrosion with powder coating
- With pull-out plate for lateral fastening above the element on metal or wood profiles or on Geberit Duofix system studs
- Alternative fastening point for wall anchors
- Rotating foot plates, suitable for installation in U profiles UW 50 and UW 75
- Foot plates that can be mounted in Geberit Duofix system rail without tools, without additional components
- Galvanised non-slip leg supports protected against corrosion
- Fastening distance for washbasin 5–38 cm
- Threaded rods adjustable in depth with 18 or 28 cm fastening distance
- Water supply connection compatible with MasterFix and MeplaFix
- Water supply connection on the bottom of concealed housing
- Fastening for connection bend, height-adjustable and sound-absorbing
- Concealed housing for Geberit washbasin tap, deck-mounted, for concealed function box, premounted
- Shut-off unit integrated in the concealed housing

Art. no.	B [cm]	H [cm]	T [cm]
111.553.00.2	50	112	7.5


Can be combined with

- Geberit Piave washbasin tap, deck-mounted, mains operation, for concealed function box → p. 323
- Geberit Brenta washbasin tap, deck-mounted, mains operation, for concealed function box → p. 325
- Geberit Piave washbasin tap, deck-mounted, battery operation, for concealed function box → p. 330
- Geberit Brenta washbasin tap, deck-mounted, battery operation, for concealed function box → p. 332
- Geberit Piave washbasin tap, deck-mounted, generator operation, for concealed function box → p. 337
- Geberit Brenta washbasin tap, deck-mounted, generator operation, for concealed function box → p. 339

Accessories

- Accessory overview – Geberit Duofix elements for washbasins → p. 55

Geberit Duofix element for washbasin, 112 cm, deck-mounted tap

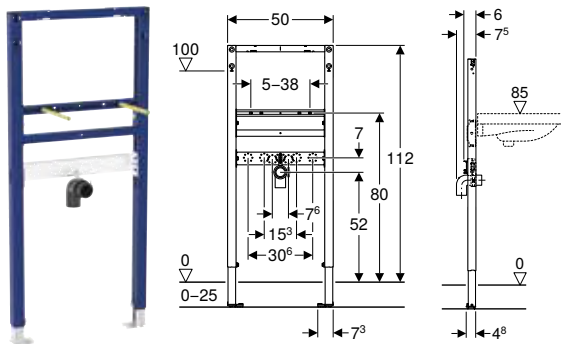

click & scan



Application purposes

- For metal and wood frame walls
- For Geberit Duofix system walls
- For installation in part- or room-height prewalls
- For installation in room-height partition walls
- For floor constructions 0–25 cm
- For installation of washbasins
- For deck-mounted taps

Scope of delivery

- Connection bend made of PE-HD, \varnothing 50 mm
- Seal \varnothing 44 / 40 mm
- Fastening material

Characteristics


- 2025 range
- Statically self-supporting frame, protected against corrosion with powder coating
- With pull-out plate for lateral fastening above the element on metal or wood profiles or on Geberit Duofix system studs
- Alternative fastening point for wall anchors
- Rotating foot plates, suitable for installation in U profiles UW 50 and UW 75
- Foot plates that can be mounted in Geberit Duofix system rail without tools, without additional components
- Galvanised non-slip leg supports protected against corrosion
- Fastening distance for washbasin 5–38 cm
- Threaded rods adjustable in depth with 18 or 28 cm fastening distance
- Fastening for connection bend, height-adjustable and sound-absorbing
- Crossbar for tap adjustable in height and depth

Art. no.	B [cm]	H [cm]	T [cm]
111.434.00.2	50	112	7.5

Accessories

- Accessory overview – Geberit Duofix elements for washbasins → p. 55

Geberit Duofix element for washbasin, 112 cm, electronic deck-mounted tap with concealed function box, with concealed trap

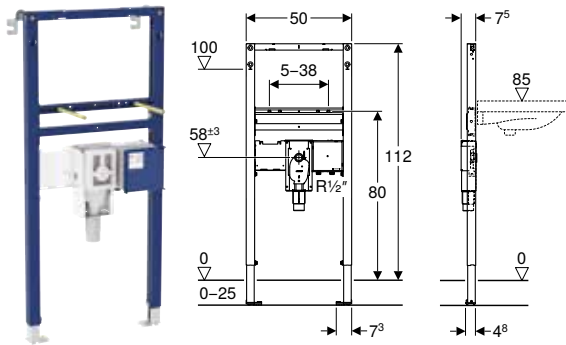

click & scan

Application purposes

- For metal and wood frame walls
- For masonry walls
- For Geberit Duofix system walls
- For installation in part- or room-height prewalls
- For installation in room-height partition walls
- Suitable for barrier-free construction
- For floor constructions 0–25 cm
- For installation of washbasins
- For Piave and Brenta washbasin taps, deck-mounted, with concealed function box

Scope of delivery

- 2 wall anchors
- Protection box
- Protection box with cover, for concealed housing
- Fastening material

Characteristics

- 2025 range
- Statically self-supporting frame, protected against corrosion with powder coating
- With pull-out plate for lateral fastening above the element on metal or wood profiles or on Geberit Duofix system studs
- Alternative fastening point for wall anchors
- Rotating foot plates, suitable for installation in U profiles UW 50 and UW 75
- Foot plates that can be mounted in Geberit Duofix system rail without tools, without additional components
- Galvanised non-slip leg supports protected against corrosion
- Fastening distance for washbasin 5–38 cm
- Threaded rods adjustable in depth with 18 or 28 cm fastening distance
- Concealed trap with optimum flow guidance and high self-cleaning effect
- Concealed trap can be height-adjusted ± 3 cm during final installation
- In-wall cabinet with straight connector made of PP, $\varnothing 50$ mm
- Water supply connection compatible with MasterFix and MeplaFix
- Water supply connection on the bottom of concealed housing
- Fastening for connection bend, height-adjustable and sound-absorbing
- Concealed housing for Geberit washbasin tap, deck-mounted, for concealed function box, premounted
- Shut-off unit integrated in the concealed housing

Art. no.	B [cm]	H [cm]	T [cm]
111.563.00.2	50	112	7.5


Can be combined with

- Geberit Piave washbasin tap, deck-mounted, mains operation, for concealed function box → p. 323
- Geberit Brenta washbasin tap, deck-mounted, mains operation, for concealed function box → p. 325
- Geberit Piave washbasin tap, deck-mounted, battery operation, for concealed function box → p. 330
- Geberit Brenta washbasin tap, deck-mounted, battery operation, for concealed function box → p. 332
- Geberit Piave washbasin tap, deck-mounted, generator operation, for concealed function box → p. 337
- Geberit Brenta washbasin tap, deck-mounted, generator operation, for concealed function box → p. 339

Accessories

- Accessory overview – Geberit Duofix elements for washbasins → p. 55

Geberit Duofix element for washbasin, 112 cm, deck-mounted tap, with concealed trap

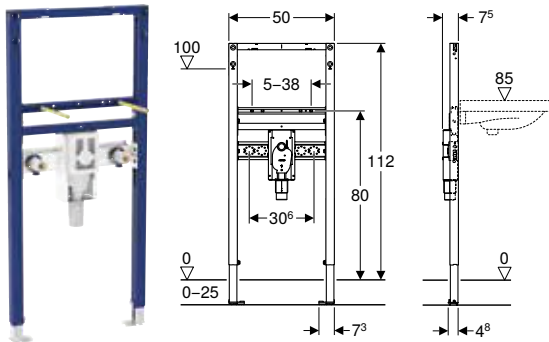

Application purposes

- For metal and wood frame walls
- For Geberit Duofix system walls
- For installation in part- or room-height prewalls
- For installation in room-height partition walls
- Suitable for barrier-free construction
- For floor constructions 0–25 cm
- For installation of washbasins
- For deck-mounted taps

Scope of delivery

- 2 elbow tap connectors Rp 1/2" / R 1/2", compatible with MF
- 2 sound insulation bases
- 2 insulating sleeves
- Protection box
- Fastening material

Characteristics


- 2025 range
- Statically self-supporting frame, protected against corrosion with powder coating
- With pull-out plate for lateral fastening above the element on metal or wood profiles or on Geberit Duofix system studs
- Alternative fastening point for wall anchors
- Rotating foot plates, suitable for installation in U profiles UW 50 and UW 75
- Foot plates that can be mounted in Geberit Duofix system rail without tools, without additional components
- Galvanised non-slip leg supports protected against corrosion
- Fastening distance for washbasin 5–38 cm
- Threaded rods adjustable in depth with 18 or 28 cm fastening distance
- Concealed trap with optimum flow guidance and high self-cleaning effect
- Concealed trap can be height-adjusted ± 3 cm during final installation
- In-wall cabinet with straight connector made of PP, $\varnothing 50$ mm
- Fastening for connection bend, height-adjustable and sound-absorbing
- Crossbar for tap adjustable in height and depth

Art. no.	B [cm]	H [cm]	T [cm]
111.480.00.2	50	112	7.5

Accessories

- Accessory overview – Geberit Duofix elements for washbasins → p. 55

Geberit Duofix element for washbasin, 82–98 cm, deck-mounted tap, with concealed trap

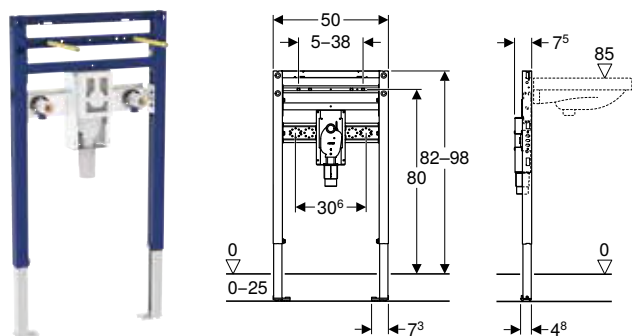

click & scan



Application purposes

- For metal and wood frame walls
- For Geberit Duofix system walls
- For installation in part-height prewalls
- Suitable for barrier-free construction
- For floor constructions 0–25 cm
- For installation of washbasins
- For deck-mounted taps

Scope of delivery

- 2 elbow tap connectors Rp 1/2" / R 1/2", compatible with MF
- 2 sound insulation bases
- 2 insulating sleeves
- Protection box
- Fastening material

Characteristics


- 2025 range
- Statically self-supporting frame, protected against corrosion with powder coating
- Alternative fastening point for wall anchors
- Rotating foot plates, suitable for installation in U profiles UW 50 and UW 75
- Foot plates that can be mounted in Geberit Duofix system rail without tools, without additional components
- Galvanised non-slip leg supports protected against corrosion
- Fastening distance for washbasin 5–38 cm
- Threaded rods adjustable in depth with 18 or 28 cm fastening distance
- Concealed trap with optimum flow guidance and high self-cleaning effect
- Concealed trap can be height-adjusted ± 3 cm during final installation
- In-wall cabinet with straight connector made of PP, \varnothing 50 mm
- Fastening for connection bend, height-adjustable and sound-absorbing
- Crossbar for tap adjustable in height and depth

Art. no.	B [cm]	H [cm]	T [cm]
111.489.00.2	50	82–98	7.5

Accessories

- Accessory overview – Geberit Duofix elements for washbasins → p. 55

Geberit Duofix element for washbasin, 112–130 cm, slim design, wall-mounted tap, concealed

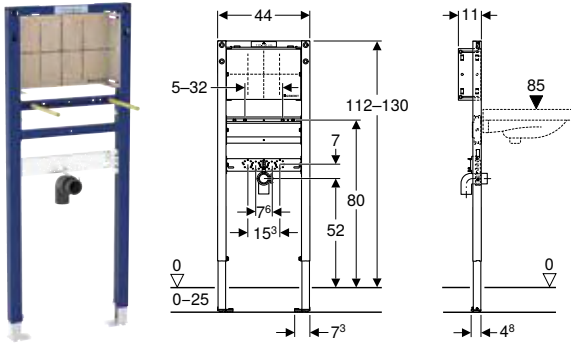

Application purposes

- For metal and wood frame walls
- For Geberit Duofix system walls
- For installation in part- or room-height prewalls
- For installation in room-height partition walls
- For floor constructions 0–25 cm
- For installation of washbasins
- For concealed taps

Scope of delivery

- Connection bend made of PE-HD, \varnothing 50 mm
- Seal \varnothing 44 / 32 mm
- Fastening material

Characteristics


- 2025 range
- Allows more positioning options for furniture substructure mounting next to element, compared to element with 50 cm width
- Statically self-supporting frame, protected against corrosion with powder coating
- With pull-out plate for lateral fastening above the element on metal or wood profiles or on Geberit Duofix system studs
- Alternative fastening point for wall anchors
- Rotating foot plates, suitable for installation in U profiles UW 50 and UW 75
- Foot plates that can be mounted in Geberit Duofix system rail without tools, without additional components
- Galvanised non-slip leg supports protected against corrosion
- Fastening distance for washbasin 5–38 cm
- Threaded rods adjustable in depth with 18 or 28 cm fastening distance
- Mounting plate adjustable in height and depth
- Mounting plate made of veneered wood, waterproof bonded
- Building material class B2 in accordance with DIN 4102-1, resp. class D-s2, d0 in accordance with EN 13501-3
- Formaldehyde release class A in accordance with EN 1084, resp. Class E 1 according to EN 13936
- Fastening for connection bend, height-adjustable and sound-absorbing

Art. no.	B [cm]	H [cm]	T [cm]
111.274.00.2	44	112–130	11

Accessories

- Accessory overview – Geberit Duofix elements for washbasins → p. 55

Geberit Duofix element for washbasin, 130 cm, electronic wall-mounted tap with concealed function box

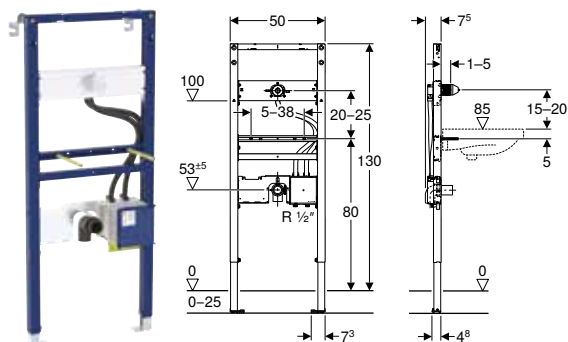

click & scan

Application purposes

- For metal and wood frame walls
- For masonry walls
- For Geberit Duofix system walls
- For installation in part- or room-height prewalls
- For installation in room-height partition walls
- For floor constructions 0–25 cm
- For installation of washbasins
- For Piave and Brenta washbasin taps, wall-mounted, with concealed function box

Scope of delivery

- 2 wall anchors
- Seal \varnothing 44 / 32 mm
- Connection bend made of PE-HD, \varnothing 50 mm
- Protection box with cover, for concealed housing
- Protection box for fastening of wall-mounted tap
- Fastening material

Characteristics

- 2025 range
- Statically self-supporting frame, protected against corrosion with powder coating
- With pull-out plate for lateral fastening above the element on metal or wood profiles or on Geberit Duofix system studs
- Alternative fastening point for wall anchors
- Rotating foot plates, suitable for installation in U profiles UW 50 and UW 75
- Foot plates that can be mounted in Geberit Duofix system rail without tools, without additional components
- Galvanised non-slip leg supports protected against corrosion
- Fastening distance for washbasin 5–38 cm
- Threaded rods adjustable in depth with 18 or 28 cm fastening distance
- Tap crossbar height-adjustable
- Premounted fastening for wall-mounted tap
- Water supply connection compatible with MasterFix and MeplaFix
- Water supply connection on the bottom of concealed housing
- Fastening for connection bend, height-adjustable and sound-absorbing
- Concealed housing for Geberit washbasin tap, wall-mounted, for concealed function box, premounted
- Premounted connection pipes between concealed housing and fastening for wall-mounted tap
- Shut-off unit integrated in the concealed housing

Art. no.	B [cm]	H [cm]	T [cm]
111.560.00.2	50	130	7.5


Can be combined with

- Geberit Piave washbasin tap, wall-mounted, mains operation, for concealed function box → p. 342
- Geberit Brenta washbasin tap, wall-mounted, mains operation, for concealed function box → p. 344
- Geberit Piave washbasin tap, wall-mounted, battery operation, for concealed function box → p. 346
- Geberit Brenta washbasin tap, wall-mounted, battery operation, for concealed function box → p. 348
- Geberit Piave washbasin tap, wall-mounted, generator operation, for concealed function box → p. 350
- Geberit Brenta washbasin tap, wall-mounted, generator operation, for concealed function box → p. 351

Accessories

- Accessory overview – Geberit Duofix elements for washbasins → p. 55

Geberit Duofix element for washbasin, 130 cm, electronic wall-mounted tap with concealed function box, with concealed trap

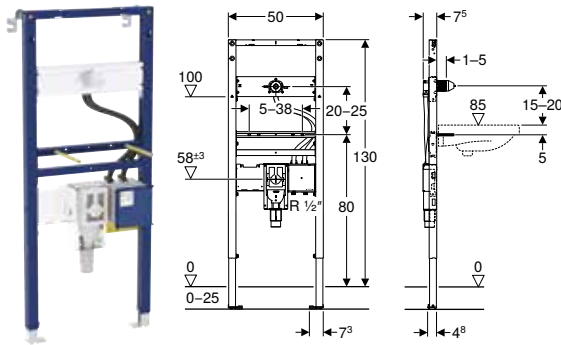

Application purposes

- For metal and wood frame walls
- For drywall construction
- For Geberit Duofix system walls
- For installation in part- or room-height prewalls
- For installation in room-height partition walls
- Suitable for barrier-free construction
- For floor constructions 0–25 cm
- For installation of washbasins
- For Piave and Brenta washbasin taps, wall-mounted, with concealed function box

Scope of delivery

- 2 wall anchors
- Protection box
- Protection box with cover, for concealed housing
- Protection box for fastening of wall-mounted tap
- Fastening material

Characteristics

- 2025 range
- Statically self-supporting frame, protected against corrosion with powder coating
- With pull-out plate for lateral fastening above the element on metal or wood profiles or on Geberit Duofix system studs
- Alternative fastening point for wall anchors
- Rotating foot plates, suitable for installation in U profiles UW 50 and UW 75
- Foot plates that can be mounted in Geberit Duofix system rail without tools, without additional components
- Galvanised non-slip leg supports protected against corrosion
- Fastening distance for washbasin 5–38 cm
- Threaded rods adjustable in depth with 18 or 28 cm fastening distance
- Tap crossbar height-adjustable
- Premounted fastening for wall-mounted tap
- Concealed trap with optimum flow guidance and high self-cleaning effect
- Concealed trap can be height-adjusted ± 3 cm during final installation
- In-wall cabinet with straight connector made of PP, $\varnothing 50$ mm
- Water supply connection compatible with MasterFix and MeplaFix
- Water supply connection on the bottom of concealed housing
- Fastening for connection bend, height-adjustable and sound-absorbing
- Concealed housing for Geberit washbasin tap, wall-mounted, for concealed function box, premounted
- Premounted connection pipes between concealed housing and fastening for wall-mounted tap
- Shut-off unit integrated in the concealed housing

Art. no.	B [cm]	H [cm]	T [cm]
111.562.00.2	50	130	7.4


Can be combined with

- Geberit Brenta washbasin tap, wall-mounted, mains operation, for concealed function box → p. 344
- Geberit Piave washbasin tap, wall-mounted, battery operation, for concealed function box → p. 346
- Geberit Brenta washbasin tap, wall-mounted, battery operation, for concealed function box → p. 348
- Geberit Piave washbasin tap, wall-mounted, generator operation, for concealed function box → p. 350
- Geberit Brenta washbasin tap, wall-mounted, generator operation, for concealed function box → p. 351
- Geberit Piave washbasin tap, wall-mounted, mains operation, for concealed function box → p. 342

Accessories

- Accessory overview – Geberit Duofix elements for washbasins → p. 55

Geberit Duofix element for washbasin, 112–130 cm, Geberit ONE wall-mounted tap with concealed function box

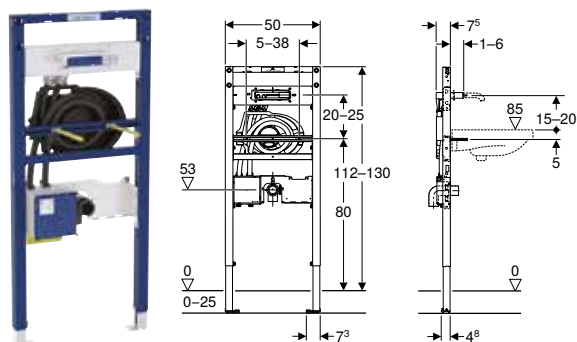

click & scan

Application purposes

- For metal and wood frame walls
- For Geberit Duofix system walls
- For installation in part- or room-height prewalls
- For installation in room-height partition walls
- For floor constructions 0–25 cm
- For installation of washbasins
- For Geberit ONE washbasin taps, wall-mounted, with concealed function box

Scope of delivery

- Connection bend made of PE-HD, \varnothing 50 mm
- Seal \varnothing 44 / 32 mm
- Protection box with cover, for concealed housing
- Protection box for fastening of wall-mounted tap
- Fastening material

Characteristics

- 2025 range
- Statically self-supporting frame, protected against corrosion with powder coating
- With pull-out plate for lateral fastening above the element on metal or wood profiles or on Geberit Duofix system studs
- Alternative fastening point for wall anchors
- Rotating foot plates, suitable for installation in U profiles UW 50 and UW 75
- Foot plates that can be mounted in Geberit Duofix system rail without tools, without additional components
- Galvanised non-slip leg supports protected against corrosion
- Fastening distance for washbasin 5–38 cm
- Premounted fastening for wall-mounted tap
- Water supply connection compatible with MasterFix and MeplaFix
- Water supply connection on the bottom of concealed housing
- Fastening for connection bend, height-adjustable and sound-absorbing
- Concealed housing for Geberit ONE washbasin tap, premounted
- Premounted connection pipes between concealed housing and fastening for wall-mounted tap
- Shut-off unit integrated in the concealed housing

Art. no.	B [cm]	H [cm]	T [cm]
111.069.00.2	50	112–130	7.5

Can be combined with


- Geberit ONE washbasin tap, round design, wall-mounted, two-handle mixer, for concealed function box → p. 352
- Geberit ONE washbasin tap, square design, wall-mounted, two-handle mixer, for concealed function box → p. 352

Accessories

- Accessory overview – Geberit Duofix elements for washbasins → p. 55

Elements for bidets

Geberit Duofix element for bidet, 112 cm, universal

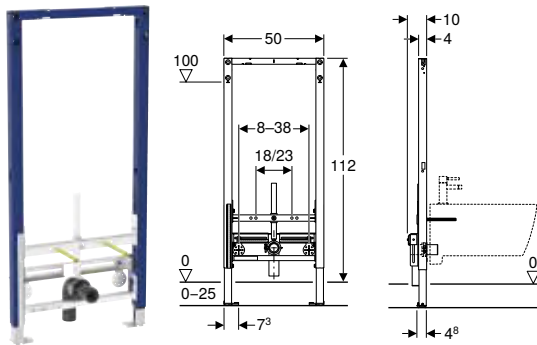

click & scan

Application purposes

- For metal and wood frame walls
- For Geberit Duofix system walls
- For installation in part- or room-height prewalls
- For installation in room-height partition walls
- For floor constructions 0–25 cm
- For wall-hung bidets with deck-mounted tap

Scope of delivery


- Connection bend made of PE-HD, \varnothing 50 mm
- Seal \varnothing 44 / 32 mm
- Fastening material

Characteristics

- 2025 range
- Statically self-supporting frame, protected against corrosion with powder coating
- With pull-out plate for lateral fastening above the element on metal or wood profiles or on Geberit Duofix system studs
- Alternative fastening point for wall anchors
- Rotating foot plates, suitable for installation in U profiles UW 50 and UW 75
- Foot plates that can be mounted in Geberit Duofix system rail without tools, without additional components
- Galvanised non-slip leg supports protected against corrosion
- Fastening distance for wall-hung bidet 18 or 23 cm
- Height-adjustable bidet fastening
- Fastening for connection bend, height-adjustable and sound-absorbing
- Tap attachments adjustable in width and height

Art. no.	B [cm]	H [cm]	T [cm]
111.520.00.2	50	112	10

Geberit Duofix element for bidet, 98 cm, universal

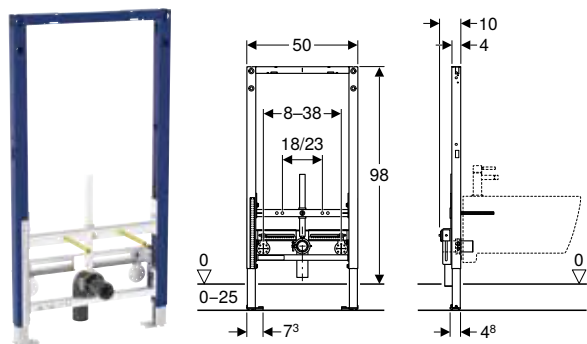

click & scan



Application purposes

- For metal and wood frame walls
- For Geberit Duofix system walls
- For installation in part-height prewalls
- For floor constructions 0-25 cm
- For wall-hung bidets with deck-mounted tap

Scope of delivery


- Connection bend made of PE-HD, \varnothing 50 mm
- Seal \varnothing 44 / 32 mm
- Fastening material

Characteristics

- 2025 range
- Statically self-supporting frame, protected against corrosion with powder coating
- Alternative fastening point for wall anchors
- Rotating foot plates, suitable for installation in U profiles UW 50 and UW 75
- Foot plates that can be mounted in Geberit Duofix system rail without tools, without additional components
- Galvanised non-slip leg supports protected against corrosion
- Fastening distance for wall-hung bidet 18 or 23 cm
- Height-adjustable bidet fastening
- Fastening for connection bend, height-adjustable and sound-absorbing
- Tap attachments adjustable in width and height

Art. no.	B [cm]	H [cm]	T [cm]
111.539.00.2	50	98	10

Geberit Duofix element for bidet, 82 cm, universal

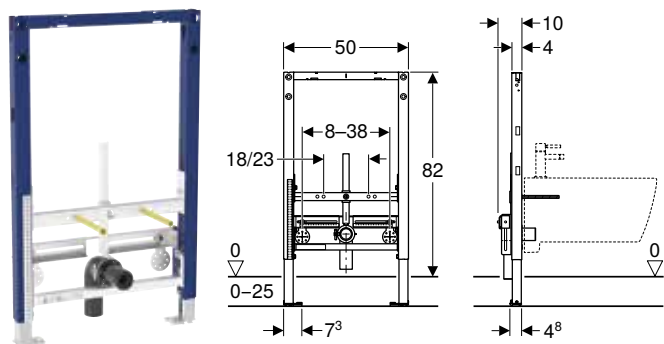

click & scan

Application purposes

- For metal and wood frame walls
- For Geberit Duofix system walls
- For installation in part-height prewalls
- For floor constructions 0-25 cm
- For wall-hung bidets with deck-mounted tap

Scope of delivery

- Connection bend made of PE-HD, \varnothing 50 mm
- Seal \varnothing 44 / 32 mm
- Fastening material

Characteristics






- 2025 range
- Statically self-supporting frame, protected against corrosion with powder coating
- Alternative fastening point for wall anchors
- Rotating foot plates, suitable for installation in U profiles UW 50 and UW 75
- Foot plates that can be mounted in Geberit Duofix system rail without tools, without additional components
- Galvanised non-slip leg supports protected against corrosion
- Fastening distance for wall-hung bidet 18 or 23 cm
- Height-adjustable bidet fastening
- Fastening for connection bend, height-adjustable and sound-absorbing
- Tap attachments adjustable in width and height

Art. no.	B [cm]	H [cm]	T [cm]
111.524.00.2	50	82	10

Elements for urinals

Accessory overview – Geberit Duofix elements for urinals









Geberit International Sales, version: December 2025

	Urinal flush controls with electronic flush actuation, battery operation	Urinal flush controls with electronic flush actuation, mains operation	Urinal flush controls with pneumatic flush actuation	Urinal flush control with electronic flush actuation, mains operation, hidden, universal	Geberit urinal flush control with electronic flush actuation, mains operation, surface-mounted, hidden	
						
					116.076.00.1	
					→ p. 283	
111.616.00.2 Geberit Duofix element for urinal, 112–130 cm, universal	✓	✓	✓			
111.676.00.2 Geberit Duofix element for urinal, 112–130 cm, universal, for spray head	✓	✓	✓			
111.689.00.2 Geberit Duofix element for urinal, 112–130 cm, universal, for hidden urinal flush control				✓		
111.686.00.2 Geberit Duofix element for urinal, 112–130 cm, universal, for exposed flushing valve					✓	
111.665.00.6 Geberit Duofix element for urinal, 130 cm, universal, for Basic urinal flush control	(✓) ¹⁾	(✓) ¹⁾	(✓) ¹⁾			


✓ Compatible

¹⁾ Only compatible with Geberit urinal flush controls Basic



	Geberit urinal flush control with electronic flush actuation, battery operation, surface-mounted, hidden	Geberit inlet cross-bar for urinal, with spray head	Geberit Duofix set of wall anchors for single installation	Geberit Duofix set of wall anchors for single and system installation	Geberit DuofixBasic set of wall anchors for single installation	Geberit Duofix set of foot fastener on rear wall	Geberit Duofix fastening material for stud clearance 50–57.5 cm	Geberit Duofix set of foot extensions 20 cm length
	116.077.00.1	242.042.00.1	111.815.00.1	111.080.00.1	111.839.00.2	111.064.00.1	111.869.00.1	111.848.00.2
								
	→ p. 284	→ p. 93	→ p. 89	→ p. 37	→ p. 90	→ p. 96	→ p. 94	→ p. 95
		✓	✓	✓		✓	✓	✓
		✓	✓	✓		✓	✓	✓
		✓	✓	✓		✓	✓	✓
	✓		✓	✓		✓	✓	✓
					✓			

Geberit Duofix element for urinal, 112–130 cm, universal

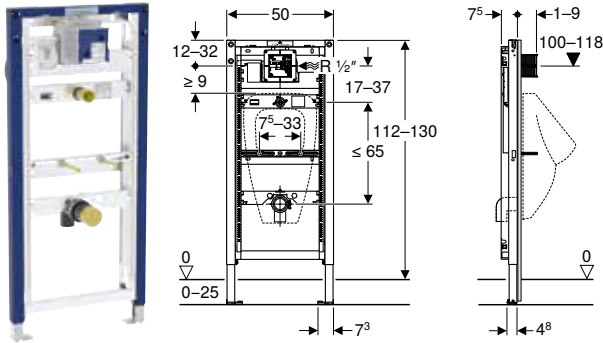

click & scan

Application purposes

- For metal and wood frame walls
- For Geberit Duofix system walls
- For installation in part- or room-height prewalls
- For installation in room-height partition walls
- For floor constructions 0–25 cm

Technical data

Flow pressure	1–8 bar
Water test pressure max.	16 bar
Test pressure air / inert gas max.	3 bar
Flow rate at 100 kPa / 1 bar without flow limiter	0.3 l/s
Flow rate at 100 kPa / 1 bar with flow limiter	0.18 l/s

Scope of delivery

- Elbow tap connector R 1/2"
- Protection box with cover
- Connection pipe between inlet \varnothing 32 mm and urinal, with seal to urinal
- Connection bend made of PE-HD, \varnothing 63 / 50 mm
- Seal \varnothing 57 / 50 mm
- Urinal trap \varnothing 50 mm, with seal on urinal
- Fastening and protection material

Characteristics

- 2025 range
- Statically self-supporting frame, protected against corrosion with powder coating
- With pull-out plate for lateral fastening above the element on metal or wood profiles or on Geberit Duofix system studs
- Alternative fastening point for wall anchors
- Rotating foot plates, suitable for installation in U profiles UW 50 and UW 75
- Foot plates that can be mounted in Geberit Duofix system rail without tools, without additional components
- Galvanised non-slip leg supports protected against corrosion
- Water supply connection compatible with MasterFix and MeplaFix
- Elbow connector can be mounted without tools
- Premounted stop valve with throttle
- Flush hose can be bent
- Flush hose with guide to prevent standing water
- Fastening for inlet \varnothing 32 mm, height-adjustable
- Fastening for connection bend, height-adjustable and sound-absorbing
- Urinal fasteners M8 width- and height-adjustable
- Crossbars with centring marks, adjustable without tools
- Can be refitted with accessories to fit urinals with spray head

Art. no.	B [cm]	H [cm]	T [cm]
111.616.00.2	50	112–130	7.5

Can be combined with

- Geberit urinal flush control with electronic flush actuation, mains operation, Type 10 cover plate, round → p. 260
- Geberit urinal flush control with electronic flush actuation, mains operation, Type 01 cover plate, round → p. 258
- Geberit urinal flush control with electronic flush actuation, battery operation, Type 10 cover plate, round → p. 268
- Geberit urinal flush control with electronic flush actuation, battery operation, Type 01 cover plate, round → p. 266
- Geberit urinal flush control with pneumatic flush actuation, Type 50 actuator plate, square, customised → p. 280
- Geberit urinal flush control with pneumatic flush actuation, Type 10 actuator plate, round → p. 275
- Geberit urinal flush control with pneumatic flush actuation, Type 01 actuator plate, round → p. 273
- Geberit urinal flush control with pneumatic flush actuation, Type 50 actuator plate, square → p. 280
- Geberit urinal flush control with electronic flush actuation, mains operation, Type 40 cover plate, round → p. 261
- Geberit urinal flush control with electronic flush actuation, mains operation, Type 40 cover plate, square → p. 263
- Geberit urinal flush control with electronic flush actuation, battery operation, Type 40 cover plate, round → p. 269
- Geberit urinal flush control with electronic flush actuation, battery operation, Type 40 cover plate, square → p. 271
- Geberit urinal flush control with pneumatic flush actuation, Type 40 actuator plate, round → p. 276
- Geberit urinal flush control with pneumatic flush actuation, Type 40 actuator plate, square → p. 278
- Geberit urinal flush control with electronic flush actuation, mains operation, Type 01 cover plate, square → p. 259
- Geberit urinal flush control with electronic flush actuation, battery operation, Type 01 cover plate, square → p. 267
- Geberit urinal flush control with pneumatic flush actuation, Type 01 actuator plate, square → p. 274
- Geberit urinal flush control with pneumatic flush actuation, Type 40 actuator plate, round, customised finish → p. 277
- Geberit urinal flush control with pneumatic flush actuation, Type 40 actuator plate, square, customised finish → p. 279
- Geberit urinal flush control with electronic flush actuation, mains operation, Type 40 cover plate, round, customised finish → p. 262
- Geberit urinal flush control with electronic flush actuation, mains operation, Type 40 cover plate, square, customised finish → p. 264
- Geberit urinal flush control with electronic flush actuation, battery operation, Type 40 cover plate, round, customised finish → p. 270
- Geberit urinal flush control with electronic flush actuation, battery operation, Type 40 cover plate, square, customised finish → p. 272


Accessories

- Accessory overview – Geberit Duofix elements for urinals → p. 71



- For urinals with spray head, the Geberit inlet crossbar for urinal (art. no. 242.042.00.1) is required in addition

Geberit Duofix element for urinal, 112–130 cm, universal, for spray head

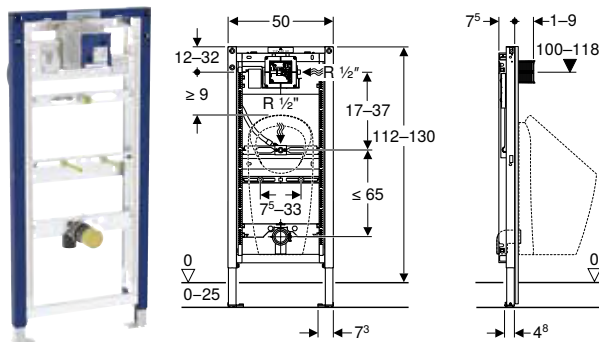

click & scan

Application purposes

- For metal and wood frame walls
- For Geberit Duofix system walls
- For installation in part- or room-height prewalls
- For installation in room-height partition walls
- For floor constructions 0–25 cm
- For Preda urinals
- For Selva urinals
- For Tamina urinals
- For Narva urinals

Technical data

Flow pressure	1–8 bar
Water test pressure max.	16 bar
Test pressure air / inert gas max.	3 bar
Flow rate at 100 kPa / 1 bar without flow limiter	0.3 l/s
Flow rate at 100 kPa / 1 bar with flow limiter	0.18 l/s

Characteristics

- 2025 range
- Statically self-supporting frame, protected against corrosion with powder coating
- With pull-out plate for lateral fastening above the element on metal or wood profiles or on Geberit Duofix system studs
- Alternative fastening point for wall anchors
- Rotating foot plates, suitable for installation in U profiles UW 50 and UW 75
- Foot plates that can be mounted in Geberit Duofix system rail without tools, without additional components
- Galvanised non-slip leg supports protected against corrosion
- Connection positions for Preda urinal prepared
- Water supply connection compatible with MasterFix and MeplaFix
- Elbow connector can be mounted without tools
- Premounted stop valve with throttle
- Flush hose can be bent
- Flush hose with guide to prevent standing water
- Fastening for connection bend, height-adjustable and sound-absorbing
- Urinal fasteners M8 width- and height-adjustable
- Crossbars with centring marks, adjustable without tools
- Markings for connection positions of Preda and Selva urinals

Scope of delivery

- Elbow tap connector R 1/2"
- Protection box with cover
- Connection bend made of PE-HD, ø 63 / 50 mm
- Seal ø 57 / 50 mm
- Urinal trap ø 50 mm, with seal on urinal
- Fastening and protection material

Art. no.	B [cm]	H [cm]	T [cm]
111.676.00.2	50	112–130	7.5


Can be combined with

- Geberit Narva urinal, inlet from the rear, outlet to the rear or downwards
- Geberit Preda urinal for concealed flush control
- Geberit Selva urinal for concealed flush control
- Geberit Tamina urinal for concealed flush control
- Geberit urinal flush control with electronic flush actuation, mains operation, Type 10 cover plate, round → p. 260
- Geberit urinal flush control with electronic flush actuation, mains operation, Type 01 cover plate, round → p. 258
- Geberit urinal flush control with electronic flush actuation, battery operation, Type 10 cover plate, round → p. 268
- Geberit urinal flush control with electronic flush actuation, battery operation, Type 01 cover plate, round → p. 266
- Geberit urinal flush control with pneumatic flush actuation, Type 50 actuator plate, square, customised → p. 280
- Geberit urinal flush control with pneumatic flush actuation, Type 10 actuator plate, round → p. 275
- Geberit urinal flush control with pneumatic flush actuation, Type 01 actuator plate, round → p. 273
- Geberit urinal flush control with pneumatic flush actuation, Type 50 actuator plate, square → p. 280
- Geberit urinal flush control with electronic flush actuation, mains operation, Type 40 cover plate, round → p. 261
- Geberit urinal flush control with electronic flush actuation, mains operation, Type 40 cover plate, square → p. 263
- Geberit urinal flush control with electronic flush actuation, battery operation, Type 40 cover plate, round → p. 269
- Geberit urinal flush control with electronic flush actuation, battery operation, Type 40 cover plate, square → p. 271
- Geberit urinal flush control with pneumatic flush actuation, Type 40 actuator plate, round → p. 276
- Geberit urinal flush control with pneumatic flush actuation, Type 40 actuator plate, square → p. 278
- Geberit urinal flush control with electronic flush actuation, mains operation, Type 01 cover plate, square → p. 259
- Geberit urinal flush control with electronic flush actuation, battery operation, Type 01 cover plate, square → p. 267
- Geberit urinal flush control with pneumatic flush actuation, Type 01 actuator plate, square → p. 274
- Geberit urinal flush control with pneumatic flush actuation, Type 40 actuator plate, round, customised finish → p. 277
- Geberit urinal flush control with pneumatic flush actuation, Type 40 actuator plate, square, customised finish → p. 279
- Geberit urinal flush control with electronic flush actuation, mains operation, Type 40 cover plate, round, customised finish → p. 262
- Geberit urinal flush control with electronic flush actuation, mains operation, Type 40 cover plate, square, customised finish → p. 264
- Geberit urinal flush control with electronic flush actuation, battery operation, Type 40 cover plate, round, customised finish → p. 270
- Geberit urinal flush control with electronic flush actuation, battery operation, Type 40 cover plate, square, customised finish → p. 272

Accessories

- Accessory overview – Geberit Duofix elements for urinals → p. 71

Geberit Duofix element for urinal, 112–130 cm, universal, for hidden urinal flush control

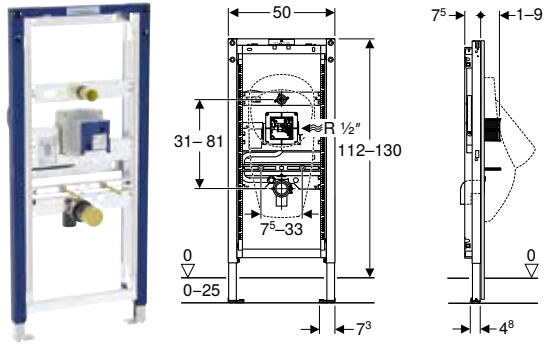

Application purposes

- For metal and wood frame walls
- For Geberit Duofix system walls
- For installation in part- or room-height prewalls
- For installation in room-height partition walls
- For floor constructions 0–25 cm
- For Geberit urinal flush controls for covered installation, vandal-resistant

Technical data

Flow pressure	1–8 bar
Water test pressure max.	16 bar
Test pressure air / inert gas max.	3 bar
Flow rate at 100 kPa / 1 bar without flow limiter	0.3 l/s
Flow rate at 100 kPa / 1 bar with flow limiter	0.24 l/s

Scope of delivery

- Water supply connection R 1/2"
- Protection box with cover
- Connection bend made of PE-HD, ø 50 / 63 mm
- Fastening and protection material

Characteristics

- 2025 range
- Statically self-supporting frame, protected against corrosion with powder coating
- With pull-out plate for lateral fastening above the element on metal or wood profiles or on Geberit Duofix system studs
- Alternative fastening point for wall anchors
- Rotating foot plates, suitable for installation in U profiles UW 50 and UW 75
- Foot plates that can be mounted in Geberit Duofix system rail without tools, without additional components
- Galvanised non-slip leg supports protected against corrosion
- Water supply connection compatible with MasterFix and MeplaFix
- Elbow connector can be mounted without tools
- Premounted stop valve with throttle
- Service opening behind urinal
- Flexible flush hose with guide and built-in check valve
- Equipped with conduit pipe to connect the sensor in the trap to the urinal flush control
- Fastening for inlet ø 32 mm, height-adjustable
- Fastening for connection bend, height-adjustable and sound-absorbing
- Urinal fasteners M8 width- and height-adjustable
- Crossbars with centring marks, adjustable without tools
- Can be refitted with accessories to fit urinals with spray head

Art. no.	B [cm]	H [cm]	T [cm]
111.689.00.2	50	112–130	7.5

Can be combined with

- Geberit urinal flush control with electronic flush actuation, mains operation, concealed installation, hidden → p. 265


Accessories

- Accessory overview – Geberit Duofix elements for urinals → p. 71



- For urinals with spray head, the Geberit inlet crossbar for urinal (art. no. 242.042.00.1) is required in addition

Geberit Duofix element for urinal, 112–130 cm, universal, for exposed flushing valve

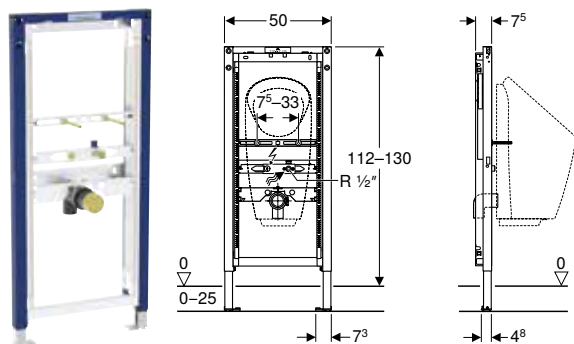

click & scan



Application purposes

- For metal and wood frame walls
- For Geberit Duofix system walls
- For installation in part- or room-height prewalls
- For installation in room-height partition walls
- For floor constructions 0–25 cm
- For installation of urinals with integrated control
- For installation of waterless urinals
- For Preda urinals
- For Selva urinals
- For Tamina urinals
- For Narva urinals
- For exposed flushing valves
- For exposed urinal flush controls, hidden

Scope of delivery

- Water supply connection Rp 1/2" / R 1/2", compatible with Master-Fix and MeplaFix
- Connection bend made of PE-HD, \varnothing 63 / 50 mm
- Seal \varnothing 57 / 50 mm
- Urinal trap \varnothing 50 mm, with seal on urinal
- Fastening and protection material

Characteristics

- 2025 range
- Statically self-supporting frame, protected against corrosion with powder coating
- With pull-out plate for lateral fastening above the element on metal or wood profiles or on Geberit Duofix system studs
- Alternative fastening point for wall anchors
- Rotating foot plates, suitable for installation in U profiles UW 50 and UW 75
- Foot plates that can be mounted in Geberit Duofix system rail without tools, without additional components
- Galvanised non-slip leg supports protected against corrosion
- Connection positions for Preda urinal prepared
- Fastening for inlet Rp 1/2", adjustable in height and sideways (central and 5–10 cm left or right)
- Fastening for connection bend, height-adjustable and sound-absorbing
- Urinal fasteners M8 width- and height-adjustable
- Crossbars with centring marks, adjustable without tools
- Markings for connection positions of Preda and Selva urinals

Art. no.	B [cm]	H [cm]	T [cm]
111.686.00.2	50	112–130	7.5


Can be combined with

- Geberit urinal flush control with electronic flush actuation, mains operation, surface-mounted, hidden → p. 283
- Geberit urinal flush control with electronic flush actuation, battery operation, surface-mounted, hidden → p. 284
- Geberit pressure flushing valve for urinal with electronic flush actuation, battery operation, for surface mounting → p. 285
- Geberit Preda urinal with integrated control, mains operation
- Geberit Selva urinal with integrated control, mains operation
- Geberit Preda urinal with integrated control, battery operation
- Geberit Selva urinal with integrated control, battery operation
- Geberit Preda urinal with integrated control, generator operation
- Geberit Selva urinal with integrated control, generator operation
- Geberit Preda urinal for integrated control
- Geberit Selva urinal for integrated control
- Geberit Tamina urinal with integrated control, mains operation
- Geberit Tamina urinal with integrated control, battery operation
- Geberit Tamina urinal with integrated control, generator operation
- Geberit Tamina urinal for integrated control
- Geberit Narva urinal, inlet from the rear, outlet to the rear or downwards

Accessories

- Accessory overview – Geberit Duofix elements for urinals → p. 71

Geberit Duofix element for urinal, 130 cm, universal, for Basic urinal flush control

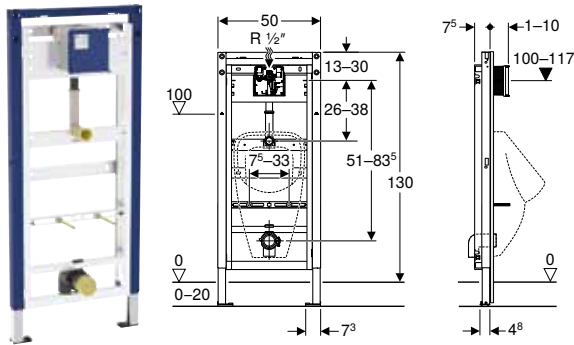

click & scan

Application purposes

- For metal and wood frame walls
- For installation in part- or room-height prewalls
- For installation in room-height partition walls
- For floor constructions 0–20 cm
- Not suitable for urinals with spray head

Technical data

Flow pressure	1–8 bar
Water test pressure max.	16 bar
Test pressure air / inert gas max.	3 bar
Flow rate at 100 kPa / 1 bar without flow limiter	0.3 l/s
Flow rate at 100 kPa / 1 bar with flow limiter	0.18 l/s

Scope of delivery

- Water supply connection R 1/2"
- Protection box with cover
- Connection pipe between inlet \varnothing 32 mm and urinal, with seal to urinal
- Connection bend made of PE-HD, \varnothing 63 / 50 mm
- Seal \varnothing 57 / 50 mm
- Urinal trap \varnothing 50 mm, with seal on urinal
- Fastening and protection material

Characteristics

- 2025 range
- Statically self-supporting frame, protected against corrosion with powder coating
- Alternative fastening point for wall anchors
- Foot plate depth suitable for installation in U-profiles UW 50
- Foot plates made of plastic
- Galvanised leg supports protected against corrosion
- Water supply connection compatible with MasterFix and MeplaFix
- Elbow connector can be mounted without tools
- Premounted stop valve with throttle
- Protection box for service opening 13.5 x 13.5 cm can be cut to length without tools
- Fastening for inlet \varnothing 32 mm, height-adjustable
- Fastening for connection bend, height-adjustable and sound-absorbing
- Urinal fasteners M8 width- and height-adjustable
- Crossbars with centring marks, adjustable without tools

Art. no.	B [cm]	H [cm]	T [cm]
111.665.00.6	50	130	7.5

Can be combined with


- Geberit Basic urinal flush control with electronic flush actuation, mains operation, actuator plate, square, made of plastic → p. 281
- Geberit Basic urinal flush control with electronic flush actuation, battery operation, actuator plate, square, made of plastic → p. 282

Accessories

- Accessory overview – Geberit Duofix elements for urinals → p. 71

Elements for showers with wall drain

Geberit Duofix element for shower, 130 cm, with CleanWall wall drain, wall-mounted tap, concealed, for screed height at inlet 90–250 mm

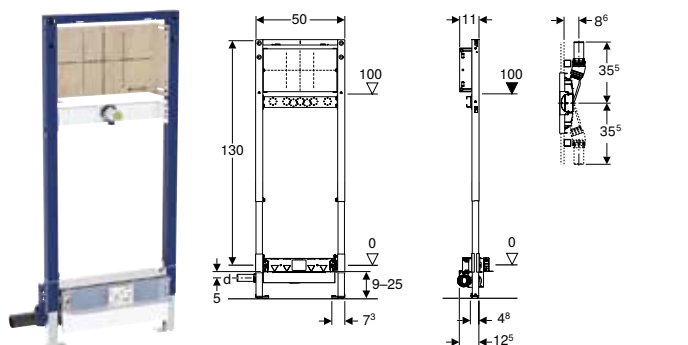

click & scan

Application purposes

- For metal and wood frame walls
- For Geberit Duofix system walls
- For installation in part- or room-height prewalls
- For installation in room-height partition walls
- For composite seals
- For drainage of floor-even showers
- For screed height ≥ 90 mm at inlet
- For concealed or surface-mounted taps

Technical data

Depth of water seal (mm)	50 mm
--------------------------	-------

Scope of delivery

- Straight connector made of PE-HD, $\varnothing 50$ mm
- Elbow tap connector Rp 1/2" / R 1/2", compatible with MF
- Sealing washer
- Sound insulation base
- Insulating sleeve
- Protection box cover with integrated outlet sheet
- Fastening and protection material

Characteristics

- 2025 range
- Statically self-supporting frame, protected against corrosion with powder coating
- With pull-out plate for lateral fastening above the element on metal or wood profiles or on Geberit Duofix system studs
- Alternative fastening point for wall anchors
- Rotating foot plates, suitable for installation in U profiles UW 50 and UW 75
- Foot plates that can be mounted in Geberit Duofix system rail without tools, without additional components
- Galvanised non-slip leg supports protected against corrosion
- Quality-monitored in accordance with EN 1253-3
- Adjustable sealing level for tension-free sealing connection
- Premounted sealing fleece
- Sealing fleece, 10 cm circumferential, for connecting sealing systems
- Mounting plate adjustable in height and depth
- Mounting plate made of veneered wood, waterproof bonded
- Building material class B2 in accordance with DIN 4102-1, resp. class D-s2, d0 in accordance with EN 13501-3
- Formaldehyde release class A in accordance with EN 1084, resp. Class E 1 according to EN 13936
- Adjustable inlet height of trap
- Panelling thickness 10–40 mm
- Suitable for tile structures on floor 2–26 mm
- Suitable for tile structures on wall 2–35 mm
- Lateral drainage connection

Art. no.	DN	d, \varnothing [mm]	Discharge rate [l/s]	B [cm]	H [cm]	T [cm]
111.580.00.2	50	50	0.8	50	130	11

To order additionally

- Ready-to-fit set


Accessories

- Accessory overview – Geberit Duofix elements for showers and bathtubs → p. 81



- Natural stone tiles in the shower area may discolour

Geberit Duofix element for shower, 130 cm, with CleanWall wall drain, wall-mounted tap, concealed, for screed height at inlet 65–90 mm

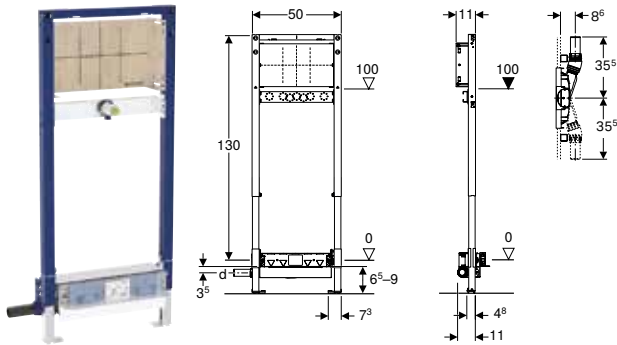

Application purposes

- For metal and wood frame walls
- For Geberit Duofix system walls
- For installation in part- or room-height prewalls
- For installation in room-height partition walls
- For drainage of floor-even showers
- For screed height ≥ 65 mm at inlet
- For concealed or surface-mounted taps
- For composite seals

Technical data

Depth of water seal (mm)	30 mm
--------------------------	-------

Scope of delivery

- Straight connector made of PE-HD, $\varnothing 40$ mm
- Elbow tap connector Rp 1/2" / R 1/2", compatible with MF
- Sealing washer
- Sound insulation base
- Insulating sleeve
- Protection box cover with integrated outlet sheet
- Fastening and protection material

Characteristics

- 2025 range
- Statically self-supporting frame, protected against corrosion with powder coating
- With pull-out plate for lateral fastening above the element on metal or wood profiles or on Geberit Duofix system studs
- Alternative fastening point for wall anchors
- Rotating foot plates, suitable for installation in U profiles UW 50 and UW 75
- Foot plates that can be mounted in Geberit Duofix system rail without tools, without additional components
- Galvanised non-slip leg supports protected against corrosion
- Adjustable sealing level for tension-free sealing connection
- Premounted sealing fleece
- Sealing fleece, 10 cm circumferential, for connecting sealing systems
- Mounting plate adjustable in height and depth
- Mounting plate made of veneered wood, waterproof bonded
- Building material class B2 in accordance with DIN 4102-1, resp. class D-s2, d0 in accordance with EN 13501-3
- Formaldehyde release class A in accordance with EN 1084, resp. Class E 1 according to EN 13936
- Deviating from the requirements from EN 1253, the depth of water seal is just 30 mm
- Adjustable inlet height of trap
- Panelling thickness 10–40 mm
- Suitable for tile structures on floor 2–26 mm
- Suitable for tile structures on wall 2–35 mm
- Lateral drainage connection

Art. no.	DN	d, \varnothing [mm]	Discharge rate [l/s]	B [cm]	H [cm]	T [cm]
111.581.00.2	40	40	0.4	50	130	11

To order additionally

- Ready-to-fit set


Accessories

- Accessory overview – Geberit Duofix elements for showers and bathtubs → p. 81



- Natural stone tiles in the shower area may discolour

Geberit Duofix element for shower, 50 cm, with CleanWall wall drain, for screed height at inlet 90–250 mm

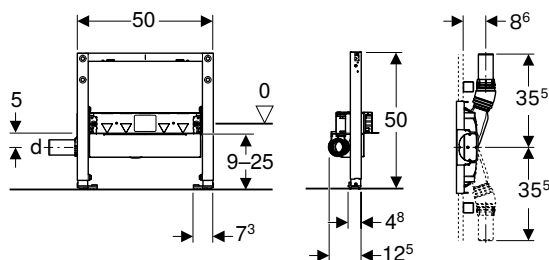

click & scan

Application purposes

- For metal and wood frame walls
- For Geberit Duofix system walls
- For installation in room-height pre-walls
- For installation in room-height partition walls
- For composite seals
- For drainage of floor-even showers
- For screed height ≥ 90 mm at inlet

Technical data

Depth of water seal (mm)	50 mm
--------------------------	-------

Scope of delivery

- Straight connector made of PE-HD, \varnothing 50 mm
- Protection box cover with integrated outlet sheet
- Fastening material

Characteristics

- 2025 range
- Statically self-supporting frame, protected against corrosion with powder coating
- With pull-out plate for lateral fastening above the element on metal or wood profiles or on Geberit Duofix system studs
- Alternative fastening point for wall anchors
- Rotating foot plates, suitable for installation in U profiles UW 50 and UW 75
- Foot plates that can be mounted in Geberit Duofix system rail without tools, without additional components
- Galvanised non-slip leg supports protected against corrosion
- Quality-monitored in accordance with EN 1253-3
- Adjustable sealing level for tension-free sealing connection
- Premounted sealing fleece
- Sealing fleece, 10 cm circumferential, for connecting sealing systems
- Adjustable inlet height of trap
- Panelling thickness 10–40 mm
- Suitable for tile structures on floor 2–26 mm
- Suitable for tile structures on wall 2–35 mm
- Lateral drainage connection

Art. no.	DN	d, \varnothing [mm]	Discharge rate [l/s]	B [cm]	H [cm]	T [cm]
111.591.00.2	50	50	0.8	50	50	12.5

To order additionally

- Ready-to-fit set


Accessories

- Accessory overview – Geberit Duofix elements for showers and bathtubs → p. 81



- Natural stone tiles in the shower area may discolour

Geberit Duofix element for shower, 50 cm, with CleanWall wall drain, for screed height at inlet 65–90 mm

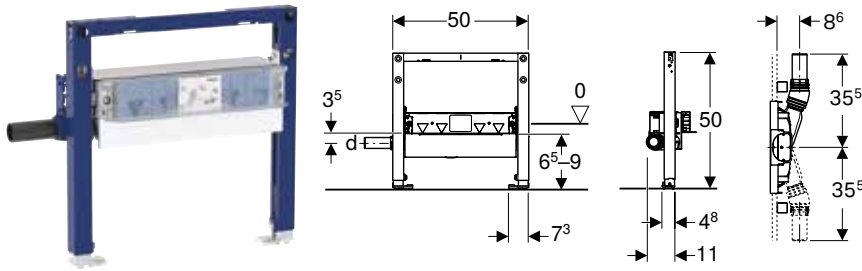

Application purposes

- For metal and wood frame walls
- For Geberit Duofix system walls
- For installation in room-height pre-walls
- For installation in room-height partition walls
- For drainage of floor-even showers
- For screed height ≥ 65 mm at inlet
- For composite seals

Technical data

Depth of water seal (mm)	30 mm
--------------------------	-------

Scope of delivery

- Straight connector made of PE-HD, ø 40 mm
- Protection box cover with integrated outlet sheet
- Fastening material

Characteristics

- 2025 range
- Statically self-supporting frame, protected against corrosion with powder coating
- With pull-out plate for lateral fastening above the element on metal or wood profiles or on Geberit Duofix system studs
- Alternative fastening point for wall anchors
- Rotating foot plates, suitable for installation in U profiles UW 50 and UW 75
- Foot plates that can be mounted in Geberit Duofix system rail without tools, without additional components
- Galvanised non-slip leg supports protected against corrosion
- Adjustable sealing level for tension-free sealing connection
- Premounted sealing fleece
- Sealing fleece, 10 cm circumferential, for connecting sealing systems
- Deviating from the requirements from EN 1253, the depth of water seal is just 30 mm
- Adjustable inlet height of trap
- Panelling thickness 10–40 mm
- Suitable for tile structures on floor 2–26 mm
- Suitable for tile structures on wall 2–35 mm
- Lateral drainage connection

Art. no.	DN	d, ø [mm]	Discharge rate [l/s]	B [cm]	H [cm]	T [cm]
111.593.00.2	40	40	0.4	50	50	11

To order additionally

- Ready-to-fit set

Accessories

- Accessory overview – Geberit Duofix elements for showers and bathtubs → p. 81









- Natural stone tiles in the shower area may discolour

Elements for showers and bathtubs

Accessory overview – Geberit Duofix elements for showers and bathtubs


Geberit International Sales, version: December 2025

	Geberit ready-to-fit set for CleanWall wall drain, cover made of brushed stainless steel	Geberit Duofix set of wall anchors for single installation	Geberit Duofix set of wall anchors for single and system installation	Geberit Duofix set of foot fastener on rear wall	Geberit Duofix fastening material for stud clearance 50–57.5 cm	Geberit Duofix set of foot extensions 20 cm length
	154.336.FW.1	111.815.00.1	111.080.00.1	111.064.00.1	111.869.00.1	111.848.00.2
						
	→ p. 413	→ p. 89	→ p. 37	→ p. 96	→ p. 94	→ p. 95
111.780.00.2 Geberit Duofix element for shower and bathtub, 98–112 cm, wall-mounted tap, concealed		✓	✓	✓	✓	✓
111.580.00.2 Geberit Duofix element for shower, 130 cm, with CleanWall wall drain, wall-mounted tap, concealed, for screed height at inlet 90–250 mm	✓	✓	✓	✓	✓	✓
111.581.00.2 Geberit Duofix element for shower, 130 cm, with CleanWall wall drain, wall-mounted tap, concealed, for screed height at inlet 65–90 mm	✓	✓	✓	✓	✓	✓
111.591.00.2 Geberit Duofix element for shower, 50 cm, with CleanWall wall drain, for screed height at inlet 90–250 mm	✓	✓	✓	✓	✓	
111.593.00.2 Geberit Duofix element for shower, 50 cm, with CleanWall wall drain, for screed height at inlet 65–90 mm	✓	✓		✓	✓	

✓ Compatible



Geberit Duofix element for shower and bathtub, 98–112 cm, wall-mounted tap, concealed

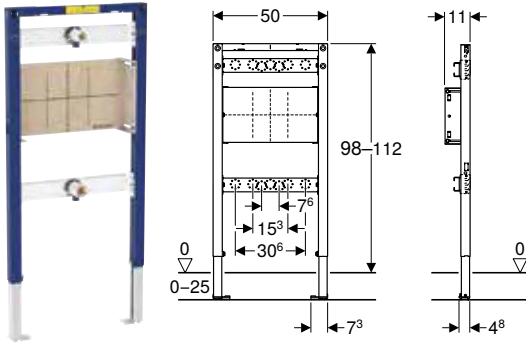

click & scan

Application purposes

- For metal and wood frame walls
- For Geberit Duofix system walls
- For installation in part- or room-height prewalls
- For installation in room-height partition walls
- For floor constructions 0–25 cm
- For concealed taps

Technical data

Product material	Steel
------------------	-------

Scope of delivery

- Elbow tap connector Rp 1/2" / R 1/2", compatible with MF
- Elbow tap connector Rp 3/4" / R 1/2", compatible with MF
- 2 sound insulation bases
- 2 insulating sleeves
- Fastening material

Characteristics

- 2025 range
- Statically self-supporting frame, protected against corrosion with powder coating
- With pull-out plate for lateral fastening above the element on metal or wood profiles or on Geberit Duofix system studs
- Alternative fastening point for wall anchors
- Rotating foot plates, suitable for installation in U profiles UW 50 and UW 75
- Foot plates that can be mounted in Geberit Duofix system rail without tools, without additional components
- Galvanised non-slip leg supports protected against corrosion
- Mounting plate adjustable in height and depth
- Mounting plate made of veneered wood, waterproof bonded
- Building material class B2 in accordance with DIN 4102-1, resp. class D-s2, d0 in accordance with EN 13501-3
- Formaldehyde release class A in accordance with EN 1084, resp. Class E 1 according to EN 13936
- Crossbar for tap adjustable in height and depth


Art. no.	B [cm]	H [cm]	T [cm]
111.780.00.2	50	98–112	11

Accessories

- Accessory overview – Geberit Duofix elements for showers and bathtubs → p. 81

Elements for taps

Geberit Duofix crossbar for wall-mounted tap, surface-mounted, variable tap position

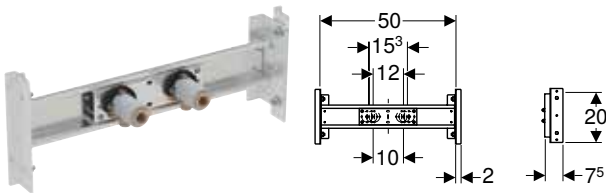

click & scan

Application purposes

- For drywall construction
- For installation in room-height installation walls
- For installation in room-height Geberit Duofix system walls
- For surface-mounted taps

Characteristics


- Adjustable in depth
- Crossbar, zinc-plated
- Crossbar, width-adjustable
- Horizontal water supply connections infinitely variable

Scope of delivery

- 2 elbow tap connectors Rp 1/2" / R 1/2", compatible with MF
- 2 sound insulation bases
- 2 insulating sleeves
- Fastening material

Art. no.	B [cm]	H [cm]	T [cm]
111.787.00.1	50	20	7.5

Geberit Duofix element, 130 cm, for electronic wall-mounted tap with concealed function box, for ablation

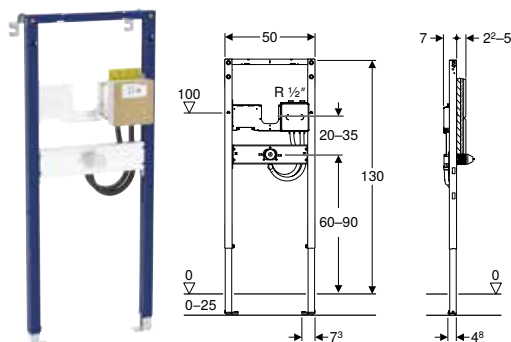

Application purposes

- For metal and wood frame walls
- For Geberit Duofix system walls
- For installation in part- or room-height prewalls
- For installation in room-height partition walls
- For floor constructions 0–25 cm
- For installation inside of ablation areas in mosques
- For Piave and Brenta washbasin taps, wall-mounted, with concealed function box

Scope of delivery

- 2 fixing brackets
- Protection box with cover, for concealed housing
- Protection box for fastening of wall-mounted tap
- Fastening material

Characteristics

- 2025 range
- Statically self-supporting frame, protected against corrosion with powder coating
- With pull-out plate for lateral fastening above the element on metal or wood profiles or on Geberit Duofix system studs
- Alternative fastening point for wall anchors
- Rotating foot plates, suitable for installation in U profiles UW 50 and UW 75
- Foot plates that can be mounted in Geberit Duofix system rail without tools, without additional components
- Galvanised non-slip leg supports protected against corrosion
- Tap crossbar height-adjustable
- Premounted fastening for wall-mounted tap
- Water supply connection compatible with MasterFix and MeplaFix
- Water supply connection on the top of concealed housing
- Fastening for connection bend, height-adjustable and sound-absorbing
- Concealed housing for Geberit washbasin tap, wall-mounted, for concealed function box, premounted
- Shut-off unit integrated in the concealed housing

Art. no.	B [cm]	H [cm]	T [cm]
111.271.00.2	50	130	7

To order additionally

- Geberit sealing set for Piave and Brenta washbasin taps, wall-mounted, with concealed function box → p. 356

Can be combined with


- Geberit Piave washbasin tap, wall-mounted, mains operation, for concealed function box → p. 342
- Geberit Brenta washbasin tap, wall-mounted, mains operation, for concealed function box → p. 344
- Geberit Piave washbasin tap, wall-mounted, battery operation, for concealed function box → p. 346
- Geberit Brenta washbasin tap, wall-mounted, battery operation, for concealed function box → p. 348
- Geberit Piave washbasin tap, wall-mounted, generator operation, for concealed function box → p. 350
- Geberit Brenta washbasin tap, wall-mounted, generator operation, for concealed function box → p. 351

Accessories

- Accessory overview – Geberit Duofix elements for washbasins → p. 55

Elements for loads

Geberit Duofix element for support handles, 112 cm, barrier-free

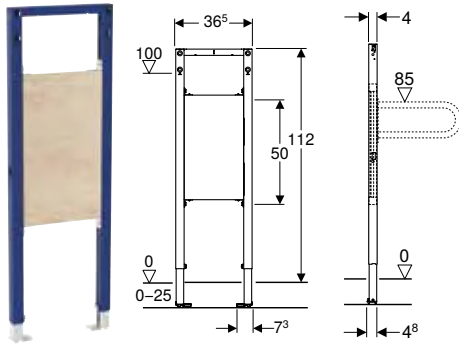

Application purposes

- For metal and wood frame walls
- For Geberit Duofix system walls
- For installation in part- or room-height prewalls
- For installation in room-height partition walls
- Suitable for barrier-free construction
- For floor constructions 0–25 cm
- For fastening support handles

Scope of delivery

- Fastening material

Characteristics


- 2025 range
- Statically self-supporting frame, protected against corrosion with powder coating
- With pull-out plate for lateral fastening above the element on metal or wood profiles or on Geberit Duofix system studs
- Alternative fastening point for wall anchors
- Rotating foot plates, suitable for installation in U profiles UW 50 and UW 75
- Foot plates that can be mounted in Geberit Duofix system rail without tools, without additional components
- Galvanised non-slip leg supports protected against corrosion
- Mounting plate height-adjustable
- Mounting plate made of veneered wood, waterproof bonded
- Building material class B2 in accordance with DIN 4102-1, resp. class D-s2, d0 in accordance with EN 13501-3
- Formaldehyde release class A in accordance with EN 1084, resp. Class E 1 according to EN 13936

Art. no.	B [cm]	H [cm]	T [cm]
111.790.00.2	36.5	112	4

Accessories

- Geberit Duofix set of wall anchors for single installation → p. 89
- Geberit Duofix set of wall anchors for single and system installation → p. 37
- Geberit Duofix set of wall anchor extensions → p. 91
- Geberit Duofix set of foot fastener on rear wall → p. 96
- Geberit Duofix set of foot extensions 20 cm length → p. 95

Geberit Duofix mounting plate for washbasin with washbasin cabinet and one washbasin tap, concentric

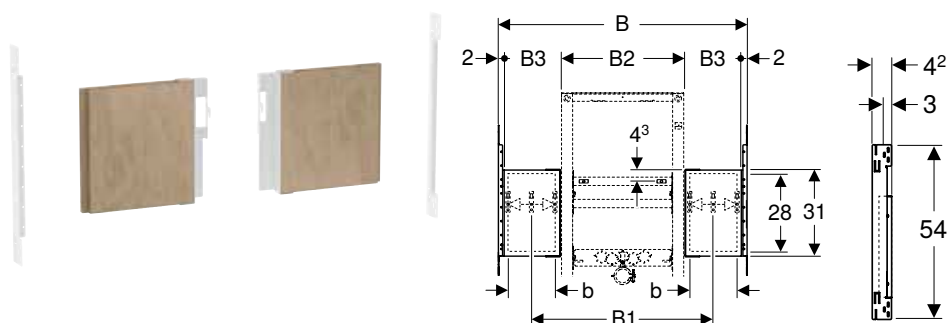

click & scan

Application purposes

- For drywall construction
- For installation in part or room-height prewall installations
- For installation in room-height installation walls
- For installation in part or room-height Geberit Duofix system walls
- For fastening between Geberit Duofix elements for washbasin and studs
- For fastening washbasins with cabinet
- For use with concentric outlet tap

Scope of delivery

- 2 mounting plates with fixing brackets
- 2 fixing brackets
- Fastening material

Characteristics

- Width adapted to Geberit ONE washbasins with cabinets
- Width adapted to Geberit Duofix crossbars for element fastening, for stud clearance from 60 cm
- Mounting plate can be cut to element width 44 or 50 cm
- Mounting plate made of veneered wood, waterproof bonded
- Building material class B2 in accordance with DIN 4102-1, resp. class D-s2, d0 in accordance with EN 13501-3
- Formaldehyde release class A in accordance with EN 1084, resp. Class E 1 according to EN 13936

Art. no.	Nominal width [cm]	B [cm]	B1 [cm]	B2 [cm]	B3 [cm]	b [cm]	H [cm]	T [cm]
111.951.00.1	60	65	47-58	44	8.5	5.5	31	3
111.952.00.1	75	80	53-73	50	13	10	31	3
111.953.00.1	90	95	53-88	50	20.5	17.5	31	3
111.954.00.1	105	110	53-103	50	28	25	31	3
111.955.00.1	120	125	53-118	50	35.5	32.5	31	3


To order additionally

- Fastening material for washbasin (if the positions of the fastening screws are on the mounting plates)

Accessories

- Geberit Duofix crossbar for element fastening, for stud clearance from 60 cm → p. 92

Geberit Duofix mounting plate for washbasin with washbasin cabinet and one washbasin tap eccentric

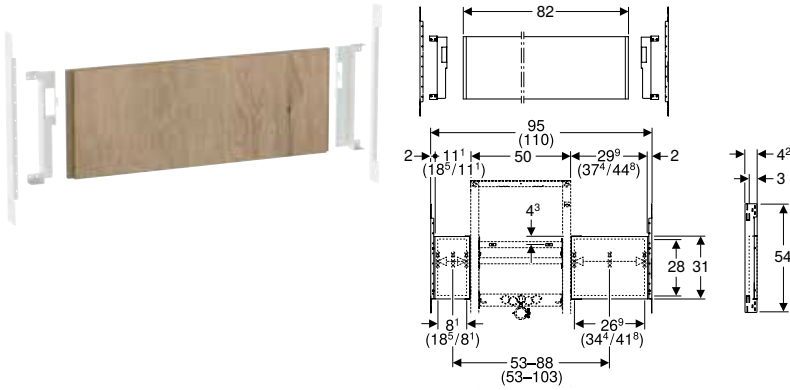

click & scan

Application purposes

- For drywall construction
- For installation in part or room-height prewall installations
- For installation in room-height installation walls
- For installation in part or room-height Geberit Duofix system walls
- For fastening between Geberit Duofix elements for washbasin and studs
- For fastening washbasins with cabinet
- For use with eccentric outlet tap

Scope of delivery

- Mounting plate
- 4 fixing brackets
- Fastening material

Characteristics

- Width adapted to Geberit ONE washbasins with cabinets
- Width adapted to Geberit Duofix crossbars for element fastening, for stud clearance from 60 cm (90–105 cm)
- Mounting plate can be cut to element width and position
- Can be divided into two smaller mounting plates
- Mounting plate made of veneered wood, waterproof bonded
- Building material class B2 in accordance with DIN 4102-1, resp. class D-s2, d0 in accordance with EN 13501-3
- Formaldehyde release class A in accordance with EN 1084, resp. Class E 1 according to EN 13936

Art. no.	Nominal width [cm]	B [cm]	H [cm]	T [cm]
111.055.00.1	90–105	82	31	3

To order additionally

- Fastening material for washbasin (if the positions of the fastening screws are on the mounting plates)


Accessories

- Geberit Duofix crossbar for element fastening, for stud clearance from 60 cm → p. 92



- The possible nominal widths of 90 cm and (105 cm) are provided separately in the dimension specifications.
- The dimension specifications for the part widths relate to the room-height installation situations combined with the crossbar for element fastening.
- The element can be moved 9.4 cm to the left or right (or 9.4 / 16.8 cm in the case of a nominal width of 105 cm)

Geberit Duofix mounting plate for washbasin with washbasin cabinet and two washbasin taps

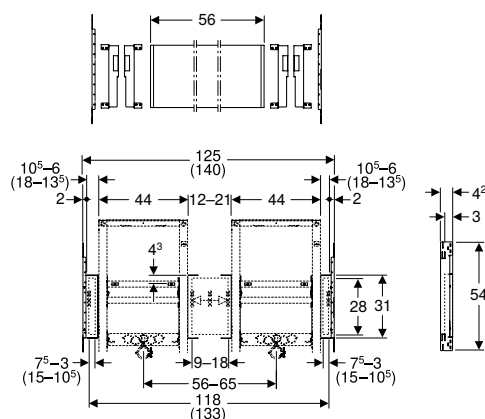

click & scan



Application purposes

- For drywall construction
- For installation in part-height prewall installations
- For installation in room-height installation walls
- For installation in part or room-height Geberit Duofix system walls
- For fastening between 2 Geberit Duofix elements for washbasin and studs
- For fastening washbasins with cabinet
- For use with 2 outlet taps

Scope of delivery

- Mounting plate
- 6 fixing brackets
- Fastening material

Characteristics

- Width adapted to Geberit ONE washbasins with cabinets
- Width adapted to Geberit Duofix crossbars for element fastening, for stud clearance from 60 cm (120–135 cm)
- Mounting plate can be cut to element width and position
- Can be divided into three smaller mounting plates
- Mounting plate made of veneered wood, waterproof bonded
- Building material class B2 in accordance with DIN 4102-1, resp. class D-s2, d0 in accordance with EN 13501-3
- Formaldehyde release class A in accordance with EN 1084, resp. Class E 1 according to EN 13936

Art. no.	Nominal width [cm]	B [cm]	H [cm]	T [cm]
111.056.00.1	120–135	56	31	3

To order additionally

- Fastening material for washbasin (if the positions of the fastening screws are on the mounting plates)


Accessories

- Geberit Duofix crossbar for element fastening, for stud clearance from 60 cm → p. 92
- Geberit Duofix fastening for central drain between two elements for washbasin → p. 93



- The possible nominal widths of 120 cm and (135 cm) are provided separately in the dimension specifications.
- The dimension specifications for the part widths relate to the room-height installation situations combined with the crossbar for element fastening
- The dimension specifications relate to the installation of 2 elements for washbasin with width 44 cm

Geberit Duofix mounting plate, universal, concealed

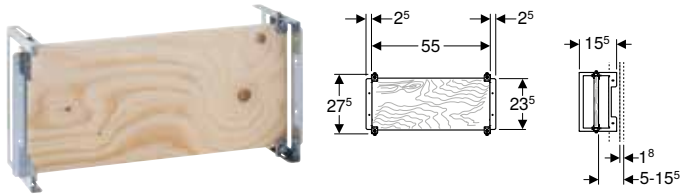

click & scan

Application purposes

- For drywall construction
- For installation in room-height Geberit Duofix system walls
- For installation of concealed taps and fans, hygiene flush units and other built-in devices

Scope of delivery


- 8 fixing brackets
- Fastening material

Characteristics

- Mounting plate adjustable in depth
- Mounting plate made of veneered wood, waterproof bonded
- Building material class B2 in accordance with DIN 4102-1, resp. class D-s2, d0 in accordance with EN 13501-3
- Formaldehyde release class A in accordance with EN 1084, resp. Class E 1 according to EN 13936

Art. no.	B [cm]	H [cm]	T [cm]
111.788.00.1	60	27.5	15.5

Geberit Duofix mounting plate, universal

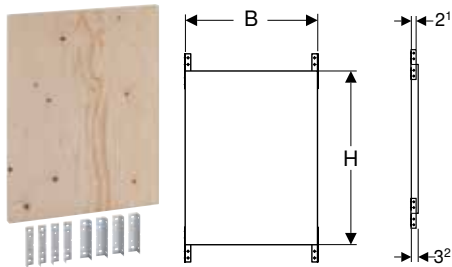

click & scan

Application purposes

- For drywall construction
- For installation in part or room-height Geberit Duofix system walls
- Suitable for barrier-free construction
- For fastening support handles
- For fastening urinal divisions, shower partition walls and wall cabinets
- For sliding bracket fastenings
- For fastening supply lines
- For discharge pipes up to \varnothing 110 mm (DN 100)

Scope of delivery


- 8 fixing brackets
- Fastening material

Characteristics

- Mounting plate made of veneered wood, waterproof bonded
- Building material class B2 in accordance with DIN 4102-1, resp. class D-s2, d0 in accordance with EN 13501-3
- Formaldehyde release class A in accordance with EN 1084, resp. Class E 1 according to EN 13936
- Can be divided into two smaller mounting plates

Art. no.	B [cm]	H [cm]
111.858.00.1	50	65

Geberit Duofix mounting plate, universal

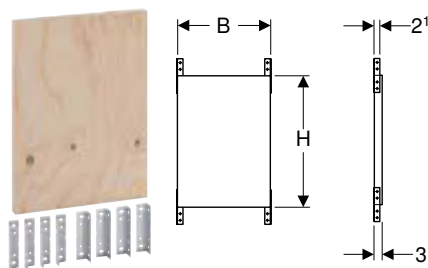

click & scan



Application purposes

- For drywall construction
- For installation in part or room-height Geberit Duofix system walls
- Suitable for barrier-free construction
- For fastening support handles
- For fastening urinal divisions, shower partition walls and wall cabinets
- For sliding bracket fastenings
- For fastening supply lines
- For discharge pipes up to \varnothing 110 mm (DN 100)

Scope of delivery

- 8 fixing brackets
- Fastening material


Characteristics

- Mounting plate made of veneered wood, waterproof bonded
- Building material class B2 in accordance with DIN 4102-1, resp. class D-s2, d0 in accordance with EN 13501-3
- Formaldehyde release class A in accordance with EN 1084, resp. Class E 1 according to EN 13936
- Can be divided into two smaller mounting plates

Art. no.	B [cm]	H [cm]
111.859.00.1	35	50

Accessories

Geberit Duofix set of wall anchors for single installation

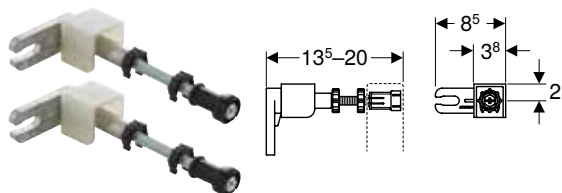

click & scan

Application purposes

- For fastening Geberit Duofix installation elements in front of drywalls and solid walls
- For placing and fastening panelling in part-height prewall installations

Scope of delivery

- Set of 2 pieces

Characteristics


- Can be adjusted in depth from the front, infinitely variable, with fast adjustment
- Wall fixation 360° rotating
- Threaded rod M10, zinc-plated

Art. no.
111.815.00.1

Accessories

- Geberit Duofix set of wall anchor extensions → p. 91

Set of wall anchors for single installation, for Geberit Duofix element for wall-hung WC, with concealed cistern 8 cm

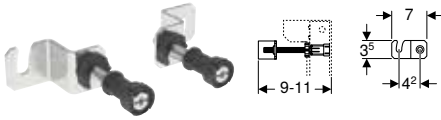

click & scan

Application purposes

- For fastening Geberit Duofix installation elements in front of dry-walls and solid walls
- For fastening Geberit Duofix elements for wall-hung WC, with concealed cistern 8 cm

Scope of delivery

- Set of 2 pieces


Characteristics

- Can be adjusted in depth from the front, infinitely variable
- Wall fixation 360° rotating
- Threaded rod M10, zinc-plated

Art. no.

111.013.00.1

Geberit Duofix set of wall anchors for single installation, corner construction

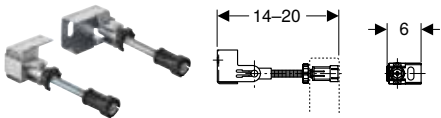

click & scan

Application purposes

- For fastening Geberit Duofix installation elements in front of dry-walls and solid walls
- For placing and fastening panelling in part-height prewall installations

Scope of delivery

- Set of 2 pieces

Characteristics

- Can be adjusted in depth from the front, infinitely variable
- Integrated panelling support
- Threaded rod M10, zinc-plated
- Wall fixation 360° rotating
- Infinitely variable angle adjustment possible for corner installation

Art. no.

111.835.00.1

Accessories

- Geberit Duofix set of wall anchor extensions → p. 91

Geberit DuofixBasic set of wall anchors for single installation



click & scan

Application purposes

- For fastening Geberit Duofix installation elements in front of dry-walls and solid walls
- For supporting panelling in part-height prewall installations
- For Geberit Duofix elements with plastic foot plates
- For Geberit Duofix elements for wall-hung WC with projection up to 62 cm

Scope of delivery

- Set of 2 pieces


Characteristics

- 2025 range
- Adjustable in depth
- Wall anchor can be rotated 360°, can be rotated 180° when supporting the panelling
- Zinc-plated
- Threaded rod M8, zinc-plated

Art. no.

Art. no.	L [cm]	B [cm]	H [cm]
111.839.00.2	8	9	4

Geberit ready-to-fit set for washbasin with concealed trap

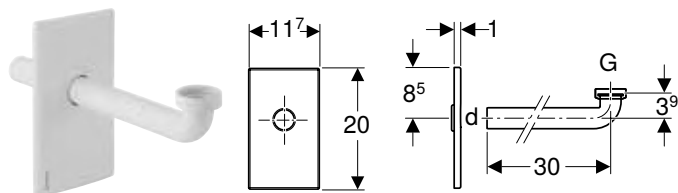

click & scan



Application purposes

- For Geberit installation elements for washbasins, with concealed trap
- Not suitable for Geberit in-wall cabinets

Characteristics


- Cover plate can be height-adjusted ± 3 cm during final installation
- Rotatable cover plate
- Fastening without screws

Scope of delivery

- Cover plate
- Flat gasket
- Connection bend, $\varnothing 32$ mm
- Seal $\varnothing 40 / 32$ mm

Art. no.	Colour / surface	d, \varnothing [mm]	G ["]	Product material
115.416.11.1	white alpine	32	1 1/4	Plastic
115.416.21.1	chrome / Glossy	32	1 1/4	Plastic

Geberit Duofix set of wall anchor extensions

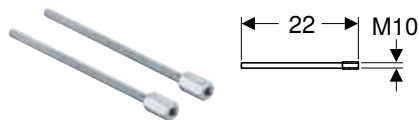

click & scan

Application purposes

- For extending Geberit Duofix wall anchors by 20 cm
- For Geberit Duofix wall anchors with threaded rod M10

Characteristics

- Can be shortened
- Zinc-plated

Art. no.

111.887.00.1

Scope of delivery

- Set of 2 pieces

Geberit Duofix flat-head screw T25, for thin sheet metal



click & scan

Application purposes

- For fastening Geberit Duofix elements and system parts made of steel with a thickness of 0.6 mm
- For fastening to the lateral pull-out plate of the Geberit Duofix element
- For fastening to CW profiles with material thickness 0.6 mm
- For Geberit Duofix elements with cargo plate (from 2025 series), if CW profiles are sufficient for the application


Characteristics

- Zinc-plated
- Thread-rolling screw, 5.0 x 20 mm
- Flat head with T25
- Collar formation during thread shaping for higher extension values

Art. no.

111.926.00.1

Installation box for Geberit ONE mirror cabinet, height 90 cm

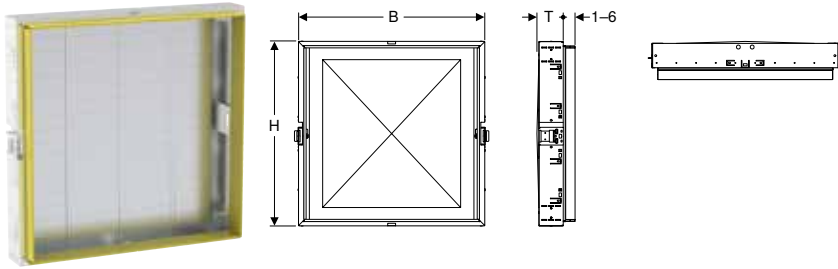

click & scan

Application purposes

- For drywall construction
- For installation in room-height prewall installations
- For installation in room-height installation walls
- For installation in room-height Geberit Duofix system walls
- For mounting in room-height Geberit GIS support systems for prewalls or partition walls
- For Geberit ONE mirror cabinets with height 90 cm

Scope of delivery

- 2 fixing brackets for studs or Geberit GIS profile
- Protection box
- Fastening material

Characteristics


- With fixing hooks for mirror cabinet, adjustable
- With fastening material for electrical connection
- With panelling stoppers made of plate, zinc-plated

Art. no.	Nominal width [cm]	B [cm]	H [cm]	T [cm]
111.941.00.1	60	64.5	93.5	14.5
111.942.00.1	75	79.5	93.5	14.5
111.943.00.1	90	94.5	93.5	14.5
111.944.00.1	105	109.5	93.5	14.5
111.945.00.1	120	124.5	93.5	14.5

Accessories

- Geberit Duofix crossbar for element fastening, for stud clearance from 60 cm → p. 92

Geberit Duofix crossbar for element fastening, for stud clearance from 60 cm

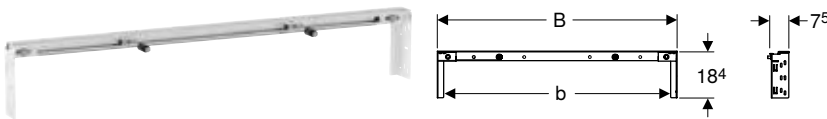

click & scan

Application purposes

- For drywall construction
- For installation in room-height prewall installations
- For installation in room-height installation walls
- For installation in room-height Geberit Duofix system walls
- For mounting between studs, room height, for nominal widths 60, 75, 90, 105, 120 or 135 cm
- For creating niches for example for concealed mirror cabinets
- For fastening Geberit Duofix installation elements between two studs
- Necessary if fastening the washbasin element to the rear wall with wall anchors is not possible

Scope of delivery

- 2 fixing brackets
- Fastening material for element for washbasin
- Fastening material

Characteristics

- Zinc-plated
- Nominal width 60 cm suitable for washbasin elements with width 44 cm or 50 cm (restricted furniture fastening for 50 cm)
- Nominal widths 75 cm to 120 cm suitable for washbasin elements with width 50 cm
- Nominal widths 120 cm to 135 cm suitable for washbasin elements with width 44 cm or 50 cm (restricted furniture fastening for 50 cm)
- Nominal widths 120 cm to 135 cm suitable for double washbasins

Art. no.	Nominal width [cm]	B [cm]	b [cm]
111.041.00.1	60	65	60
111.042.00.1	75	80	75
111.043.00.1	90	95	90
111.044.00.1	105	110	105
111.045.00.1	120	125	120
111.046.00.1	135	140	135

Accessories

- Geberit Duofix mounting plate for washbasin with washbasin cabinet and one washbasin tap, concentric → p. 85
- Geberit Duofix mounting plate for washbasin with washbasin cabinet and one washbasin tap eccentric → p. 86
- Geberit Duofix mounting plate for washbasin with washbasin cabinet and two washbasin taps → p. 87
- Geberit Duofix fastening for central drain between two elements for washbasin → p. 93

Geberit Duofix fastening for central drain between two elements for washbasin



click & scan

Application purposes

- For large washbasins with central drain and two outlet taps
- For fastening between Geberit Duofix elements for washbasins, slim design
- For fastening pipe brackets from the Geberit Duofix element for washbasins

Scope of delivery

- Fastening material

Characteristics

- Zinc-plated

Art. no.

111.027.00.1

Geberit inlet crossbar for urinal, with spray head



click & scan

Application purposes

- For Geberit installation elements for urinal with flexible connection
- For Laufen Caprino Plus 4106.5 / 4106.6 urinals
- For connecting urinals with spray head

Scope of delivery

- Connecting nipple
- Protection plug
- Crossbar


Characteristics

- Can be installed without tools
- Inlet Rp 1/2"
- Sideways adjustable inlet

Art. no.

242.042.00.1

Geberit Duofix fastening material for stud clearance 50–57.5 cm

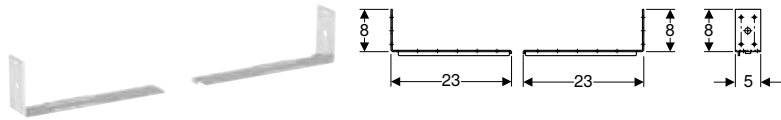

click & scan

Application purposes

- For drywall construction
- For installation in room-height installation walls
- For fastening Geberit Duofix installation elements between two studs at a distance of 50–57.5 cm

Scope of delivery

- 2 fixing brackets
- Fastening material


Characteristics

- Zinc-plated

Art. no.

111.869.00.1

Geberit Duofix fastening for washbasins with fastening distance 38–58 cm

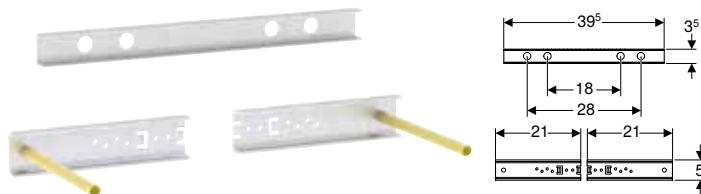

click & scan

Application purposes

- For fastening washbasins with a fastening distance > 38 cm to Geberit Duofix elements for washbasin

Characteristics

- Zinc-plated
- Fastening distance for threaded rods 38–58 cm


Scope of delivery

- 2 cavity profiles
- 2 threaded rods M10
- Reinforcing profile
- Fastening material

Art. no.

111.868.00.1

Geberit Duofix set of foot extensions 20 cm length

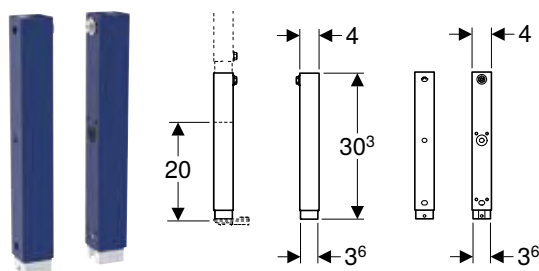

click & scan



Application purposes

- For extending the leg supports by 20 cm for high floor construction
- Not suitable for Geberit Duofix elements with a width of > 50 cm for room-height partition walls
- Not suitable for Geberit Duofix elements for wall-hung WC, corner construction
- Not suitable for Geberit Duofix elements with welded foot plate on the leg supports

Scope of delivery

- 2 foot extensions
- Fastening material

Characteristics

- 2025 range
- Compatible with Geberit Duofix installation system from the 2025 series and older series
- Foot extensions can be attached to C-foot profiles of Geberit Duofix elements
- Foot plates of Geberit Duofix elements can be re-mounted on foot extensions
- Foot extension, protected against corrosion

Art. no.	B [cm]	H [cm]	T [cm]
111.848.00.2	4	30.3	4


Accessories

- Geberit Duofix set of foot fastener on rear wall → p. 96



- When using with elements for wall-hung WCs or bidets in part-height prewall installations or in part-height Geberit Duofix system walls, the Geberit Duofix foot fastener set on rear wall must also be used

Geberit Duofix set of leg supports with large foot plate, for floor constructions 25–45 cm

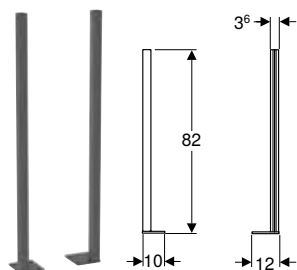

click & scan

Application purposes

- For floor constructions 25–45 cm
- For use with Geberit Duofix installation elements for increased application of force in floors
- Not suitable for Geberit Duofix elements with a width of > 50 cm for room-height partition walls
- Not suitable for Geberit Duofix elements for wall-hung WC, corner construction
- Not suitable for Geberit Duofix elements for wall-hung WC, 82 cm, with Omega concealed cistern 12 cm
- Not suitable for Geberit Duofix elements for cleaner sink, 175 cm

Scope of delivery


- Foot, left
- Foot, right
- Fastening material

Characteristics

- 2025 range
- Leg supports infinitely variable in height
- Leg supports protected against corrosion
- Leg supports with external dimensions 36 x 36 mm, suitable for Geberit Duofix elements from the 2025 range
- With large foot plates for raised power supply in floors

Art. no.	L [cm]	B [cm]	H [cm]
111.221.00.2	10	12	82

Geberit Duofix set of foot fastener on rear wall



click & scan

Application purposes

- For alternative foot fastening of the Geberit Duofix elements to the rear wall

Scope of delivery

- Set of 2 pieces


Characteristics

- Adjustable in depth
- Zinc-plated

Art. no.

111.064.00.1

Geberit set of support brackets for WC ceramic appliances with small contact surfaces

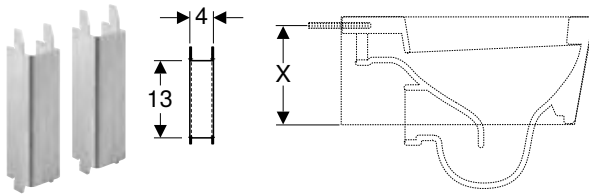

click & scan

Application purposes

- For additional support of WC ceramic appliances with contact surface $X < 17$ cm (contact surface X = dimension of the lower edge of the WC ceramic appliance to the middle of the fastening hole in the WC ceramic appliance)
- For Geberit Duofix and Geberit GIS elements for wall-hung WC with intended retainers

Scope of delivery

- Set of 2 pieces

Characteristics

- Zinc-plated
- U-profile


Art. no.

111.847.00.1



- It is known that the supports must be fitted on the following WC ceramic appliances: 1) Manufacturer: Flaminia (www.ceramicaflaminia.it), type: Link 5051 and Mini Link 5064 2) Manufacturer: Globo (www.ceramicaglobo.com), type: GLOBOconcept SAS02 and SAS03

Geberit drilling template for wall-hung WC and Geberit AquaClean

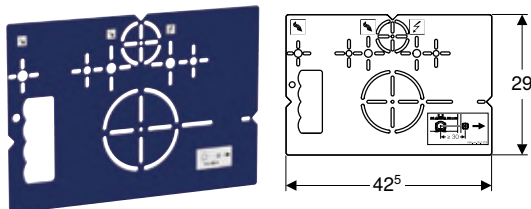

click & scan

Application purposes

- For marking the panelling cutouts for Geberit elements for wall-hung WC
- For marking the connection positions of Geberit AquaClean shower toilets


Characteristics

- Powder-coated

Art. no.

111.747.00.1

Geberit retrofit adapter for inlet Rp 1/2", urinal



click & scan


Application purposes

- For retrofitting installed Geberit Duofix elements for urinal, with urinal flush control with cover plate 13 x 13 cm, with inlet \varnothing 32 mm, to inlet Rp 1/2"
- Not suitable for Geberit Duofix elements for urinal, with urinal flush control Basic, with cover plate 16 x 16 cm

Art. no.

242.309.00.1

Geberit sound insulation set for wall-hung WC

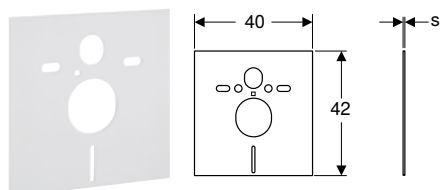

click & scan

Application purposes

- For structure-borne sound insulation of WCs and bidets
- For WCs and bidets with fastening distance 18 or 23 cm

Scope of delivery

- 2 washers
- 2 sound insulation sleeves
- Sound insulation mat


Art. no.

s
[mm]

156.050.00.1

6

Geberit sound insulation set for washbasin

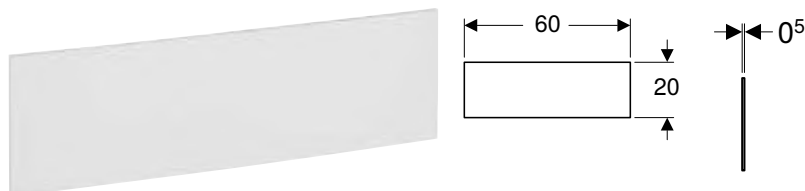

click & scan

Application purposes

- For structure-borne sound insulation of washbasins


Scope of delivery

- 2 sound insulation sleeves
- Sound insulation mat

Art. no.

156.051.00.1

Geberit sound insulation set for washbasin, large

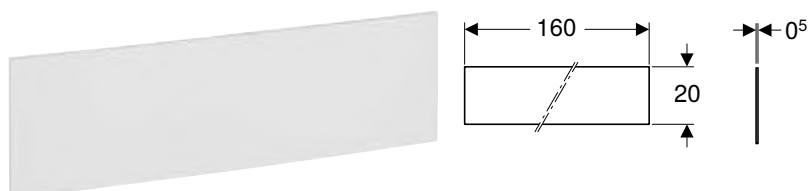

click & scan

Application purposes

- For structure-borne sound insulation of washbasins


Scope of delivery

- 4 sound insulation sleeves
- Sound insulation mat

Art. no.

156.054.00.1

Geberit concealed ball valve with fastening

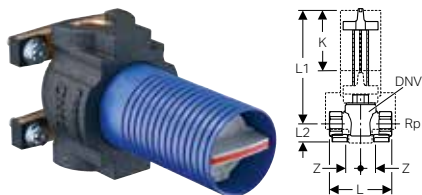

click & scan

Application purposes

- For cold and hot potable water
- For cooling and heating water without antifreeze agent
- For cooling and heating water with antifreeze agent
- For treated water (application range according to Technical Information "Treated water")
- For rainwater with a pH value ≥ 5.5
- For seawater
- For compressed air (oil purity class 0–3)
- For negative pressure
- For inert gases (e.g. nitrogen)
- For Geberit Duofix and Geberit GIS mounting plates
- For solid and drywall construction

Technical data

Operating temperature	0–90 °C
Product material	Gunmetal / lead-free silicon bronze
Material, insulation	EPP
Insulation thickness	10 mm
Thermal conductivity, insulation	0.035 W/(m·K)

Characteristics

- Approval in accordance with DVGW
- Model Geberit K4
- Ball and base unit fully exposed to flow
- Fastening points for circular hole \varnothing 60 mm
- Replaceable valve top with ball and seals
- With concealed turn handle actuation
- Lead-free
- Ball made of PPSU
- Upper part caulk made of EPDM
- Ball caulks made of silicone

Scope of delivery

- Concealed turn handle actuation
- Spindle extension
- Round protection box, can be shortened
- Protection cover plug with marking tip

Art. no.	DN	DNV	Rp [""]	L [cm]	L1 [cm]	L2 [cm]	Z [cm]	K [cm]	PN [bar]
616.042.00.1	15	15	1/2	7.5	12.7	2.2	2.3	7.3	10
616.043.00.1	20	20	3/4	7.5	12.7	2.2	2.1	7.3	10


Accessories

- Geberit turn handle set for concealed ball valve → p. 99
- Geberit cover collar for concealed ball valve → p. 99



- All components of this product which come into contact with drinking water will be converted to lead-free materials in the course of 2026

Geberit cover collar for concealed ball valve

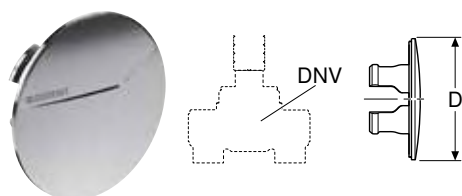


click & scan

Characteristics

- Chrome-plated

Art. no.	Colour / surface	DNV	D [cm]
610.090.21.1	chrome / Glossy	15 / 20	7.5

Geberit turn handle set for concealed ball valve

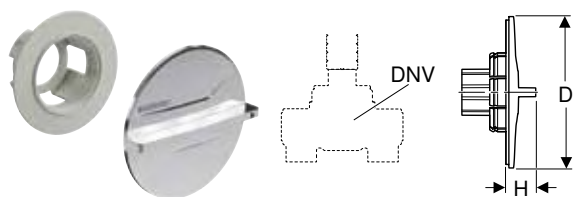

click & scan

Characteristics

- Chrome-plated

Scope of delivery

- Turn handle, chrome-plated
- Retainer with slip-on spindle and transition bushing
- Colour markings (red, blue)

Art. no.	Colour / surface	DNV	D [cm]	H [cm]
610.089.21.1	chrome / Glossy	15 / 20	7.5	1.5



Geberit GIS




System walls	102
Support systems.....	102
Accessories for prefabrication.....	104
Accessories for sound insulation.....	105
Panellings.....	106
Installation elements	110
Elements for WCs.....	110
Accessory overview – Geberit GIS elements for WCs.....	110
Elements for washbasins.....	114
Elements for bidets.....	116
Elements for urinals.....	117
Accessory overview – Geberit GIS elements for urinals.....	117
Elements for showers with wall drain.....	122
Elements for taps and devices.....	123
Elements for washing machines and dishwashers.....	126
Elements for loads.....	126
Accessories.....	127
Accessories	130
For system walls.....	130
For supply systems.....	133
For drainage systems.....	135

System walls

Support systems

Geberit GIS profile

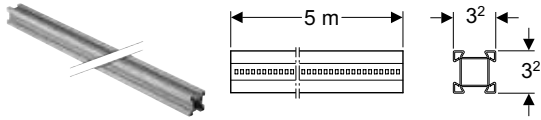

click & scan

Application purposes


- For creating Geberit GIS support systems

Characteristics

- Zinc-plated

Art. no.	L [cm]	B [cm]	H [cm]
461.000.25.1	500	3.2	3.2

Geberit GIS profile connector

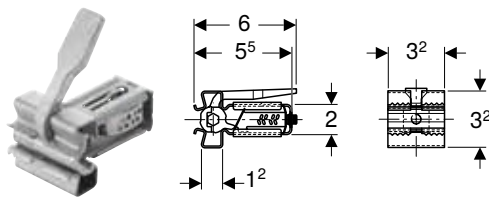

click & scan

Application purposes


- For creating Geberit GIS support systems
- For connecting Geberit GIS profiles at right angles without tools

Characteristics

- Maximum insertion depth marked
- Clip made of spring steel, protected against corrosion
- Lengths can be compensated up to 1 cm per profile side
- Lever for manual actuation made of die-cast zinc
- Prelocking function

Art. no.	B [cm]	H [cm]	T [cm]
461.200.00.1	3.2	3.2	6

Geberit GIS mounting bracket 7.5 x 5.5 cm

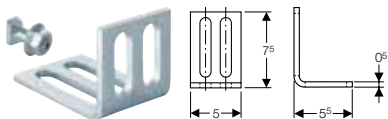

click & scan

Application purposes

- For creating Geberit GIS support systems
- For fastening Geberit GIS support systems to the building structure
- For compensating for construction differences

Scope of delivery

- Ratchet pin
- Nut M8
- Fastening material

Characteristics


- Zinc-plated
- Short and long leg with two oblong holes each

Art. no.	B [cm]	H [cm]	T [cm]
461.002.00.1	5	7.5	5.5

Accessories

- Sound insulating panel for Geberit GIS mounting bracket → p. 105

Geberit GIS connecting piece

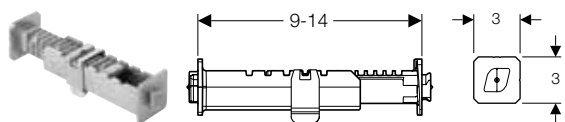

[click & scan](#)

Application purposes


- For creating Geberit GIS support systems
- For making Geberit GIS support systems more rigid

Characteristics

- Two die-cast parts, can be turned 90° relative to one another
- Clip made of spring steel
- Adjustable in depth without tools, 5-mm grid
- Insertion direction marked
- Can be shortened to 3 cm

Art. no.	B [cm]	H [cm]	T [cm]
461.003.00.1	3	3	9

Geberit GIS connecting strap

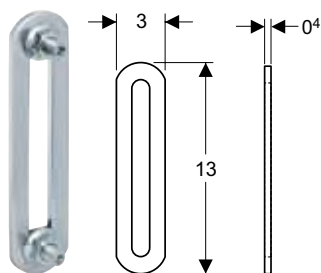

[click & scan](#)

Application purposes

- For creating Geberit GIS support systems
- For connecting Geberit GIS profiles near horizontal joints of panelling
- For right-angled or oblique wall inlets

Scope of delivery

- 2 ratchet pins
- 2 nuts M8


Characteristics

- Zinc-plated
- With oblong hole

Art. no.	B [cm]	H [cm]	T [cm]
461.022.00.1	3	13	0.4

Accessories for prefabrication

Geberit GIS mounting bracket 12 cm x 5.5 cm

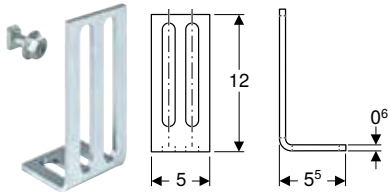

click & scan

Application purposes

- For creating Geberit GIS support systems
- For fastening Geberit GIS support systems to the building structure
- For compensating for construction differences
- For aligning prefabricated Geberit GIS support systems with the building structure

Characteristics

- Zinc-plated
- Short and long leg with two oblong holes each
- Distance of Geberit GIS profile to building structure adjustable, top edge of Geberit GIS profile 5–12 cm

Art. no.	H [cm]
461.140.00.1	12


Accessories

- Sound insulating panel for Geberit GIS mounting bracket → p. 105

Scope of delivery

- Ratchet pin
- Nut M8
- Fastening material

Geberit GIS mounting bracket 13 cm x 13 cm

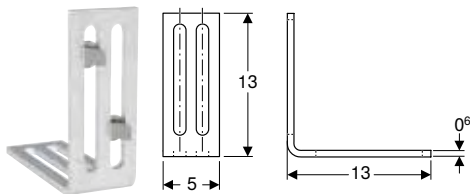

click & scan

Application purposes

- For creating Geberit GIS support systems
- For fastening Geberit GIS support systems to the building structure
- For compensating for construction differences
- For aligning prefabricated Geberit GIS support systems with the building structure

Characteristics

- Zinc-plated
- Legs with two oblong holes each
- Distance of Geberit GIS profile to building structure adjustable, top edge of Geberit GIS profile 5–13 cm

Art. no.
461.185.00.1


Accessories

- Sound insulating panel for Geberit GIS mounting bracket → p. 105

Scope of delivery

- 2 ratchet pins
- 2 nuts M8
- Fastening material

Geberit GIS profile guide



click & scan


Application purposes

- For precisely connecting two Geberit GIS support systems on the same level

Art. no.

461.064.00.1

Geberit GIS corner stiffener for transport

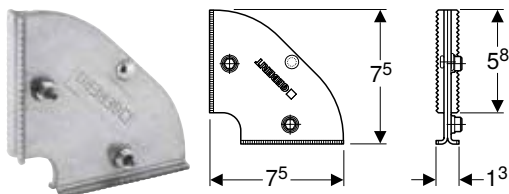

click & scan

Application purposes

- For making prefabricated Geberit GIS support systems more rigid

Characteristics


- Zinc-plated

Art. no.

461.089.00.1

Accessories for sound insulation

Geberit GIS sound insulation tape

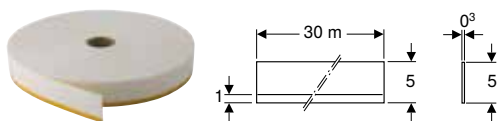

click & scan

Application purposes

- For structure-borne sound decoupling between panels and building structure
- For avoiding uncontrollable formation of cracks


Characteristics

- Single-sided self-adhesive
- Permanently elastic
- Vinyl foam tape
- Closed-cell

Art. no.

461.036.00.1

Sound insulating panel for Geberit GIS mounting bracket



click & scan

Application purposes

- For structure-borne sound decoupling between Geberit GIS support systems and the building structure

Characteristics


- Self-adhesive

Art. no.

Art. no.	B [cm]	H [cm]	T [cm]
461.014.00.1	5	7	0.5
461.194.00.1	5	12	0.5

Panellings

Geberit GIS panel

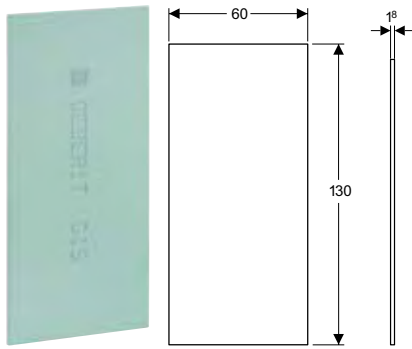

click & scan

Application purposes

- For single-layer, vertical panelling of Geberit GIS support systems
- For areas exposed to small and moderate water action
- For use in the water action classes W0-I and W1-I, according to DIN 18534
- Not suitable for standard panel screws

Characteristics

- Screwable with Geberit panel screws
- Impregnated
- Environmentally compatible
- Building material class A2, non-combustible, in accordance with DIN 4102
- Type H2 according to EN 520+A1

Technical data

Product material	Plasterboard
Compressive strength	3.5 N/mm ²

Art. no.	B [cm]	H [cm]	T [cm]	Weight of main element [kg]
461.025.00.1	60	130	1.8	12.56


Accessories

- Geberit filler → p. 40
- Geberit panel screw → p. 39
- Geberit panel screw, in magazine → p. 39



- Geberit panel screws must be used to screw in the panels

Geberit GIS aqua panel Pro

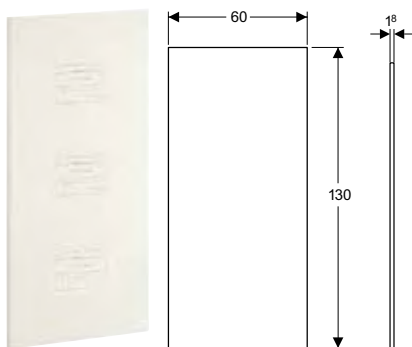

click & scan

Application purposes

- For single-layer, vertical panelling of Geberit GIS support systems
- For single-layer panelling of Geberit Duofix system walls
- For areas exposed to high and very high water action
- For use in all four water action classes W0-I, W1-I, W2-I and W3-I, according to DIN 18534
- Not suitable for standard panel screws

Characteristics

- Screwable with Geberit panel screws
- Cement-bonded mineral structural panel
- Water-resistant
- Resistant against mould
- Building material class A1, non-combustible, in accordance with DIN 4102
- Self-supporting
- Dimensionally stable
- Can be processed with woodworking tools as saws and drilling machines
- Circumferential chamfered edges 45°

Technical data

Product material	Calcium silicate
Compressive strength	9.3 N/mm ²

Art. no.	B [cm]	H [cm]	T [cm]	Weight of main element [kg]
461.163.00.5	60	130	1.8	13.48


Accessories

- Geberit filler for aqua panel Pro → p. 40
- Geberit panel screw → p. 39
- Geberit panel screw, in magazine → p. 39



- Geberit panel screws must be used to screw in the panels

Geberit GIS panel for wall-hung WC, for Sigma concealed cisterns

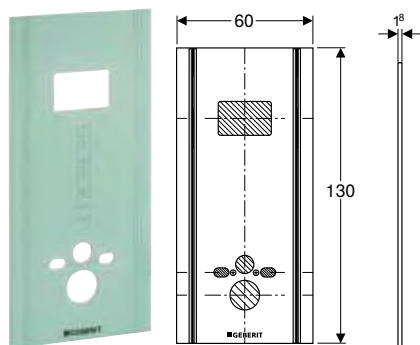

Application purposes

- For single-layer panelling of Geberit GIS elements for wall-hung WC in GIS support system
- For use in the installation of Geberit GIS support systems on finished floors
- For areas exposed to small and moderate water action
- For use in the water action classes W0-I and W1-I, according to DIN 18534
- Not suitable for standard panel screws

Characteristics

- Screwable with Geberit panel screws
- Impregnated
- Environmentally compatible
- Predrilled for wall-mounted WC connections
- Cutout available for service opening of Sigma concealed cisterns
- Building material class A2, non-combustible, in accordance with DIN 4102

Technical data


Product material	Plasterboard
Compressive strength	3,5 N/mm ²

Art. no.	B		H		T Weight of main element	
	[cm]	[cm]	[cm]	[cm]	[cm]	[kg]
461.058.00.1	60	130	1.8			12



- Geberit panel screws must be used to screw in the panels

Geberit GIS panel for washbasin

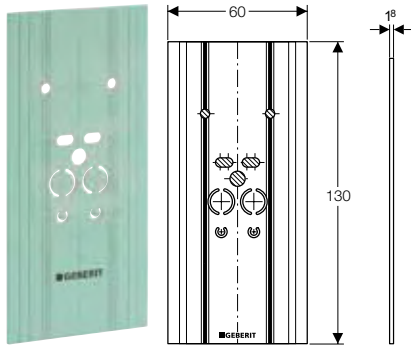

click & scan

Application purposes

- For single-layer panelling of Geberit GIS elements for washbasin in GIS support system
- For use in the installation of Geberit GIS support systems on unfinished floors
- Not suitable for standard panel screws

Characteristics

- Screwable with Geberit panel screws
- Impregnated
- Environmentally compatible
- Non-combustible
- Type H2 according to EN 520+A1
- Predrilled for washbasin connections

Technical data

Product material	Plasterboard
Compressive strength	3.5 N/mm ²

Art. no.	B [cm]	H [cm]	T [cm]
461.074.00.1	60	130	10



- Geberit panel screws must be used to screw in the panels

Geberit panel screw



click & scan

Application purposes

- For fastening Geberit panels and Geberit aqua panels Pro to Geberit Duofix system walls and Geberit GIS support systems

Characteristics

- Self-drilling screw, 4.2 x 35 mm
- Self-tapping thread
- Steel, hardened and phosphatised
- Flared head with crosshead Phillips PH 2

Technical data

Product material	Steel
------------------	-------

Art. no.	B [cm]	H [cm]	T [cm]
461.030.00.1	0.82	0.82	3.8

Geberit panel screw, in magazine



click & scan

Application purposes

- For fastening Geberit panels and Geberit aqua panels Pro to Geberit Duofix system walls and Geberit GIS support systems
- For quick-fit auto-feed screwdriver

Characteristics

- Self-drilling screw, 4.2 x 35 mm
- Self-tapping thread
- Steel, hardened and phosphatised
- Flared head with crosshead Phillips PH 2
- Plastic magazine for 50 panel screws

Technical data

Product material	Steel
------------------	-------

Art. no.	B [cm]	H [cm]	T [cm]
461.031.00.1	0.82	0.82	3.8

Geberit filler



click & scan

Application purposes

- For filling Geberit panels

Characteristics

- Impregnated
- Environmentally compatible
- Powdery

Technical data

Product material	Calcium sulphate
------------------	------------------

Art. no.	B [cm]	H [cm]	T [cm]
464.015.00.1	22.6	30	10

Geberit filler for aqua panel Pro



click & scan

Application purposes

- For filling Geberit aqua panels Pro in areas exposed to high and very high water action

Characteristics

- Environmentally compatible
- Water-resistant
- Powdery

Technical data

Product material	Calcium sulphate
------------------	------------------






Art. no.	B [cm]	H [cm]	T [cm]
464.044.00.1	22.6	30	10

Installation elements

Elements for WCs


Accessory overview – Geberit GIS elements for WCs

Geberit International Sales, version: December 2025

	Actuator plates of the Sigma series	Actuator plates of the Omega series	Geberit set of support brackets for WC ceramic appliances with small contact surfaces	Geberit drilling template for wall-hung WC and Geberit AquaClean	Geberit set of Power & Connect box and power supply unit for element for wall-hung WC
			111.847.00.1	111.747.00.1	116.098.00.6
					
			→ p. 96	→ p. 96	→ p. 250
461.311.00.6 Geberit GIS element for wall-hung WC, 114 cm, with Sigma concealed cistern 12 cm	✓		✓	✓	✓
461.301.00.6 Geberit GIS element for wall-hung WC, 114 cm, with Sigma concealed cistern 12 cm and Power & Connect box	✓		✓	✓	✓
461.141.00.2 Geberit GIS element for wall-hung WC, 87 cm, with Omega concealed cistern 12 cm		✓	✓	✓	✓
461.206.00.2 Geberit GIS element for wall-hung WC with close-coupled exposed cistern, 95 cm			✓	✓	

✓ Compatible

Geberit GIS element for wall-hung WC, 114 cm, with Sigma concealed cistern 12 cm

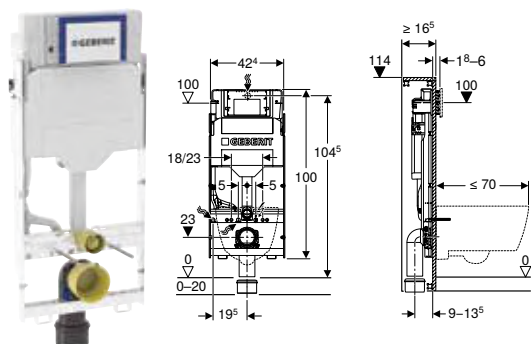

click & scan

Application purposes

- For installation in Geberit GIS support systems for prewalls, partition walls or freestanding walls
- Suitable for barrier-free construction
- For floor constructions 0–20 cm
- For wall-hung WCs

Technical data

Flow pressure	0.1–10 bar
Flush volume, factory setting	6 l / 3 l
Flush volume large, adjustment range	4 l / 4.5 l / 6 l / 7.5 l
Flush volume small, adjustment range	2–4 l
Flow rate at 300 kPa / 3 bar	0.16 l/s
Product material	Steel
Height-adjustable	Yes

Characteristics

- 2025 range
- Frame, zinc-plated
- Frame with four quick-action fasteners
- Infinitely variable height adjustment in Geberit GIS structure
- Frame for wall-hung WCs with connection dimensions as per EN 33 and projection up to 70 mm
- Connection bend can be mounted without tools at different depths, adjustable range 45 mm
- Geberit Sigma concealed cistern 12 cm, fully insulated against condensation
- For front actuation, suitable for single, dual and stop-and-go flushes
- Immediate post flush possible with factory setting
- Tool-free installation and maintenance work on concealed cistern
- Water supply connection on the rear or top centre
- Protection box for service opening, can be cut to length, protects against moisture and dirt
- With conduit pipe for feed pipe for Geberit AquaClean shower toilets and for connection cable
- Fastening for electrical connection and Power & Connect Box

Scope of delivery

- Water supply connection R 1/2", compatible with MasterFix and MeplaFix, with integrated angle stop valve and hand wheel
- Protection box for service opening
- Connection set for WC, \varnothing 90 mm
- Connection bend 90° made of PE-HD, \varnothing 90 mm
- Adapter socket made of PE-HD, \varnothing 90 / 110 mm
- Fastening and protection material

Art. no.	B [cm]	H [cm]	T [cm]	T1 [cm]
461.311.00.6	42.4	114	16.5	19.5


Accessories

- Accessory overview – Geberit GIS elements for WCs → p. 110



- Actuator plate has to be ordered separately

Geberit GIS element for wall-hung WC, 114 cm, with Sigma concealed cistern 12 cm and Power & Connect box

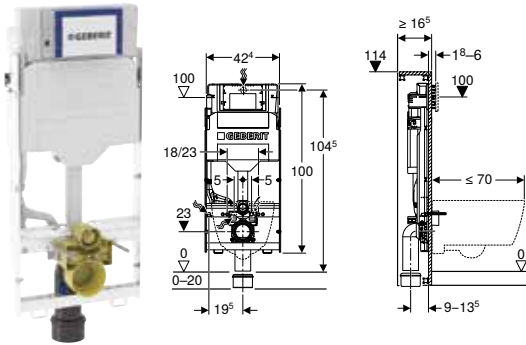

Application purposes

- For installation in Geberit GIS support systems for prewalls, partition walls or freestanding walls
- Suitable for barrier-free construction
- For floor constructions 0–20 cm
- For wall-hung WCs
- For hidden mains connection behind the WC ceramic appliance

Technical data

Flow pressure	0.1–10 bar
Flush volume, factory setting	6 l / 3 l
Flush volume large, adjustment range	4 l / 4.5 l / 6 l / 7.5 l
Flush volume small, adjustment range	2–4 l
Flow rate at 300 kPa / 3 bar	0.16 l/s
Product material	Steel
Height-adjustable	Yes

Characteristics

- 2025 range
- Frame, zinc-plated
- Frame with four quick-action fasteners
- Infinitely variable height adjustment in Geberit GIS structure
- Frame for wall-hung WCs with connection dimensions as per EN 33 and projection up to 70 cm
- Connection bend can be mounted without tools at different depths, adjustable range 45 mm
- Geberit Sigma concealed cistern 12 cm, fully insulated against condensation
- For front actuation, suitable for single, dual and stop-and-go flushes
- Immediate post flush possible with factory setting
- Tool-free installation and maintenance work on concealed cistern
- Water supply connection on the rear or top centre
- Protection box for service opening, can be cut to length, protects against moisture and dirt
- With conduit pipe for feed pipe for Geberit AquaClean shower toilets and for connection cable
- Prepared for installation of a 12 V power supply unit behind the WC ceramic appliance

Scope of delivery

- Water supply connection R 1/2", compatible with MasterFix and MeplaFix, with integrated angle stop valve and hand wheel
- Protection box for service opening
- Connection set for WC, ø 90 mm
- Connection bend 90° made of PE-HD, ø 90 mm
- Adapter socket made of PE-HD, ø 90 / 110 mm
- Power & Connect box, with intermediate bottom with terminal
- Conduit pipe, length 0.32 m, for connection of Geberit AquaClean
- Protection cover for Power & Connect box
- Fastening and protection material

Art. no.	B [cm]	H [cm]	T [cm]	T1 [cm]
461.301.00.6	42.4	114	16.5	19.5

To order additionally

- Geberit power supply unit for Power & Connect box → p. 249


Accessories

- Accessory overview – Geberit GIS elements for WCs → p. 110



- Actuator plate has to be ordered separately

Geberit GIS element for wall-hung WC, 87 cm, with Omega concealed cistern 12 cm

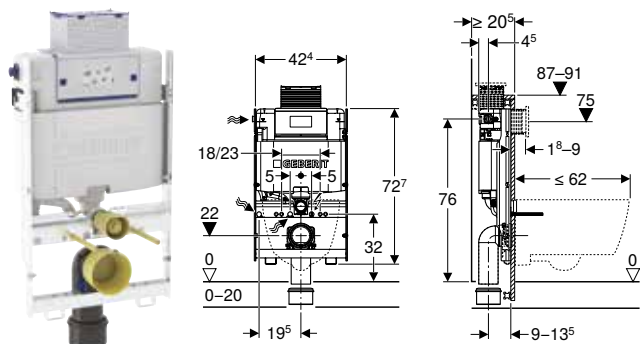

click & scan

Application purposes

- For installation in Geberit GIS support systems for part-height prewall or freestanding wall
- For floor constructions 0–20 cm
- For wall-hung WCs

Technical data

Flow pressure	0.1–10 bar
Flush volume, factory setting	6 l / 3 l
Flush volume large, adjustment range	4 l / 4.5 l / 6 l / 7.5 l
Flush volume small, adjustment range	2–4 l
Flow rate at 300 kPa / 3 bar	0.16 l/s
Product material	Steel
Height-adjustable	Yes

Characteristics

- 2025 range
- Frame, zinc-plated
- Frame with four quick-action fasteners
- Infinitely variable height adjustment in Geberit GIS structure
- Frame for wall-hung WCs with connection dimensions as per EN 33 and projection up to 62 mm
- Connection bend can be mounted without tools at different depths, adjustable range 45 mm
- Geberit Omega concealed cistern 12 cm, fully insulated against condensation
- For top or front actuation, suitable for dual flush
- Immediate post flush possible with factory setting
- Tool-free installation and maintenance work on concealed cistern
- Water supply connection on the left or rear left
- Protection box for service opening, can be cut to length, protects against moisture and dirt
- With conduit pipe for feed pipe for Geberit AquaClean shower toilets and for connection cable
- Fastening for electrical connection and Power & Connect Box

Scope of delivery

- Water supply connection R 1/2", compatible with MasterFix and MeplaFix, with integrated angle stop valve and hand wheel
- Protection box for service opening
- Connection set for WC, \varnothing 90 mm
- Connection bend 90° made of PE-HD, \varnothing 90 mm
- Adapter socket made of PE-HD, \varnothing 90 / 110 mm
- Fastening and protection material

Art. no.	B [cm]	H [cm]	T [cm]
461.141.00.2	42.4	87	20.5


Accessories

- Accessory overview – Geberit GIS elements for WCs → p. 110



- Actuator plate has to be ordered separately

Geberit GIS element for wall-hung WC with close-coupled exposed cistern, 95 cm

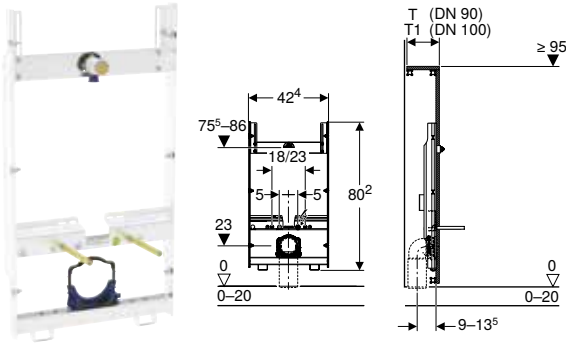

click & scan

Application purposes

- For installation in Geberit GIS support systems for prewalls, partition walls or freestanding walls
- Suitable for barrier-free construction
- For floor constructions 0–20 cm
- For wall-hung WCs
- For mounting of close-coupled WCs

Technical data

Product material	Steel
Height-adjustable	Yes

Characteristics

- 2025 range
- Frame, zinc-plated
- Frame with four quick-action fasteners
- Infinitely variable height adjustment in Geberit GIS structure
- Frame for wall-hung WCs with connection dimensions as per EN 33 and projection up to 70 cm
- Connection bend can be mounted without tools at different depths, adjustable range 45 mm
- Tap crossbar height-adjustable

Scope of delivery

- Elbow tap connector Rp 1/2" / R 1/2", compatible with MF
- Sealing washer
- Fastening and protection material


Art. no.	B [cm]	H [cm]	T [cm]	T1 [cm]
461.206.00.2	42.4	80.2	16.5	18.5

Accessories

- Accessory overview – Geberit GIS elements for WCs → p. 110

Elements for washbasins

Geberit GIS washbasin set for deck-mounted tap

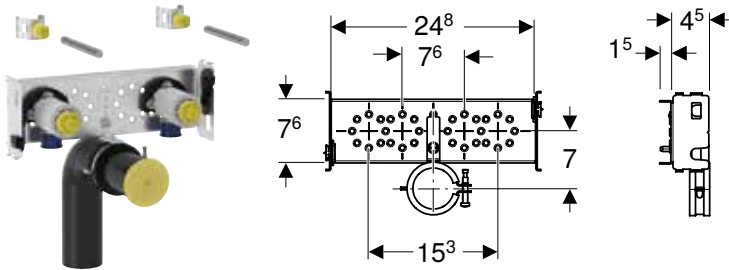

click & scan

Application purposes

- For installation in Geberit GIS support systems for prewalls, partition walls or freestanding walls
- For installation of washbasins
- For deck-mounted taps

Characteristics


- Crossbar, zinc-plated
- Crossbar with two quick-action fasteners
- Infinitely variable height adjustment in Geberit GIS structure
- Standard washbasin fastening distance 28 cm, adjustable with the Geberit GIS structure
- Fastening for connection bend, sound-absorbing
- Water supply connection compatible with MasterFix and MeplaFix
- Elbow connector can be mounted without tools

Scope of delivery

- 2 elbow tap connectors R 1/2"
- 2 sound insulation bases
- 2 insulating sleeves
- 5 protective plugs with punching tip
- 2 sealing washers
- Connection bend made of PE-HD, ø 50 mm, extended
- Seal ø 44 / 32 mm
- 2 mounting clips M10
- 2 threaded rods M10
- Fastening material

Art. no.	B [cm]	H [cm]	T [cm]
461.430.00.1	24.8	7.6	4.5

Geberit GIS washbasin set for deck-mounted tap, with concealed trap

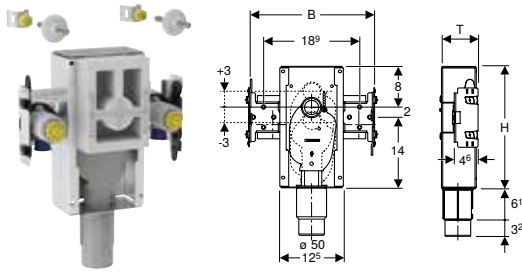

click & scan

Scope of delivery

- 2 elbow tap connectors Rp 1/2" / R 1/2", compatible with MF
- 2 sound insulation bases
- 2 insulating sleeves
- 4 protective plugs with punching tip
- 2 sealing washers
- 2 mounting clips M10
- 2 threaded rods M10
- Protection box
- Fastening material

Application purposes

- For installation in Geberit GIS support systems for prewalls, partition walls or freestanding walls
- Suitable for barrier-free construction
- For installation of washbasins
- For deck-mounted taps

Characteristics

- Crossbar, zinc-plated
- Crossbar with four quick-action fasteners
- Infinitely variable height adjustment in Geberit GIS structure
- Standard washbasin fastening distance 28 cm, adjustable with the Geberit GIS structure
- In-wall cabinet with straight connector made of PP, \varnothing 50 mm
- Concealed trap with optimum flow guidance and high self-cleaning effect
- Concealed trap can be height-adjusted \pm 3 cm during final installation


Art. no.	B [cm]	H [cm]	T [cm]
461.435.00.1	24.8	23.9	7

Accessories

- Geberit ready-to-fit set for washbasin with concealed trap → p. 91

Elements for bidets

Geberit GIS element for bidet, universal

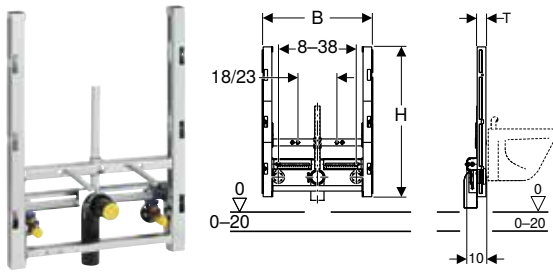

click & scan

Application purposes

- For installation in Geberit GIS support systems for prewalls, partition walls or freestanding walls
- For wall-hung bidets with deck-mounted tap
- For floor constructions 0–20 cm

Characteristics

- Frame, zinc-plated
- Frame with four quick-action fasteners
- Infinitely variable height adjustment in Geberit GIS structure
- Fastening distance for wall-hung bidet 18 or 23 cm
- Height-adjustable bidet fastening
- Fastening for connection bend, height-adjustable and sound-absorbing
- Tap attachments adjustable in width and height

Scope of delivery








- 2 elbow tap connectors Rp 1/2" / R 1/2", compatible with MF
- 2 sealing washers
- 2 sound insulation bases
- 2 insulating sleeves
- 3 protective plugs with punching tip
- Connection bend made of PE-HD, \varnothing 50 mm
- Seal \varnothing 44 / 32 mm
- 2 threaded rods M12
- Fastening material

Art. no.	B [cm]	H [cm]	T [cm]
461.530.00.1	50	69	4

Elements for urinals

Accessory overview – Geberit GIS elements for urinals


Geberit International Sales, version: December 2025

	Urinal flush controls with electronic flush actuation, battery operation	Urinal flush controls with electronic flush actuation, mains operation	Urinal flush controls with pneumatic flush actuation	Urinal flush control with electronic flush actuation, mains operation, hidden, universal	Geberit urinal flush control with electronic flush actuation, mains operation, surface-mounted, hidden	Geberit urinal flush control with electronic flush actuation, battery operation, surface-mounted, hidden	Geberit inlet cross-bar for urinal, with spray head
							
					116.076.00.1	116.077.00.1	242.042.00.1
					→ p. 283	→ p. 284	→ p. 93
461.621.00.1 Geberit GIS element for urinal, 114 cm, universal	✓	✓	✓				✓
461.606.00.1 Geberit GIS element for urinal, 114 cm, universal, for spray head	✓	✓	✓				✓
461.689.00.1 Geberit GIS element for urinal, 114–132 cm, universal, for hidden urinal flush control				✓			✓
461.686.00.1 Geberit GIS element for urinal, 114 cm, universal, for exposed flushing valve					✓	✓	

✓ Compatible



Geberit GIS element for urinal, 114–132 cm, universal, for hidden urinal flush control

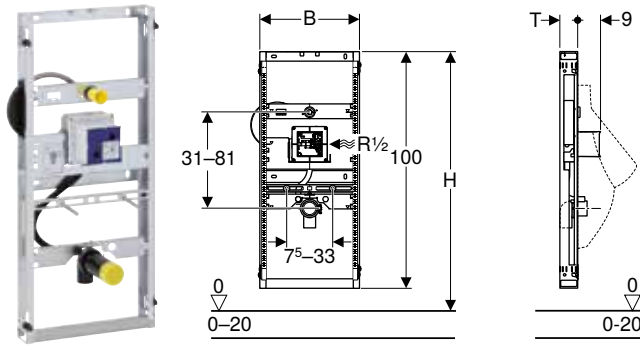

Application purposes

- For installation in Geberit GIS support systems for prewalls, partition walls or freestanding walls
- For Geberit urinal flush controls for covered installation, vandal-resistant
- For floor constructions 0–20 cm

Technical data

Flow pressure	1–8 bar
Water test pressure max.	16 bar
Test pressure air / inert gas max.	3 bar
Flow rate at 100 kPa / 1 bar without flow limiter	0.3 l/s
Flow rate at 100 kPa / 1 bar with flow limiter	0.24 l/s

Characteristics

- Frame, zinc-plated
- Frame with four quick-action fasteners
- Infinitely variable height adjustment in Geberit GIS structure
- Water supply connection compatible with MasterFix and MeplaFix
- Elbow connector can be mounted without tools
- Premounted stop valve with throttle
- Service opening behind urinal
- Flexible flush hose with guide and built-in check valve
- Equipped with conduit pipe to connect the sensor in the trap to the urinal flush control
- Fastening for inlet \varnothing 32 mm, height-adjustable
- Fastening for connection bend, height-adjustable and sound-absorbing
- Urinal fasteners M8 width- and height-adjustable
- Crossbars with centring marks, adjustable without tools
- Can be refitted with accessories to fit urinals with spray head

Scope of delivery

- Elbow tap connector R 1/2"
- Protection box with cover
- Protection plug
- Connection bend made of PE-HD, \varnothing 50 / 63 mm
- Protective cap
- 2 threaded rods M8
- Fastening material

Art. no.	B [cm]	H [cm]	T [cm]
461.689.00.1	42	109–127	7.5

Can be combined with

- Geberit urinal flush control with electronic flush actuation, mains operation, concealed installation, hidden → p. 265


Accessories

- Accessory overview – Geberit GIS elements for urinals → p. 117



- For urinals with spray head, the Geberit inlet crossbar for urinal (art. no. 242.042.00.1) is required in addition

Geberit GIS element for urinal, 114 cm, universal, for exposed flushing valve

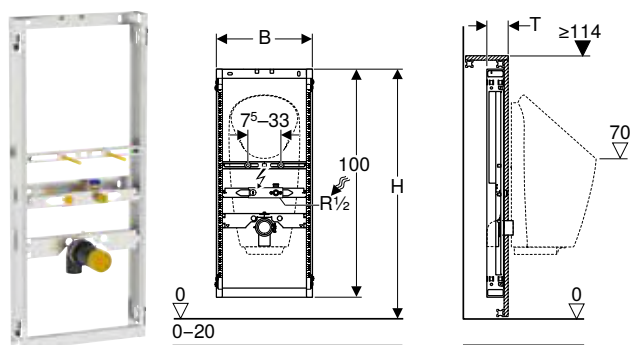

click & scan

Application purposes

- For installation in Geberit GIS support systems for prewalls, partition walls or freestanding walls
- For installation of urinals with integrated control
- For installation of waterless urinals
- For Preda urinals
- For Selva urinals
- For Tamina urinals
- For Narva urinals
- For exposed flushing valves
- For exposed urinal flush controls, hidden
- For floor constructions 0–20 cm

Characteristics

- Frame, zinc-plated
- Frame with four quick-action fasteners
- Infinitely variable height adjustment in Geberit GIS structure
- Connection positions for Preda urinal prepared
- Fastening for inlet Rp 1/2", adjustable in height and sideways (central and 5–10 cm left or right)
- Fastening for connection bend, height-adjustable and sound-absorbing
- Urinal fasteners M8 width- and height-adjustable
- Crossbars with centring marks, adjustable without tools
- Markings for connection positions of Preda and Selva urinals

Scope of delivery


- Water supply connection Rp 1/2" / R 1/2", compatible with Master-Fix and MeplaFix
- Protective plug with punching tip
- Sealing washer
- Connection bend made of PE-HD, \varnothing 63 / 50 mm
- Protective cap
- Seal \varnothing 57 / 50 mm
- Urinal trap \varnothing 50 mm, with seal on urinal
- 2 threaded rods M8
- Fastening material

Art. no.	B [cm]	H [cm]	T [cm]
461.686.00.1	42	109–127	10

Can be combined with

- Geberit urinal flush control with electronic flush actuation, mains operation, surface-mounted, hidden → p. 283
- Geberit urinal flush control with electronic flush actuation, battery operation, surface-mounted, hidden → p. 284
- Geberit pressure flushing valve for urinal with electronic flush actuation, battery operation, for surface mounting → p. 285
- Geberit Preda urinal with integrated control, mains operation
- Geberit Selva urinal with integrated control, mains operation
- Geberit Preda urinal with integrated control, battery operation
- Geberit Selva urinal with integrated control, battery operation
- Geberit Preda urinal with integrated control, generator operation
- Geberit Selva urinal with integrated control, generator operation
- Geberit Preda urinal for integrated control
- Geberit Selva urinal for integrated control
- Geberit Tamina urinal with integrated control, mains operation
- Geberit Tamina urinal with integrated control, battery operation
- Geberit Tamina urinal with integrated control, generator operation
- Geberit Tamina urinal for integrated control
- Geberit Narva urinal, inlet from the rear, outlet to the rear or downwards

Geberit GIS element for urinal, 114 cm, universal

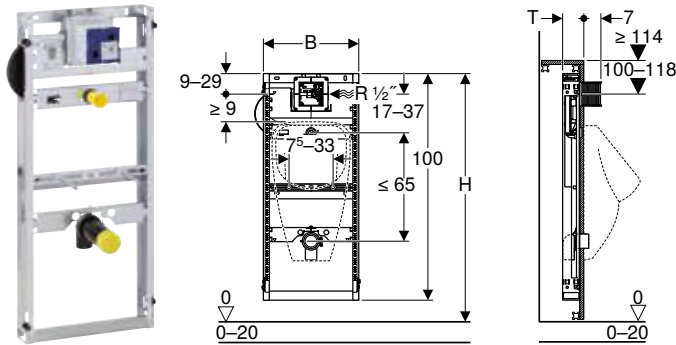

Application purposes

- For installation in Geberit GIS support systems for prewalls, partition walls or freestanding walls
- For floor constructions 0–20 cm

Technical data

Flow pressure	1–8 bar
Water test pressure max.	16 bar
Test pressure air / inert gas max.	3 bar
Flow rate at 100 kPa / 1 bar without flow limiter	0.3 l/s
Flow rate at 100 kPa / 1 bar with flow limiter	0.24 l/s

Scope of delivery

- Elbow tap connector R 1/2"
- Protection box with cover
- Connection pipe between inlet \varnothing 32 mm and urinal, with seal to urinal
- Protection plug
- Connection bend made of PE-HD, \varnothing 63 / 50 mm
- Protective cap
- Seal \varnothing 57 / 50 mm
- Urinal trap \varnothing 50 mm, with seal on urinal
- 2 threaded rods M8
- Fastening material

Characteristics

- Frame, zinc-plated
- Frame with four quick-action fasteners
- Infinitely variable height adjustment in Geberit GIS structure
- Water supply connection compatible with MasterFix and MeplaFix
- Elbow connector can be mounted without tools
- Premounted stop valve with throttle
- Flush hose can be bent
- Flush hose with guide to prevent standing water
- Fastening for inlet \varnothing 32 mm, height-adjustable
- Fastening for connection bend, height-adjustable and sound-absorbing
- Urinal fasteners M8 width- and height-adjustable
- Crossbars with centring marks, adjustable without tools
- Can be refitted with accessories to fit urinals with spray head

Art. no.	B [cm]	H [cm]	T [cm]
461.621.00.1	42	109–127	10

Can be combined with

- Geberit urinal flush control with electronic flush actuation, mains operation, Type 10 cover plate, round → p. 260
- Geberit urinal flush control with electronic flush actuation, mains operation, Type 01 cover plate, round → p. 258
- Geberit urinal flush control with electronic flush actuation, battery operation, Type 10 cover plate, round → p. 268
- Geberit urinal flush control with electronic flush actuation, battery operation, Type 01 cover plate, round → p. 266
- Geberit urinal flush control with electronic flush actuation, mains operation, Type 40 cover plate, round → p. 261
- Geberit urinal flush control with electronic flush actuation, mains operation, Type 40 cover plate, square → p. 263
- Geberit urinal flush control with electronic flush actuation, battery operation, Type 40 cover plate, round → p. 269
- Geberit urinal flush control with electronic flush actuation, battery operation, Type 40 cover plate, square → p. 271
- Geberit urinal flush control with electronic flush actuation, mains operation, Type 01 cover plate, square → p. 259
- Geberit urinal flush control with electronic flush actuation, battery operation, Type 01 cover plate, square → p. 267
- Geberit urinal flush control with electronic flush actuation, mains operation, Type 40 cover plate, round, customised finish → p. 262
- Geberit urinal flush control with electronic flush actuation, mains operation, Type 40 cover plate, square, customised finish → p. 264
- Geberit urinal flush control with electronic flush actuation, battery operation, Type 40 cover plate, round, customised finish → p. 270
- Geberit urinal flush control with electronic flush actuation, battery operation, Type 40 cover plate, square, customised finish → p. 272
- Geberit urinal flush control with pneumatic flush actuation, Type 50 actuator plate, square, customised → p. 280
- Geberit urinal flush control with pneumatic flush actuation, Type 10 actuator plate, round → p. 275
- Geberit urinal flush control with pneumatic flush actuation, Type 01 actuator plate, round → p. 273
- Geberit urinal flush control with pneumatic flush actuation, Type 50 actuator plate, square → p. 280
- Geberit urinal flush control with pneumatic flush actuation, Type 40 actuator plate, round → p. 276
- Geberit urinal flush control with pneumatic flush actuation, Type 40 actuator plate, square → p. 278
- Geberit urinal flush control with pneumatic flush actuation, Type 01 actuator plate, square → p. 274
- Geberit urinal flush control with pneumatic flush actuation, Type 40 actuator plate, round, customised finish → p. 277
- Geberit urinal flush control with pneumatic flush actuation, Type 40 actuator plate, square, customised finish → p. 279


Accessories

- Accessory overview – Geberit GIS elements for urinals → p. 117



- For urinals with spray head, the Geberit inlet crossbar for urinal (art. no. 242.042.00.1) is required in addition

Geberit GIS element for urinal, 114 cm, universal, for spray head

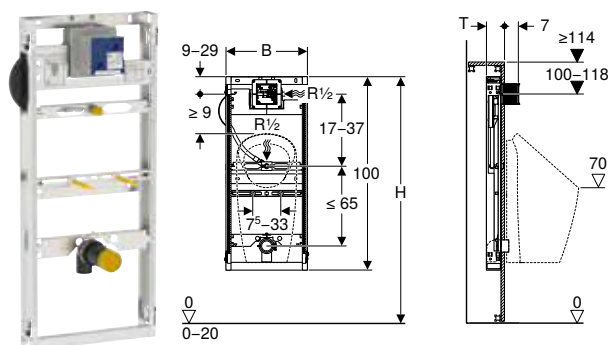

Application purposes

- For installation in Geberit GIS support systems for prewalls, partition walls or freestanding walls
- For Preda urinals
- For Selva urinals
- For Tamina urinals
- For Narva urinals
- For floor constructions 0–20 cm

Technical data

Flow pressure	1–8 bar
Water test pressure max.	16 bar
Test pressure air / inert gas max.	3 bar
Flow rate at 100 kPa / 1 bar without flow limiter	0.3 l/s
Flow rate at 100 kPa / 1 bar with flow limiter	0.24 l/s

Characteristics

- Frame, zinc-plated
- Frame with four quick-action fasteners
- Infinitely variable height adjustment in Geberit GIS structure
- Connection positions for Preda urinal prepared
- Water supply connection compatible with MasterFix and MeplaFix
- Elbow connector can be mounted without tools
- Premounted stop valve with throttle
- Flush hose can be bent
- Flush hose with guide to prevent standing water
- Fastening for connection bend, height-adjustable and sound-absorbing
- Urinal fasteners M8 width- and height-adjustable
- Crossbars with centring marks, adjustable without tools
- Markings for connection positions of Preda and Selva urinals

Scope of delivery

- Elbow tap connector R 1/2"
- Protection box with cover
- Protection plug
- Connection bend made of PE-HD, \varnothing 63 / 50 mm
- Protective cap
- Seal \varnothing 57 / 50 mm
- Urinal trap \varnothing 50 mm, with seal on urinal
- 2 threaded rods M8
- Fastening material

Art. no.	B [cm]	H [cm]	T [cm]
461.606.00.1	42	109–127	10

Can be combined with


- Geberit Narva urinal, inlet from the rear, outlet to the rear or downwards
- Geberit Preda urinal for concealed flush control
- Geberit Selva urinal for concealed flush control
- Geberit Tamina urinal for concealed flush control
- Geberit urinal flush control with electronic flush actuation, mains operation, Type 10 cover plate, round → p. 260
- Geberit urinal flush control with electronic flush actuation, mains operation, Type 01 cover plate, round → p. 258
- Geberit urinal flush control with electronic flush actuation, battery operation, Type 10 cover plate, round → p. 268
- Geberit urinal flush control with electronic flush actuation, battery operation, Type 01 cover plate, round → p. 266
- Geberit urinal flush control with electronic flush actuation, mains operation, Type 40 cover plate, round → p. 261
- Geberit urinal flush control with electronic flush actuation, mains operation, Type 40 cover plate, square → p. 263
- Geberit urinal flush control with electronic flush actuation, battery operation, Type 40 cover plate, round → p. 269
- Geberit urinal flush control with electronic flush actuation, battery operation, Type 40 cover plate, square → p. 271
- Geberit urinal flush control with electronic flush actuation, mains operation, Type 01 cover plate, square → p. 259
- Geberit urinal flush control with electronic flush actuation, battery operation, Type 01 cover plate, square → p. 267
- Geberit urinal flush control with electronic flush actuation, mains operation, Type 40 cover plate, round, customised finish → p. 262
- Geberit urinal flush control with electronic flush actuation, mains operation, Type 40 cover plate, square, customised finish → p. 264
- Geberit urinal flush control with electronic flush actuation, battery operation, Type 40 cover plate, round, customised finish → p. 270
- Geberit urinal flush control with electronic flush actuation, battery operation, Type 40 cover plate, square, customised finish → p. 272
- Geberit urinal flush control with pneumatic flush actuation, Type 50 actuator plate, square, customised → p. 280
- Geberit urinal flush control with pneumatic flush actuation, Type 10 actuator plate, round → p. 275
- Geberit urinal flush control with pneumatic flush actuation, Type 01 actuator plate, round → p. 273
- Geberit urinal flush control with pneumatic flush actuation, Type 50 actuator plate, square → p. 280
- Geberit urinal flush control with pneumatic flush actuation, Type 40 actuator plate, round → p. 276
- Geberit urinal flush control with pneumatic flush actuation, Type 40 actuator plate, square → p. 278
- Geberit urinal flush control with pneumatic flush actuation, Type 01 actuator plate, square → p. 274
- Geberit urinal flush control with pneumatic flush actuation, Type 40 actuator plate, round, customised finish → p. 277
- Geberit urinal flush control with pneumatic flush actuation, Type 40 actuator plate, square, customised finish → p. 279

Accessories

- Accessory overview – Geberit GIS elements for urinals → p. 117

Elements for showers with wall drain

Geberit GIS element for shower, with CleanWall wall drain, for screed height at inlet 90–200 mm

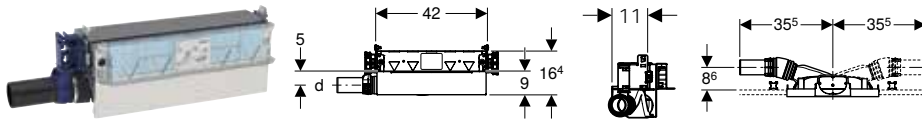

click & scan

Application purposes

- For installation in Geberit GIS support systems for prewalls, partition walls or freestanding walls
- For drainage of floor-even showers
- For composite seals
- For screed height ≥ 90 mm at inlet

Technical data

Depth of water seal (mm)	50 mm
--------------------------	-------

Characteristics

- Quality-monitored in accordance with EN 1253-3
- Infinitely variable height adjustment in Geberit GIS structure
- Adjustable inlet height of trap
- Panelling thickness 10–40 mm
- Suitable for tile structures on floor 2–26 mm
- Adjustable sealing level for tension-free sealing connection
- Suitable for tile structures on wall 2–35 mm
- Lateral drainage connection
- Premounted sealing fleece
- Sealing fleece, 10 cm circumferential, for connecting sealing systems

Scope of delivery

- Straight connector made of PE-HD, \varnothing 50 mm
- Protection box cover with integrated outlet sheet
- Fastening material

Art. no.	DN	d, \varnothing [mm]	Discharge rate [l/s]	B [cm]	H [cm]	T [cm]
461.734.00.1	50	50	0.8	42	16.4	11

To order additionally

- Ready-to-fit set


Accessories

- Geberit ready-to-fit set for CleanWall wall drain, cover made of brushed stainless steel \rightarrow p. 413
- Geberit ready-to-fit set for CleanWall wall drain, cover made of stainless steel, screwable \rightarrow p. 413
- Geberit ready-to-fit set for CleanWall wall drain, cover made of plastic \rightarrow p. 413
- Geberit ready-to-fit set for CleanWall wall drain, tile-bearing, frameless \rightarrow p. 414
- Geberit ready-to-fit set for CleanWall wall drain, tile-bearing, multi-piece \rightarrow p. 414
- Geberit CleanWall collector profile for wall drain for shower \rightarrow p. 414



- Natural stone tiles in the shower area may discolour

Geberit GIS element for shower, with CleanWall wall drain, for screed height at inlet 65–90 mm

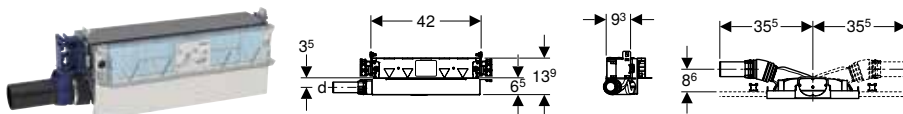

click & scan

Application purposes

- For installation in Geberit GIS support systems for prewalls, partition walls or freestanding walls
- For drainage of floor-even showers
- For composite seals
- For screed height ≥ 65 mm at inlet

Technical data

Depth of water seal (mm)	30 mm
--------------------------	-------

Characteristics

- Infinitely variable height adjustment in Geberit GIS structure
- Adjustable inlet height of trap
- Panelling thickness 10–40 mm
- Suitable for tile structures on floor 2–26 mm
- Suitable for tile structures on wall 2–35 mm
- Adjustable sealing level for tension-free sealing connection
- Lateral drainage connection
- Premounted sealing fleece
- Sealing fleece, 10 cm circumferential, for connecting sealing systems

Scope of delivery

- Straight connector made of PE-HD, \varnothing 40 mm
- Protection box cover with integrated outlet sheet
- Fastening material

Art. no.	DN	d, \varnothing [mm]	Discharge rate [l/s]	B [cm]	H [cm]	T [cm]
461.736.00.1	40	40	0.4	42	13.9	9.3

To order additionally

- Ready-to-fit set

Accessories


- Geberit ready-to-fit set for CleanWall wall drain, cover made of plastic → p. 413
- Geberit ready-to-fit set for CleanWall wall drain, cover made of brushed stainless steel → p. 413
- Geberit ready-to-fit set for CleanWall wall drain, cover made of stainless steel, screwable → p. 413
- Geberit ready-to-fit set for CleanWall wall drain, tile-bearing, frameless → p. 414
- Geberit ready-to-fit set for CleanWall wall drain, tile-bearing, multi-piece → p. 414
- Geberit CleanWall collector profile for wall drain for shower → p. 414



- Natural stone tiles in the shower area may discolour

Elements for taps and devices

Geberit GIS crossbar for wall-mounted tap, surface-mounted, 153 mm, for two water supply connections

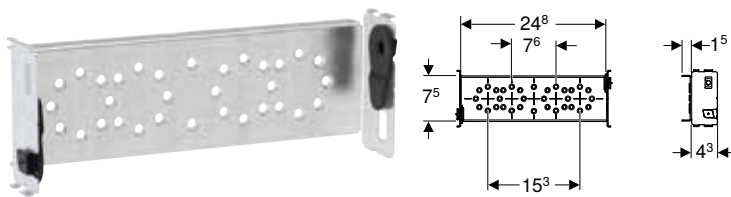

Application purposes

- For installation in Geberit GIS support systems for prewalls, partition walls or freestanding walls
- For connecting surface-mounted taps with gauge for bore holes 15.3 cm
- For connecting surface-mounted taps with gauge for bore holes 7.6 cm

Scope of delivery

- 2 protective plugs with punching tip
- 2 sealing washers
- 2 sound insulation bases
- Fastening material

Characteristics


- Infinitely variable height adjustment in Geberit GIS structure
- Crossbar, zinc-plated
- Crossbar with two quick-action fasteners

Art. no.	B [cm]	H [cm]	T [cm]
461.038.00.1	24.8	7.5	4.3

Accessories

- Geberit elbow tap connector 90° with male thread MF 1/2"

Geberit GIS crossbar for wall-mounted tap, surface-mounted, with one water supply connection

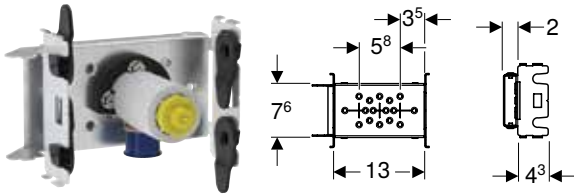

click & scan

Application purposes

- For installation in Geberit GIS support systems for prewalls, partition walls or freestanding walls
- For connecting surface-mounted taps
- For connecting block taps

Characteristics


- Infinitely variable height adjustment in Geberit GIS structure
- Crossbar, zinc-plated
- Crossbar with four quick-action fasteners
- Can be mounted vertically and horizontally
- Two elbow tap connectors can be mounted

Scope of delivery

- Elbow tap connector Rp 1/2" / R 1/2", compatible with MF
- Sound insulation base
- Insulating sleeve
- Protective plug with punching tip
- Sealing washer
- Fastening material

Art. no.	B [cm]	H [cm]	T [cm]
461.742.00.1	13	7.6	4.3

Geberit GIS mounting plate for concealed stop valves, 270 mm

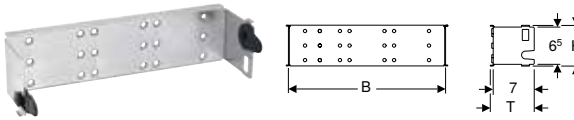

click & scan

Application purposes

- For installation in Geberit GIS support systems for prewalls, partition walls or freestanding walls
- For fastening Geberit concealed ball valves with fastening
- For fastening concealed stop valves JRG LegioStop®

Characteristics


- Infinitely variable height adjustment in Geberit GIS structure
- Crossbar, zinc-plated
- Crossbar with two quick-action fasteners

Art. no.	B [cm]	H [cm]	T [cm]
461.149.00.1	27	7	7.5

Accessories

- Geberit concealed ball valve with fastening → p. 98

Geberit GIS mounting plate, universal, 15.5 x 42 cm, concealed installation

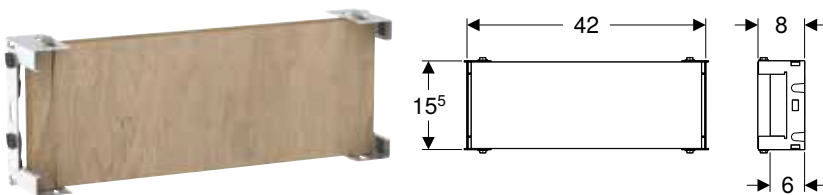

click & scan

Application purposes


- For installation in Geberit GIS support systems for prewalls, partition walls or freestanding walls
- For concealed taps
- For use in combination with mirror cabinets

Characteristics

- Infinitely variable height adjustment in Geberit GIS structure
- Mounting plate adjustable in height and depth
- Mounting plate made of veneered wood, waterproof bonded
- Building material class B2 in accordance with DIN 4102-1, resp. class D-s2, d0 in accordance with EN 13501-3
- Formaldehyde release class A in accordance with EN 1084, resp. Class E 1 according to EN 13936
- Crossbar, zinc-plated
- Crossbar with four quick-action fasteners

Art. no.	B [cm]	H [cm]	T [cm]
461.197.00.1	42	15.5	8

Geberit GIS mounting plate, universal, 24 x 42 cm, concealed installation

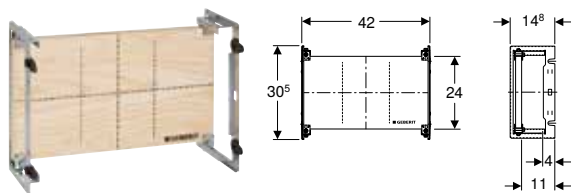

click & scan

Application purposes


- For installation in Geberit GIS support systems for prewalls, partition walls or freestanding walls
- For installation of concealed taps and fans, hygiene flush units and other built-in devices

Characteristics

- Infinitely variable height adjustment in Geberit GIS structure
- Mounting plate adjustable in height, width and depth
- Mounting plate made of veneered wood, waterproof bonded
- Building material class B2 in accordance with DIN 4102-1, resp. class D-s2, d0 in accordance with EN 13501-3
- Formaldehyde release class A in accordance with EN 1084, resp. Class E 1 according to EN 13936
- Mounting plate can be cut to size
- Crossbar, zinc-plated
- Crossbar with four quick-action fasteners

Art. no.	B [cm]	H [cm]	h1 [cm]	T [cm]
461.173.00.1	42	30.5	24	14.8

Geberit GIS mounting plate, universal, 25 x 25 cm

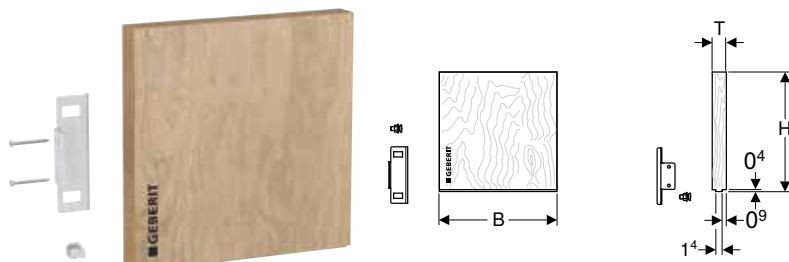

click & scan

Application purposes

- For installation in Geberit GIS support systems for prewalls, partition walls or freestanding walls
- For fastening light panel loads up to a maximum of 40 kg
- For fastening soap dispensers and toilet paper holders

Scope of delivery

- Fixing bracket
- M8 ratchet pin
- 2 wood screws


Characteristics

- Mounting plate made of veneered wood, waterproof bonded
- Building material class B2 in accordance with DIN 4102-1, resp. class D-s2, d0 in accordance with EN 13501-3
- Formaldehyde release class A in accordance with EN 1084, resp. Class E 1 according to EN 13936
- Can be mounted vertically and horizontally
- One-sided cutout suitable for Geberit GIS profile

Art. no.	B [cm]	H [cm]	T [cm]
461.221.00.1	25	25.4	3

Elements for washing machines and dishwashers

Geberit GIS crossbar for washing machine and dishwasher

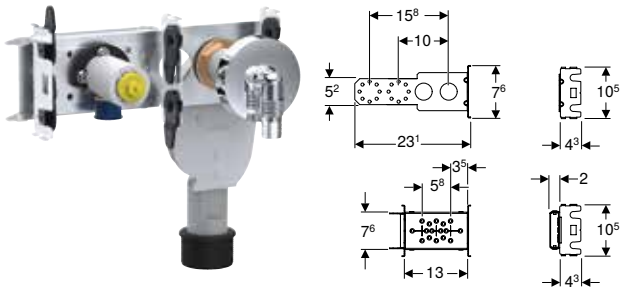

click & scan

Application purposes

- For installation in Geberit GIS support systems for prewalls, partition walls or freestanding walls
- For tumble dryers, washing machines or dishwashers

Characteristics

- Infinitely variable height adjustment in Geberit GIS structure
- Crossbar, zinc-plated
- Crossbar with two quick-action fasteners
- Can be mounted vertically and horizontally
- Elbow tap connector and concealed trap can be mounted individually or together


Scope of delivery

- Concealed trap
- Sleeve made of EPDM, \varnothing 40 / 50 mm
- Angled hose connector, \varnothing 19 / 23 mm, chrome-plated
- Wall collar, chrome-plated
- Elbow tap connector Rp 1/2" / R 1/2", compatible with MF
- Sound insulation base
- Insulating sleeve
- Sealing washer
- Protective plug with punching tip
- Fastening material

Art. no.	B [cm]	H [cm]	T [cm]
461.445.00.1	23.1	7.6	4.3

Elements for loads

Geberit GIS mounting plate, universal, 31 x 58 cm

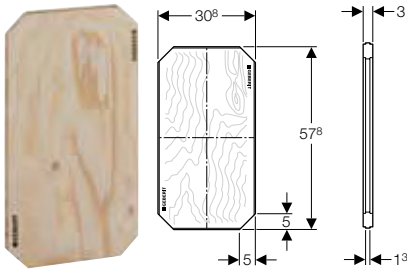

click & scan

Application purposes

- For installation in Geberit GIS support systems for prewalls, partition walls or freestanding walls
- Suitable for barrier-free construction
- For fastening support handles
- For fastening urinal divisions, shower partition walls and wall cabinets
- For fastening medium and heavy panel loads in accordance with DIN 18183-1


Characteristics

- Mounting plate made of veneered wood, waterproof bonded
- Building material class B2 in accordance with DIN 4102-1, resp. class D-s2, d0 in accordance with EN 13501-3
- Formaldehyde release class A in accordance with EN 1084, resp. Class E 1 according to EN 13936
- Can be divided into two smaller mounting plates
- Can be mounted vertically and horizontally
- Circumferential cutout suitable for Geberit GIS profile

Art. no.	B [cm]	H [cm]	T [cm]
461.035.00.1	30.8	57.8	3

Accessories

Geberit retrofit adapter for inlet Rp 1/2", urinal

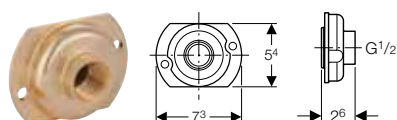

click & scan


Application purposes

- For retrofitting installed Geberit Duofix elements for urinal, with urinal flush control with cover plate 13 x 13 cm, with inlet \varnothing 32 mm, to inlet Rp 1/2"
- Not suitable for Geberit Duofix elements for urinal, with urinal flush control Basic, with cover plate 16 x 16 cm

Art. no.

242.309.00.1

Geberit sound insulation set for wall-hung WC

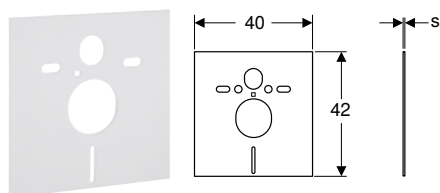

click & scan

Application purposes

- For structure-borne sound insulation of WCs and bidets
- For WCs and bidets with fastening distance 18 or 23 cm

Scope of delivery

- 2 washers
- 2 sound insulation sleeves
- Sound insulation mat


Art. no.

156.050.00.1

s
[mm]

6

Geberit sound insulation set for washbasin

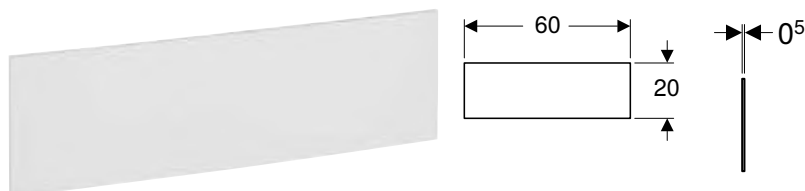

click & scan

Application purposes

- For structure-borne sound insulation of washbasins


Scope of delivery

- 2 sound insulation sleeves
- Sound insulation mat

Art. no.

156.051.00.1

Geberit sound insulation set for washbasin, large

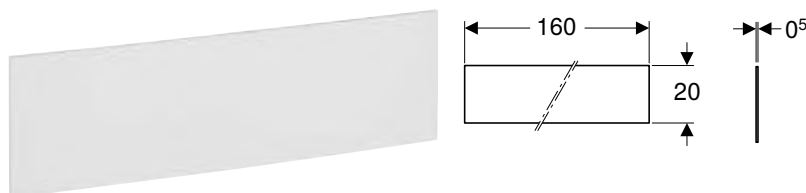

click & scan

Application purposes

- For structure-borne sound insulation of washbasins


Scope of delivery

- 4 sound insulation sleeves
- Sound insulation mat

Art. no.

156.054.00.1

Geberit ready-to-fit set for washbasin with concealed trap

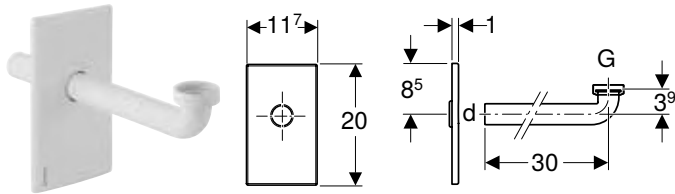

click & scan

Application purposes

- For Geberit installation elements for washbasins, with concealed trap
- Not suitable for Geberit in-wall cabinets

Characteristics


- Cover plate can be height-adjusted ± 3 cm during final installation
- Rotatable cover plate
- Fastening without screws

Scope of delivery

- Cover plate
- Flat gasket
- Connection bend, ø 32 mm
- Seal ø 40 / 32 mm

Art. no.	Colour / surface	d, ø [mm]	G ["]	Product material
115.416.11.1	white alpine	32	1 1/4	Plastic
115.416.21.1	chrome / glossy	32	1 1/4	Plastic

Geberit GIS crossbar for electronic deck-mounted tap with concealed function box

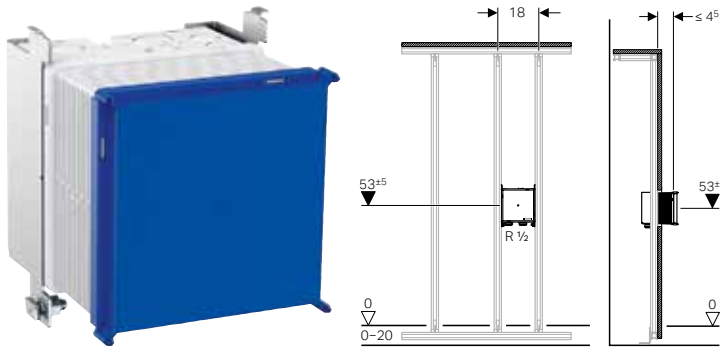

click & scan

Application purposes

- For Piave and Brenta washbasin taps, deck-mounted, with concealed function box

Scope of delivery

- Protection box with cover, for concealed housing

Characteristics

- Water supply connection compatible with MasterFix and MeplaFix
- Water supply connection on the bottom of concealed housing
- Concealed housing for Geberit washbasin tap, deck-mounted, for concealed function box, premounted
- Shut-off unit integrated in the concealed housing


Art. no.	B [cm]	H [cm]	T [cm]
461.145.00.1	14.7	18	7

Can be combined with

- Geberit Piave washbasin tap, deck-mounted, mains operation, for concealed function box → p. 323
- Geberit Brenta washbasin tap, deck-mounted, mains operation, for concealed function box → p. 325
- Geberit Piave washbasin tap, deck-mounted, battery operation, for concealed function box → p. 330
- Geberit Brenta washbasin tap, deck-mounted, battery operation, for concealed function box → p. 332
- Geberit Piave washbasin tap, deck-mounted, generator operation, for concealed function box → p. 337
- Geberit Brenta washbasin tap, deck-mounted, generator operation, for concealed function box → p. 339

Accessories

- Geberit cover plate for concealed function box → p. 354
- Geberit cover plate, surface-even, for concealed function box → p. 354

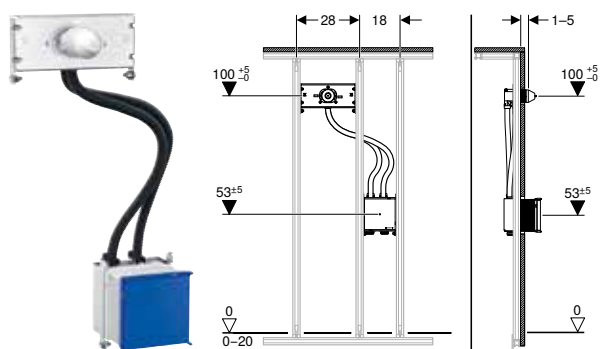Geberit GIS crossbar for electronic wall-mounted tap with concealed function box

click & scan

Application purposes

- For Piave and Brenta washbasin taps, wall-mounted, with concealed function box

Scope of delivery

- Protection box with cover, for concealed housing
- Protection box for fastening of wall-mounted tap

Characteristics

- Premounted fastening for wall-mounted tap
- Water supply connection compatible with MasterFix and MeplaFix
- Water supply connection on the bottom of concealed housing
- Concealed housing for Geberit washbasin tap, wall-mounted, for concealed function box, premounted
- Premounted connection pipes between concealed housing and fastening for wall-mounted tap
- Shut-off unit integrated in the concealed housing

Art. no.

461.146.00.1


Can be combined with

- Geberit Piave washbasin tap, wall-mounted, mains operation, for concealed function box → p. 342
- Geberit Brenta washbasin tap, wall-mounted, mains operation, for concealed function box → p. 344
- Geberit Piave washbasin tap, wall-mounted, battery operation, for concealed function box → p. 346
- Geberit Brenta washbasin tap, wall-mounted, battery operation, for concealed function box → p. 348
- Geberit Piave washbasin tap, wall-mounted, generator operation, for concealed function box → p. 350
- Geberit Brenta washbasin tap, wall-mounted, generator operation, for concealed function box → p. 351

Accessories

- Geberit cover plate for concealed function box → p. 354
- Geberit cover plate, surface-even, for concealed function box → p. 354

Installation box for Geberit ONE mirror cabinet, height 90 cm

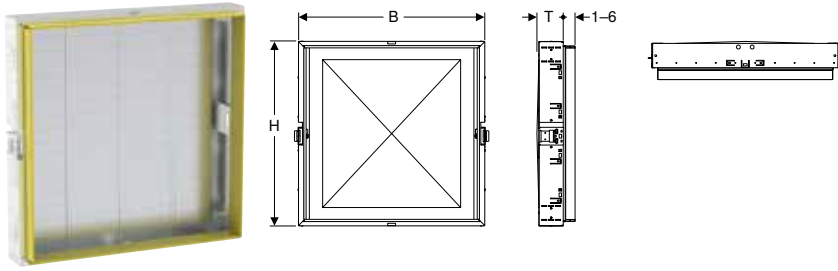

click & scan

Application purposes

- For drywall construction
- For installation in room-height prewall installations
- For installation in room-height installation walls
- For installation in room-height Geberit Duofix system walls
- For mounting in room-height Geberit GIS support systems for prewalls or partition walls
- For Geberit ONE mirror cabinets with height 90 cm

Scope of delivery

- 2 fixing brackets for studs or Geberit GIS profile
- Protection box
- Fastening material

Characteristics

- With fixing hooks for mirror cabinet, adjustable
- With fastening material for electrical connection
- With panelling stoppers made of plate, zinc-plated

Art. no.	Nominal width [cm]	B [cm]	H [cm]	T [cm]
111.941.00.1	60	64.5	93.5	14.5
111.942.00.1	75	79.5	93.5	14.5
111.943.00.1	90	94.5	93.5	14.5
111.944.00.1	105	109.5	93.5	14.5
111.945.00.1	120	124.5	93.5	14.5


Accessories

- Geberit Duofix crossbar for element fastening, for stud clearance from 60 cm → p. 92

Accessories

For system walls

Geberit GIS installation kit for freestanding system wall



click & scan

Application purposes

- For making freestanding Geberit GIS support systems more rigid

Characteristics

- Zinc-plated


Scope of delivery

- 2 support brackets, premounted, zinc-plated
- 2 heavy-duty dowels
- 4 ratchet pins
- 2 screws M8
- 6 nuts M8

Art. no.

461.660.00.1

Geberit GIS feet for freestanding system wall



click & scan

Application purposes

- For creating Geberit GIS support systems
- For part-height or room-height Geberit GIS room dividers
- For making freestanding Geberit GIS support systems more rigid

Characteristics

- Zinc-plated
- With adjusting screw


Scope of delivery

- Leg supports
- 3 ratchet pins
- 3 nuts M8
- Heavy-duty dowel

Art. no.

461.190.00.1

Geberit GIS fixing bracket, adjustable, for roof pitch

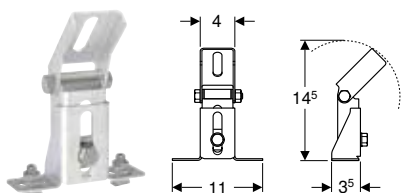

click & scan

Application purposes

- For creating Geberit GIS support systems
- For fastening Geberit GIS support systems on roof pitches

Characteristics

- Zinc-plated
- Angle infinitely adjustable up to 90°
- Fastening bracket can be extended with Geberit GIS profile
- Oblong holes


Scope of delivery

- Roof pitch fixing bracket with fixing bracket retainer, premounted
- 2 ratchet pins
- 2 nuts M8
- Fastening material

Art. no.

461.191.00.1

Geberit GIS mounting clip

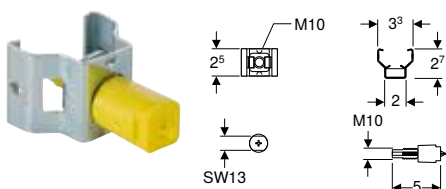

click & scan

Application purposes

- For fastening threaded rods to Geberit GIS profiles
- For fastening installation parts and sanitary appliances to Geberit GIS profiles

Characteristics

- Zinc-plated
- Thread M10

Scope of delivery

- Protective plug with punching tip
- Fastening screw


Art. no.

B
[cm]

461.004.00.1

3.3

Geberit GIS ratchet pin



click & scan

Application purposes

- For fastening Geberit GIS installation elements on the structure
- For creating additional fastenings on Geberit GIS profiles


Characteristics

- Zinc-plated
- Thread M8

Art. no.

461.006.00.1

Geberit void dowel made of metal

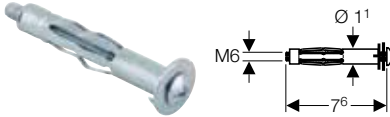

click & scan

Application purposes

- For fastening Geberit GIS mounting brackets to panels with paneling thickness of 18–25 mm
- For fastening Geberit Duofix system rails to panels with paneling thickness of 18–25 mm

Scope of delivery

- Screw M6


Characteristics

- Zinc-plated

Art. no.

465.029.00.1

Geberit heavy-duty dowel

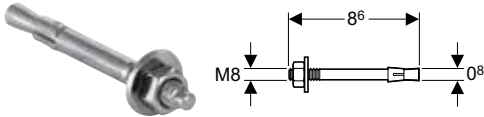

click & scan

Application purposes

- For fastening Geberit GIS mounting brackets and GIS installation kits for freestanding GIS walls on the unfinished building structure (concrete)
- For fastening Geberit GIS feet for freestanding GIS system walls on the unfinished building structure (concrete)
- For fastening Geberit Duofix installation elements with large, reinforced foot plates to the unfinished building structure (concrete)


Characteristics

- Zinc-plated

Art. no.

461.037.26.1

Geberit GIS wall fixation

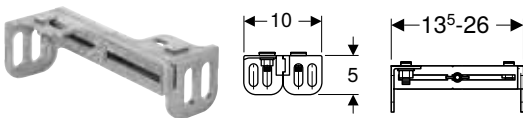

click & scan

Application purposes

- For bracing and fastening Geberit GIS support systems to the building structure

Scope of delivery

- Fastening material

Characteristics

- Premounted parts made of die-cast zinc
- With two ratchet pins
- Infinitely variable hand adjustment

Art. no.

461.015.00.1


B
[cm]

10

Accessories

- Sound insulating panel for Geberit GIS mounting bracket → p. 105

Geberit set of wood screws with dowels

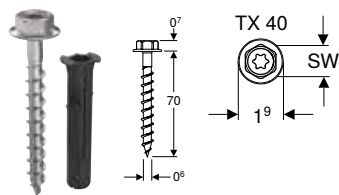

click & scan

Application purposes

- For fastening Geberit Duofix system rails

Characteristics

- Hexalobular socket TX 40


Scope of delivery

- Bolt
- Dowel

Art. no.	SW [mm]
111.089.00.1	13

For supply systems

Geberit concealed ball valve with fastening

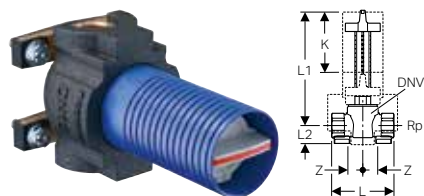

click & scan

Application purposes

- For cold and hot potable water
- For cooling and heating water without antifreeze agent
- For cooling and heating water with antifreeze agent
- For treated water (application range according to Technical Information "Treated water")
- For rainwater with a pH value ≥ 5.5
- For seawater
- For compressed air (oil purity class 0–3)
- For negative pressure
- For inert gases (e.g. nitrogen)
- For Geberit Duofix and Geberit GIS mounting plates
- For solid and drywall construction

Characteristics

- Approval in accordance with DVGW
- Model Geberit K4
- Ball and base unit fully exposed to flow
- Fastening points for circular hole $\varnothing 60$ mm
- Replaceable valve top with ball and seals
- With concealed turn handle actuation
- Lead-free
- Ball made of PPSU
- Upper part caulk made of EPDM
- Ball caulks made of silicone

Scope of delivery

- Concealed turn handle actuation
- Spindle extension
- Round protection box, can be shortened
- Protection cover plug with marking tip

Technical data

Operating temperature	0–90 °C
Product material	Gunmetal / lead-free silicon bronze
Material, insulation	EPP
Insulation thickness	10 mm
Thermal conductivity, insulation	0.035 W/(m·K)

Art. no.	DN	DNV	Rp ["]	L [cm]	L1 [cm]	L2 [cm]	Z [cm]	K [cm]	PN [bar]
616.042.00.1	15	15	1/2	7.5	12.7	2.2	2.3	7.3	10
616.043.00.1	20	20	3/4	7.5	12.7	2.2	2.1	7.3	10


Accessories

- Geberit turn handle set for concealed ball valve → p. 99
- Geberit cover collar for concealed ball valve → p. 99



- All components of this product which come into contact with drinking water will be converted to lead-free materials in the course of 2026

Geberit cover collar for concealed ball valve

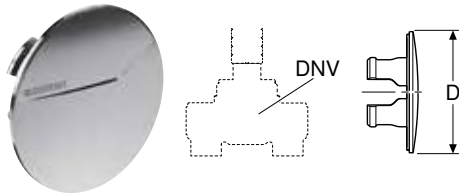


click & scan

Characteristics

- Chrome-plated

Art. no.	Colour / surface	DNV	D [cm]
610.090.21.1	chrome / glossy	15 / 20	7.5

Geberit turn handle set for concealed ball valve

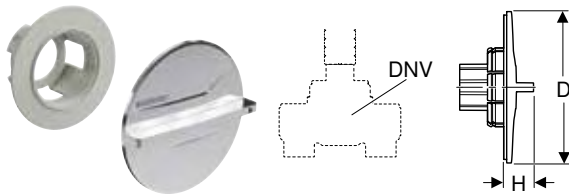

click & scan

Characteristics


- Chrome-plated

Scope of delivery

- Turn handle, chrome-plated
- Retainer with slip-on spindle and transition bushing
- Colour markings (red, blue)

Art. no.	Colour / surface	DNV	D [cm]	H [cm]
610.089.21.1	chrome / glossy	15 / 20	7.5	1.5

Geberit GIS pipe clip for supply pipes



click & scan

Application purposes

- For fastening supply pipes to Geberit GIS support systems
- For Geberit Mepla system pipes, ML, \varnothing 16–32 mm


Characteristics

- Adjustable, \varnothing 16–40 mm

Art. no.
461.070.00.1

New

Geberit GIS pipe bracket for supply pipes



click & scan

Application purposes

- For fastening supply pipes to Geberit GIS support systems
- For Geberit system pipes, ML, \varnothing 16–32 mm

Characteristics


- Adjustable, \varnothing 16–44 mm

Art. no.	DN	L [cm]	B [cm]	H [cm]
461.216.00.1	12 / 25	12	4	19

Available as of April 2026

For drainage systems

Geberit GIS pipe bracket for discharge pipe



click & scan


Application purposes

- For fastening discharge pipes made of plastic to the Geberit GIS support system

Art. no.	DN	di, \varnothing [mm]
363.050.00.1	50 / 56	50-56
364.052.00.1	60	63
365.050.00.1	70	75
366.050.00.1	90	90
367.050.00.1	100	110

New

Geberit GIS Rohrschellenhalterung

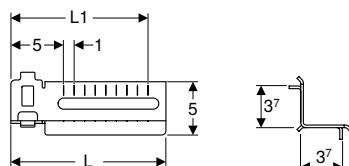

click & scan

Application purposes

- For fastening discharge pipes made of plastic to the Geberit GIS support system
- For discharge pipes up to \varnothing 110 mm (DN 100)
- For sliding bracket fastenings

Scope of delivery

- M8 ratchet pin
- Schraube M10

Characteristics

- Zinc-plated

Art. no.	L [cm]	L1 [cm]	L3 [cm]
461.214.00.2	14.7	13	1
461.215.00.2	11.2	10	1

Available as of April 2026




Concealed Cisterns



Sigma concealed cisterns	138
Omega concealed cisterns	140
Alpha concealed cisterns	142
Flush pipes	144
Accessories	145

Sigma concealed cisterns

Geberit Sigma concealed cistern 12 cm, 6 / 3 litres

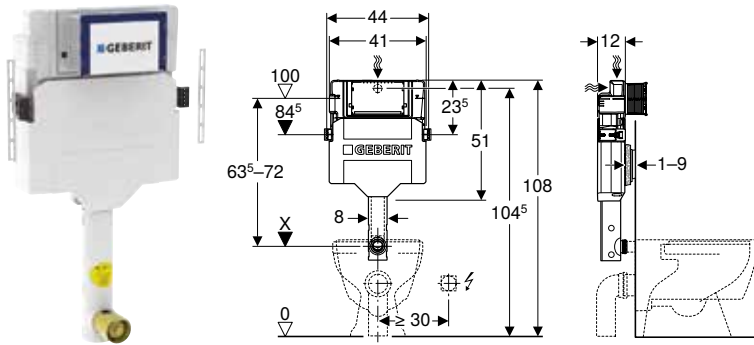

click & scan

Application purposes

- For masonry walls
- For installation in part or room-height prewall installations
- For installation in room-height installation walls
- For floor-standing and wall-hung WCs
- For single flush, dual flush or stop-and-go flush

Technical data

Flow pressure	0.1–10 bar
Flush volume, factory setting	6 l / 3 l
Flush volume large, adjustment range	4 l / 4.5 l / 6 l / 7.5 l
Flush volume small, adjustment range	2–4 l
Product material	Plastic

Characteristics

- Concealed cistern with front actuation
- Concealed cistern, fully insulated against condensation
- Immediate post flush possible with factory setting
- Flush bend fitted
- Tool-free installation and maintenance work on concealed cistern
- Water supply connection on the rear or top centre
- Protection box for service opening can be cut to length

Scope of delivery

- Water supply connection R 1/2", compatible with MasterFix and MeplaFix, with integrated angle stop valve and hand wheel
- Protection box for service opening
- Flush bend with recess shells
- Protection plug
- 2 slotted flat irons
- 2 fixing brackets
- Fastening material

Art. no.	B [cm]	H [cm]	T [cm]
109.300.00.5	41	51	12


Can be combined with

- Geberit Publica squatting pan



- Actuator plate has to be ordered separately

Geberit Sigma concealed cistern 8 cm, 6 / 3 litres

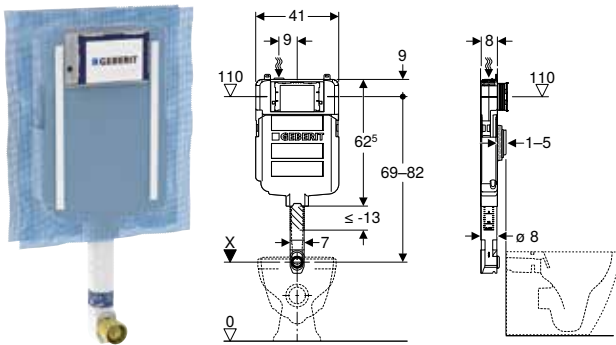

Application purposes

- For masonry walls
- For installation in part or room-height prewall installations
- For installation in room-height installation walls
- For floor-standing WCs
- For single flush, dual flush or stop-and-go flush

Technical data

Flow pressure	0.1–10 bar
Flush volume, factory setting	6 l / 3 l
Flush volume large, adjustment range	4 l / 4.5 l / 6 l / 7.5 l
Flush volume small, adjustment range	2–4 l
Product material	Plastic

Characteristics

- Range 2016
- Concealed cistern with front actuation
- Concealed cistern, fully insulated against condensation
- Premounted direct plastering netting
- Immediate post flush possible with factory setting
- Flush bend fitted
- Flush bend adjustable 2 cm upwards and 1 cm downwards
- Tool-free installation and maintenance work on concealed cistern
- Water supply connection on the top left
- Protection box for service opening can be cut to length, suitable for surface-even actuator plates

Scope of delivery

- Water supply connection R 1/2", compatible with MasterFix and MeplaFix, with integrated angle stop valve and hand wheel
- Protection box for service opening
- Flush bend with recess shells
- Flush bend extension, \varnothing 45 mm
- Protection plug
- 2 slotted flat irons
- Fastening material


Art. no.	B [cm]	H [cm]	T [cm]
109.791.00.1	41	62.5	8



- Actuator plate has to be ordered separately

Omega concealed cisterns

Geberit Omega concealed cistern 12 cm, 6 / 3 litres, installation height 82 cm

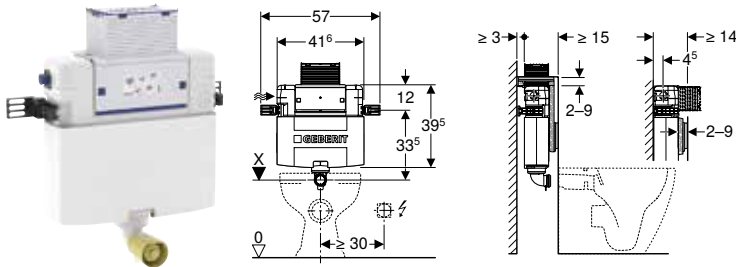

click & scan

Application purposes

- For masonry walls
- For installation in part-height prewall installations
- For floor-standing WCs
- For dual flush

Technical data

Flow pressure	0.1–10 bar
Flush volume, factory setting	6 l / 3 l
Flush volume large, adjustment range	4 l / 4.5 l / 6 l / 7.5 l
Flush volume small, adjustment range	2–4 l
Flow rate at 300 kPa / 3 bar	0.16 l/s
Product material	Plastic

Characteristics

- Adjustable in depth
- Concealed cistern with top or front actuation
- Concealed cistern, fully insulated against condensation
- Immediate post flush possible with factory setting
- Welded flush bend
- Tool-free installation and maintenance work on concealed cistern
- Water supply connection on the left or rear left
- Protection box for service opening can be cut to length

Scope of delivery


- Water supply connection R 1/2", compatible with MasterFix and MeplaFix, with integrated angle stop valve and hand wheel
- Protection box for service opening
- Flush bend extension, \varnothing 45 mm
- Protection plug
- 2 fixing brackets
- Fastening material

Art. no.	B [cm]	H [cm]	T [cm]
109.043.00.1	44	39.5	12



- Actuator plate has to be ordered separately

Geberit Omega concealed cistern 12 cm, 6 / 3 litres, installation height 98 cm

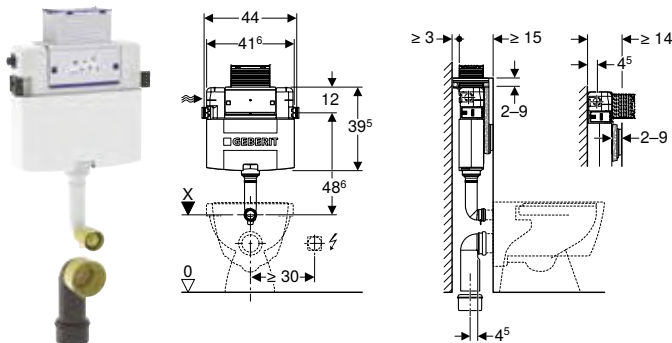

click & scan

Application purposes

- For masonry walls
- For installation in part-height prewall installations
- For floor-standing and wall-hung WCs
- For dual flush

Characteristics

- Concealed cistern with top or front actuation
- Concealed cistern, fully insulated against condensation
- Immediate post flush possible with factory setting
- Welded flush bend
- Tool-free installation and maintenance work on concealed cistern
- Water supply connection on the left or rear left
- Protection box for service opening can be cut to length

Technical data

Flow pressure	0.1–10 bar
Flush volume, factory setting	6 l / 3 l
Flush volume large, adjustment range	4 l / 4.5 l / 6 l / 7.5 l
Flush volume small, adjustment range	2–4 l
Flow rate at 300 kPa / 3 bar	0.16 l/s
Product material	Plastic

Scope of delivery

- Water supply connection R 1/2", compatible with MasterFix and MeplaFix, with integrated angle stop valve and hand wheel
- Protection box for service opening
- Connection set for WC, ø 90 mm
- Connection bend, ø 90 / 110 mm
- 2 protection plugs
- 2 fixing brackets
- Fastening material


Art. no.	B [cm]	H [cm]	T [cm]
109.050.00.1	44	39.5	12



- Actuator plate has to be ordered separately



Geberit Omega concealed cistern 12 cm, 6 / 3 litres, installation height 106 cm

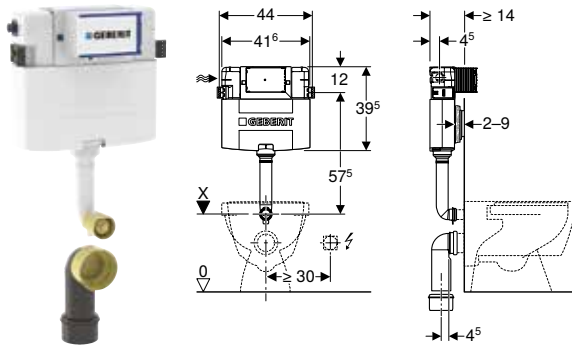

Application purposes

- For masonry walls
- For installation in part or room-height prewall installations
- For installation in room-height installation walls
- For floor-standing and wall-hung WCs
- For dual flush

Technical data

Flow pressure	0.1–10 bar
Flush volume, factory setting	6 l / 3 l
Flush volume large, adjustment range	4 l / 4.5 l / 6 l / 7.5 l
Flush volume small, adjustment range	2–4 l
Flow rate at 300 kPa / 3 bar	0.16 l/s
Product material	Plastic

Characteristics

- Concealed cistern with front actuation
- Concealed cistern, fully insulated against condensation
- Immediate post flush possible with factory setting
- Welded flush bend
- Tool-free installation and maintenance work on concealed cistern
- Water supply connection on the left or rear left
- Protection box for service opening can be cut to length

Scope of delivery

- Water supply connection R 1/2", compatible with MasterFix and MeplaFix, with integrated angle stop valve and hand wheel
- Protection box for service opening
- Connection set for WC, ø 90 mm
- Connection bend, ø 90 / 110 mm
- 2 protection plugs
- 2 fixing brackets
- Fastening material


Art. no.	B [cm]	H [cm]	T [cm]
109.060.00.1	44	39.5	12



- Actuator plate has to be ordered separately

Alpha concealed cisterns

Geberit Alpha concealed cistern 12 cm, 6 / 3 litres, installation height 82 cm

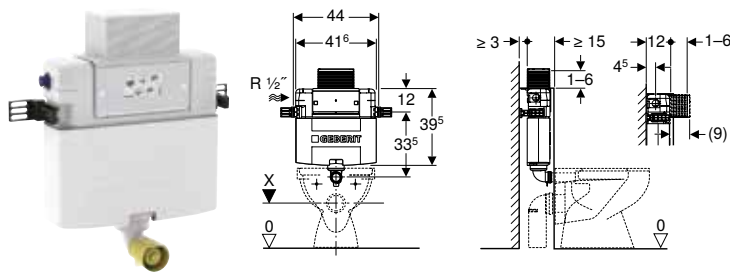

click & scan

Application purposes

- For masonry walls
- For installation in part-height prewall installations
- For floor-standing and wall-hung WCs
- For dual flush

Technical data

Flow pressure	0.1–10 bar
Flush volume, factory setting	6 l / 3 l
Flush volume large, adjustment range	4 l / 4.5 l / 6 l / 7.5 l
Flush volume small, adjustment range	2–4 l
Product material	Plastic

Characteristics

- Adjustable in depth
- Concealed cistern with top or front actuation
- Concealed cistern, fully insulated against condensation
- Immediate post flush possible with factory setting
- Welded flush bend
- Water supply connection on the left or rear left
- Protection box for service opening can be cut to length

Scope of delivery


- Water supply connection R 1/2", compatible with MasterFix and MeplaFix, with integrated angle stop valve and hand wheel
- Protection box for service opening
- Flush bend extension, \varnothing 45 mm
- Protection plug
- 2 fixing brackets
- Fastening material

Art. no.	B [cm]	H [cm]	T [cm]
109.212.00.1	44	39.5	12



- Actuator plate has to be ordered separately

Geberit Alpha concealed cistern 12 cm, 6 / 3 litres, installation height 109 cm

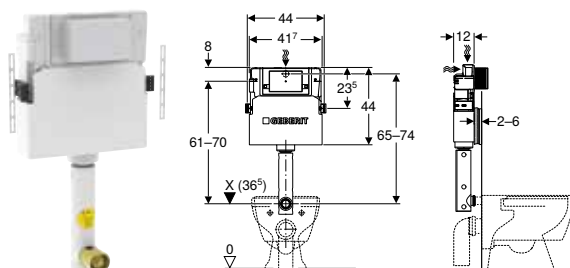

click & scan

Application purposes

- For masonry walls
- For installation in part or room-height prewall installations
- For installation in room-height installation walls
- For floor-standing and wall-hung WCs
- For dual flush

Technical data

Flow pressure	0.1–10 bar
Flush volume, factory setting	6 l / 3 l
Flush volume large, adjustment range	4 l / 4.5 l / 6 l / 7.5 l
Flush volume small, adjustment range	2–4 l
Product material	Plastic

Characteristics

- Concealed cistern with front actuation
- Concealed cistern, fully insulated against condensation
- Immediate post flush possible with factory setting
- Flush bend fitted
- Water supply connection on the rear or top centre
- Protection box for service opening can be cut to length

Scope of delivery


- Water supply connection unit R 1/2", compatible with MasterFix and MeplaFix, with integrated angle stop valve and adapter ring
- Protection box for service opening
- Flush bend with recess shells
- Flush bend extension, \varnothing 45 mm
- Protection plug
- 2 slotted flat irons
- 2 fixing brackets
- Fastening material

Art. no.	B [cm]	H [cm]	T [cm]
109.233.00.2	44	39.5	12



- Actuator plate has to be ordered separately

Geberit Alpha concealed cistern 8 cm, 6 / 3 litres

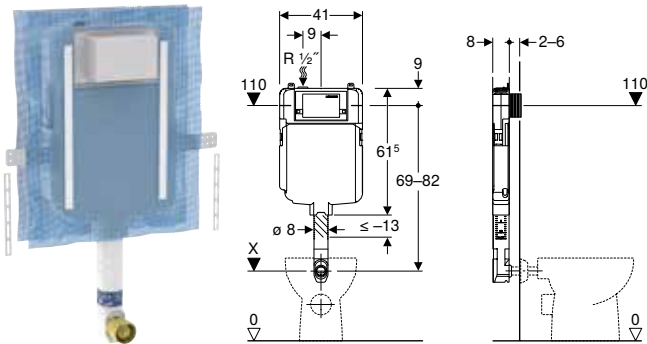

Application purposes

- For masonry walls
- For installation in part or room-height prewall installations
- For installation in room-height installation walls
- For floor-standing WCs
- For dual flush

Technical data

Flow pressure	0.1–10 bar
Flush volume, factory setting	6 l / 3 l
Flush volume large, adjustment range	4 l / 4.5 l / 6 l / 7.5 l
Flush volume small, adjustment range	2–4 l
Product material	Plastic

Characteristics

- Concealed cistern with front actuation
- Concealed cistern, fully insulated against condensation
- Premounted direct plastering netting
- Immediate post flush possible with factory setting
- Flush bend fitted
- Flush bend adjustable 2 cm upwards and 1 cm downwards
- Water supply connection on the top left
- Protection box for service opening can be cut to length

Scope of delivery

- Water supply connection R 1/2", compatible with MasterFix and MeplaFix, with integrated angle stop valve and hand wheel
- Protection box for service opening
- Flush bend with recess shells
- Flush bend extension, \varnothing 45 mm
- Protection plug
- 2 slotted flat irons
- 2 mounting shoes
- Fastening material


Art. no.	B [cm]	H [cm]	T [cm]
109.175.00.1	41	61.5	8



- Actuator plate has to be ordered separately

Flush pipes

Geberit flush bend set 90°, telescopic

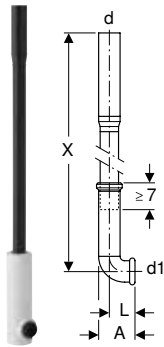

click & scan

Application purposes

- For connecting concealed cisterns with a WC ceramic appliance

Technical data

Product material	PE-HD
------------------	-------

Characteristics


- Can be pulled out

Scope of delivery

- Flush pipe
- Recess shells
- Protection plug

Art. no.	d, ø [mm]	d1, ø [mm]	arc [°]	A [cm]	L [cm]	X [cm]
119.698.16.1	56	45	90	9.5	6.5	112

Geberit flush bend extension set with collar

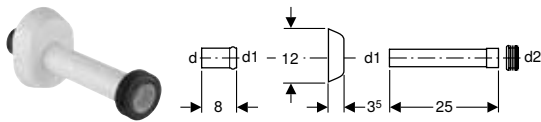

click & scan

Application purposes

- For height adjustment of flush pipe connections (2 cm upwards and 1 cm downwards)
- For connecting flush bends and WCs

Technical data

Product material	ASA
------------------	-----

Scope of delivery

- Sleeve made of EPDM
- Collar, oval
- Ring seal socket
- Flush pipe

Art. no.	Colour / surface	d, ø [mm]	d1, ø [mm]	d2, ø [mm]	arc [°]
118.221.11.1	white alpine	45	40	44	0
118.221.21.1	chrome / glossy	45	40	44	0

Accessories

Geberit damming device for concealed cisterns (from year of manufacture 1998)



click & scan

Application purposes

- For Geberit concealed cisterns
- Not suitable for Alpha concealed cisterns 12 cm
- Not suitable for Omega concealed cisterns 12 cm

Characteristics

- Optimises the flushing process

Art. no.

240.476.00.1



Geberit throttle for flush bend



click & scan

Application purposes

- For Geberit concealed cisterns
- For installation in flush bend
- For calming the flow rate


Characteristics

- Optimises the flushing process

Art. no.

243.905.00.1

Geberit flush bend extension set with collar

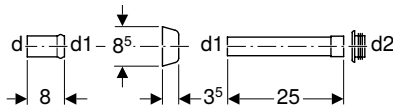

click & scan

Application purposes

- For connecting flush bends and WCs

Scope of delivery

- Ring seal socket
- Collar
- Flush pipe
- Sleeve made of EPDM, \varnothing 44 / 55 mm

Technical data

Product material	ASA
------------------	-----

Art. no.	Colour / surface	d, \varnothing [mm]	d1, \varnothing [mm]	d2, \varnothing [mm]	arc [°]
118.026.11.1	white alpine	45	40	44	0
118.026.21.1	chrome / glossy	45	40	44	0



Exposed Cisterns

Exposed cisterns for WCs, made of plastic	148
Close-coupled	148
High-level	149
Low and half-high level	150
Flush pipes for exposed cisterns	154
High-level	154
Low-level and half-high level	156
Accessories	158
Connections	158
Angle stop valves	158
Sleeves	158
With pneumatic flush actuation.....	159




Exposed Cisterns

Exposed cisterns for WCs, made of plastic
Close-coupled

Exposed cisterns for WCs, made of plastic

Close-coupled

Geberit AP128 exposed cistern, dual flush, bottom left or right water supply connection

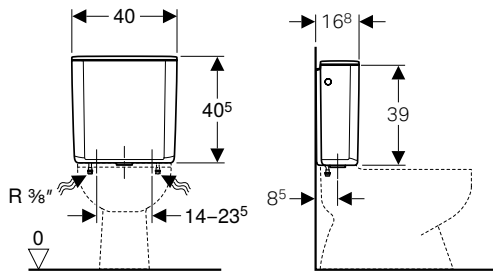

click & scan

Application purposes

- For close-coupled installation

Technical data

Flush volume, factory setting	6 l / 4 l
Flush volume large, adjustment range	6 l / 9 l
Small flush volume	4 l
Product material	ASA

Characteristics


- Low-noise
- Dual flush
- Insulated against condensation
- Water supply connection 3/8"
- Water supply connection on the bottom

Scope of delivery

- Seal made of EPDM
- Fastening material

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]
128.309.11.5	white alpine	40	40.5	16.8

Geberit AP128 exposed cistern, dual flush, lateral or rear centre water supply connection

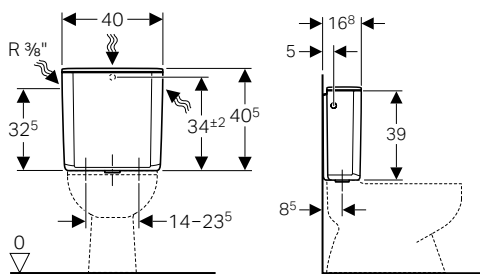

click & scan

Application purposes

- For close-coupled installation

Technical data

Flush volume, factory setting	9 l / 4 l
Flush volume large, adjustment range	6 l / 9 l
Small flush volume	4 l
Product material	ASA

Characteristics


- Low-noise
- Dual flush
- Insulated against condensation
- Water supply connection on the left/right or rear centre

Scope of delivery

- Angle stop valve 1/2", chrome-plated
- Seal made of EPDM
- Connecting bend made of copper, chrome-plated
- Collar, chrome-plated
- Fastening material

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]
128.300.11.5	white alpine	40	40.5	16.8

Geberit AP117 exposed cistern, dual flush, lateral or rear centre water supply connection

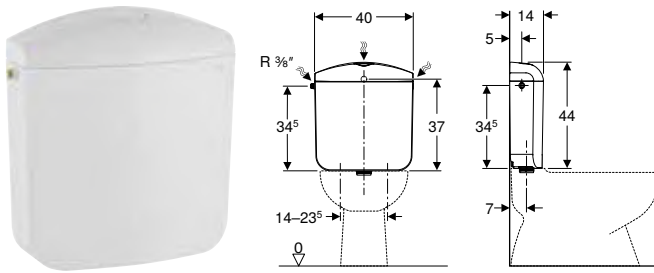

click & scan

Application purposes

- For close-coupled installation

Technical data

Flow pressure	0.1–10 bar
Storage temperature	≤ 40 °C
Flush volume, factory setting	6 l / 3 l
Flush volume large, adjustment range	6 l / 9 l
Flush volume small, adjustment range	3–4 l
Product material	ASA

Characteristics

- Dual flush
- Low-noise
- Insulated against condensation
- Water supply connection on the left/right or rear centre
- Water supply connection 3/8"


Scope of delivery

- Wall-mounted holder
- Fastening material

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]
136.535.11.1	white alpine	40	44	14

High-level

Geberit AP123 exposed cistern, single flush, with pull chain

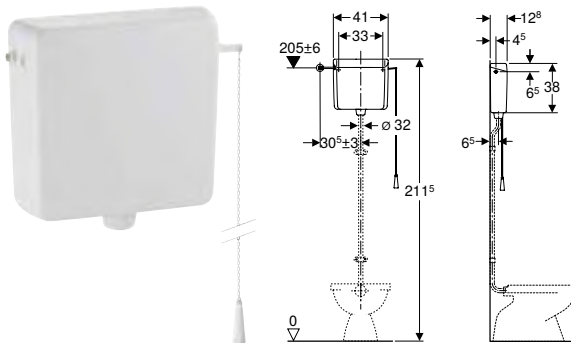

click & scan

Application purposes

- For high-level installation
- For mechanical remote flush actuation

Technical data

Flush volume, factory setting	6 l
Flush volume, adjustment range	6 l / 9 l
Product material	ABS

Characteristics

- Low-noise
- Single flush
- Insulated against condensation
- Flush pipe connection with compression joint
- Cistern lid without actuator button
- Water supply connection on the left/right
- Water supply connection 3/8"

Scope of delivery

- Draw chain
- Damming device
- Fastening material

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]
123.700.11.1	white alpine	41	38	12.8

To order additionally

- Water supply connection set
- Flush bend 90°




- For flush pipes for exposed installation see art. no. 119.503.11.1 and 118.026.xx.1
- For flush pipes for concealed installation see art. no. 119.610.11.1, 119.611.16.1 and 242.018.00.1

Exposed Cisterns

Exposed cisterns for WCs, made of plastic
Low and half-high level

Geberit AP123 exposed cistern, single flush, for remote flush actuation

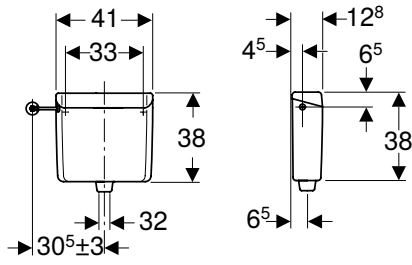

click & scan

Application purposes

- For high-level installation
- For flush actuations with remote flush actuation

Technical data

Flush volume, factory setting	6 l
Flush volume, adjustment range	6 l / 9 l
Product material	ABS

Characteristics

- Low-noise
- Single flush
- Can be refitted for mechanical flush actuation
- Can be converted to pneumatic single flush or dual flush actuation
- Can be refitted for electronic flush actuation
- Insulated against condensation
- Flush pipe connection with compression joint
- Cistern lid without actuator button
- Water supply connection on the left/right
- Water supply connection 3/8"

Scope of delivery

- Damming device
- Fastening material


Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]
123.701.11.1	white alpine	41	38	12.5

To order additionally

- Water supply connection set
- Flush bend 90°
- Remote flush actuation

Low and half-high level

Geberit AP123 exposed cistern, stop-and-go flush

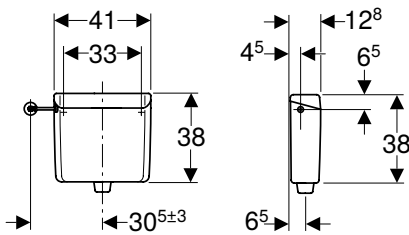

click & scan

Application purposes

- For low level installation

Technical data

Flush volume, factory setting	6 l
Flush volume, adjustment range	6 l / 9 l
Product material	ABS

Characteristics


- Low-noise
- Stop-and-go flush
- Insulated against condensation
- Flush pipe connection, pluggable
- Water supply connection on the left/right
- Water supply connection 3/8"
- Can be refitted for water supply connection on the rear centre

Scope of delivery

- Flush bend 90° made of ABS, ø 50 / 44 mm, 23 x 23 cm
- Fastening material

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]
123.105.11.1	white alpine	41	38	12.5

Geberit AP123 exposed cistern, stop-and-go flush, for remote flush actuation

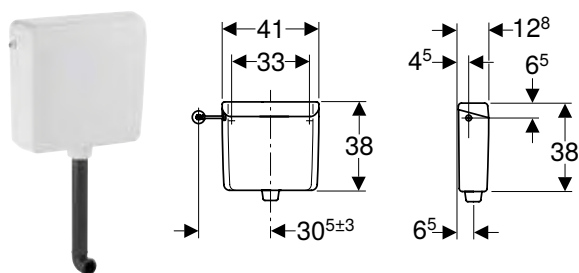

click & scan

Application purposes

- For low level installation
- For bathroom furniture or for installation behind the wall
- For thin walls of max. 70 mm thickness in combination with floor-standing WCs
- For flush actuations with pneumatic remote flush actuation

Technical data

Flush volume, factory setting	6 l
Flush volume, adjustment range	6 l / 9 l
Product material	ABS

Characteristics

- Low-noise
- Single flush
- Can be converted to pneumatic single flush or dual flush actuation
- Insulated against condensation
- Cistern lid without actuator button
- Flush pipe connection, pluggable
- Water supply connection on the left/right
- Water supply connection 3/8"

Scope of delivery


- Flush bend 90° made of PE-HD, \varnothing 50 / 44 mm, 38 x 5.2 cm
- Fastening material

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]
123.136.11.1	white alpine	41	38	12.5

To order additionally

- Water supply connection set
- Flush bend extension, \varnothing 45 mm
- Pneumatic actuator
- Pneumatic flushing device

Geberit AP123 exposed cistern, stop-and-go flush, for remote flush actuation

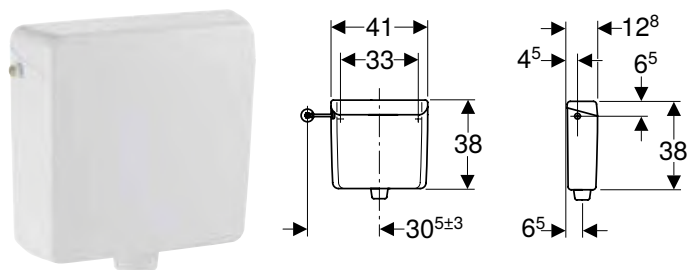

click & scan

Application purposes

- For low level installation
- For bathroom furniture or for installation behind the wall
- For thin walls of max. 70 mm thickness in combination with floor-standing WCs
- For flush actuations with pneumatic remote flush actuation

Technical data

Flush volume, factory setting	9 l
Flush volume, adjustment range	6 l / 9 l
Product material	ABS

Characteristics

- Low-noise
- Single flush
- Can be converted to pneumatic single flush or dual flush actuation
- Insulated against condensation
- Cistern lid without actuator button
- Flush pipe connection, pluggable
- Water supply connection on the left/right
- Water supply connection 3/8"

Scope of delivery

- Fastening material

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]
123.135.11.1	white alpine	41	38	12.5


To order additionally

- Water supply connection set
- Pneumatic actuator
- Pneumatic flushing device
- Flush bend 90° made of PE-HD, \varnothing 50 / 44 mm, 38 x 5.2 cm
- Flush bend extension, \varnothing 45 mm

Exposed Cisterns

Exposed cisterns for WCs, made of plastic
Low and half-high level

Geberit AP117 exposed cistern, dual flush, lateral or rear centre water supply connection

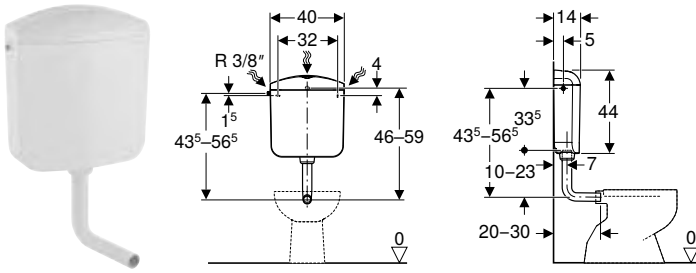

click & scan

Application purposes

- For low level installation

Technical data

Flow pressure	0.1–10 bar
Storage temperature	≤ 40 °C
Flush volume, factory setting	6 l / 3 l
Flush volume large, adjustment range	6 l / 9 l
Flush volume small, adjustment range	3–4 l
Product material	ASA

Characteristics


- Dual flush
- Low-noise
- Insulated against condensation
- Water supply connection on the left/right or rear centre

Scope of delivery

- Reinforced braided hose 3/8"
- Flush bend 90° made of ABS, ø 50 / 44 mm, 23 x 23 cm
- Sleeve made of EPDM, ø 44 / 55 mm
- Fastening material

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]
136.530.11.1	white alpine	40	44	14

Geberit AP116plus exposed cistern, dual flush, with insert for in-cistern block

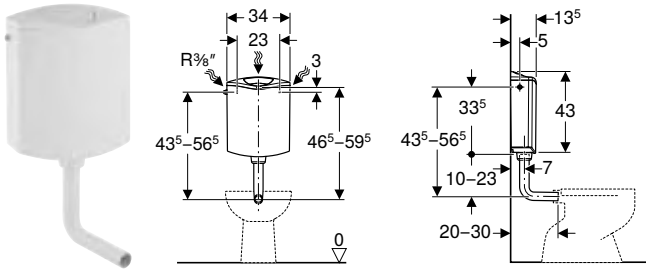

click & scan

Application purposes

- For low level installation

Technical data

Flow pressure	0.1–10 bar
Storage temperature	≤ 40 °C
Flush volume, factory setting	6 l / 3 l
Flush volume large, adjustment range	6–7.5 l
Flush volume small, adjustment range	3–4.5 l
Product material	ABS

Characteristics


- Dual flush
- Low-noise
- Hinged flush plate for insertion of in-cistern blocks
- Insulated against condensation
- Water supply connection on the left/right or rear centre

Scope of delivery

- Reinforced braided hose 3/8"
- Receptacle for in-cistern block
- Flush bend 90° made of ABS, ø 50 / 44 mm, 23 x 23 cm
- Sleeve made of EPDM, ø 44 / 55 mm
- Fastening material

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]
136.444.11.1	white alpine	34	43	13.5

Geberit AP116 exposed cistern, dual flush

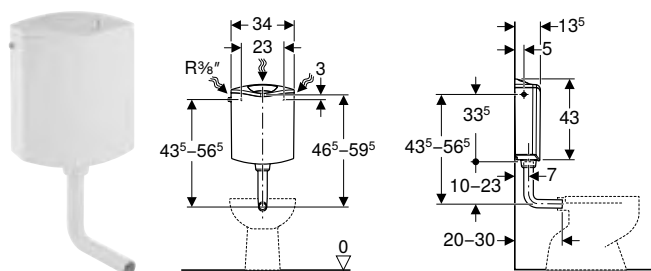

click & scan

Application purposes

- For low level installation

Technical data

Flow pressure	0.1–10 bar
Storage temperature	≤ 40 °C
Flush volume, factory setting	6 l / 3 l
Flush volume large, adjustment range	6–7.5 l
Flush volume small, adjustment range	3–4.5 l
Product material	ABS

Characteristics


- Dual flush
- Insulated against condensation
- Water supply connection on the left/right or rear centre

Scope of delivery

- Reinforced braided hose 3/8"
- Copper pipe, bent
- Flush bend 90° made of ABS, ø 50 / 44 mm, 23 x 23 cm
- Sleeve made of EPDM, ø 44 / 55 mm
- Fastening material

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]
136.430.11.1	white alpine	34	43	13.5

Geberit AP110 exposed cistern, stop-and-go flush

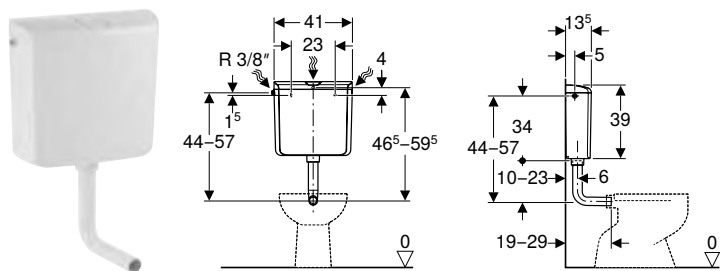

click & scan

Application purposes

- For low level installation

Technical data

Flow pressure	0.1–10 bar
Storage temperature	≤ 40 °C
Flush volume, factory setting	9 l
Flush volume, adjustment range	6 l / 9 l
Product material	ABS

Characteristics

- Low-noise
- Stop-and-go flush
- Insulated against condensation
- Water supply connection on the left/right or rear centre

Scope of delivery


- Reinforced braided hose 3/8"
- Flush bend 90° made of ABS, ø 50 / 44 mm, 23 x 23 cm
- Sleeve made of EPDM, ø 44 / 55 mm
- Fastening material

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]
136.610.11.1	white alpine	41	39	13.5

Flush pipes for exposed cisterns

High-level

Geberit flush bend 90°, high-level, with collar

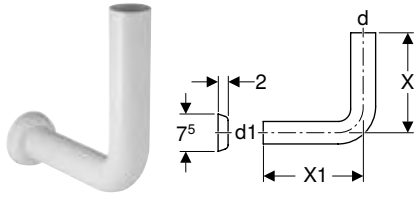

click & scan

Application purposes


- For connecting high-level Geberit exposed cisterns with a concealed flush bend

Technical data

Product material	PVC
------------------	-----

Art. no.	Colour / surface	d, ø [mm]	d1, ø [mm]	arc [°]	X [cm]	X1 [cm]
119.610.11.1	white alpine	32	32	90	24	12

Geberit flush bend 90°, 28 cm, for thick walls

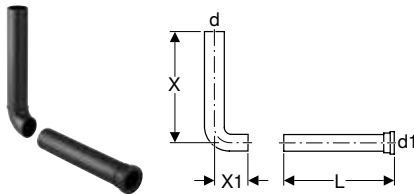

click & scan

Application purposes


- For connecting WCs to exposed cisterns mounted behind the wall

Technical data

Product material	PE-HD
------------------	-------

Art. no.	d, ø [mm]	d1, ø [mm]	arc [°]	L [cm]	X [cm]	X1 [cm]
118.200.16.1	50	45	90	28	28	4

Geberit flush bend 90° set, telescopic, with recess shells and protection plugs

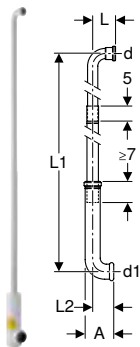

click & scan

Application purposes

- For concealed connection of high-level exposed cisterns with a WC ceramic appliance

Characteristics

- Three-piece
- Can be pulled out

Technical data

Product material	PE-HD
------------------	-------

Scope of delivery


- Flush bend with ring seal socket
- Adhesive
- Recess shells
- 2 protection plugs

Art. no.	d, ø [mm]	d1, ø [mm]	arc [°]	A [cm]	L [cm]	L1 [cm]	L2 [cm]
119.611.16.1	32	45	90	9.5	7.5	173	7



- This product is supplied with the Tangit PVC-U special adhesive. This consumable contains classified hazardous substances. Information, instructions and measures for handling hazardous substances safely can be found at <https://www.geberit-global.com>.

Geberit flush bend 90° set, 156 x 24 cm, offset

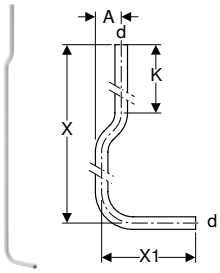

click & scan

Application purposes

- For connecting high-level Geberit exposed cisterns with a WC ceramic appliance

Scope of delivery


- Flush bend 90°
- 2 pipe straps

Technical data

Product material	PVC
------------------	-----

Art. no.	Colour / surface	d, \varnothing [mm]	arc [°]	A [cm]	X [cm]	X1 [cm]	K [cm]
119.504.11.1	white alpine	32	90	6.5	156	24	27

Geberit flush bend extension with sleeve



click & scan

Application purposes

- For connecting to $\varnothing 55$ mm

Scope of delivery

- Pipe
- Sleeve made of EPDM

Technical data

Product material	EPDM / PE-HD
------------------	--------------

Art. no.	d, \varnothing [mm]	Product material	L [cm]	l [cm]
152.434.16.1	45	PE	18.5	16

Geberit flushing water manifold



click & scan

Application purposes

- For adhering to Geberit flush pipes $\varnothing 32$ mm

Technical data

Product material	PVC
------------------	-----


Art. no.	Colour / surface	d, \varnothing [mm]
119.696.11.1	white alpine	32

Exposed Cisterns

Flush pipes for exposed cisterns
Low-level and half-high level

Low-level and half-high level

Geberit flush bend 90° set, offset

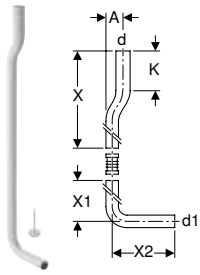

click & scan

Application purposes

- For connecting half-high level Geberit exposed cisterns with a WC ceramic appliance

Scope of delivery


- Flush bend 90°
- Pipe strap
- Compensation pad
- Damming device

Technical data

Product material	PVC
------------------	-----

Art. no.	Colour / surface	d, ø [mm]	d1, ø [mm]	arc [°]	A [cm]	X [cm]	X1 [cm]	X2 [cm]	K [cm]
118.100.11.1	white alpine	50	44	90	6	53	50	22	14

Geberit flush bend extension 90° with ring seal socket



click & scan

Application purposes

- For extending flush bends on high-level Geberit exposed cisterns

Scope of delivery

- Adhesive

Technical data


Product material	PVC
------------------	-----

Art. no.	Colour / surface	d, ø [mm]	arc [°]
119.060.11.1	white alpine	32	90



- This product is supplied with the Tangit PVC-U special adhesive. This consumable contains classified hazardous substances. Information, instructions and measures for handling hazardous substances safely can be found at <https://www.geberit-global.com>.

Geberit flush bend extension, offset

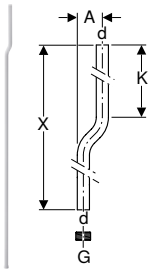

click & scan

Application purposes

- For connecting high-level Geberit exposed cisterns with a squat WC

Scope of delivery

- 2 pipe straps
- Adhesive
- Threaded connector

Technical data


Product material	PVC
------------------	-----

Art. no.	Colour / surface	d, \emptyset [mm]	G ["]	A [cm]	X [cm]	K [cm]
119.503.11.1	white alpine	32	1 1/4	6.5	200	27



- This product is supplied with the Tangit PVC-U special adhesive. This consumable contains classified hazardous substances. Information, instructions and measures for handling hazardous substances safely can be found at <https://www.geberit-global.com>.

Geberit flush bend extension, straight, with ring seal socket

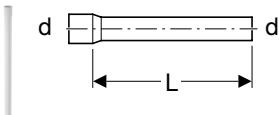

click & scan

Application purposes

- For extending flush bends on high-level Geberit exposed cisterns

Scope of delivery

- Adhesive

Technical data


Product material	PVC
------------------	-----

Art. no.	Colour / surface	d, \emptyset [mm]	L [cm]
119.063.11.1	white alpine	32	46.5



- This product is supplied with the Tangit PVC-U special adhesive. This consumable contains classified hazardous substances. Information, instructions and measures for handling hazardous substances safely can be found at <https://www.geberit-global.com>.

Geberit flush bend extension set with collar

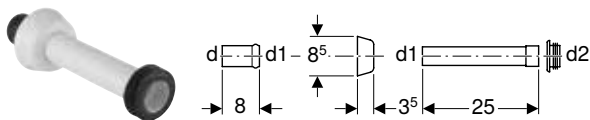

click & scan

Application purposes

- For connecting flush bends and WCs

Scope of delivery

- Ring seal socket
- Collar
- Flush pipe
- Sleeve made of EPDM, \emptyset 44 / 55 mm

Technical data

Product material	ASA
------------------	-----

Art. no.	Colour / surface	d, \emptyset [mm]	d1, \emptyset [mm]	d2, \emptyset [mm]	arc [°]
118.026.11.1	white alpine	45	40	44	0
118.026.21.1	chrome / glossy	45	40	44	0

Accessories

Connections

Geberit rear centre water supply connection set



click & scan

Scope of delivery

- Cone screw fitting
- Copper pipe, bent

Art. no.	d, \emptyset [mm]
240.017.00.1	10

Angle stop valves

Geberit angle stop valve for exposed cistern AP117



click & scan

Art. no.
238.192.00.2

Sleeves

Geberit sleeve for flush pipe connection




click & scan

Application purposes

- For sealing between flush pipes and WC ceramic appliances

Art. no.	d, \emptyset [mm]	D [cm]	L [cm]
119.668.00.1	45	6	2.5
119.675.00.1	45	7.5	3.3
242.018.00.1	32	6	2.5

Geberit wall collar, large




click & scan

Art. no.	Colour / surface	d, \emptyset [mm]	Product material	D [cm]	H [cm]
241.507.11.1	white alpine	32	Plastic	8.5	3.7
241.507.21.1	chrome / glossy	32	Plastic	8.5	3.7
241.508.11.1	white alpine	40	Plastic	8.5	3.7
241.508.21.1	chrome / glossy	40	Plastic	8.5	3.7
854.909.11.1	white alpine	50	PP	8.5	3.5
894.094.11.1	white alpine	50	PP	9	7

With pneumatic flush actuation

Geberit low-height concealed cistern, 6 / 3 litres, pneumatic flush actuation

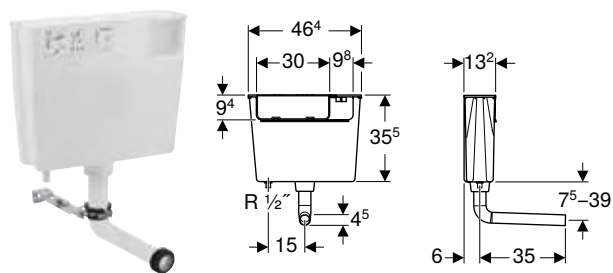

click & scan

Application purposes

- For drywall construction
- For installation in bathroom furniture
- For installation in part-height prewall installations
- For low level installation
- For floor-standing WCs
- Not suitable for Geberit AquaClean Alba
- Not suitable for Geberit AquaClean Sela

Technical data

Flow pressure	0.1–10 bar
Flush volume, factory setting	5.8 l
Product material	Plastic

Characteristics

- Flush actuation pneumatic
- Single flush
- Flush pipe connection with compression joint
- Water supply connection on the bottom left
- Water supply connection 1/2"

Scope of delivery


- Flush bend 90°
- Fastening for flush bend
- Cup for flush volume reduction 4.0 / 2.6 l
- Fastening material

Art. no.	B [cm]	H [cm]	T [cm]
109.721.00.2	46.4	35.5	13.2




- Pneumatic flush actuation has to be ordered separately



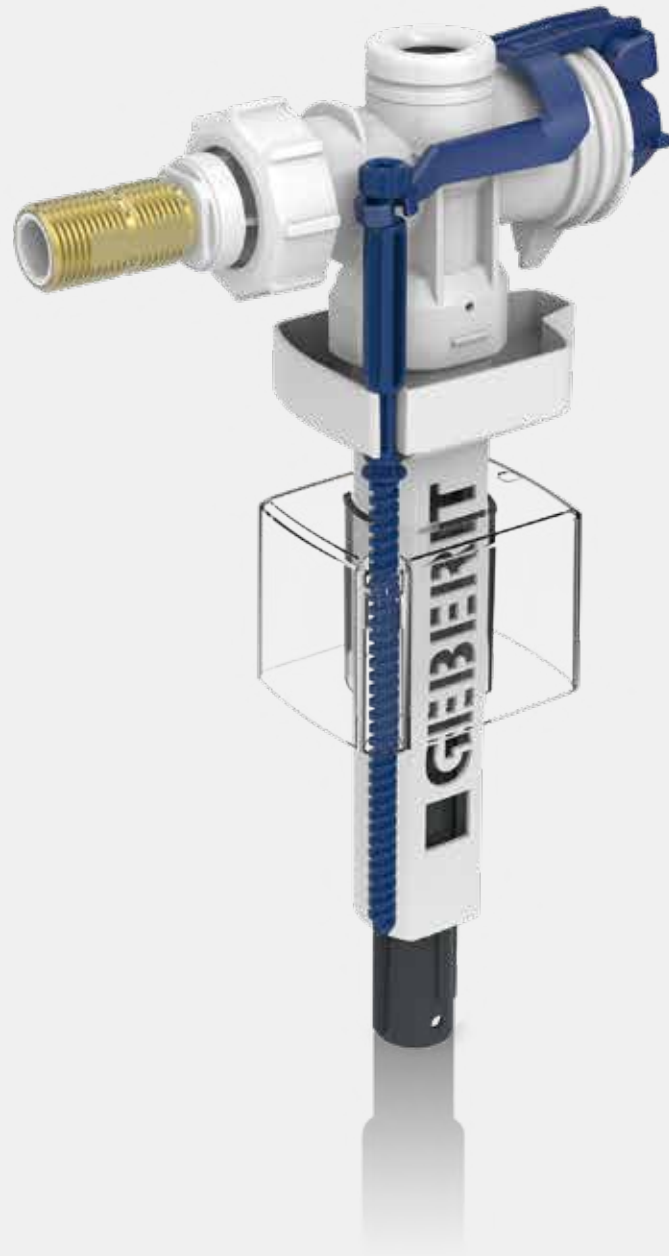

Fill Valves and Flush Valve Systems


Fill valves	162
Fill valves for exposed cisterns	162
Fill valves for ceramic cisterns	162
Fill valves for universal flushing cisterns	165
Flush valves	166
Dual flush	166
Mechanisms	167
Dual flush	167



Fill valves

Fill valves for exposed cisterns

Geberit Type 383 fill valve, lateral water supply connection, 3/8", nipple made of brass, with copper pipe

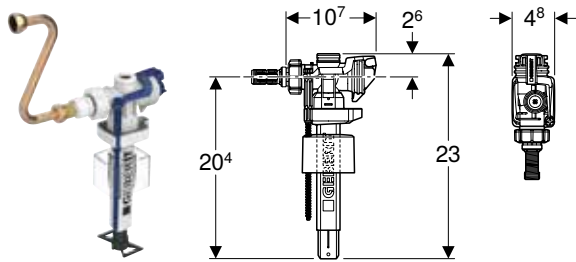

click & scan

Application purposes

- For installation in exposed cisterns with lateral water supply connection
- For Geberit concealed cisterns
- For greywater and rainwater with pH value 5.5–9.5, if a filter system is used
- For potable water
- For water supply connections 3/8"

Characteristics

- Adjustable filling height
- Threaded nipple made of brass
- Water supply connection on the left/right
- Low-noise in accordance with tap group I (DIN 4109)
- Components in contact with drinking water lead-free

Technical data

Flow pressure	0.1–10 bar
Storage temperature	≤ 40 °C
Flow rate at 50 kPa / 0.5 bar	0.06 l/s
Flow rate at 300 kPa / 3 bar	0.16 l/s


Scope of delivery

- Filter for nipple / reinforced braided hose types 350 and 380 filling valves
- Cone screw fitting
- Copper pipe, bent

Art. no.	B [cm]	H [cm]	T [cm]
246.191.00.5	4.8	23	10.7

Fill valves for ceramic cisterns

Geberit Type 360 fill valve, bottom water supply connection, 1/2", nipple made of plastic

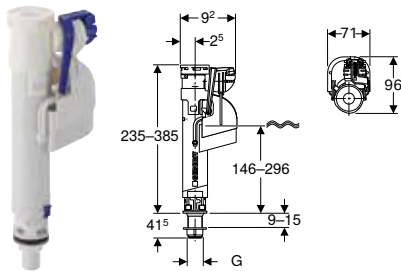

click & scan

Application purposes

- For Geberit exposed cisterns with bottom water supply connection
- For greywater and rainwater with pH value 5.5–9.5, if a filter system is used
- For ceramic cisterns
- For potable water
- For water supply connections 1/2"

Characteristics


- Adjustable filling height
- Threaded nipple made of plastic
- Height-adjustable
- Water supply connection on the bottom

Technical data

Flow pressure	0.1–10 bar
Storage temperature	≤ 40 °C

Art. no.	G ["]	B [cm]	H [cm]	T [cm]
281.208.00.1	1/2	7.1	23.5	9.6

Geberit Type 360 fill valve, bottom water supply connection, 3/8", nipple made of plastic

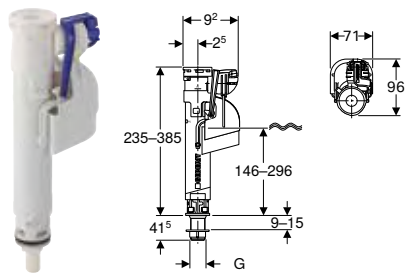

click & scan

Application purposes

- For Geberit exposed cisterns with bottom water supply connection
- For greywater and rainwater with pH value 5.5–9.5, if a filter system is used
- For ceramic cisterns
- For potable water
- For water supply connections 3/8"

Characteristics

- Adjustable filling height
- Threaded nipple made of plastic
- Height-adjustable
- Water supply connection on the bottom


Technical data

Flow pressure	0.1–10 bar
Storage temperature	≤ 40 °C

Art. no.	G ["]	B [cm]	H [cm]	T [cm]
281.207.00.1	3/8	7.1	23.5	9.6



Geberit Type 323 fill valve, bottom water supply connection, 3/8", nipple made of plastic

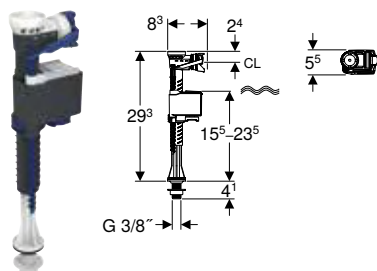

click & scan

Application purposes

- For Geberit exposed cisterns with bottom water supply connection
- For greywater and rainwater with pH value 5.5–9.5, if a filter system is used
- For ceramic cisterns
- For potable water
- For water supply connections 3/8"

Characteristics


- Adjustable filling height
- Threaded nipple made of plastic
- Water supply connection on the bottom

Technical data

Flow pressure	0.1–10 bar
Storage temperature	≤ 40 °C
Flow rate at 50 kPa / 0.5 bar	0.06 l/s
Flow rate at 300 kPa / 3 bar	0.17 l/s

Art. no.	G ["]	B [cm]	H [cm]	T [cm]
136.753.00.1	3/8	5.5	29.3	8.3

Geberit Type 323 fill valve, bottom water supply connection, 1/2", nipple made of plastic

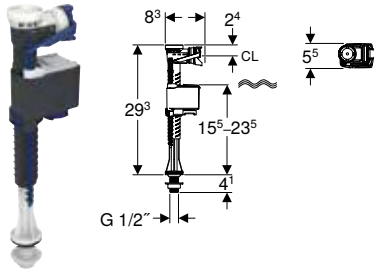

click & scan

Application purposes

- For Geberit exposed cisterns with bottom water supply connection
- For greywater and rainwater with pH value 5.5–9.5, if a filter system is used
- For ceramic cisterns
- For potable water
- For water supply connections 1/2"

Characteristics


- Adjustable filling height
- Threaded nipple made of plastic
- Water supply connection on the bottom

Technical data

Flow pressure	0.1–10 bar
Storage temperature	≤ 40 °C
Flow rate at 50 kPa / 0.5 bar	0.06 l/s
Flow rate at 300 kPa / 3 bar	0.17 l/s

Art. no.	G ["]	B [cm]	H [cm]	T [cm]
136.752.00.1	1/2	5.5	29.3	8.3

Geberit Type 383 fill valve, lateral water supply connection, 3/8" and 1/2", nipple made of brass

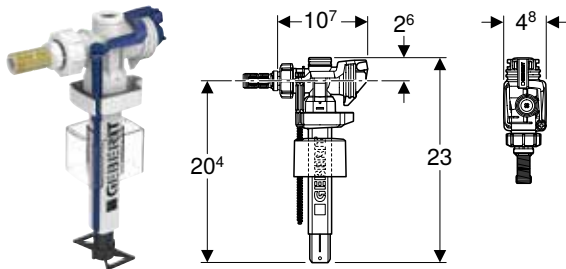

click & scan

Application purposes

- For installation in exposed cisterns with lateral water supply connection
- For greywater and rainwater with pH value 5.5–9.5, if a filter system is used
- For ceramic cisterns
- For potable water
- For water supply connections 1/2"
- For water supply connections 3/8"

Characteristics

- Adjustable filling height
- Threaded nipple made of brass
- Water supply connection on the left/right
- Low-noise in accordance with tap group I (DIN 4109)
- Components in contact with drinking water lead-free

Scope of delivery

- Spacer ring set
- Nipple made of brass, R 3/8" and R 1/2"


Technical data

Flow pressure	0.1–10 bar
Storage temperature	≤ 40 °C
Flow rate at 50 kPa / 0.5 bar	0.06 l/s
Flow rate at 300 kPa / 3 bar	0.16 l/s

Art. no.	B [cm]	H [cm]	T [cm]
281.004.00.5	4.8	23	10.7

Fill valves for universal flushing cisterns

Geberit Type 333 fill valve, lateral water supply connection, 3/8", nipple made of brass

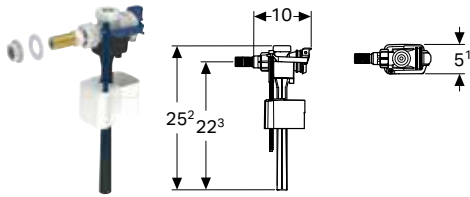
[click & scan](#)

Application purposes

- For installation in exposed cisterns with lateral water supply connection
- For greywater and rainwater with pH value 5.5–9.5, if a filter system is used
- For ceramic cisterns
- For potable water
- For water supply connections 3/8"

Characteristics

- Adjustable filling height
- Water supply connection on the left/right
- Threaded nipple made of brass
- Components in contact with drinking water lead-free


Technical data

Flow pressure	0.1–10 bar
Storage temperature	≤ 40 °C

Art. no.	B [cm]	H [cm]	T [cm]
136.723.00.3	5.1	25.2	10



Geberit Type 333 fill valve, lateral water supply connection, 3/8" and 1/2", nipple made of brass

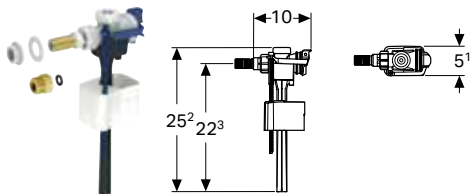
[click & scan](#)

Application purposes

- For installation in exposed cisterns with lateral water supply connection
- For greywater and rainwater with pH value 5.5–9.5, if a filter system is used
- For ceramic cisterns
- For potable water
- For water supply connections 3/8"
- For water supply connections 1/2"

Characteristics

- Adjustable filling height
- Water supply connection on the left/right
- Threaded nipple made of brass
- Components in contact with drinking water lead-free

Scope of delivery

- Adapter made of brass, G 3/8" / G 1/2"

Technical data


Flow pressure	0.1–10 bar
Storage temperature	≤ 40 °C

Art. no.	B [cm]	H [cm]	T [cm]
136.724.00.3	5.1	25.2	10

Flush valves

Dual flush

Geberit Type 290 flush valve d40, dual flush

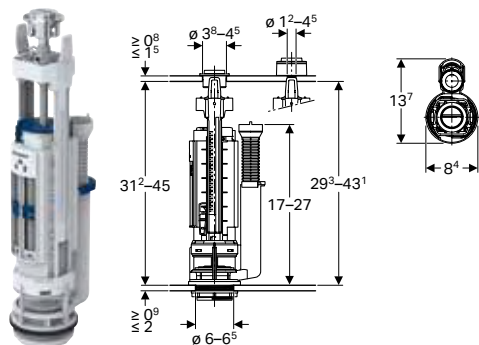

click & scan

Application purposes

- For ceramic cisterns with drilling \varnothing 40 mm
- For potable water
- For greywater and rainwater with pH value 5.5–9.5, if a filter system is used

Technical data

Storage temperature	≤ 40 °C
Flush volume large, adjustment range	4–9 l
Flush volume small, adjustment range	2–4.5 l
Actuation force	18 N

Characteristics


- Dual flush
- Height-adjustable
- Small and large flush volume can be set depending on the amount of water in the cistern
- Overflow pipe height-adjustable
- With lid attachment
- Suitable for basket, for Type 280 flush valve
- Suitable for basket, for Type 250 flush valve (Twico 1)

Scope of delivery

- Fastening material

Art. no.	Colour / surface	H [cm]
282.303.21.2	chrome / glossy	32

Geberit Type 240 flush valve, dual flush

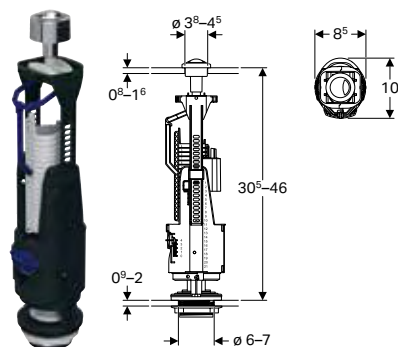

click & scan

Application purposes

- For ceramic cisterns
- For potable water
- For greywater and rainwater with pH value 5.5–9.5, if a filter system is used

Technical data

Storage temperature	≤ 40 °C
Flush volume large, adjustment range	6–9 l
Flush volume small, adjustment range	3–4.5 l
Actuation force	18 N

Characteristics

- Dual flush
- Height-adjustable
- Small and large flush volume can be set depending on the amount of water in the cistern
- Overflow pipe can be shortened
- With lid attachment

Scope of delivery


- Fastening material

Art. no.	Colour / surface	H [cm]
136.909.21.2	chrome / glossy	30.5

Mechanisms

Dual flush

Geberit Type 290-323 mechanism, dual flush, bottom water supply connection, 3/8", nipple made of brass

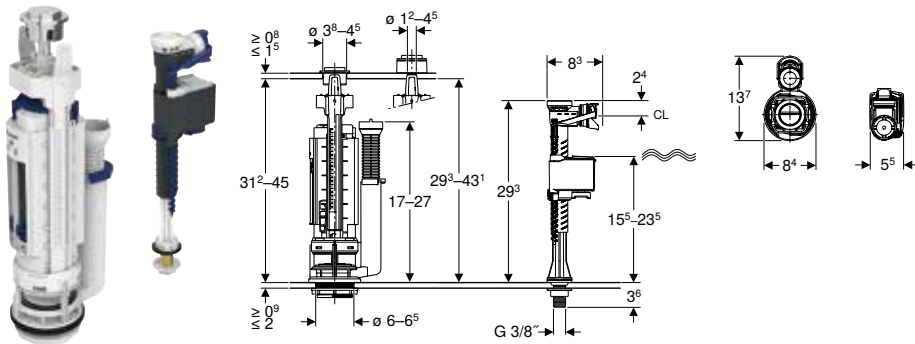

Application purposes

- For greywater and rainwater with pH value 5.5–9.5, if a filter system is used
- For ceramic cisterns
- For potable water
- For water supply connections 3/8"

Technical data

Flow pressure	0.1–10 bar
Storage temperature	≤ 40 °C
Flush volume large, adjustment range	4–9 l
Flush volume small, adjustment range	2–4.5 l
Actuation force	18 N

Characteristics

- Dual flush
- Adjustable filling height
- Threaded nipple made of brass
- Height-adjustable
- Small and large flush volume can be set depending on the amount of water in the cistern
- Overflow pipe height-adjustable
- Water supply connection on the bottom
- With lid attachment


Scope of delivery

- Fastening material

Art. no.	Colour / surface
136.765.21.1	chrome / glossy



Geberit Type 290-323 mechanism, dual flush, bottom water supply connection, 3/8", nipple made of brass

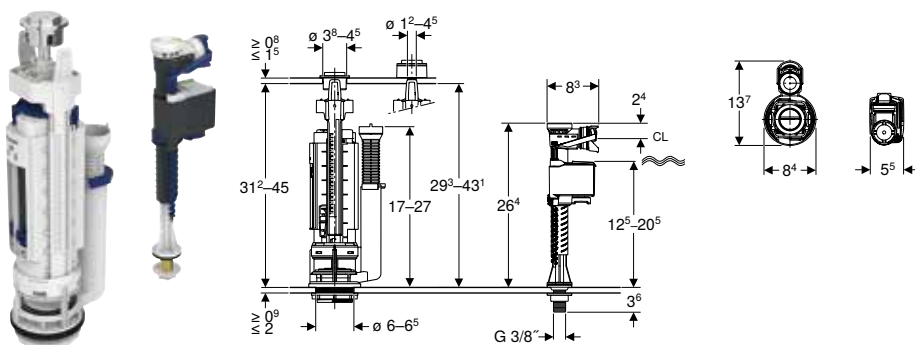

Application purposes

- For greywater and rainwater with pH value 5.5–9.5, if a filter system is used
- For ceramic cisterns
- For potable water
- For water supply connections 3/8"

Technical data

Flow pressure	0.1–10 bar
Storage temperature	≤ 40 °C
Flush volume large, adjustment range	4–9 l
Flush volume small, adjustment range	2–4.5 l
Actuation force	18 N

Characteristics


- Dual flush
- Adjustable filling height
- Threaded nipple made of plastic
- Height-adjustable
- Small and large flush volume can be set depending on the amount of water in the cistern
- Overflow pipe height-adjustable
- Water supply connection on the bottom
- With lid attachment

Scope of delivery

- Fastening material

Art. no.	Colour / surface
136.764.21.1	chrome / glossy

Geberit Type 290-360 mechanism, dual flush, bottom water supply connection, 3/8", nipple made of plastic

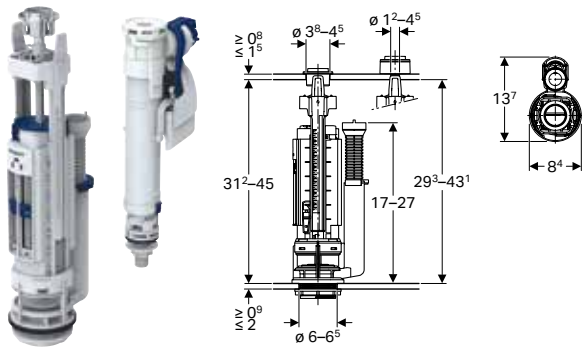

click & scan

Application purposes

- For greywater and rainwater with pH value 5.5–9.5, if a filter system is used
- For ceramic cisterns
- For potable water
- For water supply connections 3/8"

Characteristics

- Dual flush
- Adjustable filling height
- Threaded nipple made of plastic
- Height-adjustable
- Small and large flush volume can be set depending on the amount of water in the cistern
- Overflow pipe height-adjustable
- Water supply connection on the bottom
- With lid attachment

Technical data


Flow pressure	0.1–10 bar
Storage temperature	≤ 40 °C
Flush volume large, adjustment range	4–9 l
Flush volume small, adjustment range	2–4.5 l
Actuation force	18 N

Scope of delivery

- Fastening material

Art. no.	Colour / surface
273.645.21.2	chrome / glossy

Geberit Type 290-383 mechanism, dual flush, universal water supply connection, 3/8" and 1/2", nipple made of brass

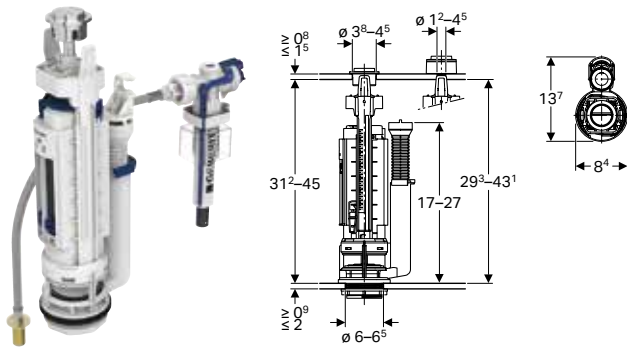

click & scan

Application purposes

- For greywater and rainwater with pH value 5.5–9.5, if a filter system is used
- For ceramic cisterns
- For potable water
- For water supply connections 1/2"
- For water supply connections 3/8"

Characteristics

- Dual flush
- Adjustable filling height
- Threaded nipple made of brass
- Height-adjustable
- Small and large flush volume can be set depending on the amount of water in the cistern
- Overflow pipe height-adjustable
- Water supply connection on the left/right
- Water supply connection on the bottom
- With lid attachment


Technical data

Flow pressure	0.1–10 bar
Storage temperature	≤ 40 °C
Flush volume large, adjustment range	4–9 l
Flush volume small, adjustment range	2–4.5 l
Actuation force	18 N

Scope of delivery

- Fastening material

Art. no.	Colour / surface
283.313.21.5	chrome / glossy























Actuator plates and WC flush controls

Range of colours	172
Actuator plates	174
For Sigma concealed cisterns	174
Assortment overview – Geberit actuator plates of the Sigma series for concealed cisterns	175
For Omega concealed cisterns	198
Assortment overview – Geberit actuator plates of the Omega series for concealed cisterns	198
For Alpha concealed cisterns	203
Assortment overview – Geberit actuator plates of the Alpha series for concealed cisterns	203
Accessories	206
WC flush controls with electronic flush actuation.....	208
Assortment overview – Geberit WC flush controls with electronic flush actuation, touchless	209
Assortment overview – Geberit WC flush controls with electronic flush actuation, manual	211
For mains operation, for Geberit Sigma concealed cisterns 12 cm	212
For mains operation, for Geberit Sigma concealed cisterns 8 cm	223
For mains operation, for Geberit Omega concealed cisterns 12 cm	225
For battery operation, for Geberit Sigma concealed cisterns 12 cm	227
WC flush controls with pneumatic flush actuation.....	236
Assortment overview – Geberit WC flush controls with pneumatic flush actuation	236
For dual flush	237
For single flush	244
Accessories for flush controls.....	248
Installation sets	248
For WC flush controls with electronic flush actuation	252








Range of colours

Metal / metallic finished

	00		21		45		46
stainless steel		bright chrome-plated		gold-plated		matt chrome-plated	
	DT		FW***		GH***		ID***
special brass galvanized		stainless steel brushed		brushed chrome		nickel brushed	
	JQ***		JT***		KA		KH
matt chrome / bright chrome		white matt / bright chrome		bright chrome / matt chrome		bright chrome / matt chrome	
	KX***		KY		QB***		QD***
chrome brushed / bright chrome		bright chrome / chrome brushed		red gold/red gold brushed		black chrome/black chrome brushed	
	QF***		SN***				
brass/brass brushed		stainless steel brushed / polished					

Glass

	SD		SG		SI		SJ
smoked glass reflective		black glass		white glass		black glass	
	SM		JK		JL		
mirrored glass		lava		sand grey			

* The colour and structure of natural products may vary

** The inlay is not supplied by Geberit

*** Easy-to-clean coated

Plastic



01

white matt / white



11

white alpine



KJ

white / bright chrome



KK

white / gold-plated



14***

black matt (bright chrome)



16***

black matt / black



DW

black



KM

black / bright chrome




LA

white / yellow / green



LB

white / blue / red



SX

white / ocean blue / light blue



79

white / forest green / light green



FY

white / carmine red / orange

Natural surface



JM*

mustang slate*



JV*

concrete*



JX*

black walnut*



00**



customised









Actuator plates

For Sigma concealed cisterns


Assortment overview – Geberit actuator plates of the Sigma series for concealed cisterns

Geberit International Sales, version: December 2025

		Sigma01 round	Sigma01 square	Sigma10 round	Sigma10 square (ex Sigma30)	Sigma20 round	Sigma20 square (ex Sigma30)	
								
		→ p. 176	→ p. 177	→ p. 178	→ p. 179	→ p. 180	→ p. 181	
Concealed cistern	109.300.00.5	✓	✓	✓	✓	✓	✓	
Concealed cistern	109.791.00.1	✓	✓	✓	✓	✓	✓	
Duofix	111.950.00.6	✓	✓	✓	✓	✓	✓	
Duofix	111.900.00.6	✓	✓	✓	✓	✓	✓	
Duofix	111.350.00.6	✓	✓	✓	✓	✓	✓	
Duofix	111.923.00.6	✓	✓	✓	✓	✓	✓	
Duofix	111.796.00.2	✓	✓	✓	✓	✓	✓	
GIS	461.311.00.6	✓	✓	✓	✓	✓	✓	
GIS	461.301.00.6	✓	✓	✓	✓	✓	✓	
Kombifix	110.350.00.5	✓	✓	✓	✓	✓	✓	
Kombifix	110.340.00.5	✓	✓	✓	✓	✓	✓	
Kombifix	110.792.00.1	✓	✓	✓	✓	✓	✓	

✓ Compatible

Geberit Sigma01 actuator plate, round, dual flush

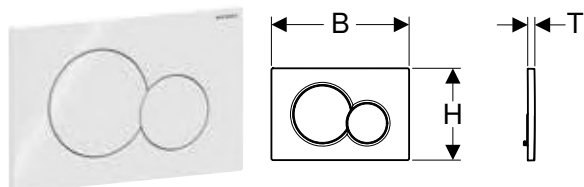

click & scan

Application purposes

- For flush actuation with Sigma concealed cisterns

Technical data

Actuation force (N) max.	20 N
--------------------------	------

Characteristics

- Front actuation
- Sound-absorbing actuator rods, tool-free fast adjustment

Scope of delivery


- Mounting frame
- 2 distance bolts
- 2 actuator rods

Art. no.	Colour / surface	Product material	B	H	T
			[cm]	[cm]	[cm]
115.770.11.5	Plate, Button: white / glossy	Plastic	24.6	16.4	1.3
115.770.21.5	Plate, Button: chrome / glossy	Plastic	24.6	16.4	1.3
115.770.DT.5	galvanized special brass	Plastic	24.6	16.4	1.3
115.770.DW.5	Plate, Button: black / glossy	Plastic	24.6	16.4	1.3
115.770.JQ.5	Plate, Button: chrome / matt, easy-to-clean coated	Plastic	24.6	16.4	1.3
115.770.KA.5	Plate: chrome / glossy Button: chrome / matt	Plastic	24.6	16.4	1.3

Accessories

- Geberit DuoFresh module with automatic actuation, for Sigma concealed cistern 12 cm → p. 193
- Geberit DuoFresh module with manual actuation, for Sigma concealed cistern 12 cm → p. 194
- Geberit DuoFresh module with automatic actuation, for Sigma concealed cistern 8 cm → p. 194
- Geberit DuoFresh module with manual actuation, for Sigma concealed cistern 8 cm → p. 195
- Geberit extension set for Sigma, Omega and Kappa concealed cisterns → p. 206

Geberit Sigma01 actuator plate, round, dual flush, for Bambini WC

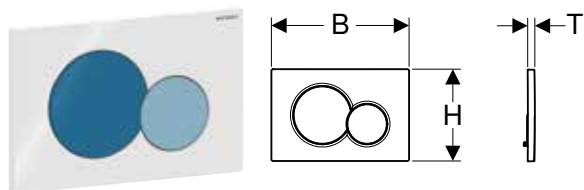

click & scan

Application purposes

- For flush actuation with Sigma concealed cisterns

Technical data

Actuation force (N) max.	20 N
--------------------------	------

Characteristics

- Front actuation
- Sound-absorbing actuator rods, tool-free fast adjustment

Scope of delivery

- Mounting frame
- 2 distance bolts
- 2 actuator rods

Art. no.	Colour / surface	Product material	B	H	T
			[cm]	[cm]	[cm]
115.770.79.5	Plate: white / glossy Full flush volume button: forest green / glossy Partial flush volume button: light green / glossy	Plastic	24.6	16.4	1.3
115.770.FY.5	Plate: white / glossy Full flush volume button: carmine red / glossy Partial flush volume button: orange / glossy	Plastic	24.6	16.4	1.3
115.770.LB.5	Plate: white / glossy Full flush volume button: ultramarine blue / glossy Partial flush volume button: coral red / glossy	Plastic	24.6	16.4	1.3
115.770.SX.5	Plate: white / glossy Full flush volume button: ocean blue / glossy Partial flush volume button: light blue / glossy	Plastic	24.6	16.4	1.3


Can be combined with

- Geberit Duofix Bambini element for wall-hung WC for children, 97 cm, with Sigma concealed cistern 12 cm → p. 47
- Geberit Bambini wall-hung WC for children, washdown, Rimfree, for WC seat
- Geberit Bambini floor-standing WC for children, washdown, Rimfree, for WC seat
- Geberit Bambini floor-standing WC for small children, washdown, Rimfree

Accessories

- Geberit DuoFresh module with automatic actuation, for Sigma concealed cistern 12 cm → p. 193
- Geberit DuoFresh module with manual actuation, for Sigma concealed cistern 12 cm → p. 194
- Geberit DuoFresh module with automatic actuation, for Sigma concealed cistern 8 cm → p. 194
- Geberit DuoFresh module with manual actuation, for Sigma concealed cistern 8 cm → p. 195
- Geberit extension set for Sigma, Omega and Kappa concealed cisterns → p. 206

Geberit Sigma01 actuator plate, square, dual flush

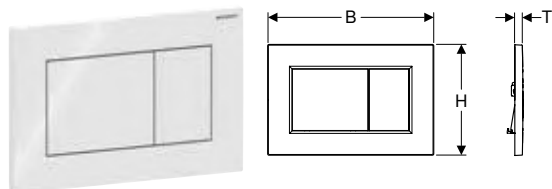

click & scan

Application purposes

- For flush actuation with Sigma concealed cisterns

Technical data

Actuation force (N) max.	20 N
--------------------------	------

Characteristics

- Front actuation
- Sound-absorbing actuator rods, tool-free fast adjustment

Scope of delivery

- Mounting frame
- 2 distance bolts
- 2 actuator rods


Art. no.	Colour / surface	Product material	B [cm]	H [cm]	T [cm]
115.660.11.1	Plate, Button: white / glossy	Plastic	24.6	16.4	1.3
115.660.21.1	Plate, Button: chrome / glossy	Plastic	24.6	16.4	1.3
115.660.DW.1	Plate, Button: black / glossy	Plastic	24.6	16.4	1.3
115.660.JQ.1	Plate, Button: chrome / matt, easy-to-clean coated	Plastic	24.6	16.4	1.3

Accessories

- Geberit DuoFresh module with automatic actuation, for Sigma concealed cistern 12 cm → p. 193
- Geberit DuoFresh module with manual actuation, for Sigma concealed cistern 12 cm → p. 194
- Geberit DuoFresh module with automatic actuation, for Sigma concealed cistern 8 cm → p. 194
- Geberit DuoFresh module with manual actuation, for Sigma concealed cistern 8 cm → p. 195
- Geberit extension set for Sigma, Omega and Kappa concealed cisterns → p. 206



Geberit Sigma10 actuator plate, round, stop-and-go flush

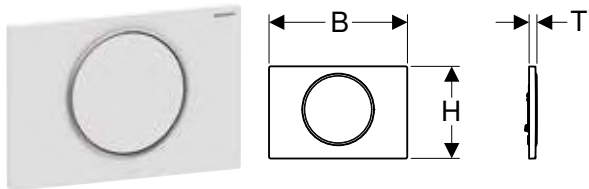

click & scan

Application purposes

- For flush actuation with Sigma concealed cisterns

Technical data

Actuation force (N) max.	20 N
--------------------------	------

Characteristics

- Front actuation
- Sound-absorbing actuator rods, tool-free fast adjustment

Scope of delivery


- Mounting frame
- 2 distance bolts
- Actuator rod
- Stop-and-go lever

Art. no.	Colour / surface	Product material	B	H	T
			[cm]	[cm]	[cm]
115.758.01.5	Plate, Button: white matt / easy-to-clean coated Design ring/-s: white / glossy	Stainless steel	24.6	16.4	1.4
115.758.14.5	Plate, Button: black matt / easy-to-clean coated Design ring: polished	Stainless steel	24.6	16.4	1.4
115.758.16.5	Plate, Button: black matt / easy-to-clean coated Design ring/-s: black / glossy	Stainless steel	24.6	16.4	1.4
115.758.JQ.5	Plate, Button: chrome / matt, easy-to-clean coated Design ring/-s: chrome / glossy	Plastic	24.6	16.4	1.4
115.758.JT.5	Plate, Button: white matt / easy-to-clean coated Design ring: polished	Stainless steel	24.6	16.4	1.4
115.758.KH.5	Plate, Button: chrome / glossy Design ring/-s: chrome / matt	Plastic	24.6	16.4	1.4
115.758.KJ.5	Plate, Button: white / glossy Design ring/-s: chrome / glossy	Plastic	24.6	16.4	1.4
115.758.KK.5	Plate, Button: white / glossy Design ring/-s: gold-coloured / glossy	Plastic	24.6	16.4	1.4
115.758.KM.5	Plate, Button: black / glossy Design ring/-s: chrome / glossy	Plastic	24.6	16.4	1.4
115.758.SN.5	Plate, Button: brushed, easy-to-clean coated Design ring: polished	Stainless steel	24.6	16.4	1.4

Accessories

- Geberit DuoFresh module with automatic actuation, for Sigma concealed cistern 12 cm → p. 193
- Geberit DuoFresh module with manual actuation, for Sigma concealed cistern 12 cm → p. 194
- Geberit DuoFresh module with automatic actuation, for Sigma concealed cistern 8 cm → p. 194
- Geberit DuoFresh module with manual actuation, for Sigma concealed cistern 8 cm → p. 195
- Geberit extension set for Sigma, Omega and Kappa concealed cisterns → p. 206

Geberit Sigma10 actuator plate, round, stop-and-go flush, screwable

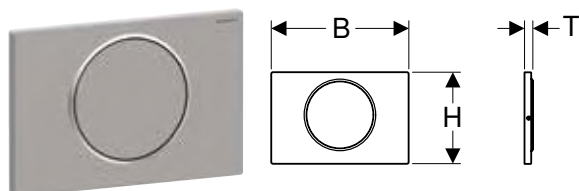

click & scan

Application purposes

- For flush actuation with Sigma concealed cisterns

Technical data

Actuation force (N) max.	20 N
--------------------------	------

Characteristics

- Front actuation
- Sound-absorbing actuator rods, tool-free fast adjustment

Scope of delivery


- Mounting frame
- 2 distance bolts
- Actuator rod
- Stop-and-go lever
- Set of bolts

Art. no.	Colour / surface	Product material	B	H	T
			[cm]	[cm]	[cm]
115.787.SN.5	Plate, Button: brushed, easy-to-clean coated Design ring: polished	Stainless steel	24.6	16.4	1.5

Accessories

- Geberit extension set for Sigma, Omega and Kappa concealed cisterns → p. 206

Geberit Sigma10 actuator plate, square, stop-and-go flush, screwable

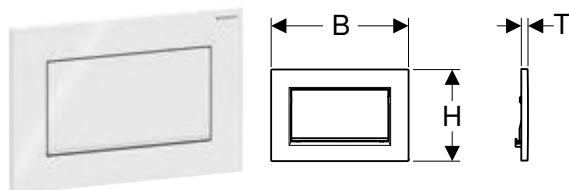

click & scan

Application purposes

- For flush actuation with Sigma concealed cisterns

Technical data

Actuation force (N) max.	20 N
--------------------------	------

Characteristics

- Front actuation
- Sound-absorbing actuator rods, tool-free fast adjustment

Scope of delivery


- Mounting frame
- 2 distance bolts
- Actuator rod
- Stop-and-go lever
- Set of bolts

Art. no.	Colour / surface	Product material	B	H	T
			[cm]	[cm]	[cm]
115.893.14.1	Plate, Button: black matt / easy-to-clean coated Design stripes: chrome / glossy	Die-cast zinc	24.6	16.4	1.2
115.893.45.1	Plate, Button, Design stripes: gold-plated	Die-cast zinc	24.6	16.4	1.2
115.893.JT.1	Plate, Button: white matt / easy-to-clean coated Design stripes: chrome / glossy	Die-cast zinc	24.6	16.4	1.2
115.893.KJ.1	Plate, Button: white / glossy Design stripes: chrome / glossy	Die-cast zinc	24.6	16.4	1.2
115.893.KX.1	Plate, Button: chrome / brushed, easy-to-clean coated Design stripes: chrome / glossy	Die-cast zinc	24.6	16.4	1.2
115.893.KY.1	Plate, Button: chrome / glossy Design stripes: chrome / brushed	Die-cast zinc	24.6	16.4	1.2

Accessories

- Geberit extension set for Sigma, Omega and Kappa concealed cisterns → p. 206

Geberit Sigma20 actuator plate, round, dual flush

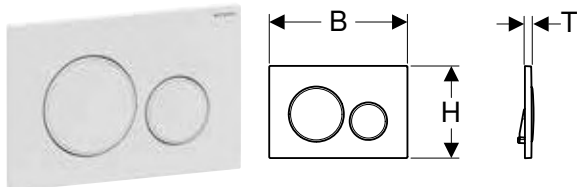

click & scan

Application purposes

- For flush actuation with Sigma concealed cisterns

Technical data

Actuation force (N) max.	20 N
--------------------------	------

Characteristics

- Front actuation
- Sound-absorbing actuator rods, tool-free fast adjustment

Scope of delivery


- Mounting frame
- 2 distance bolts
- 2 actuator rods

Art. no.	Colour / surface	Product material	B	H	T
			[cm]	[cm]	[cm]
115.882.01.1	Plate, Button: white matt / easy-to-clean coated Design ring/-s: white / glossy	Plastic	24.6	16.4	1.2
115.882.11.1	Plate, Button: white / glossy Design ring/-s: white matt	Plastic	24.6	16.4	1.2
115.882.14.1	Plate, Button: black matt / easy-to-clean coated Design ring/-s: chrome / glossy	Plastic	24.6	16.4	1.2
115.882.16.1	Plate, Button: black matt / easy-to-clean coated Design ring/-s: black / glossy	Plastic	24.6	16.4	1.2
115.882.DW.1	Plate, Button: black / glossy Design ring/-s: black matt	Plastic	24.6	16.4	1.2
115.882.JQ.1	Plate, Button: chrome / matt, easy-to-clean coated Design ring/-s: chrome / glossy	Plastic	24.6	16.4	1.2
115.882.JT.1	Plate, Button: white matt / easy-to-clean coated Design ring/-s: chrome / glossy	Plastic	24.6	16.4	1.2
115.882.KH.1	Plate, Button: chrome / glossy Design ring/-s: matt chrome	Plastic	24.6	16.4	1.2
115.882.KJ.1	Plate, Button: white / glossy Design ring/-s: chrome / glossy	Plastic	24.6	16.4	1.2
115.882.KK.1	Plate, Button: white / glossy Design ring/-s: gold-coloured / glossy	Plastic	24.6	16.4	1.2
115.882.KM.1	Plate, Button: black / glossy Design ring/-s: chrome / glossy	Plastic	24.6	16.4	1.2
115.882.SN.1	Plate, Button: brushed, easy-to-clean coated Design ring: polished	Stainless steel	24.6	16.4	1.2

Accessories

- Geberit DuoFresh module with automatic actuation, for Sigma concealed cistern 12 cm → p. 193
- Geberit DuoFresh module with manual actuation, for Sigma concealed cistern 12 cm → p. 194
- Geberit DuoFresh module with automatic actuation, for Sigma concealed cistern 8 cm → p. 194
- Geberit DuoFresh module with manual actuation, for Sigma concealed cistern 8 cm → p. 195
- Geberit extension set for Sigma, Omega and Kappa concealed cisterns → p. 206

Geberit Sigma20 actuator plate, round, dual flush, screwable

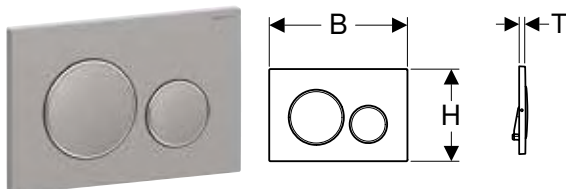

click & scan

Application purposes

- For flush actuation with Sigma concealed cisterns

Technical data

Actuation force (N) max.	20 N
--------------------------	------

Characteristics

- Front actuation
- Sound-absorbing actuator rods, tool-free fast adjustment

Scope of delivery


- Mounting frame
- 2 distance bolts
- 2 actuator rods
- Set of bolts

Art. no.	Colour / surface	Product material	B	H	T
			[cm]	[cm]	[cm]
115.889.SN.1	Plate, Button: brushed, easy-to-clean coated Design ring: polished	Stainless steel	24.6	16.4	1.2

Accessories

- Geberit extension set for Sigma, Omega and Kappa concealed cisterns → p. 206

Geberit Sigma20 actuator plate, square, dual flush

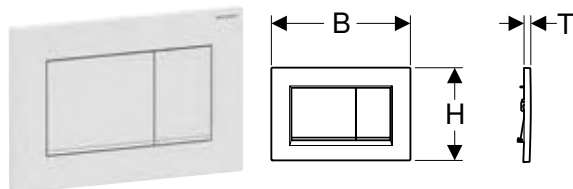

click & scan

Application purposes

- For flush actuation with Sigma concealed cisterns

Technical data

Actuation force (N) max.	20 N
--------------------------	------

Characteristics

- Front actuation
- Sound-absorbing actuator rods, tool-free fast adjustment

Scope of delivery


- Mounting frame
- 2 distance bolts
- 2 actuator rods

Art. no.	Colour / surface	Product material	B	H	T
			[cm]	[cm]	[cm]
115.883.01.1	Plate, Button: white matt / easy-to-clean coated Design stripes: white / glossy	Plastic	24.6	16.4	1.2
115.883.11.1	Plate, Button: white / glossy Design stripes: white matt	Plastic	24.6	16.4	1.2
115.883.14.1	Plate, Button: black matt / easy-to-clean coated Design stripes: chrome / glossy	Plastic	24.6	16.4	1.2
115.883.16.1	Plate, Button: black matt / easy-to-clean coated Design stripes: black / glossy	Plastic	24.6	16.4	1.2
115.883.DW.1	Plate, Button: black / glossy Design stripes: black matt	Plastic	24.6	16.4	1.2
115.883.JQ.1	Plate, Button: chrome / matt, easy-to-clean coated Design stripes: chrome / glossy	Plastic	24.6	16.4	1.2
115.883.JT.1	Plate, Button: white matt / easy-to-clean coated Design stripes: chrome / glossy	Plastic	24.6	16.4	1.2
115.883.KH.1	Plate, Button: chrome / glossy Design stripes: matt chrome	Plastic	24.6	16.4	1.2
115.883.KJ.1	Plate, Button: white / glossy Design stripes: chrome / glossy	Plastic	24.6	16.4	1.2
115.883.KK.1	Plate, Button: white / glossy Design stripes: gold-coloured / glossy	Plastic	24.6	16.4	1.2
115.883.KM.1	Plate, Button: black / glossy Design stripes: chrome / glossy	Plastic	24.6	16.4	1.2

Accessories

- Geberit extension set for Sigma, Omega and Kappa concealed cisterns → p. 206
- Geberit DuoFresh module with automatic actuation, for Sigma concealed cistern 12 cm → p. 193
- Geberit DuoFresh module with manual actuation, for Sigma concealed cistern 12 cm → p. 194
- Geberit DuoFresh module with automatic actuation, for Sigma concealed cistern 8 cm → p. 194
- Geberit DuoFresh module with manual actuation, for Sigma concealed cistern 8 cm → p. 195

Geberit Sigma40 actuator plate, round, dual flush

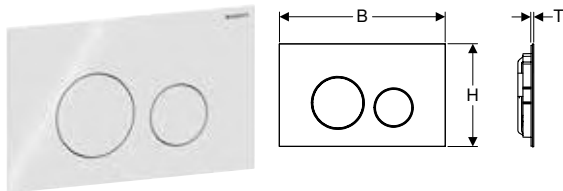

click & scan

Application purposes

- For flush actuation with Sigma concealed cisterns
- For covering thicknesses ≥ 15 mm

Characteristics

- Front actuation
- Sound-absorbing actuator rods, tool-free fast adjustment

Scope of delivery

- Mounting frame
- 2 distance bolts
- 2 actuator rods

Art. no.	Colour / surface	Product material	B	H	T
			[cm]	[cm]	[cm]
115.628.14.1	Plate, Button: black matt / easy-to-clean coated	Stainless steel	24.6	15.2	0.4
115.628.FW.1	Plate, Button: brushed, easy-to-clean coated	Stainless steel	24.6	15.2	0.4
115.628.JK.1	Plate: lava Button: lava / glossy glass Frame: glossy glass	Glass	24.6	15.2	0.6
115.628.JL.1	Plate, Button: sand grey / glossy glass	Glass	24.6	15.2	0.6
115.628.JT.1	Plate, Button: white matt / easy-to-clean coated	Stainless steel	24.6	15.2	0.4
115.628.QB.1	Plate, Button: red gold / brushed, easy-to-clean coated	Stainless steel	24.6	15.2	0.4
115.628.QD.1	Plate, Button: black chrome / brushed, easy-to-clean coated	Stainless steel	24.6	15.2	0.4
115.628.QF.1	Plate, Button: brass-coloured / brushed, easy-to-clean coated	Stainless steel	24.6	15.2	0.4
115.628.SI.1	Plate, Button: white / glossy glass	Glass	24.6	15.2	0.6
115.628.SJ.1	Plate, Button: black / glossy glass	Glass	24.6	15.2	0.6
115.628.ID.1	N Plate, Button: nickel / brushed, easy-to-clean coated	Stainless steel	24.6	15.2	0.4


N: New, available as of July 2026

Accessories

- Geberit extension set for Sigma, Omega and Kappa concealed cisterns → p. 206

New

Geberit Sigma40 actuator plate, round, dual flush, customised finish

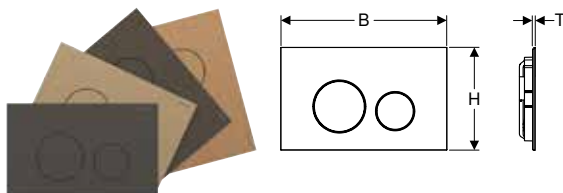

click & scan

Application purposes

- For flush actuation with Sigma concealed cisterns
- For covering thicknesses ≥ 15 mm

Characteristics

- Front actuation
- Sound-absorbing actuator rods, tool-free fast adjustment

Scope of delivery

- Mounting frame
- 2 distance bolts
- 2 actuator rods


Art. no.	Colour / surface	Product material	B	H	T
			[cm]	[cm]	[cm]
004.610.00.2*	galvanized	Stainless steel	24.6	15.2	0.4
004.610.00.3*	galvanized and varnished	Stainless steel	24.6	15.2	0.4

Available as of April 2026; * Order-based production

Accessories

- Geberit extension set for Sigma, Omega and Kappa concealed cisterns → p. 206

Geberit Sigma40 actuator plate, square, dual flush

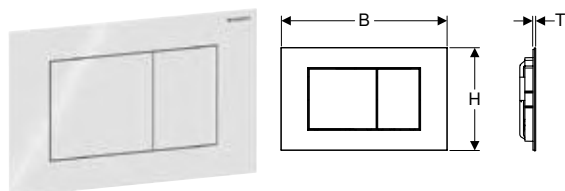

click & scan

Application purposes

- For flush actuation with Sigma concealed cisterns
- For covering thicknesses ≥ 15 mm

Characteristics

- Front actuation
- Sound-absorbing actuator rods, tool-free fast adjustment

Scope of delivery

- Mounting frame
- 2 distance bolts
- 2 actuator rods

Art. no.	Colour / surface	Product material	B	H	T
			[cm]	[cm]	[cm]
115.629.14.1	Plate, Button: black matt / easy-to-clean coated	Stainless steel	24.6	15.2	0.4
115.629.FW.1	Plate, Button: brushed, easy-to-clean coated	Stainless steel	24.6	15.2	0.4
115.629.JK.1	Plate, Button: lava / glossy glass	Glass	24.6	15.2	0.6
115.629.JL.1	Plate, Button: sand grey / glossy glass	Glass	24.6	15.2	0.6
115.629.JT.1	Plate, Button: white matt / easy-to-clean coated	Stainless steel	24.6	15.2	0.4
115.629.QB.1	Plate, Button: red gold / brushed, easy-to-clean coated	Stainless steel	24.6	15.2	0.4
115.629.QD.1	Plate, Button: black chrome / brushed, easy-to-clean coated	Stainless steel	24.6	15.2	0.4
115.629.QF.1	Plate, Button: brass-coloured / brushed, easy-to-clean coated	Stainless steel	24.6	15.2	0.4
115.629.SI.1	Plate, Button: white / glossy glass	Glass	24.6	15.2	0.6
115.629.SJ.1	Plate, Button: black / glossy glass	Glass	24.6	15.2	0.6
115.629.ID.1	N Plate, Button: nickel / brushed, easy-to-clean coated	Stainless steel	24.6	15.2	0.4


N: New, available as of July 2026

Accessories

- Geberit extension set for Sigma, Omega and Kappa concealed cisterns → p. 206

New

Geberit Sigma40 actuator plate, square, dual flush, customised finish

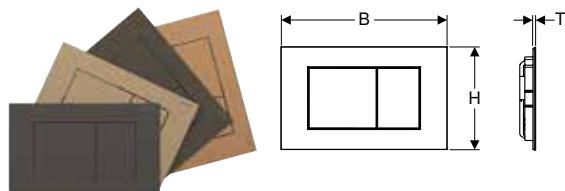

click & scan

Application purposes

- For flush actuation with Sigma concealed cisterns
- For covering thicknesses ≥ 15 mm

Characteristics

- Front actuation
- Sound-absorbing actuator rods, tool-free fast adjustment

Scope of delivery

- Mounting frame
- 2 distance bolts
- 2 actuator rods


Art. no.	Colour / surface	Product material	B	H	T
			[cm]	[cm]	[cm]
004.611.00.2 *	galvanized	Stainless steel	24.6	15.2	0.4
004.611.00.3 *	galvanized and varnished	Stainless steel	24.6	15.2	0.4

Available as of April 2026; * Order-based production

Accessories

- Geberit extension set for Sigma, Omega and Kappa concealed cisterns → p. 206

Geberit Sigma50 actuator plate, round, dual flush, metal colour chrome-plated

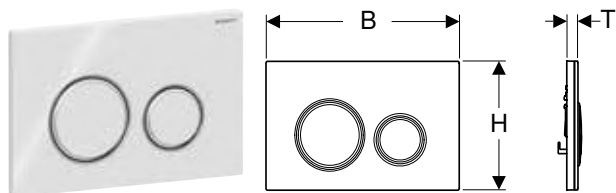

click & scan

Application purposes

- For flush actuation with Sigma concealed cisterns

Technical data

Actuation force (N) max.	20 N
--------------------------	------

Characteristics

- Front actuation
- Sound-absorbing actuator rods, tool-free fast adjustment

Scope of delivery

- Mounting frame
- 2 distance bolts
- 2 actuator rods

Art. no.	Colour / surface	Product material	B	H	T
			[cm]	[cm]	[cm]
115.884.00.1	Base plate, Design ring/-s: chrome / glossy Cover plate, Button: customised	Die-cast zinc	24.6	16.4	1
115.884.JK.1	Base plate, Design ring/-s: chrome / glossy Cover plate, Button: lava / glossy glass	Die-cast zinc / glass	24.6	16.4	1.4
115.884.JL.1	Base plate, Design ring/-s: chrome / glossy Cover plate, Button: sand grey / glossy glass	Die-cast zinc / glass	24.6	16.4	1.4
115.884.JM.1	Base plate, Design ring/-s: chrome / glossy Cover plate, Button: Mustang slate	Die-cast zinc / slate (natural product)	24.6	16.4	1.4
115.884.JV.1	Base plate, Design ring/-s: chrome / glossy Cover plate, Button: concrete look	Die-cast zinc / ceramic	24.6	16.4	1.4
115.884.JX.1	Base plate, Design ring/-s: chrome / glossy Cover plate, Button: black walnut	Die-cast zinc / wood (natural product)	24.6	16.4	1.4
115.884.SI.1	Base plate, Design ring/-s: chrome / glossy Cover plate, Button: white / glossy glass	Die-cast zinc / glass	24.6	16.4	1.4
115.884.SJ.1	Base plate, Design ring/-s: chrome / glossy Cover plate, Button: black / glossy glass	Die-cast zinc / glass	24.6	16.4	1.4


Accessories

- Geberit DuoFresh module with automatic actuation, for Sigma concealed cistern 12 cm → p. 193
- Geberit DuoFresh module with manual actuation, for Sigma concealed cistern 12 cm → p. 194
- Geberit DuoFresh module with automatic actuation, for Sigma concealed cistern 8 cm → p. 194
- Geberit DuoFresh module with manual actuation, for Sigma concealed cistern 8 cm → p. 195
- Geberit extension set for Sigma, Omega and Kappa concealed cisterns → p. 206



- Customised solution without inlay, must be sourced locally
- The colour and structure of natural products may vary
- Lead time: 6 weeks for art. nos. 115.884.JV.1 and 115.884.JX.1

Geberit Sigma50 actuator plate, round, dual flush, metal colour red gold

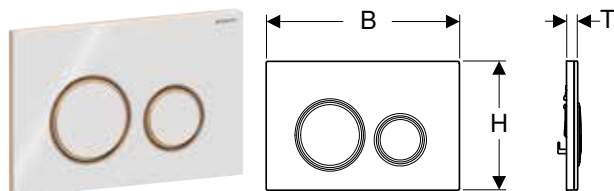

click & scan

Application purposes

- For flush actuation with Sigma concealed cisterns

Technical data

Actuation force (N) max.	20 N
--------------------------	------

Characteristics

- Front actuation
- Mounting plate, easy-to-clean coated
- Sound-absorbing actuator rods, tool-free fast adjustment

Scope of delivery

- Mounting frame
- 2 distance bolts
- 2 actuator rods

Art. no.	Colour / surface	Product material	B	H	T
			[cm]	[cm]	[cm]
115.650.00.1	Base plate: red gold / brushed, easy-to-clean coated Cover plate, Button: customised Design ring/-s: red gold	Die-cast zinc	24.6	16.4	1
115.650.JM.1	Base plate: red gold / brushed, easy-to-clean coated Cover plate, Button: Mustang slate Design ring/-s: red gold	Die-cast zinc / slate (natural product)	24.6	16.4	1.4
115.650.JV.1	Base plate: red gold / brushed, easy-to-clean coated Cover plate, Button: concrete look Design ring/-s: red gold	Die-cast zinc / ceramic	24.6	16.4	1.4
115.650.JX.1	Base plate: red gold / brushed, easy-to-clean coated Cover plate, Button: black walnut Design ring/-s: red gold	Die-cast zinc / wood (natural product)	24.6	16.4	1.4
115.650.SI.1	Base plate: red gold / brushed, easy-to-clean coated Cover plate, Button: white / glossy glass Design ring/-s: red gold	Die-cast zinc / glass	24.6	16.4	1.4
115.650.SJ.1	Base plate: red gold / brushed, easy-to-clean coated Cover plate, Button: black / glossy glass Design ring/-s: red gold	Die-cast zinc / glass	24.6	16.4	1.4

Accessories


- Geberit DuoFresh module with automatic actuation, for Sigma concealed cistern 12 cm → p. 193
- Geberit DuoFresh module with manual actuation, for Sigma concealed cistern 12 cm → p. 194
- Geberit DuoFresh module with automatic actuation, for Sigma concealed cistern 8 cm → p. 194
- Geberit DuoFresh module with manual actuation, for Sigma concealed cistern 8 cm → p. 195
- Geberit extension set for Sigma, Omega and Kappa concealed cisterns → p. 206



- The colour and structure of natural products may vary
- Lead time: 6 weeks



Geberit Sigma50 actuator plate, round, dual flush, metal colour black chrome

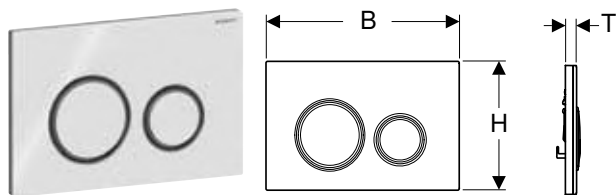

click & scan

Application purposes

- For flush actuation with Sigma concealed cisterns

Technical data

Actuation force (N) max.	20 N
--------------------------	------

Characteristics

- Front actuation
- Mounting plate, easy-to-clean coated
- Sound-absorbing actuator rods, tool-free fast adjustment

Scope of delivery

- Mounting frame
- 2 distance bolts
- 2 actuator rods

Art. no.	Colour / surface	Product material	B	H	T
			[cm]	[cm]	[cm]
115.651.00.1	Base plate: black chrome / brushed, easy-to-clean coated Cover plate, Button: customised Design ring/-s: black chrome	Die-cast zinc	24.6	16.4	1
115.651.JM.1	Base plate: black chrome / brushed, easy-to-clean coated Cover plate, Button: Mustang slate Design ring/-s: black chrome	Die-cast zinc / slate (natural product)	24.6	16.4	1.4
115.651.JV.1	Base plate: black chrome / brushed, easy-to-clean coated Cover plate, Button: concrete look Design ring/-s: black chrome	Die-cast zinc / ceramic	24.6	16.4	1.4
115.651.JX.1	Base plate: black chrome / brushed, easy-to-clean coated Cover plate, Button: black walnut Design ring/-s: black chrome	Die-cast zinc / wood (natural product)	24.6	16.4	1.4
115.651.SI.1	Base plate: black chrome / brushed, easy-to-clean coated Cover plate, Button: white / glossy glass Design ring/-s: black chrome	Die-cast zinc / glass	24.6	16.4	1.4
115.651.SJ.1	Base plate: black chrome / brushed, easy-to-clean coated Cover plate, Button: black / glossy glass Design ring/-s: black chrome	Die-cast zinc / glass	24.6	16.4	1.4


Accessories

- Geberit DuoFresh module with automatic actuation, for Sigma concealed cistern 12 cm → p. 193
- Geberit DuoFresh module with manual actuation, for Sigma concealed cistern 12 cm → p. 194
- Geberit DuoFresh module with automatic actuation, for Sigma concealed cistern 8 cm → p. 194
- Geberit DuoFresh module with manual actuation, for Sigma concealed cistern 8 cm → p. 195
- Geberit extension set for Sigma, Omega and Kappa concealed cisterns → p. 206



- The colour and structure of natural products may vary
- Lead time: 6 weeks

Geberit Sigma50 actuator plate, round, dual flush, metal colour brass-coloured

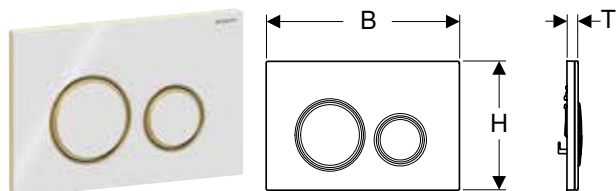

click & scan

Application purposes

- For flush actuation with Sigma concealed cisterns

Technical data

Actuation force (N) max.	20 N
--------------------------	------

Characteristics

- Front actuation
- Mounting plate, easy-to-clean coated
- Sound-absorbing actuator rods, tool-free fast adjustment

Scope of delivery

- Mounting frame
- 2 distance bolts
- 2 actuator rods

Art. no.	Colour / surface	Product material	B	H	T
			[cm]	[cm]	[cm]
115.652.00.1	Base plate: brass-coloured / brushed, easy-to-clean coated Cover plate, Button: customised Design ring/-s: brass-coloured	Die-cast zinc	24.6	16.4	1
115.652.JM.1	Base plate: brass-coloured / brushed, easy-to-clean coated Cover plate, Button: Mustang slate Design ring/-s: brass-coloured	Die-cast zinc / slate (natural product)	24.6	16.4	1.4
115.652.JV.1	Base plate: brass-coloured / brushed, easy-to-clean coated Cover plate, Button: concrete look Design ring/-s: brass-coloured	Die-cast zinc / ceramic	24.6	16.4	1.4
115.652.JX.1	Base plate: brass-coloured / brushed, easy-to-clean coated Cover plate, Button: black walnut Design ring/-s: brass-coloured	Die-cast zinc / wood (natural product)	24.6	16.4	1.4
115.652.SI.1	Base plate: brass-coloured / brushed, easy-to-clean coated Cover plate, Button: white / glossy glass Design ring/-s: brass-coloured	Die-cast zinc / glass	24.6	16.4	1.4
115.652.SJ.1	Base plate: brass-coloured / brushed, easy-to-clean coated Cover plate, Button: black / glossy glass Design ring/-s: brass-coloured	Die-cast zinc / glass	24.6	16.4	1.4

Accessories


- Geberit DuoFresh module with automatic actuation, for Sigma concealed cistern 12 cm → p. 193
- Geberit DuoFresh module with manual actuation, for Sigma concealed cistern 12 cm → p. 194
- Geberit DuoFresh module with automatic actuation, for Sigma concealed cistern 8 cm → p. 194
- Geberit DuoFresh module with manual actuation, for Sigma concealed cistern 8 cm → p. 195
- Geberit extension set for Sigma, Omega and Kappa concealed cisterns → p. 206



- The colour and structure of natural products may vary
- Lead time: 6 weeks



Geberit Sigma50 actuator plate, square, dual flush, metal colour chrome-plated

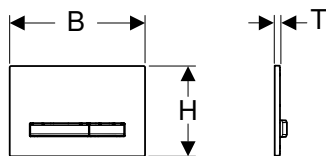

click & scan

Application purposes

- For flush actuation with Sigma concealed cisterns

Technical data

Actuation force (N) max.	20 N
--------------------------	------

Characteristics

- Front actuation
- Easy-to-clean coated actuator buttons
- Sound-absorbing actuator rods, tool-free fast adjustment

Scope of delivery

- Mounting frame
- 2 distance bolts
- 2 actuator rods

Art. no.	Colour / surface	Product material	B	H	T
			[cm]	[cm]	[cm]
115.788.00.2	Base plate: chrome / glossy Cover plate: customised Button: chrome / brushed, easy-to-clean coated	Die-cast zinc	24.6	16.4	1
115.788.11.2	Base plate: chrome / glossy Cover plate: white / glossy Button: chrome / brushed, easy-to-clean coated	Die-cast zinc / plastic	24.6	16.4	1.3
115.788.21.2	Base plate, Cover plate: chrome / glossy Button: chrome / brushed, easy-to-clean coated	Die-cast zinc / brass	24.6	16.4	1.2
115.788.DW.2	Base plate: chrome / glossy Cover plate: black / glossy Button: chrome / brushed, easy-to-clean coated	Die-cast zinc / plastic	24.6	16.4	1.3
115.788.GH.2	Base plate, Cover plate, Button: chrome / brushed, easy-to-clean coated	Die-cast zinc / brass	24.6	16.4	1.2
115.788.JK.2	Base plate: chrome / glossy Cover plate: lava / glossy glass Button: chrome / brushed, easy-to-clean coated	Die-cast zinc / glass	24.6	16.4	1.4
115.788.JL.2	Base plate: chrome / glossy Cover plate: sand grey / glossy glass Button: chrome / brushed, easy-to-clean coated	Die-cast zinc / glass	24.6	16.4	1.4
115.788.JM.2	Base plate: chrome / glossy Cover plate: Mustang slate Button: chrome / brushed, easy-to-clean coated	Die-cast zinc / slate (natural product)	24.6	16.4	1.4
115.788.JV.2	Base plate: chrome / glossy Cover plate: concrete look Button: chrome / brushed, easy-to-clean coated	Die-cast zinc / ceramic	24.6	16.4	1.4
115.788.JX.2	Base plate: chrome / glossy Cover plate: black walnut Button: chrome / brushed, easy-to-clean coated	Die-cast zinc / wood (natural product)	24.6	16.4	1.4
115.788.SD.2	Base plate: chrome / glossy Cover plate: reflective smoked glass Button: chrome / brushed, easy-to-clean coated	Die-cast zinc / glass	24.6	16.4	1.4


Accessories

- Geberit extension set for Sigma, Omega and Kappa concealed cisterns → p. 206
- Geberit DuoFresh module with automatic actuation, for Sigma concealed cistern 12 cm → p. 193
- Geberit DuoFresh module with manual actuation, for Sigma concealed cistern 12 cm → p. 194
- Geberit DuoFresh module with automatic actuation, for Sigma concealed cistern 8 cm → p. 194
- Geberit DuoFresh module with manual actuation, for Sigma concealed cistern 8 cm → p. 195



- The colour and structure of natural products may vary
- Lead time: 6 weeks for art. nos. 115.788.JV.2 and 115.788.JX.2

Geberit Sigma50 actuator plate, square, dual flush, metal colour red gold

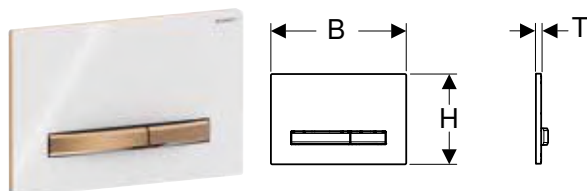

click & scan

Application purposes

- For flush actuation with Sigma concealed cisterns

Technical data

Actuation force (N) max.	20 N
--------------------------	------

Characteristics

- Front actuation
- Actuator buttons and mounting plate, easy-to-clean coated
- Sound-absorbing actuator rods, tool-free fast adjustment

Scope of delivery

- Mounting frame
- 2 distance bolts
- 2 actuator rods

Art. no.	Colour / surface	Product material	B	H	T
			[cm]	[cm]	[cm]
115.670.00.2	Base plate, Button: red gold / brushed, easy-to-clean coated Cover plate: customised	Die-cast zinc	24.6	16.4	1
115.670.11.2	Base plate, Button: red gold / brushed, easy-to-clean coated Cover plate: white / glossy	Die-cast zinc / plastic	24.6	16.4	1.3
115.670.DW.2	Base plate, Button: red gold / brushed, easy-to-clean coated Cover plate: black / glossy	Die-cast zinc / plastic	24.6	16.4	1.3
115.670.JM.2	Base plate, Button: red gold / brushed, easy-to-clean coated Cover plate: Mustang slate	Die-cast zinc / slate (natural product)	24.6	16.4	1.4
115.670.JV.2	Base plate, Button: red gold / brushed, easy-to-clean coated Cover plate: concrete look	Die-cast zinc / ceramic	24.6	16.4	1.4
115.670.JX.2	Base plate, Button: red gold / brushed, easy-to-clean coated Cover plate: black walnut	Die-cast zinc / wood (natural product)	24.6	16.4	1.4
115.670.QB.2	Base plate, Cover plate, Button: red gold / brushed, easy-to-clean coated	Die-cast zinc / brass	24.6	16.4	1.2

Accessories


- Geberit extension set for Sigma, Omega and Kappa concealed cisterns → p. 206
- Geberit DuoFresh module with automatic actuation, for Sigma concealed cistern 12 cm → p. 193
- Geberit DuoFresh module with manual actuation, for Sigma concealed cistern 12 cm → p. 194
- Geberit DuoFresh module with automatic actuation, for Sigma concealed cistern 8 cm → p. 194
- Geberit DuoFresh module with manual actuation, for Sigma concealed cistern 8 cm → p. 195



- The colour and structure of natural products may vary
- Lead time: 6 weeks



Geberit Sigma50 actuator plate, square, dual flush, metal colour black chrome

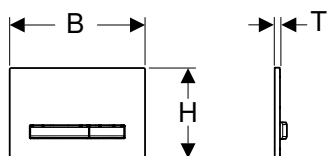

click & scan

Application purposes

- For flush actuation with Sigma concealed cisterns

Technical data

Actuation force (N) max.	20 N
--------------------------	------

Characteristics

- Front actuation
- Actuator buttons and mounting plate, easy-to-clean coated
- Sound-absorbing actuator rods, tool-free fast adjustment

Scope of delivery

- Mounting frame
- 2 distance bolts
- 2 actuator rods

Art. no.	Colour / surface	Product material	B	H	T
			[cm]	[cm]	[cm]
115.671.00.2	Base plate, Button: black chrome / brushed, easy-to-clean coated Cover plate: customised	Die-cast zinc	24.6	16.4	1
115.671.11.2	Base plate, Button: black chrome / brushed, easy-to-clean coated Cover plate: white / glossy	Die-cast zinc / plastic	24.6	16.4	1.3
115.671.DW.2	Base plate, Button: black chrome / brushed, easy-to-clean coated Cover plate: black / glossy	Die-cast zinc / plastic	24.6	16.4	1.3
115.671.JM.2	Base plate, Button: black chrome / brushed, easy-to-clean coated Cover plate: Mustang slate	Die-cast zinc / slate (natural product)	24.6	16.4	1.4
115.671.JV.2	Base plate, Button: black chrome / brushed, easy-to-clean coated Cover plate: concrete look	Die-cast zinc / ceramic	24.6	16.4	1.4
115.671.JX.2	Base plate, Button: black chrome / brushed, easy-to-clean coated Cover plate: black walnut	Die-cast zinc / wood (natural product)	24.6	16.4	1.4
115.671.QD.2	Base plate, Cover plate, Button: black chrome / brushed, easy-to-clean coated	Die-cast zinc / brass	24.6	16.4	1.2


Accessories

- Geberit extension set for Sigma, Omega and Kappa concealed cisterns → p. 206
- Geberit DuoFresh module with automatic actuation, for Sigma concealed cistern 12 cm → p. 193
- Geberit DuoFresh module with manual actuation, for Sigma concealed cistern 12 cm → p. 194
- Geberit DuoFresh module with automatic actuation, for Sigma concealed cistern 8 cm → p. 194
- Geberit DuoFresh module with manual actuation, for Sigma concealed cistern 8 cm → p. 195



- The colour and structure of natural products may vary
- Lead time: 6 weeks

Geberit Sigma50 actuator plate, square, dual flush, metal colour brass-coloured

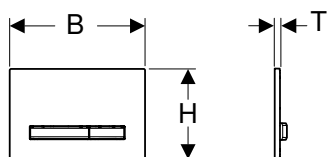

click & scan

Application purposes

- For flush actuation with Sigma concealed cisterns

Technical data

Actuation force (N) max.	20 N
--------------------------	------

Characteristics

- Front actuation
- Actuator buttons and mounting plate, easy-to-clean coated
- Sound-absorbing actuator rods, tool-free fast adjustment

Scope of delivery

- Mounting frame
- 2 distance bolts
- 2 actuator rods

Art. no.	Colour / surface	Product material	B	H	T
			[cm]	[cm]	[cm]
115.672.00.2	Base plate, Button: brass-coloured / brushed, easy-to-clean coated Cover plate: customised	Die-cast zinc	24.6	16.4	1
115.672.11.2	Base plate, Button: brass-coloured / brushed, easy-to-clean coated Cover plate: white / glossy	Die-cast zinc / plastic	24.6	16.4	1.3
115.672.DW.2	Base plate, Button: brass-coloured / brushed, easy-to-clean coated Cover plate: black / glossy	Die-cast zinc / plastic	24.6	16.4	1.3

Art. no.	Colour / surface	Product material	B	H	T
			[cm]	[cm]	[cm]
115.672.JM.2	Base plate, Button: brass-coloured / brushed, easy-to-clean coated Cover plate: Mustang slate	Die-cast zinc / slate (natural product)	24.6	16.4	1.4
115.672.JV.2	Base plate, Button: brass-coloured / brushed, easy-to-clean coated Cover plate: concrete look	Die-cast zinc / ceramic	24.6	16.4	1.4
115.672.JX.2	Base plate, Button: brass-coloured / brushed, easy-to-clean coated Cover plate: black walnut	Die-cast zinc / wood (natural product)	24.6	16.4	1.4
115.672.QF.2	Base plate, Cover plate, Button: brass-coloured / brushed, easy-to-clean coated	Die-cast zinc / brass	24.6	16.4	1.2


Accessories

- Geberit extension set for Sigma, Omega and Kappa concealed cisterns → p. 206
- Geberit DuoFresh module with automatic actuation, for Sigma concealed cistern 12 cm → p. 193
- Geberit DuoFresh module with manual actuation, for Sigma concealed cistern 12 cm → p. 194
- Geberit DuoFresh module with automatic actuation, for Sigma concealed cistern 8 cm → p. 194
- Geberit DuoFresh module with manual actuation, for Sigma concealed cistern 8 cm → p. 195



- The colour and structure of natural products may vary
- Lead time: 6 weeks

Geberit Sigma50 actuator plate, square, dual flush, customised

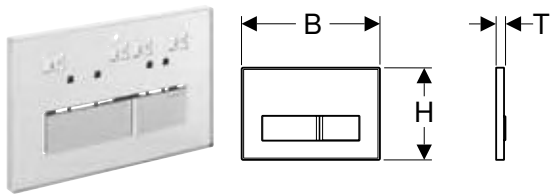

Application purposes

- For flush actuation with Sigma concealed cisterns
- For individual bathroom design

Technical data

Actuation force (N) max.	20 N
--------------------------	------

Characteristics

- Surface is provided and completed by customer
- Front actuation
- Easy-to-clean coated actuator buttons
- Sound-absorbing actuator rods, tool-free fast adjustment

Scope of delivery

- Mounting frame
- 2 distance bolts
- 2 actuator rods

Art. no.	Colour / surface	Product material	B	H	T
			[cm]	[cm]	[cm]
115.788.00.1	Base plate: chrome / glossy Cover plate: customised Button: chrome / brushed, easy-to-clean coated	Die-cast zinc	24.6	16.4	1.4

Accessories

- Geberit extension set for Sigma, Omega and Kappa concealed cisterns → p. 206
- Geberit DuoFresh module with automatic actuation, for Sigma concealed cistern 12 cm → p. 193
- Geberit DuoFresh module with manual actuation, for Sigma concealed cistern 12 cm → p. 194
- Geberit DuoFresh module with automatic actuation, for Sigma concealed cistern 8 cm → p. 194
- Geberit DuoFresh module with manual actuation, for Sigma concealed cistern 8 cm → p. 195



- Customised solution without inlay, must be sourced locally

Installation set, surface-even, for Geberit element for wall-hung WC, with Sigma concealed cistern 12 cm



click & scan

Application purposes

- For surface-even installation of Geberit Sigma60 actuator plates
- For surface-even installation of Geberit Sigma cover plates


Scope of delivery

- 2 fixing brackets
- 2 brackets
- Protection box

Art. no.

243.168.00.1

Geberit Sigma70 actuator plate, square, dual flush

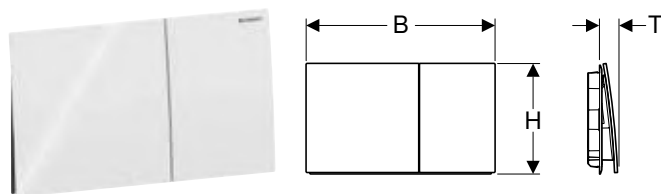

click & scan

Application purposes

- For flush actuation with Sigma concealed cisterns

Characteristics

- Front actuation
- Sound-absorbing actuator rods, tool-free fast adjustment

Scope of delivery

- Mounting frame
- 2 distance bolts
- 2 actuator rods


Art. no.	Colour / surface	Product material	B [cm]	H [cm]	T [cm]
115.622.14.1	Button: black matt / easy-to-clean coated	Stainless steel	25	14.6	2.3
115.622.FW.1	Button: brushed, easy-to-clean coated	Stainless steel	25	14.6	2.3
115.622.JK.1	Button: lava / glossy glass	Glass	25	14.6	2.5
115.622.JL.1	Button: sand grey / glossy glass	Glass	25	14.6	2.5
115.622.JT.1	Button: white matt / easy-to-clean coated	Stainless steel	25	14.6	2.3
115.622.QB.1	Button: red gold / brushed, easy-to-clean coated	Stainless steel	25	14.6	2.3
115.622.QD.1	Button: black chrome / brushed, easy-to-clean coated	Stainless steel	25	14.6	2.3
115.622.QF.1	Button: brass-coloured / brushed, easy-to-clean coated	Stainless steel	25	14.6	2.3
115.622.SI.1	Button: white / glossy glass	Glass	25	14.6	2.5
115.622.SJ.1	Button: black / glossy glass	Glass	25	14.6	2.5
115.622.ID.1	N Button: nickel / brushed, easy-to-clean coated	Stainless steel	25	14.6	2.3

N: New, available as of July 2026

Accessories

- Geberit cover frame for Sigma70 actuator plate, square → p. 192
- Geberit extension set for Sigma, Omega and Kappa concealed cisterns → p. 206

Geberit cover frame for Sigma70 actuator plate, square

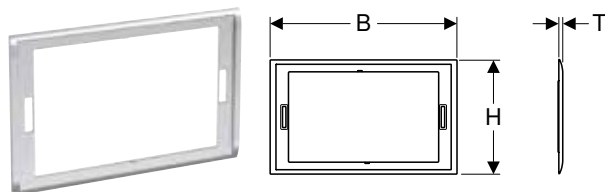

click & scan

Application purposes

- For Geberit Sigma70 actuator plates
- For covering unfinished tile edges

Art. no.	Colour / surface	Product material	B [cm]	H [cm]	T [cm]
115.623.21.1	chrome / Glossy	Die-cast zinc	25.7	15.7	0.6
115.623.QC.1	black chrome / Polished	Die-cast zinc	25.7	15.7	0.6

Geberit DuoFresh module with automatic actuation, for Sigma concealed cistern 12 cm



click & scan

Application purposes

- For Sigma concealed cisterns 12 cm (from year of manufacture 2008)
- For direct odour extraction from WC ceramic appliances
- For Sigma01 actuator plates
- For Sigma10 actuator plates
- For Sigma20 actuator plates
- For Sigma50 actuator plates
- Not suitable for Geberit Duofix elements for wall-hung WC, corner construction

Characteristics

- Front actuation
- Odour extraction unit with filtration, integrated in the concealed cistern
- Extraction unit can be mounted without tools
- Compatible with Geberit Home App
- Odour extraction unit with user recognition can be activated
- Odour neutralisation with ceramic honeycomb filter
- Activation of the orientation light via brightness sensor

Scope of delivery

- Mounting frame with swivelling mechanism
- Protection plate
- Extraction unit with centrifugal fan
- Ceramic honeycomb filter
- Plug for conduit pipe

Technical data

Degree of protection	IPX4
Operating voltage	12 V DC
Power consumption in standby mode max.	0.5 W

Art. no.	Colour / surface	Protection class	Power consumption [W]
115.980.21.2	chrome / glossy	III	7
115.980.BZ.2	anthracite	III	7

To order additionally

- Geberit 230 V / 12 V / 50 Hz power supply unit set with 1.8 m voltage supply cable for outlet mounting box → p. 206

Can be combined with

- Geberit set of Power & Connect box and power supply unit for element for wall-hung WC → p. 250

Accessories

- Geberit combination outlet mounting box → p. 195
- Installation set with flush-mounting box, for Geberit DuoFresh module → p. 251



Geberit DuoFresh module with manual actuation, for Sigma concealed cistern 12 cm



click & scan

Application purposes

- For Sigma concealed cisterns 12 cm (from year of manufacture 2008)
- For direct odour extraction from WC ceramic appliances
- For Sigma01 actuator plates
- For Sigma10 actuator plates
- For Sigma20 actuator plates
- For Sigma50 actuator plates
- Not suitable for Geberit Duofix elements for wall-hung WC, corner construction

Characteristics

- Front actuation
- Odour extraction unit with filtration, integrated in the concealed cistern
- Extraction unit can be mounted without tools
- Compatible with Geberit Home App
- Odour neutralisation with ceramic honeycomb filter

Scope of delivery

- Mounting frame with swivelling mechanism
- Protection plate
- Extraction unit with centrifugal fan
- Ceramic honeycomb filter
- Plug for conduit pipe

Technical data

Degree of protection	IPX4
Operating voltage	12 V DC
Power consumption in standby mode max.	0.5 W

Art. no.	Colour / surface	Protection class	Power consumption [W]
115.995.21.2	chrome / glossy	III	7
115.995.BZ.2	anthracite	III	7

To order additionally

- Geberit 230 V / 12 V / 50 Hz power supply unit set with 1.8 m voltage supply cable for outlet mounting box → p. 206

Can be combined with

- Geberit set of Power & Connect box and power supply unit for element for wall-hung WC → p. 250

Accessories

- Geberit combination outlet mounting box → p. 195
- Installation set with flush-mounting box, for Geberit DuoFresh module → p. 251



- Switch for activating and deactivating odour extraction must be provided by the customer

Geberit DuoFresh module with automatic actuation, for Sigma concealed cistern 8 cm



click & scan

Application purposes

- For Sigma concealed cisterns 8 cm
- For direct odour extraction from WC ceramic appliances
- For Sigma01 actuator plates
- For Sigma10 actuator plates
- For Sigma20 actuator plates
- For Sigma50 actuator plates
- Not suitable for Geberit Duofix elements for wall-hung WC, corner construction

Characteristics

- Front actuation
- Odour extraction unit with filtration, integrated in the concealed cistern
- Extraction unit can be mounted without tools
- Compatible with Geberit Home App
- Odour extraction unit with user recognition can be activated
- Odour neutralisation with ceramic honeycomb filter
- Activation of the orientation light via brightness sensor

Scope of delivery

- Mounting frame with swivelling mechanism
- Protection plate
- Extraction unit with centrifugal fan
- Ceramic honeycomb filter
- Plug for conduit pipe

Technical data

Degree of protection	IPX4
Operating voltage	12 V DC
Power consumption in standby mode max.	0.5 W

Art. no.	Colour / surface	Protection class	Power consumption [W]
115.981.21.2	chrome / Glossy	III	7
115.981.BZ.2	anthracite	III	7

To order additionally

- Geberit 230 V / 12 V / 50 Hz power supply unit set with 1.8 m voltage supply cable for outlet mounting box → p. 206

Accessories

- Geberit combination outlet mounting box → p. 195
- Installation set with flush-mounting box, for Geberit DuoFresh module → p. 251

Geberit DuoFresh module with manual actuation, for Sigma concealed cistern 8 cm



click & scan

Application purposes

- For Sigma concealed cisterns 8 cm
- For direct odour extraction from WC ceramic appliances
- For Sigma01 actuator plates
- For Sigma10 actuator plates
- For Sigma20 actuator plates
- For Sigma50 actuator plates
- Not suitable for Geberit Duofix elements for wall-hung WC, corner construction

Characteristics

- Front actuation
- Odour extraction unit with filtration, integrated in the concealed cistern
- Extraction unit can be mounted without tools
- Compatible with Geberit Home App
- Odour neutralisation with ceramic honeycomb filter

Scope of delivery

- Mounting frame with swivelling mechanism
- Protection plate
- Extraction unit with centrifugal fan
- Ceramic honeycomb filter
- Plug for conduit pipe

Technical data

Degree of protection	IPX4
Operating voltage	12 V DC
Power consumption in standby mode max.	0.5 W

Art. no.	Colour / surface	Protection class	Power consumption [W]
115.996.21.2	chrome / glossy	III	7
115.996.BZ.2	anthracite	III	7

To order additionally

- Geberit 230 V / 12 V / 50 Hz power supply unit set with 1.8 m voltage supply cable for outlet mounting box → p. 206


Accessories

- Geberit combination outlet mounting box → p. 195
- Installation set with flush-mounting box, for Geberit DuoFresh module → p. 251



- Switch for activating and deactivating odour extraction must be provided by the customer

Geberit combination outlet mounting box

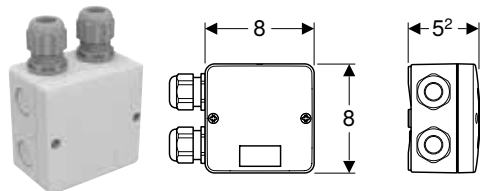

click & scan

Application purposes

- For connecting an odour extraction unit
- For hidden connection in WC ceramic appliances

Scope of delivery

- 2 grommets
- 2 hook-and-loop strip


Characteristics

- Cover with screw connection

Art. no.

244.120.00.1

Geberit Mambo actuator plate, round, for stop-and-go flush, screwable

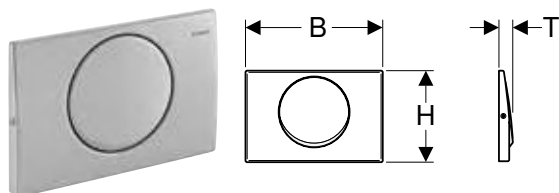

click & scan

Application purposes

- For flush actuation with Sigma concealed cisterns

Technical data

Actuation force (N) max.	20 N
--------------------------	------

Characteristics

- Front actuation
- Sound-absorbing actuator rods, tool-free fast adjustment

Scope of delivery


- Mounting frame
- 2 distance bolts
- Actuator rod
- Stop-and-go lever
- Set of bolts

Art. no.	Colour / surface	Product material	B [cm]	H [cm]	T [cm]
115.751.00.1	brushed	Stainless steel	24.6	16.4	2.5

Accessories

- Geberit extension set for Sigma, Omega and Kappa concealed cisterns → p. 206

Geberit Sigma cover plate, screwable

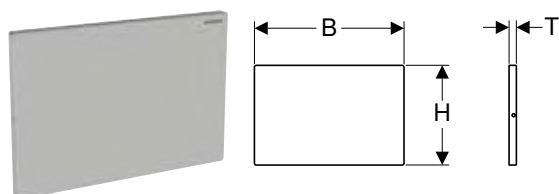

click & scan

Application purposes


- For covering the service opening of Sigma concealed cisterns

Scope of delivery

- Mounting frame
- 2 distance bolts
- Set of bolts

Art. no.	Colour / surface	Product material	B [cm]	H [cm]	T [cm]
115.764.FW.1	Brushed, easy-to-clean coated	Stainless steel	24.6	16.4	1.2

Geberit Sigma cover plate

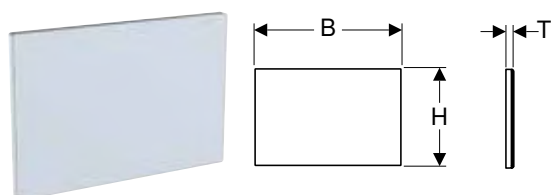

click & scan

Application purposes


- For covering the service opening of Sigma concealed cisterns

Scope of delivery

- Mounting frame
- 2 distance bolts

Art. no.	Colour / surface	Product material	B [cm]	H [cm]	T [cm]
115.766.00.1	customised	Die-cast zinc	24.6	16.4	1.1
115.766.SI.1	white	Die-cast zinc / glass	24.6	16.4	1.2

Geberit Sigma cover plate

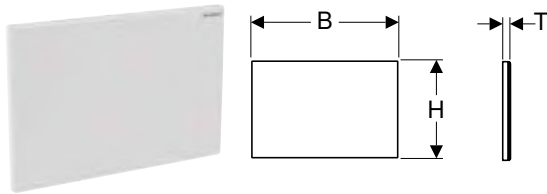

click & scan

Application purposes


- For covering the service opening of Sigma concealed cisterns

Scope of delivery

- Mounting frame
- 2 distance bolts

Art. no.	Colour / surface	Product material	B [cm]	H [cm]	T [cm]
115.768.11.1	white	Plastic	24.6	16.4	1.1
115.768.21.1	chrome / Glossy	Plastic	24.6	16.4	1.1
115.768.46.1	chrome / Matt	Plastic	24.6	16.4	1.1

Geberit Sigma cover plate, surface-even

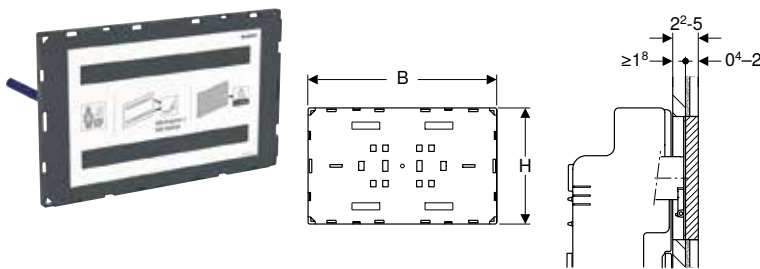

click & scan

Application purposes

- For covering the service opening of Sigma concealed cisterns
- For individual bathroom design
- For extensive surface coverings
- For covering thicknesses ≥ 18 mm
- Suitable for tile structures of 4–20 mm

Scope of delivery

- Protection plate
- 2 spacers
- 2 distance bolts

Characteristics

- Surface is provided and completed by customer
- Surface-even installation
- Cover plate not suitable for applying plaster

Art. no.	Colour / surface	Product material	B [cm]	H [cm]	T [cm]
115.696.00.1	customised	Plastic	21.3	13.1	1.8


To order additionally

- Installation set, surface-even, for Geberit element for wall-hung WC, with Sigma concealed cistern 12 cm → p. 192



- When using with Geberit Sigma concealed cistern 12 cm, the installation set, surface-even, for Geberit Sigma concealed cistern 12 cm (art. no. 243.168.00.1) is required in addition.

Geberit Sigma cover plate, surface-even, with sight frame

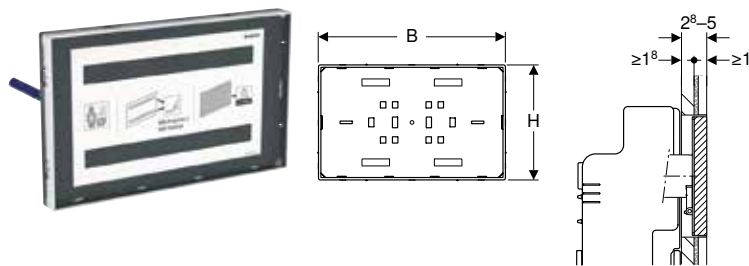

click & scan

Application purposes

- For covering the service opening of Sigma concealed cisterns
- For individual bathroom design
- For extensive surface coverings
- For covering thicknesses ≥ 18 mm
- Suitable for tile structures on cover with sight frame ≤ 10 mm

Scope of delivery

- Protection plate
- 2 spacers
- 2 distance bolts

Characteristics

- Surface is provided and completed by customer
- Surface-even installation
- Sight frame for bright chrome-plated cover plate
- Cover plate not suitable for applying plaster

Art. no.	Colour / surface	Product material	B [cm]	H [cm]	T [cm]
115.697.00.1	customised	Plastic	21.3	13.1	2.8

To order additionally

- Installation set, surface-even, for Geberit element for wall-hung WC, with Sigma concealed cistern 12 cm \rightarrow p. 192



- When using with Geberit Sigma concealed cistern 12 cm, the installation set, surface-even, for Geberit Sigma concealed cistern 12 cm (art. no. 243.168.00.1) is required in addition.

For Omega concealed cisterns

Assortment overview – Geberit actuator plates of the Omega series for concealed cisterns


Geberit International Sales, version: December 2025

		Omega20 round	Omega20 square (ex Omega30)	Omega60 square	Cover plate Omega
		\rightarrow p. 200	\rightarrow p. 200	\rightarrow p. 201	\rightarrow p. 202
Concealed cistern	109.050.00.1			✓	
	109.050.00.1			✓	
	109.060.00.1			✓	
	109.043.00.1			✓	
Duofix	111.003.00.2			✓	
	111.030.00.2			✓	
	111.060.00.2			✓	
GIS	461.141.00.2			✓	
Kombifix	110.001.00.1			✓	
	110.011.00.1			✓	
	110.020.00.1			✓	

✓ Compatible

New

Geberit Omega01 actuator plate, round, dual flush

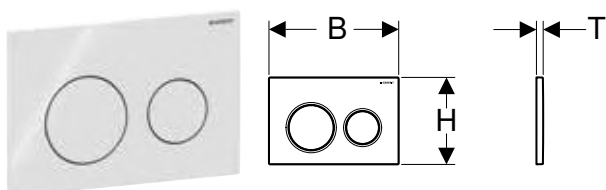

click & scan

Application purposes

- For flush actuation with Omega concealed cisterns

Technical data

Actuation force (N) max.	20 N
--------------------------	------

Characteristics

- Top/front actuation
- Sound-absorbing actuator rods, tool-free fast adjustment

Scope of delivery

- Mounting frame
- 2 distance bolts
- 2 actuator rods
- Fastening material

Art. no.	Colour / surface	Product material	B	H	T
			[cm]	[cm]	[cm]
115.093.11.1	Plate, Button: white / glossy	Plastic	21.2	14.2	1
115.093.21.1	Plate, Button: chrome / glossy	Plastic	21.2	14.2	1
115.093.46.1	Plate: matt Base plate: chrome Button: chrome / matt	Plastic	21.2	14.2	1
115.093.DW.1	Plate, Button: black / glossy	Plastic	21.2	14.2	1
115.093.ID.1	Plate, Button: nickel / brushed, easy-to-clean coated	Plastic	21.2	14.2	1
115.093.QF.1	Plate: brass-coloured / brushed, easy-to-clean coated Button: brushed, easy-to-clean coated Full flush volume button: brass-coloured	Plastic	21.2	14.2	1
115.093.QB.1	Plate, Button: red gold / brushed, easy-to-clean coated	Plastic	21.2	14.2	1
115.093.QD.1	Plate, Button: black chrome / brushed, easy-to-clean coated	Plastic	21.2	14.2	1
115.093.14.1	Plate, Button: black matt	Plastic	21.2	14.2	1


Available as of April 2026

Accessories

- Geberit extension set for Sigma, Omega and Kappa concealed cisterns → p. 206

New

Geberit Omega10 actuator plate, square, dual flush

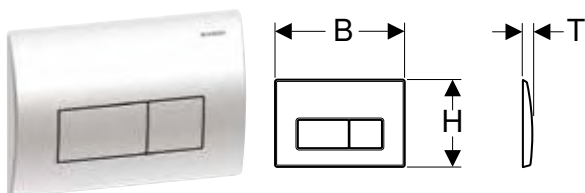

click & scan

Application purposes

- For flush actuation with Omega concealed cisterns

Technical data

Actuation force (N) max.	20 N
--------------------------	------

Characteristics

- Top/front actuation
- Sound-absorbing actuator rods, tool-free fast adjustment

Scope of delivery

- Mounting frame
- 2 distance bolts
- 2 actuator rods
- Fastening material


Art. no.	Colour / surface	Product material	B	H	T
			[cm]	[cm]	[cm]
115.092.FW.1	Plate, Button: brushed stainless steel	Stainless steel	22.1	14.2	1.5

Available as of April 2026

Accessories

- Geberit extension set for Sigma, Omega and Kappa concealed cisterns → p. 206

Geberit Omega20 actuator plate, round, dual flush



click & scan

Application purposes

- For flush actuation with Omega concealed cisterns

Technical data

Actuation force (N) max.	20 N
--------------------------	------

Characteristics

- Top/front actuation
- Sound-absorbing actuator rods, tool-free fast adjustment

Scope of delivery


- Mounting frame
- 2 distance bolts
- 2 actuator rods
- Fastening material

Art. no.	Colour / surface	Product material	B	H	T
			[cm]	[cm]	[cm]
115.085.01.1	Plate, Button: white matt / easy-to-clean coated Design ring/-s: white / glossy	Plastic	21.2	14.2	1
115.085.11.1	Plate, Button: white / glossy Design ring/-s: white matt	Plastic	21.2	14.2	1
115.085.14.1	Plate, Button: black matt / easy-to-clean coated Design ring/-s: chrome / glossy	Plastic	21.2	14.2	1
115.085.16.1	Plate, Button: black matt / easy-to-clean coated Design ring/-s: black / glossy	Plastic	21.2	14.2	1
115.085.DW.1	Plate, Button: black / glossy Design ring/-s: black matt	Plastic	21.2	14.2	1
115.085.JQ.1	Plate, Button: chrome / matt, easy-to-clean coated Design ring/-s: chrome / glossy	Plastic	21.2	14.2	1
115.085.JT.1	Plate, Button: white matt / easy-to-clean coated Design ring/-s: chrome / glossy	Plastic	21.2	14.2	1
115.085.KH.1	Plate, Button: chrome / glossy Design ring/-s: chrome / matt	Plastic	21.2	14.2	1
115.085.KJ.1	Plate, Button: white / glossy Design ring/-s: chrome / glossy	Plastic	21.2	14.2	1
115.085.KK.1	Plate, Button: white / glossy Design ring/-s: gold-coloured / glossy	Plastic	21.2	14.2	1
115.085.KM.1	Plate, Button: black / glossy Design ring/-s: chrome / glossy	Plastic	21.2	14.2	1

Accessories

- Geberit extension set for Sigma, Omega and Kappa concealed cisterns → p. 206

Geberit Omega20 actuator plate, square, dual flush

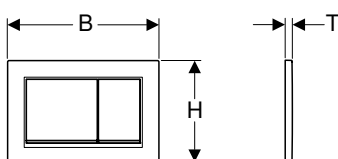

click & scan

Application purposes

- For flush actuation with Omega concealed cisterns

Technical data

Actuation force (N) max.	20 N
--------------------------	------

Characteristics

- Top/front actuation
- Sound-absorbing actuator rods, tool-free fast adjustment

Scope of delivery

- Mounting frame
- 2 distance bolts
- 2 actuator rods
- Fastening material


Art. no.	Colour / surface	Product material	B	H	T
			[cm]	[cm]	[cm]
115.080.01.1	Plate, Button: white matt / easy-to-clean coated Design stripes: white / glossy	Plastic	21.2	14.2	1
115.080.11.1	Plate, Button: white / glossy Design stripes: white matt	Plastic	21.2	14.2	1
115.080.14.1	Plate, Button: black matt / easy-to-clean coated Design stripes: chrome / glossy	Plastic	21.2	14.2	1

Art. no.	Colour / surface	Product material	B	H	T
			[cm]	[cm]	[cm]
115.080.16.1	Plate, Button: black matt / easy-to-clean coated Design stripes: black / glossy	Plastic	21.2	14.2	1
115.080.DW.1	Plate, Button: black / glossy Design stripes: black matt	Plastic	21.2	14.2	1
115.080.JQ.1	Plate, Button: chrome / matt, easy-to-clean coated Design stripes: chrome / glossy	Plastic	21.2	14.2	1
115.080.JT.1	Plate, Button: white matt / easy-to-clean coated Design stripes: chrome / glossy	Plastic	21.2	14.2	1
115.080.KH.1	Plate, Button: chrome / glossy Design stripes: chrome / matt	Plastic	21.2	14.2	1
115.080.KJ.1	Plate, Button: white / glossy Design stripes: chrome / glossy	Plastic	21.2	14.2	1
115.080.KK.1	Plate, Button: white / glossy Design stripes: gold-coloured / glossy	Plastic	21.2	14.2	1
115.080.KM.1	Plate, Button: black / glossy Design stripes: chrome / glossy	Plastic	21.2	14.2	1

Accessories

- Geberit extension set for Sigma, Omega and Kappa concealed cisterns → p. 206

Geberit Omega60 actuator plate, square, dual flush, surface-even

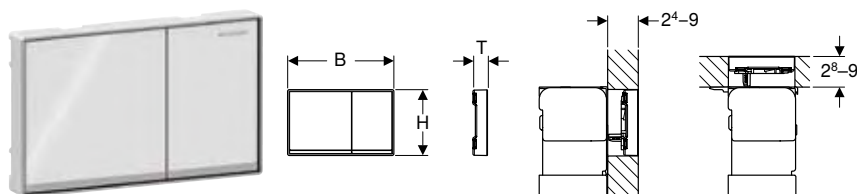

Application purposes

- For flush actuation with Omega concealed cisterns
- For covering thicknesses 24–90 mm (front actuation)
- For covering thicknesses 28–90 mm (top actuation)

Scope of delivery

- Compensation frame
- 2 spacers
- 2 distance bolts
- 2 actuator rods
- Fastening material

Characteristics


- Top/front actuation
- Surface-even actuation
- Sound-absorbing actuator rods, tool-free fast adjustment

Art. no.	Colour / surface	Product material	B	H	T
			[cm]	[cm]	[cm]
115.081.GH.1	Button: chrome / brushed Design stripes, Frame: chrome / glossy	Die-cast zinc	18.4	11.4	2.5
115.081.JK.1	Button: lava / glossy glass Design stripes: reflective glass Frame: chrome / glossy	Die-cast zinc / glass	18.4	11.4	2.5
115.081.JL.1	Button: sand grey / glossy glass Design stripes: reflective glass Frame: chrome / glossy	Die-cast zinc / glass	18.4	11.4	2.5
115.081.SI.1	Button: white / glossy glass Design stripes: reflective glass Frame: chrome / glossy	Die-cast zinc / glass	18.4	11.4	2.5
115.081.SJ.1	Button: black / glossy Design stripes: reflective glass Frame: chrome / glossy	Die-cast zinc / glass	18.4	11.4	2.5

Accessories

- Geberit cover frame for Omega60 actuator plate, square → p. 202

Geberit cover frame for Omega60 actuator plate, square

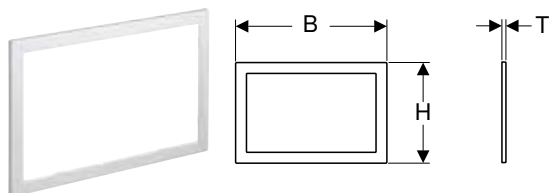


click & scan

Application purposes

- For Omega60 actuator plates
- For covering unfinished tile edges

Art. no.	Colour / surface	Product material	B	H	T
			[cm]	[cm]	[cm]
115.086.21.1	chrome / glossy	Die-cast zinc	20.9	13.9	0.5
115.086.GH.1	chrome / brushed, easy-to-clean coated	Die-cast zinc	20.9	13.9	0.5

Geberit Omega cover plate

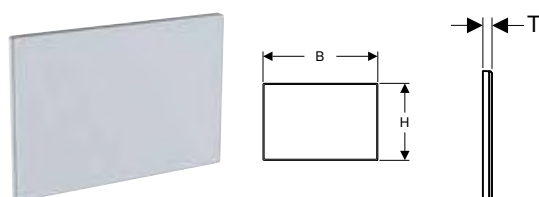

click & scan

Application purposes


- For covering the service opening in Omega concealed cisterns

Scope of delivery

- Mounting frame
- 2 distance bolts

Art. no.	Colour / surface	Product material	B	H	T
			[cm]	[cm]	[cm]
115.082.00.1	customised	Die-cast zinc	21.2	14.2	0.8
115.082.SI.1	white	Die-cast zinc / glass	21.2	14.2	1.1

Geberit Omega cover plate, surface-even

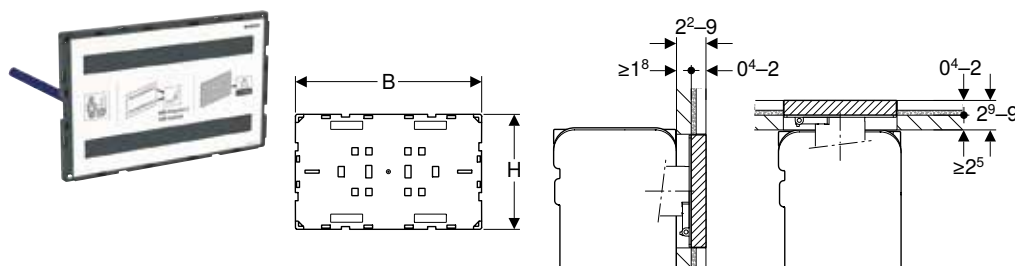

click & scan

Application purposes

- For individual bathroom design
- For covering the service opening in Omega concealed cisterns
- For extensive surface coverings
- For covering thicknesses ≥ 18 mm (front installation)
- For covering thicknesses ≥ 25 mm (top installation)
- Suitable for tile structures of 4–20 mm

Scope of delivery


- Protection plate
- 2 spacers
- 2 distance bolts

Characteristics

- Surface is provided and completed by customer
- Installation possible from the top/front
- Surface-even installation
- Cover plate not suitable for applying plaster

Art. no.	Colour / surface	Product material	B	H	T
			[cm]	[cm]	[cm]
115.087.00.1	customised	Plastic	18.3	11.3	1.8

Geberit Omega cover plate, surface-even, with sight frame

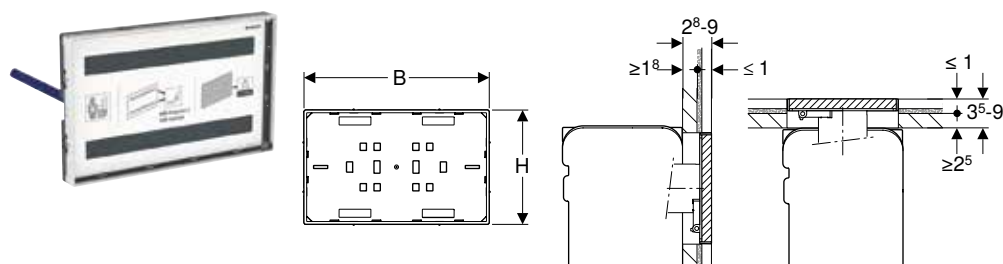

Application purposes

- For individual bathroom design
- For covering the service opening in Omega concealed cisterns
- For extensive surface coverings
- For covering thicknesses ≥ 18 mm (front installation)
- For covering thicknesses ≥ 25 mm (top installation)
- Suitable for tile structures on cover with sight frame ≤ 10 mm

Scope of delivery

- Protection plate
- 2 spacers
- 2 distance bolts

Characteristics






- Surface is provided and completed by customer
- Installation possible from the top/front
- Surface-even installation
- Sight frame for bright chrome-plated cover plate
- Cover plate not suitable for applying plaster

Art. no.	Colour / surface	Product material	B [cm]	H [cm]	T [cm]
115.088.00.1	customised	Plastic	18.3	11.3	2.8

For Alpha concealed cisterns

Assortment overview – Geberit actuator plates of the Alpha series for concealed cisterns

Geberit International Sales, version: December 2025

		Alpha01 round	Alpha01 square (ex Alpha30)	Alpha25 round (ex Alpha20)	Alpha25 square (ex Alpha35)	Alpha50 square
						
		→ p. 204	→ p. 204			→ p. 205
Duofix	458.212.00.2			✓		
	458.233.00.3			✓		
Kombifix	110.175.00.1			✓		
	110.212.00.1			✓		
	110.231.00.2			✓		
	110.233.00.2			✓		
	110.174.00.1			✓		
Alpha concealed cistern 8 cm	109.175.00.1			✓		
Alpha concealed cistern 12 cm	109.212.00.1			✓		
	109.233.00.2			✓		


✓ Compatible

Actuator plates and WC flush controls

Actuator plates

For Alpha concealed cisterns

Geberit Alpha01 actuator plate, round, dual flush

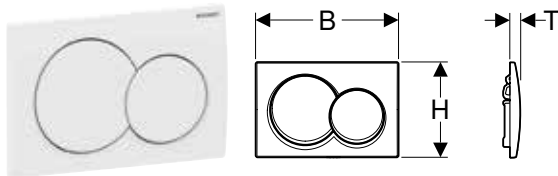

click & scan

Application purposes

- For flush actuation with Alpha concealed cisterns

Technical data

Actuation force (N) max.	20 N
--------------------------	------

Characteristics


- Top/front actuation

Scope of delivery

- 2 actuator rods
- Fastening material

Art. no.	Colour / surface	Product material	B [cm]	H [cm]	T [cm]
115.035.11.1	Plate, Button: white / glossy	Plastic	21.3	14.2	1.6
115.035.14.1	Plate, Button: black matt	Plastic	21.3	14.2	1.6
115.035.21.1	Plate, Button: chrome / glossy	Plastic	21.3	14.2	1.6
115.035.46.1	Plate, Button: chrome / matt	Plastic	21.3	14.2	1.6
115.035.QA.1	Plate, Button: red gold	Plastic	21.3	14.2	1.6
115.035.QC.1	Plate, Button: black chrome	Plastic	21.3	14.2	1.6
115.035.QE.1	Plate, Button: brass-coloured	Plastic	21.3	14.2	1.6

Geberit Alpha01 actuator plate, square, dual flush

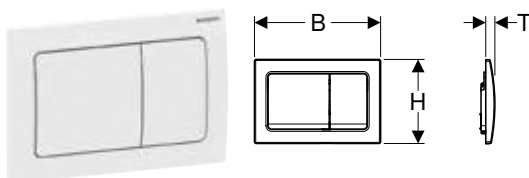

click & scan

Application purposes

- For flush actuation with Alpha concealed cisterns

Technical data

Actuation force (N) max.	20 N
--------------------------	------

Characteristics


- Top/front actuation

Scope of delivery

- 2 actuator rods
- Fastening material

Art. no.	Colour / surface	Product material	B [cm]	H [cm]	T [cm]
115.055.11.1	Plate, Button: white / glossy	Plastic	21.3	14.2	1.6
115.055.14.1	Plate, Button: black matt	Plastic	21.3	14.2	1.6
115.055.21.1	Plate, Button: chrome / glossy	Plastic	21.3	14.2	1.6
115.055.46.1	Plate, Button: chrome / matt	Plastic	21.3	14.2	1.6
115.055.QA.1	Plate, Button: red gold	Plastic	21.3	14.2	1.6
115.055.QC.1	Plate, Button: black chrome	Plastic	21.3	14.2	1.6
115.055.QE.1	Plate, Button: brass-coloured	Plastic	21.3	14.2	1.6

Geberit Alpha25 actuator plate, round, dual flush

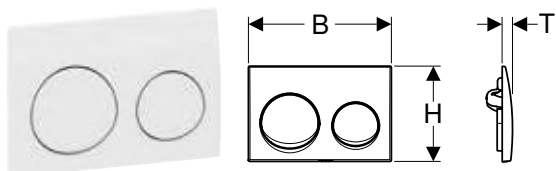

click & scan

Application purposes

- For flush actuation with Alpha concealed cisterns

Technical data

Actuation force (N) max.	20 N
--------------------------	------

Characteristics


- Top/front actuation

Scope of delivery

- 2 actuator rods
- Fastening material

Art. no.	Colour / surface	Product material	B [cm]	H [cm]	T [cm]
115.040.11.5	Plate, Button: white	Plastic	21.3	14.2	1.6
115.040.21.5	Plate, Button: chrome / glossy	Plastic	21.3	14.2	1.6
115.040.46.5	Plate, Button: chrome / matt	Plastic	21.3	14.2	1.6

Geberit Alpha25 actuator plate, square, dual flush

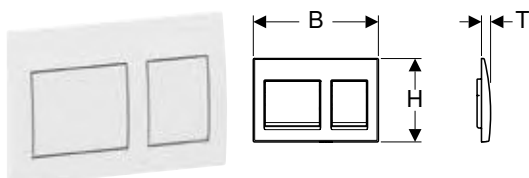

click & scan

Application purposes

- For flush actuation with Alpha concealed cisterns

Technical data

Actuation force (N) max.	20 N
--------------------------	------

Characteristics


- Top/front actuation

Scope of delivery

- 2 actuator rods
- Fastening material

Art. no.	Colour / surface	Product material	B [cm]	H [cm]	T [cm]
115.045.11.5	Plate, Button: white alpine	Plastic	21.3	14.2	1.6
115.045.21.5	Plate, Button: chrome / glossy	Plastic	21.3	14.2	1.6
115.045.46.5	Plate, Button: chrome / matt	Plastic	21.3	14.2	1.6

Geberit Alpha50 actuator plate, square, dual flush

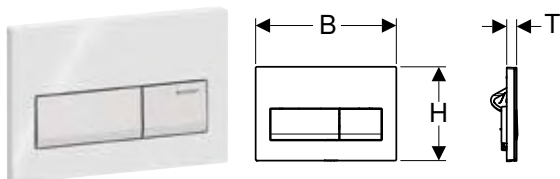

click & scan

Application purposes

- For flush actuation with Alpha concealed cisterns

Technical data

Actuation force (N) max.	20 N
--------------------------	------

Characteristics

- Top/front actuation


Scope of delivery

- 2 actuator rods
- Fastening material

Art. no.	Colour / surface	Product material	B [cm]	H [cm]	T [cm]
115.060.11.1	Base plate, Button: chrome / glossy Cover plate: white / glossy	Plastic	21.3	14.2	1.5
115.060.DW.1	Base plate, Button: chrome / glossy Cover plate: black / glossy	Plastic	21.3	14.2	1.5

Accessories

Geberit extension set for Sigma, Omega and Kappa concealed cisterns



click & scan

Application purposes

- For installation of Geberit actuator plates with oversize outer walls

Characteristics

- Outer wall of 18 cm max. possible
- Extension for actuator rods with fast adjustment
- Extension for distance bolts with fast adjustment

Scope of delivery

- 2 extensions for distance bolts
- 2 extensions for actuator rods
- Fastening material

Art. no.

240.938.00.1

Geberit extension set for Alpha concealed cisterns



click & scan

Application purposes

- For installation of Geberit actuator plates with oversize outer walls


Scope of delivery

- 2 actuator rods
- Fastening material

Art. no.

242.758.00.1

Geberit 230 V / 12 V / 50 Hz power supply unit set with 1.8 m voltage supply cable for outlet mounting box



click & scan

Application purposes

- For installation in outlet mounting boxes

Technical data

Nominal voltage	230 V AC
Mains frequency	50 Hz
Output voltage	12 V DC

Scope of delivery

- Power supply unit
- Connection cable with plug

Art. no.

115.335.00.1

Accessories

- Installation set with flush-mounting box, for Geberit DuoFresh module → p. 251
- Geberit combination outlet mounting box → p. 195

Geberit 230 V / 12 V / 50 Hz power supply unit set with 1.8 m voltage supply cable and combination outlet mounting box



click & scan

Application purposes

- For connecting an odour extraction unit
- For connecting Geberit WC flush controls
- For hidden connection in WC ceramic appliances

Technical data

Nominal voltage	230 V AC
Mains frequency	50 Hz
Output voltage	12 V DC

Art. no.

115.336.00.1

Characteristics

- Cover with screw connection


Scope of delivery

- Combination outlet mounting box
- Power supply unit
- Connection cable with plug

Can be combined with

- Geberit electronic WC flush control, mains operation, for Sigma concealed cistern 8 cm, with Sigma10 actuator plate, round, automatic / touchless / manual → p. 223
- Geberit electronic WC flush control, mains operation, for Sigma concealed cistern 8 cm, with Sigma80 actuator plate, square, touchless → p. 224
- Geberit electronic WC flush control, mains operation, for Sigma concealed cistern 12 cm, with Sigma80 actuator plate, square, touchless → p. 218
- Geberit electronic WC flush control, mains operation, for Sigma concealed cistern 12 cm, with Sigma10 actuator plate, round, automatic / touchless / manual → p. 212
- Geberit electronic WC flush control, mains operation, for Sigma concealed cistern 12 cm, with Sigma10 actuator plate, round, automatic / touchless, screwable → p. 213
- Geberit electronic WC flush control, mains operation, for Sigma concealed cistern 12 cm, with Sigma10 actuator plate, round, automatic / touchless → p. 214
- Geberit electronic WC flush control, mains operation, for Sigma concealed cistern 12 cm, for external button → p. 219
- Geberit electronic WC flush control, mains operation, for Omega concealed cistern 12 cm, for external button → p. 225
- Geberit electronic WC flush control, mains operation, for Sigma concealed cistern 12 cm, with Sigma10 actuator plate, round, for pull-down rail, manual → p. 215
- Geberit electronic WC flush control, mains operation, for Sigma concealed cistern 12 cm, with Type 10 IR button, round → p. 222
- Geberit electronic WC flush control, mains operation, for Omega concealed cistern 12 cm, with Type 10 IR button, round → p. 226
- Geberit electronic WC flush control, mains operation, for Sigma concealed cistern 12 cm, for RF-controlled button → p. 220
- Geberit electronic WC flush control, mains operation, for Sigma concealed cistern 12 cm, for Bluetooth® remote flush actuation → p. 221
- Geberit electronic WC flush control, mains operation, for Sigma concealed cistern 12 cm, with Sigma10 actuator plate, round, for pull-down rail, radio → p. 216
- Geberit electronic WC flush control, mains operation, for Sigma concealed cistern 12 cm, with Sigma10 actuator plate, round, for pull-down rail, for Bluetooth® remote flush actuation → p. 217

Geberit combination outlet mounting box

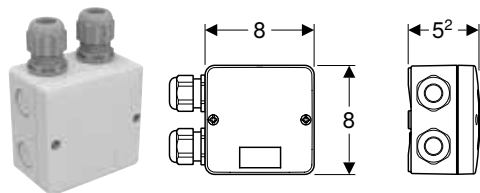

click & scan

Application purposes

- For connecting an odour extraction unit
- For hidden connection in WC ceramic appliances

Characteristics

- Cover with screw connection

Scope of delivery

- 2 grommets
- 2 hook-and-loop strip











Art. no.

244.120.00.1

WC flush controls with electronic flush actuation















Assortment overview – Geberit WC flush controls with electronic flush actuation, touchless

Geberit International Sales, version: December 2025

	Sigma80	Sigma80	Sigma10	Sigma10	Sigma10	
						
Art. no.	116.090.SG.6 116.090.SM.6	116.092.SG.6 116.092.SM.6	115.906.SN.6	115.907.xx.6	115.908.xx.6	
	→ p. 218	→ p. 224	→ p. 213	→ p. 214	→ p. 229	
Activation	Touchless / automatic	Touchless / automatic	Touchless / automatic	Touchless / automatic	Touchless / automatic	
Detection / control	Infrared-controlled	Infrared-controlled	Infrared-controlled	Infrared-controlled	Infrared-controlled	
Power supply	Mains	Mains	Mains	Mains	Battery	
Suitable for concealed cisterns	Sigma concealed cistern 12 cm	Sigma concealed cistern 8 cm	Sigma concealed cistern 12 cm	Sigma concealed cistern 12 cm	Sigma concealed cistern 12 cm	
Application range						
To order additionally (only one of the following options is required)						
115.861.00.6 Geberit installation set with power supply unit, for WC flush controls with electronic flush actuation, 12 V	Power supply in an external flush-mounting box	✓	✓	✓	✓	
116.098.00.6 Geberit set of Power & Connect box and power supply unit for element for wall-hung WC	Set consisting of an outlet mounting box and power supply unit for hidden installation in a Geberit Duofix or Geberit GIS element behind the WC	✓		✓	✓	
111.900.00.6 Geberit Duofix element for wall-hung WC, 112 cm, with Sigma concealed cistern 12 cm and Power & Connect box	Installation elements with outlet mounting box for hidden installation behind WC ceramic appliance	✓ ¹⁾		✓ ¹⁾	✓ ¹⁾	
461.301.00.6 Geberit GIS element for wall-hung WC, 114 cm, with Sigma concealed cistern 12 cm and Power & Connect box		✓ ¹⁾		✓ ¹⁾	✓ ¹⁾	
Power supply unit						
116.096.00.1 Geberit power supply unit for Power & Connect box	Power supply unit for installation in hidden outlet mounting and communication connection box	✓		✓	✓	
Accessories						
115.707.00.1 Geberit remote flush actuator for single flush, Bluetooth®		✓	✓	✓	✓	✓
115.708.00.1 Geberit remote flush actuator for dual flush, Bluetooth®		✓	✓	✓	✓	✓

✓ Compatible

¹⁾ When using the outlet mounting box for a hidden installation, the power supply unit 116.096.00.1 must be ordered additionally

	Sigma10	Sigma10	Sigma10	Sigma10	Type 10 infrared sensor	Type 10 infrared sensor	Type 10 infrared sensor
							
	115.909.SN.6	115.890.SN.6	115.856.SN.6	115.891.SN.6	115.936.SN.6	115.937.SN.6	115.956.SN.6
	→ p. 228	→ p. 212	→ p. 223	→ p. 227	→ p. 222	→ p. 235	→ p. 226
	Touchless / automatic	Touchless / manual / automatic	Touchless / manual / automatic	Touchless / manual / automatic	Touchless	Touchless	Touchless
	Infrared-controlled	Infrared-controlled	Infrared-controlled	Infrared-controlled	Infrared-controlled	Infrared-controlled	Infrared-controlled
	Battery	Mains	Mains	Battery	Mains	Battery	Mains
	Sigma concealed cistern 12 cm	Sigma concealed cistern 12 cm	Sigma concealed cistern 8 cm	Sigma concealed cistern 12 cm	Sigma concealed cistern 12 cm	Sigma concealed cistern 12 cm	Omega concealed cistern 12 cm
							
		✓	✓		✓		✓
		✓			✓		✓
		✓ ¹⁾			✓ ¹⁾		
		✓ ¹⁾			✓ ¹⁾		
		✓			✓		✓
	✓	✓	✓	✓			
	✓	✓	✓	✓			



Assortment overview – Geberit WC flush controls with electronic flush actuation, manual

Geberit International Sales, version: December 2025

	Sigma10	Sigma10	Sigma10	Sigma10	
Art. no.	115.863.SN.6 115.863.16.6	115.864.SN.6	115.867.SN.6	115.869.SN.6	
	→ p. 215	→ p. 234	→ p. 216	→ p. 232	
Activation	Manual	Manual	Manual	Manual	
Detection / control	Manual (cable)	Manual (cable)	Manual (radio)	Manual (radio)	
Power supply	Mains	Battery	Mains	Battery	
Suitable for concealed cisterns	Sigma concealed cistern 12 cm	Sigma concealed cistern 12 cm	Sigma concealed cistern 12 cm	Sigma concealed cistern 12 cm	
Application range					

To order additionally (only one of the following options is required)

115.861.00.6 Geberit installation set with power supply unit, for WC flush controls with electronic flush actuation, 12 V	Power supply in an external flush-mounting box	✓		✓		
116.098.00.6 Geberit set of Power & Connect box and power supply unit for element for wall-hung WC	Set consisting of an outlet mounting box and power supply unit for hidden installation in a Geberit Duofix or Geberit GIS element behind the WC	✓		✓		
111.900.00.6 Geberit Duofix element for wall-hung WC, 112 cm, with Sigma concealed cistern 12 cm and Power & Connect box	Installation elements with outlet mounting box for hidden installation behind WC ceramic appliance					
461.301.00.6 Geberit GIS element for wall-hung WC, 114 cm, with Sigma concealed cistern 12 cm and Power & Connect box						

Power supply unit



















116.096.00.1 Geberit power supply unit for Power & Connect box	Power supply unit for installation in hidden outlet mounting and communication connection box	✓		✓		
---	---	---	--	---	--	--

Accessories

241.155.00.1 Geberit installation set for WC flush control with mechanical flush actuation, push-button						
241.154.00.1 Geberit installation set for WC flush control with electronic flush actuation, for pull-down rail	✓	✓				
241.568.00.1 Geberit RF-controlled button for electronic flush actuation			✓	✓		
115.707.00.1 Geberit remote flush actuator for single flush, Bluetooth®			✓	✓		
115.708.00.1 Geberit remote flush actuator for dual flush, Bluetooth®			✓	✓		

✓ Compatible


¹⁾ When using the outlet mounting box for a hidden installation, the power supply unit 116.096.00.1 must be ordered additionally

	Sigma10	Sigma10	Without actuator plate	Without actuator plate	Without actuator plate	Without actuator plate	Without actuator plate	Without actuator plate	Without actuator plate
									
	115.705.SN.6 115.705.16.6	115.706.SN.6 115.706.16.6	115.862.00.6	115.885.00.6	115.955.00.6	115.897.00.6	115.898.00.6	115.702.00.6	115.704.00.6
	→ p. 217	→ p. 233	→ p. 219	→ p. 234	→ p. 225	→ p. 220	→ p. 230	→ p. 221	→ p. 231
	Manual	Manual	Manual	Manual	Manual	Manual	Manual	Manual	Manual
	Manuell (Bluetooth®)	Manuell (Bluetooth®)	Manual (cable)	Manual (cable)	Manual (cable)	Manual (radio)	Manual (radio)	Manuell (Bluetooth®)	Manuell (Bluetooth®)
	Mains	Battery	Mains	Battery	Mains	Mains	Battery	Mains	Battery
	Sigma concealed cistern 12 cm	Sigma concealed cistern 12 cm	Sigma concealed cistern 12 cm	Sigma concealed cistern 12 cm	Omega concealed cistern 12 cm	Sigma concealed cistern 12 cm	Sigma concealed cistern 12 cm	Sigma concealed cistern 12 cm	Sigma concealed cistern 12 cm
									
	✓		✓		✓	✓		✓	
	✓		✓		✓	✓		✓	
			✓ ¹⁾						
			✓ ¹⁾						
	✓		✓		✓	✓		✓	
			✓	✓	✓				
						✓	✓		
	✓	✓				✓	✓	✓	✓
	✓	✓				✓	✓	✓	✓



For mains operation, for Geberit Sigma concealed cisterns 12 cm

Geberit electronic WC flush control, mains operation, for Sigma concealed cistern 12 cm, with Sigma10 actuator plate, round, automatic / touchless / manual

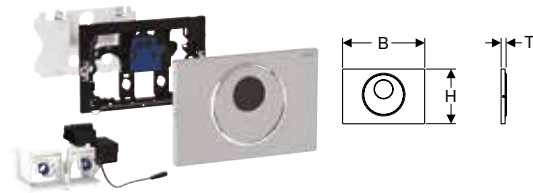

click & scan

Application purposes

- For releasing a dual flush
- For solid and drywall construction
- For touchless flush actuation of Sigma concealed cisterns 12 cm
- Not suitable for use with Geberit inserts for in-cistern block
- Suitable for barrier-free construction

Technical data

Degree of protection	IP45
Nominal voltage	85–240 V AC
Mains frequency	50–60 Hz
Operating voltage	12 V DC
Power consumption in standby mode	0.15 W
Interval flush time, factory setting	5 s
Detection time, factory setting	7 s

Characteristics

- Touchless flush actuation for single or dual flush by moving hand toward sensor
- Manual flush actuation via actuator plate
- Flush actuation possible via external push-button
- Screwable actuator plate
- Power supply via external power supply unit
- Transformation of mains voltage to extra-low voltage, 12 V DC
- Operation with extra-low voltage, no mains voltage in cistern
- Interval flush preset
- Adjustable interval flush
- Preflush can be set
- Minimum detection time can be set
- Device settings and operation with mobile device via integrated Bluetooth® interface
- Compatible with Geberit Control App
- Wired networkable with Geberit gateway via GEBUS converter
- Wirelessly connectable with Geberit Gateway via Bluetooth®
- Compatible with Geberit Connect
- Compatible with Geberit Service Handy
- Vandal-resistant

Scope of delivery

- Sigma10 actuator plate
- Mounting frame with infrared control, premounted
- Protection plate
- Support block with servomotor and lifting device, premounted
- Actuator rod
- Fastening material

Art. no.	Colour / surface	Product material	B [cm]	H [cm]	T [cm]	Power consumption [W]
115.890.16.6	Plate, Button: black matt / easy-to-clean coated Design ring/-s: black / glossy	Stainless steel	24.6	16.4	1.5	≤ 4
115.890.DW.6	Plate, Button: black / glossy Design ring/-s: black matt	Stainless steel	24.6	16.4	1.5	≤ 4
115.890.SN.6	Plate, Button: brushed, easy-to-clean coated Design ring: polished	Stainless steel	24.6	16.4	1.5	≤ 4

To order additionally

- Geberit power supply unit for Power & Connect box → p. 249


Can be combined with

- Geberit installation set with power supply unit, for WC flush controls with electronic flush actuation, 12 V → p. 248
- Geberit set of Power & Connect box and power supply unit for element for wall-hung WC → p. 250
- Geberit 230 V / 12 V / 50 Hz power supply unit set with 1.8 m voltage supply cable and combination outlet mounting box → p. 207

Accessories

- Geberit remote flush actuator for single flush, Bluetooth® → p. 252
- Geberit remote flush actuator for dual flush, Bluetooth® → p. 253

Geberit electronic WC flush control, mains operation, for Sigma concealed cistern 12 cm, with Sigma10 actuator plate, round, automatic / touchless, screwable

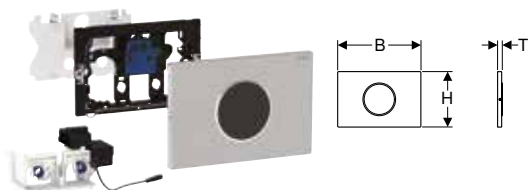

Application purposes

- For releasing a dual flush
- For solid and drywall construction
- For touchless flush actuation of Sigma concealed cisterns 12 cm
- Not suitable for use with Geberit inserts for in-cistern block
- Suitable for barrier-free construction

Technical data

Degree of protection	IP45
Nominal voltage	85–240 V AC
Mains frequency	50–60 Hz
Operating voltage	12 V DC
Power consumption in standby mode	0.15 W
Interval flush time, factory setting	5 s
Detection time, factory setting	7 s

Characteristics

- Touchless flush actuation for single or dual flush by moving hand toward sensor
- Flush actuation possible via external push-button
- Screwable actuator plate
- Power supply via external power supply unit
- Transformation of mains voltage to extra-low voltage, 12 V DC
- Operation with extra-low voltage, no mains voltage in cistern
- Interval flush preset
- Adjustable interval flush
- Preflush can be set
- Minimum detection time can be set
- Device settings and operation with mobile device via integrated Bluetooth® interface
- Compatible with Geberit Control App
- Wired networkable with Geberit gateway via GEBUS converter
- Wirelessly connectable with Geberit Gateway via Bluetooth®
- Compatible with Geberit Connect
- Compatible with Geberit Service Handy
- Vandal-resistant

Scope of delivery

- Sigma10 actuator plate
- Mounting frame with infrared control, premounted
- Protection plate
- Support block with servomotor and lifting device, premounted
- Fastening material

Art. no.	Colour / surface	Product material	B [cm]	H [cm]	T [cm]	Power consumption [W]
115.906.16.6	Plate: black matt / easy-to-clean coated Design ring/-s: black / glossy	Stainless steel	24.6	16.4	1.5	≤ 4
115.906.DW.6	Plate: black / glossy Design ring/-s: black matt	Stainless steel	24.6	16.4	1.5	≤ 4
115.906.SN.6	Plate: brushed, easy-to-clean coated Design ring: polished	Stainless steel	24.6	16.4	1.5	≤ 4

To order additionally

- Geberit power supply unit for Power & Connect box → p. 249


Can be combined with

- Geberit installation set with power supply unit, for WC flush controls with electronic flush actuation, 12 V → p. 248
- Geberit set of Power & Connect box and power supply unit for element for wall-hung WC → p. 250
- Geberit 230 V / 12 V / 50 Hz power supply unit set with 1.8 m voltage supply cable and combination outlet mounting box → p. 207

Accessories

- Geberit remote flush actuator for single flush, Bluetooth® → p. 252
- Geberit remote flush actuator for dual flush, Bluetooth® → p. 253

Geberit electronic WC flush control, mains operation, for Sigma concealed cistern 12 cm, with Sigma10 actuator plate, round, automatic / touchless

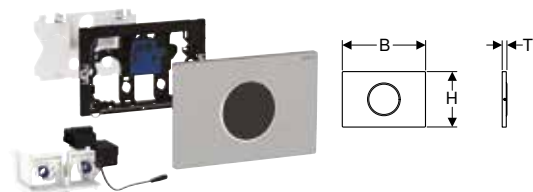

Application purposes

- For private and semipublic areas
- For releasing a dual flush
- For solid and drywall construction
- For touchless flush actuation of Sigma concealed cisterns 12 cm
- Not suitable for use with Geberit inserts for in-cistern block
- Suitable for barrier-free construction

Technical data

Degree of protection	IP45
Nominal voltage	85–240 V AC
Mains frequency	50–60 Hz
Operating voltage	12 V DC
Power consumption in standby mode	0.15 W
Interval flush time, factory setting	5 s
Detection time, factory setting	7 s

Characteristics

- Touchless flush actuation for single or dual flush by moving hand toward sensor
- Flush actuation possible via external push-button
- Power supply via external power supply unit
- Transformation of mains voltage to extra-low voltage, 12 V DC
- Operation with extra-low voltage, no mains voltage in cistern
- Interval flush preset
- Adjustable interval flush
- Preflush can be set
- Minimum detection time can be set
- Device settings and operation with mobile device via integrated Bluetooth® interface
- Compatible with Geberit Control App
- Wired networkable with Geberit gateway via GEBUS converter
- Wirelessly connectable with Geberit Gateway via Bluetooth®
- Compatible with Geberit Connect
- Compatible with Geberit Service Handy

Scope of delivery

- Sigma10 actuator plate
- Mounting frame with infrared control, premounted
- Protection plate
- Support block with servomotor and lifting device, premounted

Art. no.	Colour / surface	Product material	B	H	T	Power consumption [W]
			[cm]	[cm]	[cm]	
115.907.16.6	Plate: black matt / easy-to-clean coated Design ring/-s: black / glossy	Stainless steel	24.6	16.4	1.5	≤ 4
115.907.DW.6	Plate: black / glossy Design ring/-s: black matt	Stainless steel	24.6	16.4	1.5	≤ 4
115.907.JQ.6	Plate: chrome / matt, easy-to-clean coated Design ring/-s: chrome / glossy	Plastic	24.6	16.4	1.5	≤ 4
115.907.KH.6	Plate: chrome / glossy Design ring/-s: chrome / matt	Plastic	24.6	16.4	1.5	≤ 4
115.907.KJ.6	Plate: white alpine / glossy Design ring/-s: chrome / glossy	Plastic	24.6	16.4	1.5	≤ 4
115.907.KK.6	Plate: white alpine / glossy Design ring/-s: gold-coloured / glossy	Plastic	24.6	16.4	1.5	≤ 4
115.907.KM.6	Plate: black / glossy Design ring/-s: chrome / glossy	Plastic	24.6	16.4	1.5	≤ 4
115.907.SN.6	Plate: brushed, easy-to-clean coated Design ring: polished	Stainless steel	24.6	16.4	1.5	≤ 4

To order additionally

- Geberit power supply unit for Power & Connect box → p. 249


Can be combined with

- Geberit installation set with power supply unit, for WC flush controls with electronic flush actuation, 12 V → p. 248
- Geberit set of Power & Connect box and power supply unit for element for wall-hung WC → p. 250
- Geberit 230 V / 12 V / 50 Hz power supply unit set with 1.8 m voltage supply cable and combination outlet mounting box → p. 207

Accessories

- Geberit remote flush actuator for single flush, Bluetooth® → p. 252
- Geberit remote flush actuator for dual flush, Bluetooth® → p. 253

Geberit electronic WC flush control, mains operation, for Sigma concealed cistern 12 cm, with Sigma10 actuator plate, round, for pull-down rail, manual

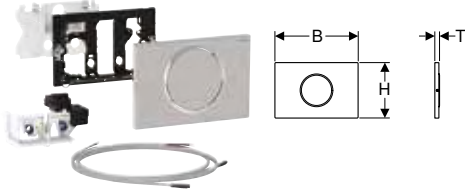

Application purposes

- For manual remote flush actuation of Sigma concealed cisterns 12 cm using pull-down rails with potential-free push-button with closing function
- For single flush
- For solid and drywall construction
- Suitable for barrier-free construction
- For Sigma concealed cisterns 12 cm
- Not suitable for use with Geberit inserts for in-cistern block

Technical data

Degree of protection	IP45
Nominal voltage	85–240 V AC
Mains frequency	50–60 Hz
Operating voltage	12 V DC
Power consumption in standby mode	0.15 W
Interval flush time, factory setting	5 s

Characteristics

- Flush actuation connected by wire
- Flush actuation via pull-down rail, connected by wire
- Push-buttons can be connected in parallel
- Single flush can be triggered via actuator plate
- Power supply via external power supply unit
- Transformation of mains voltage to extra-low voltage, 12 V DC
- Operation with extra-low voltage, no mains voltage in cistern
- Interval flush preset
- Adjustable interval flush
- Device settings and operation with mobile device via integrated Bluetooth® interface
- Compatible with Geberit Control App
- Wired networkable with Geberit gateway via GEBUS converter
- Wirelessly connectable with Geberit Gateway via Bluetooth®
- Compatible with Geberit Connect
- Screwable actuator plate

Scope of delivery

- Sigma10 actuator plate
- Mounting frame
- Protection plate
- Actuator rod
- Support block with servomotor and lifting device, premounted
- Electrical control
- 2 cables, prefabricated, length 1.2 m
- Fastening material

Art. no.	Colour / surface	Product material	B	H	T	Power consumption [W]
			[cm]	[cm]	[cm]	
115.863.16.6	Plate, Button: black matt / easy-to-clean coated Design ring/-s: black / glossy	Stainless steel	24.6	16.4	1.5	≤ 4
115.863.SN.6	Plate, Button: brushed, easy-to-clean coated Design ring: polished	Stainless steel	24.6	16.4	1.5	≤ 4

To order additionally

- Geberit power supply unit for Power & Connect box → p. 249


Can be combined with

- Geberit installation set with power supply unit, for WC flush controls with electronic flush actuation, 12 V → p. 248
- Geberit set of Power & Connect box and power supply unit for element for wall-hung WC → p. 250
- Geberit 230 V / 12 V / 50 Hz power supply unit set with 1.8 m voltage supply cable and combination outlet mounting box → p. 207

Accessories

- Geberit installation set for WC flush control with mechanical flush actuation, push-button → p. 251
- Geberit installation set for WC flush control with electronic flush actuation, for pull-down rail → p. 251

Geberit electronic WC flush control, mains operation, for Sigma concealed cistern 12 cm, with Sigma10 actuator plate, round, for pull-down rail, radio

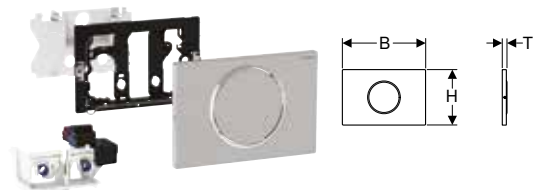

click & scan

Application purposes

- For manual remote flush actuation of Sigma concealed cisterns 12 cm using pull-down rails with RF-controlled button
- For single flush
- For solid and drywall construction
- Suitable for barrier-free construction
- For Sigma concealed cisterns 12 cm
- Not suitable for use with Geberit inserts for in-cistern block

Technical data

Degree of protection	IP45
Nominal voltage	85–240 V AC
Mains frequency	50–60 Hz
Operating voltage	12 V DC
Power consumption in standby mode	0.15 W
Radio frequency	868.4 MHz
Radio frequency distance	10 m
Interval flush time, factory setting	5 s

Characteristics

- Flush actuation using pull-down rail, wireless, radio
- Single flush can be triggered via actuator plate
- Power supply via external power supply unit
- Transformation of mains voltage to extra-low voltage, 12 V DC
- Operation with extra-low voltage, no mains voltage in cistern
- Interval flush preset
- Adjustable interval flush
- Device settings and operation with mobile device via integrated Bluetooth® interface
- Compatible with Geberit Control App
- Wired networkable with Geberit gateway via GEBUS converter
- Wirelessly connectable with Geberit Gateway via Bluetooth®
- Compatible with Geberit Connect
- Screwable actuator plate

Scope of delivery

- Sigma10 actuator plate
- Mounting frame
- Protection plate
- Actuator rod
- Support block with servomotor and lifting device, premounted
- Control electronics with radio receiver
- Fastening material

Art. no.	Colour / surface	Product material	B	H	T	Power consumption [W]
			[cm]	[cm]	[cm]	
115.867.16.6	Plate, Button: black matt / easy-to-clean coated Design ring/-s: black / glossy	Stainless steel	24.6	16.4	1.5	≤ 4
115.867.SN.6	Plate, Button: brushed, easy-to-clean coated Design ring: polished	Stainless steel	24.6	16.4	1.5	≤ 4

To order additionally

- Geberit power supply unit for Power & Connect box → p. 249

Can be combined with


- Geberit installation set with power supply unit, for WC flush controls with electronic flush actuation, 12 V → p. 248
- Geberit set of Power & Connect box and power supply unit for element for wall-hung WC → p. 250
- Geberit 230 V / 12 V / 50 Hz power supply unit set with 1.8 m voltage supply cable and combination outlet mounting box → p. 207

Accessories

- Geberit remote flush actuator for single flush, Bluetooth® → p. 252
- Geberit remote flush actuator for dual flush, Bluetooth® → p. 253
- Geberit RF-controlled button for electronic flush actuation → p. 252

New

Geberit electronic WC flush control, mains operation, for Sigma concealed cistern 12 cm, with Sigma10 actuator plate, round, for pull-down rail, for Bluetooth® remote flush actuation

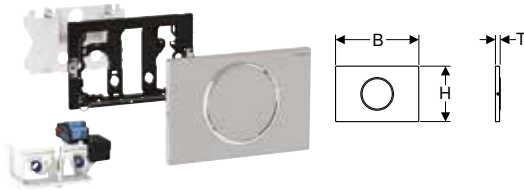

Application purposes

- For manual remote flush actuation of Sigma concealed cisterns 12 cm using pull-down rails with Bluetooth® remote control
- For manual remote flush actuation of Sigma concealed cisterns 12 cm using Geberit Bluetooth® remote control
- For actuating a single flush via the Sigma10 actuator plate
- For actuating a single or dual flush via the Bluetooth® remote control
- For solid and drywall construction
- Suitable for barrier-free construction
- For Sigma concealed cisterns 12 cm
- Not suitable for use with Geberit inserts for in-cistern block

Technical data

Degree of protection	IP45
Nominal voltage	85–240 V AC
Mains frequency	50–60 Hz
Operating voltage	12 V DC
Power consumption in standby mode	0.15 W
Radio frequency	2400 MHz
Radio frequency distance	10 m
Interval flush time, factory setting	5 s

Characteristics

- Flush actuation via pull-down rail, wireless, with Bluetooth® remote control
- Flush actuation via Geberit Bluetooth® remote control, wireless
- Dual flush can be actuated via Bluetooth® remote control
- Single flush can be triggered via actuator plate
- Power supply via external power supply unit
- Transformation of mains voltage to extra-low voltage, 12 V DC
- Operation with extra-low voltage, no mains voltage in cistern
- Interval flush preset
- Adjustable interval flush
- Device settings and operation with mobile device via integrated Bluetooth® interface
- Compatible with Geberit Control App
- Wired networkable with Geberit gateway via GEBUS converter
- Wirelessly connectable with Geberit Gateway via Bluetooth®
- Compatible with Geberit Connect
- Screwable actuator plate

Scope of delivery

- Sigma10 actuator plate
- Mounting frame
- Protection plate
- Actuator rod
- Support block with servomotor and lifting device, premounted
- Control electronics with Bluetooth® receiver
- Fastening material

Art. no.	Colour / surface	Product material	B [cm]	H [cm]	T [cm]	Power consumption [W]
115.705.16.6	black / matt	Stainless steel	24.6	16.4	1.5	≤ 4
115.705.SN.6	brushed, easy-to-clean coated	Stainless steel	24.6	16.4	1.5	≤ 4

Available as of April 2026

To order additionally

- Geberit remote flush actuator for dual flush, Bluetooth® → p. 253
- Geberit power supply unit for Power & Connect box → p. 249

Can be combined with

- Geberit installation set with power supply unit, for WC flush controls with electronic flush actuation, 12 V → p. 248
- Geberit set of Power & Connect box and power supply unit for element for wall-hung WC → p. 250
- Geberit 230 V / 12 V / 50 Hz power supply unit set with 1.8 m voltage supply cable and combination outlet mounting box → p. 207


Accessories

- Geberit remote flush actuator for single flush, Bluetooth® → p. 252



- Exclusively compatible with Bluetooth® remote control according to the accessories and compatibility list in the online catalogue

Geberit electronic WC flush control, mains operation, for Sigma concealed cistern 12 cm, with Sigma80 actuator plate, square, touchless

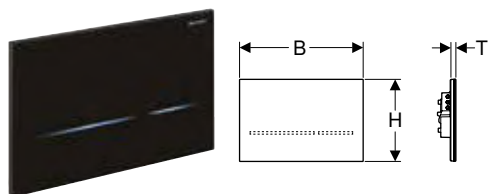

click & scan

Application purposes

- For private and semipublic areas
- For releasing a dual flush
- For solid and drywall construction
- For touchless flush actuation of Sigma concealed cisterns 12 cm
- Not suitable for use with Geberit inserts for in-cistern block
- Suitable for barrier-free construction

Technical data

Degree of protection	IP45
Nominal voltage	85–240 V AC
Mains frequency	50–60 Hz
Operating voltage	12 V DC
Power consumption in standby mode	0.15 W
Interval flush time, factory setting	5 s
Detection time, factory setting	7 s

Scope of delivery

- Sigma80 actuator plate
- Mounting frame
- Support block with servomotor and lifting device, premounted

Characteristics

- Flush actuation possible via external push-button
- Actuator plate without mechanical buttons
- Actuator buttons identifiable by light bars
- Button illumination activated when approached
- Button illumination can be set in five colours
- Orientation light can be activated
- Power supply via external power supply unit
- Transformation of mains voltage to extra-low voltage, 12 V DC
- Operation with extra-low voltage, no mains voltage in cistern
- Adjustable interval flush
- Preflush can be set
- Minimum detection time can be set
- Device settings and operation with mobile device via integrated Bluetooth® interface
- Compatible with Geberit Control App
- Wired networkable with Geberit gateway via GEBUS converter
- Wirelessly connectable with Geberit Gateway via Bluetooth®
- Compatible with Geberit Connect
- Compatible with Geberit Service Handy
- Lockable

Art. no.	Colour / surface	Product material	B [cm]	H [cm]	T [cm]	Power consumption [W]
116.090.SG.6	black / glass	Glass	24.7	16.4	1	≤ 4
116.090.SM.6	reflective glass	Glass	24.7	16.4	1	≤ 4

To order additionally

- Geberit power supply unit for Power & Connect box → p. 249

Can be combined with

- Geberit set of Power & Connect box and power supply unit for element for wall-hung WC → p. 250
- Geberit installation set with power supply unit, for WC flush controls with electronic flush actuation, 12 V → p. 248
- Geberit 230 V / 12 V / 50 Hz power supply unit set with 1.8 m voltage supply cable and combination outlet mounting box → p. 207

Accessories

- Geberit remote flush actuator for single flush, Bluetooth® → p. 252
- Geberit remote flush actuator for dual flush, Bluetooth® → p. 253

Geberit electronic WC flush control, mains operation, for Sigma concealed cistern 12 cm, for external button



click & scan

Application purposes

- For manual remote flush actuation of Sigma concealed cisterns 12 cm using pull-down rails with potential-free push-button with closing function
- For releasing a single or dual flush
- For solid and drywall construction
- Suitable for barrier-free construction
- For Sigma concealed cisterns 12 cm

Technical data

Degree of protection	IP45
Nominal voltage	85–240 V AC
Mains frequency	50–60 Hz
Operating voltage	12 V DC
Power consumption in standby mode	0.15 W
Interval flush time, factory setting	5 s
Product material	Plastic

Characteristics

- Flush actuation connected by wire
- Flush actuation via pull-down rail, connected by wire
- Push-buttons can be connected in parallel
- Single or dual flush can be triggered via actuator plate
- Can be combined with Sigma01 to Sigma70 actuator plates or Geberit cover plates
- Power supply via external power supply unit
- Transformation of mains voltage to extra-low voltage, 12 V DC
- Operation with extra-low voltage, no mains voltage in cistern
- Interval flush preset
- Adjustable interval flush
- Device settings and operation with mobile device via integrated Bluetooth® interface
- Compatible with Geberit Control App
- Wired networkable with Geberit gateway via GEBUS converter
- Wirelessly connectable with Geberit Gateway via Bluetooth®
- Compatible with Geberit Connect

Scope of delivery

- Support block with servomotor and lifting device, premounted
- Electrical control
- Connection cable, length 2 m, prefabricated

Art. no.	Power consumption [W]
115.862.00.6	≤ 4

To order additionally

- Actuator plate or cover plate
- Push-button
- Geberit power supply unit for Power & Connect box → p. 249

Can be combined with

- Geberit installation set with power supply unit, for WC flush controls with electronic flush actuation, 12 V → p. 248
- Geberit set of Power & Connect box and power supply unit for element for wall-hung WC → p. 250
- Geberit 230 V / 12 V / 50 Hz power supply unit set with 1.8 m voltage supply cable and combination outlet mounting box → p. 207

Accessories

- Geberit installation set for WC flush control with mechanical flush actuation, push-button → p. 251



Geberit electronic WC flush control, mains operation, for Sigma concealed cistern 12 cm, for RF-controlled button



click & scan

Application purposes

- For manual remote flush actuation of Sigma concealed cisterns 12 cm using pull-down rails with RF-controlled button
- For manual remote flush actuation of Sigma concealed cisterns 12 cm using Geberit RF-controlled button
- For releasing a single or dual flush
- For solid and drywall construction
- Suitable for barrier-free construction
- For Sigma concealed cisterns 12 cm
- Not suitable for use with Geberit inserts for in-cistern block

Technical data

Degree of protection	IP45
Nominal voltage	85–240 V AC
Mains frequency	50–60 Hz
Operating voltage	12 V DC
Power consumption in standby mode	0.15 W
Radio frequency	868.4 MHz
Radio frequency distance	10 m
Interval flush time, factory setting	5 s
Product material	Plastic

Characteristics

- Flush actuation using pull-down rail, wireless, radio
- Flush actuation via Geberit RF-controlled button, wireless
- Dual flush can be triggered via RF-controlled button
- Single or dual flush can be triggered via actuator plate
- Can be combined with Sigma01 to Sigma70 actuator plates or Geberit cover plates
- Power supply via external power supply unit
- Transformation of mains voltage to extra-low voltage, 12 V DC
- Operation with extra-low voltage, no mains voltage in cistern
- Interval flush preset
- Adjustable interval flush
- Device settings and operation with mobile device via integrated Bluetooth® interface
- Compatible with Geberit Control App
- Wired networkable with Geberit gateway via GEBUS converter
- Wirelessly connectable with Geberit Gateway via Bluetooth®
- Compatible with Geberit Connect

Scope of delivery

- Support block with servomotor and lifting device, premounted
- Control electronics with radio receiver

Art. no.	Power consumption [W]
115.897.00.6	≤ 4

To order additionally

- Actuator plate or cover plate
- Geberit power supply unit for Power & Connect box → p. 249

Can be combined with

- Geberit installation set with power supply unit, for WC flush controls with electronic flush actuation, 12 V → p. 248
- Geberit set of Power & Connect box and power supply unit for element for wall-hung WC → p. 250
- Geberit 230 V / 12 V / 50 Hz power supply unit set with 1.8 m voltage supply cable and combination outlet mounting box → p. 207

Accessories

- Geberit remote flush actuator for single flush, Bluetooth® → p. 252
- Geberit remote flush actuator for dual flush, Bluetooth® → p. 253
- Geberit RF-controlled button for electronic flush actuation → p. 252

New

Geberit electronic WC flush control, mains operation, for Sigma concealed cistern 12 cm, for Bluetooth® remote flush actuation



click & scan

Application purposes

- For manual remote flush actuation of Sigma concealed cisterns 12 cm using pull-down rails with Bluetooth® remote control
- For manual remote flush actuation of Sigma concealed cisterns 12 cm using Geberit Bluetooth® remote control
- For releasing a single or dual flush
- For solid and drywall construction
- Suitable for barrier-free construction
- For Sigma concealed cisterns 12 cm
- Not suitable for use with Geberit inserts for in-cistern block

Technical data

Degree of protection	IP45
Nominal voltage	85–240 V AC
Mains frequency	50–60 Hz
Operating voltage	12 V DC
Power consumption in standby mode	0.15 W
Radio frequency	2400 MHz
Radio frequency distance	10 m
Interval flush time, factory setting	5 s
Product material	Plastic

Characteristics

- Flush actuation via pull-down rail, wireless, with Bluetooth® remote control
- Flush actuation via Geberit Bluetooth® remote control, wireless
- Dual flush can be actuated via Bluetooth® remote control
- Single or dual flush can be triggered via actuator plate
- Can be combined with Sigma01 to Sigma70 actuator plates or Geberit cover plates
- Power supply via external power supply unit
- Transformation of mains voltage to extra-low voltage, 12 V DC
- Operation with extra-low voltage, no mains voltage in cistern
- Interval flush preset
- Adjustable interval flush
- Device settings and operation with mobile device via integrated Bluetooth® interface
- Compatible with Geberit Control App
- Wired networkable with Geberit gateway via GEBUS converter
- Wirelessly connectable with Geberit Gateway via Bluetooth®
- Compatible with Geberit Connect

Scope of delivery

- Support block with servomotor and lifting device, premounted
- Control electronics with Bluetooth® receiver

Art. no.	Power consumption [W]
115.702.00.6	≤ 4

Available as of April 2026

To order additionally

- Actuator plate or cover plate
- Geberit remote flush actuator for dual flush, Bluetooth® → p. 253
- Geberit power supply unit for Power & Connect box → p. 249

Can be combined with

- Geberit installation set with power supply unit, for WC flush controls with electronic flush actuation, 12 V
- Geberit set of Power & Connect box and power supply unit for element for wall-hung WC
- Geberit 230 V / 12 V / 50 Hz power supply unit set with 1.8 m voltage supply cable and combination outlet mounting box → p. 528

Accessories

- Geberit remote flush actuator for single flush, Bluetooth® → p. 252



- Exclusively compatible with Bluetooth® remote control according to the accessories and compatibility list in the online catalogue

Geberit electronic WC flush control, mains operation, for Sigma concealed cistern 12 cm, with Type 10 IR button, round



click & scan

Application purposes

- For manual remote flush actuation of Sigma concealed cisterns 12 cm using a touchless IR button
- For releasing a dual flush
- For installation in solid and drywall constructions with flush-mounting box
- For installation in bathroom furniture with counternut
- Suitable for barrier-free construction
- For Sigma concealed cisterns 12 cm

Technical data

Degree of protection	IP45
Nominal voltage	85–240 V AC
Mains frequency	50–60 Hz
Operating voltage	12 V DC
Power consumption in standby mode	0.15 W
Interval flush time, factory setting	5 s

Characteristics

- Touchless flush actuation for single or dual flush by moving hand toward sensor
- Single or dual flush can be triggered via actuator plate
- Can be combined with Sigma01 to Sigma70 actuator plates or Geberit cover plates
- Power supply via external power supply unit
- Transformation of mains voltage to extra-low voltage, 12 V DC
- Operation with extra-low voltage, no mains voltage in cistern
- Interval flush preset
- Adjustable interval flush
- Device settings and operation with mobile device via integrated Bluetooth® interface
- Compatible with Geberit Control App
- Wired networkable with Geberit gateway via GEBUS converter
- Wirelessly connectable with Geberit Gateway via Bluetooth®
- Compatible with Geberit Connect

Scope of delivery

- Infrared button with 2 m connection cable
- Flush-mounting box
- Counternut
- Conduit pipe, length 1.7 m
- Support block with servomotor and lifting device, premounted
- Electrical control

Art. no.	Colour / surface	Product material	B	H	T	Power consumption [W]
			[cm]	[cm]	[cm]	
115.936.14.6	black matt	Brass	6	6	0.5	≤ 4
115.936.SN.6	Design ring: polished Collar: brushed, easy-to-clean coated	Stainless steel	6	6	0.5	≤ 4

To order additionally


- Actuator plate or cover plate
- Geberit power supply unit for Power & Connect box → p. 249

Can be combined with

- Geberit installation set with power supply unit, for WC flush controls with electronic flush actuation, 12 V → p. 248
- Geberit set of Power & Connect box and power supply unit for element for wall-hung WC → p. 250
- Geberit 230 V / 12 V / 50 Hz power supply unit set with 1.8 m voltage supply cable and combination outlet mounting box → p. 207

For mains operation, for Geberit Sigma concealed cisterns 8 cm

Geberit electronic WC flush control, mains operation, for Sigma concealed cistern 8 cm, with Sigma10 actuator plate, round, automatic / touchless / manual

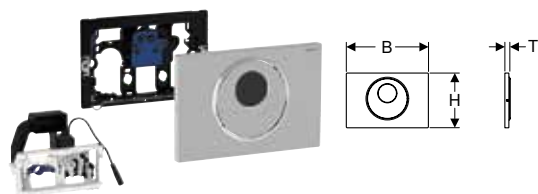

Application purposes

- For solid and drywall construction
- For Sigma concealed cisterns 8 cm, range 2016
- Not suitable for use with Geberit inserts for in-cistern block
- Suitable for barrier-free construction

Technical data

Degree of protection	IP45
Nominal voltage	85–240 V AC
Mains frequency	50–60 Hz
Operating voltage	12 V DC
Power consumption in standby mode	0.15 W
Interval flush time, factory setting	5 s
Detection time, factory setting	7 s

Scope of delivery

- Sigma10 actuator plate
- Mounting frame with infrared control, premounted
- Support block with servomotor and lifting device, premounted
- Actuator rod
- Fastening material

Characteristics

- Touchless flush actuation for single or dual flush by moving hand toward sensor
- Manual flush actuation via actuator plate
- Flush actuation possible via external push-button
- Screwable actuator plate
- Power supply via external power supply unit
- Transformation of mains voltage to extra-low voltage, 12 V DC
- Operation with extra-low voltage, no mains voltage in cistern
- Interval flush preset
- Adjustable interval flush
- Preflush can be set
- Minimum detection time can be set
- Device settings and operation with mobile device via integrated Bluetooth® interface
- Compatible with Geberit Control App
- Wired networkable with Geberit gateway via GEBUS converter
- Wirelessly connectable with Geberit Gateway via Bluetooth®
- Compatible with Geberit Connect
- Compatible with Geberit Service Handy
- Vandal-resistant

Art. no.	Colour / surface	Product material	B	H	T	Power consumption [W]
			[cm]	[cm]	[cm]	
115.856.16.6	Plate, Button: black matt / easy-to-clean coated Design ring/-s: black / glossy	Stainless steel	24.6	16.4	1.5	≤ 4
115.856.DW.6	Plate, Button: black / glossy Design ring/-s: black matt	Stainless steel	24.6	16.4	1.5	≤ 4
115.856.SN.6	Plate, Button: brushed, easy-to-clean coated Design ring: polished	Stainless steel	24.6	16.4	1.5	≤ 4

To order additionally

- Geberit installation set with power supply unit, for WC flush controls with electronic flush actuation, 12 V → p. 248

Can be combined with

- Geberit 230 V / 12 V / 50 Hz power supply unit set with 1.8 m voltage supply cable and combination outlet mounting box → p. 207

Accessories


- Geberit remote flush actuator for single flush, Bluetooth® → p. 252
- Geberit remote flush actuator for dual flush, Bluetooth® → p. 253

Actuator plates and WC flush controls

WC flush controls with electronic flush actuation

For mains operation, for Geberit Sigma concealed cisterns 8 cm

Geberit electronic WC flush control, mains operation, for Sigma concealed cistern 8 cm, with Sigma80 actuator plate, square, touchless

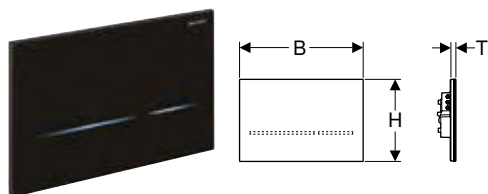

click & scan

Application purposes

- For private and semipublic areas
- For releasing a dual flush
- For solid and drywall construction
- For Sigma concealed cisterns 8 cm, range 2016
- Not suitable for use with Geberit inserts for in-cistern block
- Suitable for barrier-free construction

Technical data

Degree of protection	IP45
Nominal voltage	85–240 V AC
Mains frequency	50–60 Hz
Operating voltage	12 V DC
Power consumption in standby mode	0.15 W
Interval flush time, factory setting	5 s
Detection time, factory setting	7 s

Scope of delivery

- Sigma80 actuator plate
- Mounting frame
- Support block with servomotor and lifting device, premounted

Characteristics

- Flush actuation possible via external push-button
- Actuator plate without mechanical buttons
- Actuator buttons identifiable by light bars
- Button illumination activated when approached
- Button illumination can be set in five colours
- Orientation light can be activated
- Power supply via external power supply unit
- Transformation of mains voltage to extra-low voltage, 12 V DC
- Operation with extra-low voltage, no mains voltage in cistern
- Adjustable interval flush
- Preflush can be set
- Minimum detection time can be set
- Device settings and operation with mobile device via integrated Bluetooth® interface
- Compatible with Geberit Control App
- Wired networkable with Geberit gateway via GEBUS converter
- Wirelessly connectable with Geberit Gateway via Bluetooth®
- Compatible with Geberit Connect
- Compatible with Geberit Service Handy
- Lockable

Art. no.	Colour / surface	Product material	B [cm]	H [cm]	T [cm]	Power consumption [W]
116.092.SG.6	black / reflective glass	Glass	24.7	16.4	1	≤ 4
116.092.SM.6	reflective glass	Glass	24.7	16.4	1	≤ 4

To order additionally

- Geberit installation set with power supply unit, for WC flush controls with electronic flush actuation, 12 V → p. 248

Can be combined with

- Geberit 230 V / 12 V / 50 Hz power supply unit set with 1.8 m voltage supply cable and combination outlet mounting box → p. 207

Accessories

- Geberit remote flush actuator for single flush, Bluetooth® → p. 252
- Geberit remote flush actuator for dual flush, Bluetooth® → p. 253

For mains operation, for Geberit Omega concealed cisterns 12 cm

Geberit electronic WC flush control, mains operation, for Omega concealed cistern 12 cm, for external button



click & scan

Application purposes

- For manual remote flush actuation of Omega concealed cisterns 12 cm using standard, potential-free push-buttons with closing function
- For releasing a single or dual flush
- For solid and drywall construction
- Suitable for barrier-free construction
- For Omega concealed cisterns 12 cm

Technical data

Degree of protection	IP45
Nominal voltage	85–240 V AC
Mains frequency	50–60 Hz
Operating voltage	12 V DC
Power consumption in standby mode	0.15 W
Interval flush time, factory setting	5 s
Product material	Plastic

Characteristics

- Flush actuation connected by wire
- Dual-flush remote control flush actuation via external push-buttons
- Push-buttons can be connected in parallel
- Dual flush via actuator plate can be triggered from above or from the front
- Can be combined with actuator plates Omega20 to Omega60 or Geberit cover plates
- Power supply via external power supply unit
- Transformation of mains voltage to extra-low voltage, 12 V DC
- Operation with extra-low voltage, no mains voltage in cistern
- Interval flush preset
- Adjustable interval flush
- Device settings and operation with mobile device via integrated Bluetooth® interface
- Compatible with Geberit Control App
- Wired networkable with Geberit gateway via GEBUS converter
- Wirelessly connectable with Geberit Gateway via Bluetooth®
- Compatible with Geberit Connect

Scope of delivery

- Support block with servomotor and lifting device, premounted
- Electrical control
- Connection cable, length 2 m, prefabricated

Art. no.	Power consumption [W]
115.955.00.6	≤ 4

To order additionally

- Actuator plate or cover plate
- Push-button
- Geberit power supply unit for Power & Connect box → p. 249

Can be combined with

- Geberit installation set with power supply unit, for WC flush controls with electronic flush actuation, 12 V → p. 248
- Geberit set of Power & Connect box and power supply unit for element for wall-hung WC → p. 250
- Geberit 230 V / 12 V / 50 Hz power supply unit set with 1.8 m voltage supply cable and combination outlet mounting box → p. 207

Geberit electronic WC flush control, mains operation, for Omega concealed cistern 12 cm, with Type 10 IR button, round



click & scan

Application purposes

- For manual remote flush actuation of Omega concealed cisterns 12 cm using a touchless IR button
- For releasing a dual flush
- For installation in solid and drywall constructions with flush-mounting box
- For installation in bathroom furniture with counternut
- Suitable for barrier-free construction
- For Omega concealed cisterns 12 cm

Technical data

Degree of protection	IP45
Nominal voltage	85–240 V AC
Mains frequency	50–60 Hz
Operating voltage	12 V DC
Power consumption in standby mode	0.15 W
Interval flush time, factory setting	5 s

Characteristics

- Touchless flush actuation for single or dual flush by moving hand toward sensor
- Dual flush via actuator plate can be triggered from above or from the front
- Can be combined with actuator plates Omega20 to Omega60 or Geberit cover plates
- Power supply via external power supply unit
- Transformation of mains voltage to extra-low voltage, 12 V DC
- Operation with extra-low voltage, no mains voltage in cistern
- Interval flush preset
- Adjustable interval flush
- Device settings and operation with mobile device via integrated Bluetooth® interface
- Compatible with Geberit Control App
- Wired networkable with Geberit gateway via GEBUS converter
- Wirelessly connectable with Geberit Gateway via Bluetooth®
- Compatible with Geberit Connect

Scope of delivery

- Infrared button with 2 m connection cable
- Flush-mounting box
- Counternut
- Conduit pipe, length 1.7 m
- Support block with servomotor and lifting device, premounted
- Electrical control

Art. no.	Colour / surface	Product material	B [cm]	H [cm]	T [cm]	Power consumption [W]
115.956.14.6	black matt	Brass	6	6	0.5	≤ 4
115.956.SN.6	Design ring: polished Collar: brushed, easy-to-clean coated	Stainless steel	6	6	0.5	≤ 4

To order additionally


- Actuator plate or cover plate
- Geberit power supply unit for Power & Connect box → p. 249

Can be combined with

- Geberit installation set with power supply unit, for WC flush controls with electronic flush actuation, 12 V → p. 248
- Geberit set of Power & Connect box and power supply unit for element for wall-hung WC → p. 250
- Geberit 230 V / 12 V / 50 Hz power supply unit set with 1.8 m voltage supply cable and combination outlet mounting box → p. 207

For battery operation, for Geberit Sigma concealed cisterns 12 cm

Geberit electronic WC flush control, battery operation, for Sigma concealed cistern 12 cm, with Sigma10 actuator plate, round, automatic / touchless / manual

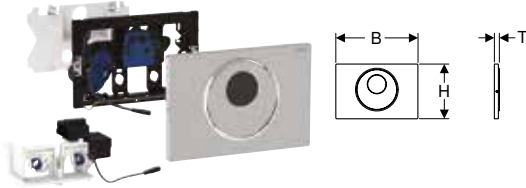

Application purposes

- For releasing a dual flush
- For solid and drywall construction
- For touchless flush actuation of Sigma concealed cisterns 12 cm
- Not suitable for use with Geberit inserts for in-cistern block
- Suitable for barrier-free construction

Technical data

Battery type	LR20
Degree of protection	IP45
Operating voltage	3 V DC
Power consumption in standby mode	0.15 W
Interval flush time, factory setting	1 s
Detection time, factory setting	7 s

Characteristics

- Touchless flush actuation for single or dual flush by moving hand toward sensor
- Manual flush actuation via actuator plate
- Flush actuation possible via external push-button
- Screwable actuator plate
- Batteries in closed battery compartment in the flushing cistern
- Interval flush preset
- Adjustable interval flush
- Preflush can be set
- Minimum detection time can be set
- Device settings and operation with mobile device via integrated Bluetooth® interface
- Compatible with Geberit Control App
- Wirelessly connectable with Geberit Gateway via Bluetooth®
- Compatible with Geberit Connect
- Compatible with Geberit Service Handy
- Vandal-resistant

Scope of delivery

- Sigma10 actuator plate
- Mounting frame with infrared control and battery compartment, premounted
- Protection plate
- Support block with servomotor and lifting device, premounted
- 2 alkaline manganese batteries LR20, each 1.5 V
- Actuator rod
- Fastening material

Art. no.	Colour / surface	Product material	B	H	T	Power consumption
			[cm]	[cm]	[cm]	
115.891.16.6	Plate, Button: black matt / easy-to-clean coated Design ring/-s: black / glossy	Stainless steel	24.6	16.4	1.5	≤ 4
115.891.DW.6	Plate, Button: black / glossy Design ring/-s: black matt	Stainless steel	24.6	16.4	1.5	≤ 4
115.891.SN.6	Plate, Button: brushed, easy-to-clean coated Design ring: polished	Stainless steel	24.6	16.4	1.5	≤ 4

Accessories


- Geberit remote flush actuator for single flush, Bluetooth® → p. 252
- Geberit remote flush actuator for dual flush, Bluetooth® → p. 253

Actuator plates and WC flush controls

WC flush controls with electronic flush actuation

For battery operation, for Geberit Sigma concealed cisterns 12 cm

Geberit electronic WC flush control, battery operation, for Sigma concealed cistern 12 cm, with Sigma10 actuator plate, round, automatic / touchless, screwable

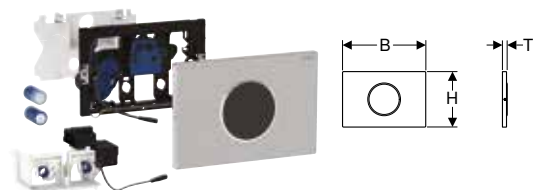

click & scan

Application purposes

- For releasing a dual flush
- For solid and drywall construction
- For touchless flush actuation of Sigma concealed cisterns 12 cm
- Not suitable for use with Geberit inserts for in-cistern block
- Suitable for barrier-free construction

Technical data

Battery type	LR20
Degree of protection	IP45
Operating voltage	3 V DC
Power consumption in standby mode	0.15 W
Interval flush time, factory setting	5 s
Detection time, factory setting	7 s

Characteristics

- Touchless flush actuation for single or dual flush by moving hand toward sensor
- Flush actuation possible via external push-button
- Screwable actuator plate
- Batteries in closed battery compartment in the flushing cistern
- Interval flush preset
- Adjustable interval flush
- Preflush can be set
- Minimum detection time can be set
- Device settings and operation with mobile device via integrated Bluetooth® interface
- Compatible with Geberit Control App
- Wirelessly connectable with Geberit Gateway via Bluetooth®
- Compatible with Geberit Connect
- Compatible with Geberit Service Handy
- Vandal-resistant

Scope of delivery


- Sigma10 actuator plate
- Mounting frame with infrared control and battery compartment, premounted
- Protection plate
- Support block with servomotor and lifting device, premounted
- 2 alkaline manganese batteries LR20, each 1.5 V
- Fastening material

Art. no.	Colour / surface	Product material	B	H	T	Power consumption
			[cm]	[cm]	[cm]	
115.909.16.6	Plate: black matt / easy-to-clean coated Design ring/-s: black / glossy	Stainless steel	24.6	16.4	1.5	≤ 4
115.909.DW.6	Plate: black / glossy Design ring/-s: black matt	Stainless steel	24.6	16.4	1.5	≤ 4
115.909.SN.6	Plate: brushed, easy-to-clean coated Design ring: polished	Stainless steel	24.6	16.4	1.5	≤ 4

Accessories

- Geberit remote flush actuator for single flush, Bluetooth® → p. 252
- Geberit remote flush actuator for dual flush, Bluetooth® → p. 253

Geberit electronic WC flush control, battery operation, for Sigma concealed cistern 12 cm, with Sigma10 actuator plate, round, automatic / touchless

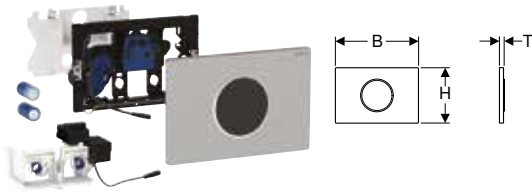

Application purposes

- For private and semipublic areas
- For releasing a dual flush
- For solid and drywall construction
- For touchless flush actuation of Sigma concealed cisterns 12 cm
- Not suitable for use with Geberit inserts for in-cistern block
- Suitable for barrier-free construction

Technical data

Battery type	LR20
Degree of protection	IP45
Operating voltage	3 V DC
Power consumption in standby mode	0.15 W
Interval flush time, factory setting	5 s
Detection time, factory setting	7 s

Characteristics

- Touchless flush actuation for single or dual flush by moving hand toward sensor
- Flush actuation possible via external push-button
- Batteries in closed battery compartment in the flushing cistern
- Interval flush preset
- Adjustable interval flush
- Preflush can be set
- Minimum detection time can be set
- Device settings and operation with mobile device via integrated Bluetooth® interface
- Compatible with Geberit Control App
- Wirelessly connectable with Geberit Gateway via Bluetooth®
- Compatible with Geberit Connect
- Compatible with Geberit Service Handy

Scope of delivery

- Sigma10 actuator plate
- Mounting frame with infrared control and battery compartment, premounted
- Protection plate
- Support block with servomotor and lifting device, premounted
- 2 alkaline manganese batteries LR20, each 1.5 V

Art. no.	Colour / surface	Product material	B	H	T	Power consumption [W]
			[cm]	[cm]	[cm]	
115.908.16.6	Plate: black matt / easy-to-clean coated Design ring/-s: black / glossy	Stainless steel	24.6	16.4	1.5	≤ 4
115.908.DW.6	Plate: black / glossy Design ring/-s: black matt	Stainless steel	24.6	16.4	1.5	≤ 4
115.908.JQ.6	Plate: chrome / matt, easy-to-clean coated Design ring/-s: chrome / glossy	Plastic	24.6	16.4	1.5	≤ 4
115.908.KH.6	Plate: chrome / glossy Design ring/-s: chrome / matt	Plastic	24.6	16.4	1.5	≤ 4
115.908.KJ.6	Plate: white alpine / glossy Design ring/-s: chrome / glossy	Plastic	24.6	16.4	1.5	≤ 4
115.908.KK.6	Plate: white alpine / glossy Design ring/-s: gold-coloured / glossy	Plastic	24.6	16.4	1.5	≤ 4
115.908.KM.6	Plate: black / glossy Design ring/-s: chrome / glossy	Plastic	24.6	16.4	1.5	≤ 4
115.908.SN.6	Plate: brushed, easy-to-clean coated Design ring: polished	Stainless steel	24.6	16.4	1.5	≤ 4

Accessories

- Geberit remote flush actuator for single flush, Bluetooth® → p. 252
- Geberit remote flush actuator for dual flush, Bluetooth® → p. 253

Geberit electronic WC flush control, battery operation, for Sigma concealed cistern 12 cm, for RF-controlled button



click & scan

Application purposes

- For manual remote flush actuation of Sigma concealed cisterns 12 cm using pull-down rails with RF-controlled button
- For manual remote flush actuation of Sigma concealed cisterns 12 cm using Geberit RF-controlled button
- For releasing a single or dual flush
- For solid and drywall construction
- Suitable for barrier-free construction
- For Sigma concealed cisterns 12 cm
- Not suitable for use with Geberit inserts for in-cistern block

Technical data

Battery type	LR20
Degree of protection	IP45
Operating voltage	3 V DC
Power consumption in standby mode	0.15 W
Radio frequency	868.4 MHz
Radio frequency distance	10 m
Interval flush time, factory setting	5 s
Product material	Plastic

Characteristics

- Flush actuation using pull-down rail, wireless, radio
- Flush actuation via Geberit RF-controlled button, wireless
- Dual flush can be triggered via RF-controlled button
- Single or dual flush can be triggered via actuator plate
- Can be combined with Sigma01 to Sigma50 actuator plates or Geberit cover plates
- Batteries in closed battery compartment in the flushing cistern
- Interval flush preset
- Adjustable interval flush
- Device settings and operation with mobile device via integrated Bluetooth® interface
- Compatible with Geberit Control App
- Wirelessly connectable with Geberit Gateway via Bluetooth®
- Compatible with Geberit Connect

Scope of delivery

- Mounting frame with battery compartment, premounted
- Protection plate
- Support block with servomotor and lifting device, premounted
- Control electronics with radio receiver
- 2 alkaline manganese batteries LR20, each 1.5 V

Art. no.	Power consumption [W]
115.898.00.6	≤ 4

To order additionally

- Actuator plate or cover plate

Accessories

- Geberit remote flush actuator for single flush, Bluetooth® → p. 252
- Geberit remote flush actuator for dual flush, Bluetooth® → p. 253
- Geberit RF-controlled button for electronic flush actuation → p. 252

New

Geberit electronic WC flush control, battery operation, for Sigma concealed cistern 12 cm, for Bluetooth® remote flush actuation



click & scan

Application purposes

- For manual remote flush actuation of Sigma concealed cisterns 12 cm using pull-down rails with Bluetooth® remote control
- For manual remote flush actuation of Sigma concealed cisterns 12 cm using Geberit Bluetooth® remote control
- For releasing a single or dual flush
- For solid and drywall construction
- Suitable for barrier-free construction
- For Sigma concealed cisterns 12 cm
- Not suitable for use with Geberit inserts for in-cistern block

Technical data

Battery type	LR20
Degree of protection	IP45
Operating voltage	3 V DC
Power consumption in standby mode	0.15 W
Radio frequency	2400 MHz
Radio frequency distance	10 m
Interval flush time, factory setting	5 s
Product material	Plastic

Characteristics

- Flush actuation via pull-down rail, wireless, with Bluetooth® remote control
- Flush actuation via Geberit Bluetooth® remote control, wireless
- Dual flush can be actuated via Bluetooth® remote control
- Single or dual flush can be triggered via actuator plate
- Can be combined with Sigma01 to Sigma50 actuator plates or Geberit cover plates
- Batteries in closed battery compartment in the flushing cistern
- Interval flush preset
- Adjustable interval flush
- Device settings and operation with mobile device via integrated Bluetooth® interface
- Compatible with Geberit Control App
- Wirelessly connectable with Geberit Gateway via Bluetooth®
- Compatible with Geberit Connect

Scope of delivery

- Mounting frame with battery compartment, premounted
- Protection plate
- Support block with servomotor and lifting device, premounted
- Control electronics with Bluetooth® receiver
- 2 alkaline manganese batteries LR20, each 1.5 V

Art. no.	Power consumption [W]
115.704.00.6	≤ 4

Available as of April 2026

To order additionally

- Actuator plate or cover plate
- Geberit remote flush actuator for dual flush, Bluetooth® → p. 253

Accessories


- Geberit remote flush actuator for single flush, Bluetooth® → p. 252



- Exclusively compatible with Bluetooth® remote control according to the accessories and compatibility list in the online catalogue



Geberit electronic WC flush control, battery operation, for Sigma concealed cistern 12 cm, with Sigma10 actuator plate, round, for pull-down rail, radio

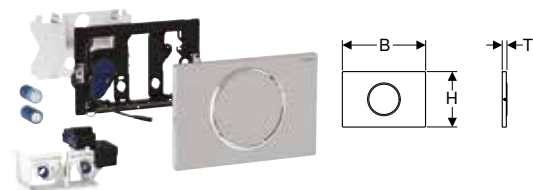

click & scan

Application purposes

- For manual remote flush actuation of Sigma concealed cisterns 12 cm using pull-down rails with RF-controlled button
- For single flush
- For solid and drywall construction
- Suitable for barrier-free construction
- For Sigma concealed cisterns 12 cm
- Not suitable for use with Geberit inserts for in-cistern block

Technical data

Battery type	LR20
Degree of protection	IP45
Operating voltage	3 V DC
Power consumption in standby mode	0.15 W
Radio frequency	868.4 MHz
Radio frequency distance	10 m
Interval flush time, factory setting	5 s

Characteristics

- Flush actuation using pull-down rail, wireless, radio
- Single flush can be triggered via actuator plate
- Batteries in closed battery compartment in the flushing cistern
- Interval flush preset
- Adjustable interval flush
- Device settings and operation with mobile device via integrated Bluetooth® interface
- Compatible with Geberit Control App
- Wirelessly connectable with Geberit Gateway via Bluetooth®
- Compatible with Geberit Connect
- Screwable actuator plate

Scope of delivery

- Sigma10 actuator plate
- Mounting frame
- Protection plate
- Actuator rod
- Support block with servomotor and lifting device, premounted
- Control electronics with radio receiver
- 2 alkaline manganese batteries LR20, each 1.5 V
- Fastening material


Art. no.	Colour / surface	Product material	B	H	T	Power consumption
			[cm]	[cm]	[cm]	
115.869.16.6	Plate, Button: black matt / easy-to-clean coated Design ring/-s: black / glossy	Stainless steel	24.6	16.4	1.5	≤ 4
115.869.SN.6	Plate, Button: brushed, easy-to-clean coated Design ring: polished	Stainless steel	24.6	16.4	1.5	≤ 4

Accessories

- Geberit remote flush actuator for single flush, Bluetooth® → p. 252
- Geberit remote flush actuator for dual flush, Bluetooth® → p. 253
- Geberit RF-controlled button for electronic flush actuation → p. 252

New

Geberit electronic WC flush control, battery operation, for Sigma concealed cistern 12 cm, with Sigma10 actuator plate, round, for pull-down rail, for Bluetooth® remote flush actuation

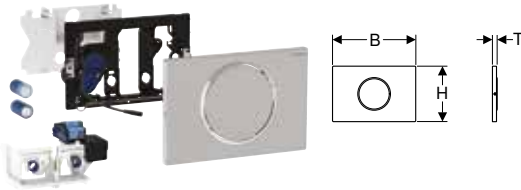

Application purposes

- For manual remote flush actuation of Sigma concealed cisterns 12 cm using pull-down rails with Bluetooth® remote control
- For manual remote flush actuation of Sigma concealed cisterns 12 cm using Geberit Bluetooth® remote control
- For actuating a single flush via the Sigma10 actuator plate
- For actuating a single or dual flush via the Bluetooth® remote control
- For solid and drywall construction
- Suitable for barrier-free construction
- For Sigma concealed cisterns 12 cm
- Not suitable for use with Geberit inserts for in-cistern block

Technical data

Battery type	LR20
Degree of protection	IP45
Operating voltage	3 V DC
Power consumption in standby mode	0.15 W
Radio frequency	2400 MHz
Radio frequency distance	10 m
Interval flush time, factory setting	5 s

Characteristics

- Flush actuation via pull-down rail, wireless, with Bluetooth® remote control
- Flush actuation via Geberit Bluetooth® remote control, wireless
- Dual flush can be actuated via Bluetooth® remote control
- Single flush can be triggered via actuator plate
- Batteries in closed battery compartment in the flushing cistern
- Interval flush preset
- Adjustable interval flush
- Device settings and operation with mobile device via integrated Bluetooth® interface
- Compatible with Geberit Control App
- Wirelessly connectable with Geberit Gateway via Bluetooth®
- Compatible with Geberit Connect
- Screwable actuator plate

Scope of delivery

- Sigma10 actuator plate
- Mounting frame
- Protection plate
- Actuator rod
- Support block with servomotor and lifting device, premounted
- Control electronics with Bluetooth® receiver
- 2 alkaline manganese batteries LR20, each 1.5 V
- Fastening material

Art. no.	Colour / surface	Product material	B	H	T	Power consumption [W]
			[cm]	[cm]	[cm]	
115.706.16.6	black / matt	Stainless steel	24.6	16.4	1.5	≤ 4
115.706.SN.6	brushed, easy-to-clean coated	Stainless steel	24.6	16.4	1.5	≤ 4

Available as of April 2026

To order additionally

- Geberit remote flush actuator for dual flush, Bluetooth® → p. 253


Accessories

- Geberit remote flush actuator for single flush, Bluetooth® → p. 252



- Exclusively compatible with Bluetooth® remote control according to the accessories and compatibility list in the online catalogue

Geberit electronic WC flush control, battery operation, for Sigma concealed cistern 12 cm, with Sigma10 actuator plate, round, for pull-down rail, manual

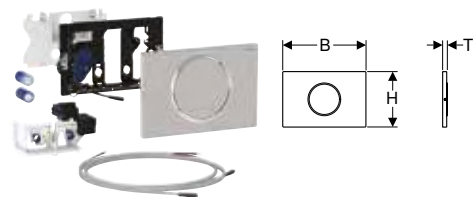

click & scan

Application purposes

- For manual remote flush actuation of Sigma concealed cisterns 12 cm using pull-down rails with potential-free push-button with closing function
- For single flush
- For solid and drywall construction
- Suitable for barrier-free construction
- For Sigma concealed cisterns 12 cm
- Not suitable for use with Geberit inserts for in-cistern block

Technical data

Battery type	LR20
Degree of protection	IP45
Operating voltage	3 V DC
Power consumption in standby mode	0.15 W
Interval flush time, factory setting	5 s

Characteristics

- Flush actuation connected by wire
- Flush actuation via pull-down rail, connected by wire
- Push-buttons can be connected in parallel
- Single flush can be triggered via actuator plate
- Batteries in closed battery compartment in the flushing cistern
- Interval flush preset
- Adjustable interval flush
- Device settings and operation with mobile device via integrated Bluetooth® interface
- Compatible with Geberit Control App
- Wirelessly connectable with Geberit Gateway via Bluetooth®
- Compatible with Geberit Connect
- Screwable actuator plate

Scope of delivery

- Sigma10 actuator plate
- Mounting frame
- Protection plate
- Actuator rod
- Support block with servomotor and lifting device, premounted
- Electrical control
- 2 alkaline manganese batteries LR20, each 1.5 V
- 2 cables, prefabricated, length 1.2 m
- Fastening material

Art. no.	Colour / surface	Product material	B	H	T	Power consumption [W]
			[cm]	[cm]	[cm]	
115.864.16.6	Plate, Button: black matt / easy-to-clean coated Design ring/-s: black / glossy	Stainless steel	24.6	16.4	1.5	≤ 4
115.864.SN.6	Plate, Button: brushed, easy-to-clean coated Design ring: polished	Stainless steel	24.6	16.4	1.5	≤ 4

Geberit electronic WC flush control, battery operation, for Sigma concealed cistern 12 cm, for external button



click & scan

Application purposes

- For manual remote flush actuation of Sigma concealed cisterns 12 cm using pull-down rails with potential-free push-button with closing function
- For releasing a single or dual flush
- For solid and drywall construction
- Suitable for barrier-free construction
- For Sigma concealed cisterns 12 cm
- Not suitable for use with Geberit inserts for in-cistern block

Characteristics

- Flush actuation connected by wire
- Flush actuation via pull-down rail, connected by wire
- Push-buttons can be connected in parallel
- Single or dual flush can be triggered via actuator plate
- Can be combined with Sigma01 to Sigma50 actuator plates or Geberit cover plates
- Batteries in closed battery compartment in the flushing cistern
- Interval flush preset
- Adjustable interval flush
- Device settings and operation with mobile device via integrated Bluetooth® interface
- Compatible with Geberit Control App
- Wirelessly connectable with Geberit Gateway via Bluetooth®
- Compatible with Geberit Connect

Technical data

Battery type	LR20
Degree of protection	IP45
Operating voltage	3 V DC
Power consumption in standby mode	0.15 W
Radio frequency	868.4 MHz
Radio frequency distance	10 m
Interval flush time, factory setting	5 s
Product material	Plastic

Scope of delivery

- Mounting frame with battery compartment, premounted
- Protection plate
- Support block with servomotor and lifting device, premounted
- Electrical control
- Connection cable, length 2 m, prefabricated
- 2 alkaline manganese batteries LR20, each 1.5 V

Art. no.	Power consumption [W]
115.885.00.6	≤ 4


To order additionally

- Actuator plate or cover plate
- Push-button

Accessories

- Geberit installation set for WC flush control with mechanical flush actuation, push-button → p. 251

Geberit electronic WC flush control, battery operation, for Sigma concealed cistern 12 cm, with Type 10 IR button, round

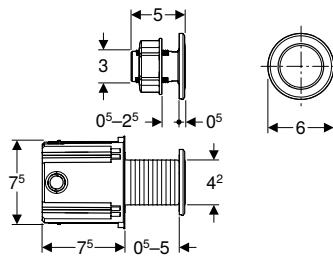

click & scan

Application purposes

- For manual remote flush actuation of Sigma concealed cisterns 12 cm using a touchless IR button
- For releasing a dual flush
- For installation in solid and drywall constructions with flush-mounting box
- For installation in bathroom furniture with counternut
- Suitable for barrier-free construction
- For Sigma concealed cisterns 12 cm
- Not suitable for use with Geberit inserts for in-cistern block

Characteristics

- Touchless flush actuation for single or dual flush by moving hand toward sensor
- Single or dual flush can be triggered via actuator plate
- Can be combined with Sigma01 to Sigma50 actuator plates or Geberit cover plates
- Batteries in closed battery compartment in the flushing cistern
- Interval flush preset
- Adjustable interval flush
- Device settings and operation with mobile device via integrated Bluetooth® interface
- Compatible with Geberit Control App
- Wirelessly connectable with Geberit Gateway via Bluetooth®
- Compatible with Geberit Connect

Scope of delivery

- Infrared button with 2 m connection cable
- Flush-mounting box
- Counternut
- Conduit pipe, length 1.7 m
- Mounting frame with battery compartment, premounted
- Protection plate
- Support block with servomotor and lifting device, premounted
- Electrical control
- 2 alkaline manganese batteries LR20, each 1.5 V

Technical data

Battery type	LR20
Degree of protection	IP45
Operating voltage	3 V DC
Power consumption in standby mode	0.15 W
Interval flush time, factory setting	3 s

Art. no.	Colour / surface	Product material	B [cm]	H [cm]	T [cm]	Power consumption [W]
115.937.14.6	black matt	Brass	6	6	0.5	≤ 4
115.937.SN.6	Design ring: polished Collar: brushed, easy-to-clean coated	Stainless steel	6	6	0.5	≤ 4



To order additionally

- Actuator plate or cover plate

WC flush controls with pneumatic flush actuation

Assortment overview – Geberit WC flush controls with pneumatic flush actuation


Geberit International Sales, version: October 2025

Design	Concealed cistern								Low-height furniture cistern	Exposed cistern	
	Sigma 12 cm	Sigma 8 cm	Omega 12 cm	Delta 12 cm	Kappa 15 cm	Alpha 12 cm (82 cm)	Alpha 12 cm (109 cm)	Alpha 8 cm		AP 123	AP 140
											
Remote flush actuation type 01, single flush, concealed actuator											
116.040.xx.1 	✓		✓	✓	✓	✓	✓		✓	✓	✓
116.041.xx.1		✓						✓			
Remote flush actuation type 01, single flush, exposed actuator											
116.046.11.1 	✓		✓	✓	✓	✓	✓		✓	✓	✓
116.047.11.1		✓						✓			
Remote flush actuation type 01, dual flush, concealed actuator											
116.042.xx.1 	✓		✓	✓	✓	✓	✓		✓	✓	✓
116.043.xx.1		✓						✓			
Remote flush actuation type 01, dual flush, concealed actuator, protruding											
116.044.11.1 	✓		✓	✓	✓	✓	✓		✓	✓	✓
116.045.11.1		✓						✓			
Remote flush actuation type 01, dual flush, exposed actuator											
116.048.11.1 	✓		✓	✓	✓	✓	✓		✓	✓	✓
116.049.11.1		✓						✓			
Remote flush actuation type 01, dual flush, low-height furniture actuator											
116.050.xx.1 	✓		✓	✓	✓	✓	✓		✓	✓	✓
Remote flush actuation type 10, dual flush, concealed actuator											
116.055.xx.1 	✓		✓	✓	✓	✓	✓		✓	✓	✓
116.056.xx.1		✓						✓			
Remote flush actuation type 10, dual flush, low-height furniture actuator											
116.057.xx.1 	✓		✓	✓	✓	✓	✓		✓	✓	✓
Remote flush actuation, square design, dual flush											
116.051.xx.1 	✓		✓	✓	✓	✓	✓		✓	✓	✓
116.053.xx.1		✓						✓			
116.052.xx.1 	✓		✓	✓	✓	✓	✓		✓	✓	✓
116.054.xx.1		✓						✓			
Single flush, low-height furniture actuator, metal											
115.947.xx.1 	✓		✓	✓	✓	✓	✓		✓	✓	✓
Single flush, wall-mounted foot actuator											
115.918.00.1 	✓		✓	✓	✓	✓	✓		✓	✓	✓
115.993.00.1 		✓						✓			
Single flush, for institutions											
115.943.21.1 	✓		✓	✓	✓	✓	✓		✓	✓	✓

✓ Compatible

For dual flush

Geberit Type 01 remote flush actuation, round, pneumatic, dual flush, concealed actuator

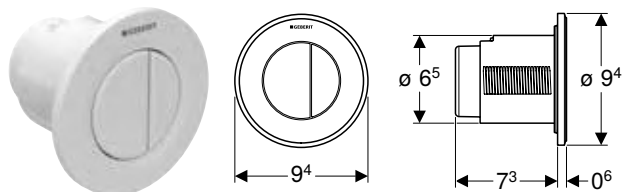

click & scan

Application purposes

- For pneumatic remote flush actuation of Geberit exposed and concealed cisterns
- For releasing a dual flush
- For solid and drywall construction
- For concealed installation
- For Sigma concealed cisterns 12 cm
- For Omega concealed cisterns 12 cm
- For AP123 exposed cisterns

Characteristics

- Round design
- Can be combined with Geberit actuator plates for single flush, dual flush and stop-and-go flush or Geberit cover plate

Scope of delivery


- Actuator
- Pneumatic flushing device
- Pneumatic hose, length 2 m
- Conduit pipe, length 1.7 m
- Flush-mounting box with protection cover
- Fastening material

Technical data

Actuation force (N) max.	25 N
--------------------------	------

Art. no.	Colour / surface	Product material
116.042.11.1	white	Plastic
116.042.21.1	chrome / Glossy	Plastic
116.042.JQ.1	chrome / Matt, easy-to-clean coated	Plastic

Geberit Type 01 remote flush actuation, round, pneumatic, dual flush, concealed actuator, protruding

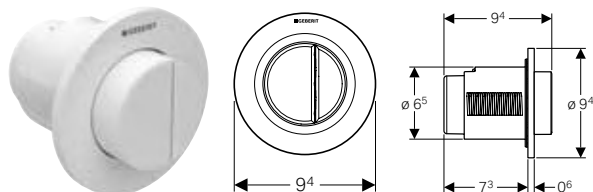

click & scan

Application purposes

- For pneumatic remote flush actuation of Geberit exposed and concealed cisterns
- For releasing a dual flush
- For solid and drywall construction
- For concealed installation
- For Sigma concealed cisterns 12 cm
- For Omega concealed cisterns 12 cm
- For AP123 exposed cisterns

Characteristics

- Round design
- Actuator buttons protruding
- Can be combined with Geberit actuator plates for single flush, dual flush and stop-and-go flush or Geberit cover plate

Scope of delivery


- Actuator
- Pneumatic flushing device
- Pneumatic hose, length 2 m
- Conduit pipe, length 1.7 m
- Flush-mounting box with protection cover
- Fastening material

Technical data

Actuation force (N) max.	25 N
--------------------------	------

Art. no.	Colour / surface	Product material
116.044.11.1	white alpine	Plastic

Geberit Type 01 remote flush actuation, round, pneumatic, dual flush, exposed actuator

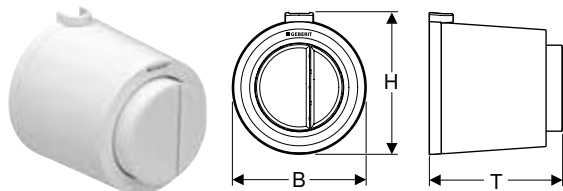

click & scan

Application purposes

- For pneumatic remote flush actuation of Geberit exposed and concealed cisterns
- For releasing a dual flush
- For solid and drywall construction
- For exposed installation
- For Sigma concealed cisterns 12 cm
- For Omega concealed cisterns 12 cm
- For AP123 exposed cisterns

Characteristics

- Round design
- Actuator buttons protruding
- Can be combined with Geberit actuator plates for single flush, dual flush and stop-and-go flush or Geberit cover plate

Scope of delivery


- Actuator
- Pneumatic flushing device
- Pneumatic hose, length 2 m
- Conduit pipe, length 0.9 m
- Fastening material

Technical data

Actuation force (N) max.	25 N
--------------------------	------

Art. no.	Colour / surface	Product material	B [cm]	H [cm]	T [cm]
116.048.11.1	white alpine	Plastic	8.5	9	8.5

Geberit Type 01 remote flush actuation, round, pneumatic, dual flush, furniture actuator

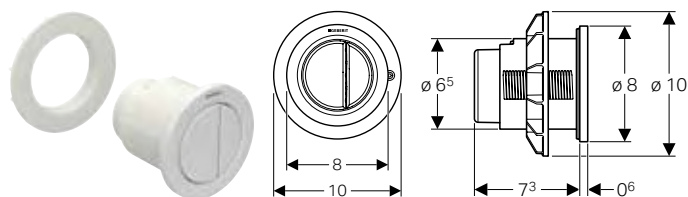

click & scan

Application purposes

- For pneumatic remote flush actuation of Geberit exposed and concealed cisterns
- For pneumatic remote control flush actuation of Geberit low-height concealed cisterns
- For releasing a dual flush
- For bathroom furniture
- For Sigma concealed cisterns 12 cm
- For Omega concealed cisterns 12 cm
- For AP123 exposed cisterns

Characteristics

- Round design
- Can be combined with Geberit actuator plates for single flush, dual flush and stop-and-go flush or Geberit cover plate

Scope of delivery


- Actuator
- Pneumatic flushing device
- Pneumatic hose, length 2 m
- Fastening material

Technical data

Actuation force (N) max.	25 N
--------------------------	------

Art. no.	Colour / surface	Product material
116.050.11.1	white	Plastic
116.050.21.1	chrome / glossy	Plastic
116.050.JQ.1	chrome / matt, easy-to-clean coated	Plastic

Geberit Type 01 remote flush actuation, round, pneumatic, dual flush, for Sigma concealed cistern 8 cm, concealed actuator

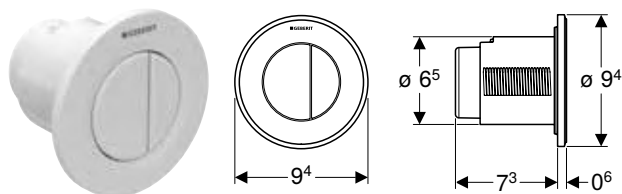

click & scan

Application purposes

- For pneumatic remote flush actuation of Geberit concealed cisterns
- For dual flush
- For solid and drywall construction
- For concealed installation
- For Sigma concealed cisterns 8 cm
- For Alpha concealed cisterns 8 cm

Characteristics

- Round design
- Can be combined with Geberit actuator plates for single flush and stop-and-go flush or Geberit cover plate

Scope of delivery


- Actuator
- Pneumatic flushing device
- Pneumatic hose, length 2 m
- Conduit pipe, length 1.7 m
- Flush-mounting box with protection cover
- Fastening material

Technical data

Actuation force (N) max.	25 N
--------------------------	------

Art. no.	Colour / surface	Product material
116.043.11.1	white	Plastic
116.043.21.1	chrome / glossy	Plastic
116.043.JQ.1	chrome / matt, easy-to-clean coated	Plastic

Geberit Type 01 remote flush actuation, round, pneumatic, dual flush, for Sigma concealed cistern 8 cm, concealed actuator, protruding

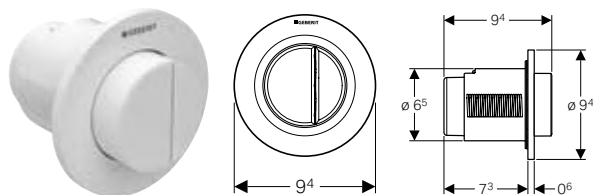

click & scan

Application purposes

- For pneumatic remote flush actuation of Geberit concealed cisterns
- For dual flush
- For solid and drywall construction
- For concealed installation
- For Sigma concealed cisterns 8 cm
- For Alpha concealed cisterns 8 cm

Characteristics

- Round design
- Actuator buttons protruding
- Can be combined with Geberit actuator plates for single flush and stop-and-go flush or Geberit cover plate

Scope of delivery


- Actuator
- Pneumatic flushing device
- Pneumatic hose, length 2 m
- Conduit pipe, length 1.7 m
- Flush-mounting box with protection cover
- Fastening material

Technical data

Actuation force (N) max.	25 N
--------------------------	------

Art. no.	Colour / surface	Product material
116.045.11.1	white alpine	Plastic

Geberit Type 01 remote flush actuation, round, pneumatic, dual flush, for Sigma concealed cistern 8 cm, exposed actuator

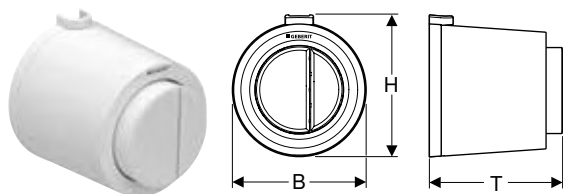

click & scan

Application purposes

- For pneumatic remote flush actuation of Geberit concealed cisterns
- For dual flush
- For solid and drywall construction
- For exposed installation
- For Sigma concealed cisterns 8 cm
- For Alpha concealed cisterns 8 cm

Characteristics

- Round design
- Actuator buttons protruding
- Can be combined with Geberit actuator plates for single flush and stop-and-go flush or Geberit cover plate

Scope of delivery


- Actuator
- Pneumatic flushing device
- Pneumatic hose, length 2 m
- Fastening material
- Conduit pipe, length 0.9 m

Technical data

Actuation force (N) max.	25 N
--------------------------	------

Art. no.	Colour / surface	Product material	B [cm]	H [cm]	T [cm]
116.049.11.1	white alpine	Plastic	8.5	9	8.5

Geberit Type 10 remote flush actuation, round, pneumatic, dual flush, concealed actuator

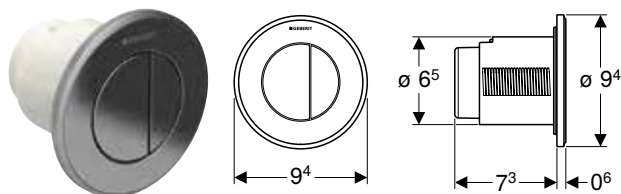

click & scan

Application purposes

- For pneumatic remote flush actuation of Geberit exposed and concealed cisterns
- For releasing a dual flush
- For solid and drywall construction
- For concealed installation
- For Sigma concealed cisterns 12 cm
- For Omega concealed cisterns 12 cm
- For AP123 exposed cisterns

Characteristics

- Round design
- Can be combined with Geberit actuator plates for single flush, dual flush and stop-and-go flush or Geberit cover plate

Scope of delivery


- Actuator
- Pneumatic flushing device
- Pneumatic hose, length 2 m
- Conduit pipe, length 1.7 m
- Flush-mounting box with protection cover
- Fastening material

Technical data

Actuation force (N) max.	25 N
--------------------------	------

Art. no.	Colour / surface	Product material
116.055.16.1	Button, Collar: black matt / easy-to-clean coated Design ring/-s: black / glossy	Plastic
116.055.DW.1	Button, Collar: black / glossy Design ring/-s: black matt	Plastic
116.055.JQ.1	Button, Collar: chrome / matt, easy-to-clean coated Design ring/-s: chrome / glossy	Plastic
116.055.KH.1	Button, Collar: chrome / glossy Design ring/-s: chrome / matt	Plastic
116.055.KJ.1	Button, Collar: white alpine / glossy Design ring/-s: chrome / glossy	Plastic
116.055.KK.1	Button, Collar: white alpine / glossy Design ring/-s: gold-coloured / glossy	Plastic
116.055.KM.1	Button, Collar: black / glossy Design ring/-s: chrome / glossy	Plastic

Geberit Type 10 remote flush actuation, round, pneumatic, dual flush, furniture actuator

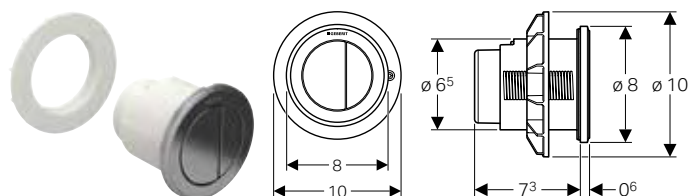

click & scan

Application purposes

- For pneumatic remote flush actuation of Geberit exposed and concealed cisterns
- For pneumatic remote control flush actuation of Geberit low-height concealed cisterns
- For releasing a dual flush
- For bathroom furniture
- For Sigma concealed cisterns 12 cm
- For Omega concealed cisterns 12 cm
- For AP123 exposed cisterns

Characteristics

- Round design
- Can be combined with Geberit actuator plates for single flush, dual flush and stop-and-go flush or Geberit cover plate

Scope of delivery

- Actuator
- Pneumatic flushing device
- Pneumatic hose, length 2 m
- Fastening material


Technical data

Actuation force (N) max.	25 N
--------------------------	------

Art. no.	Colour / surface	Product material
116.057.16.1	Button, Collar: black matt / easy-to-clean coated Design ring/-s: black / glossy	Plastic
116.057.DW.1	Button, Collar: black / glossy Design ring/-s: black matt	Plastic
116.057.JQ.1	Button, Collar: chrome / matt, easy-to-clean coated Design ring/-s: chrome / glossy	Plastic
116.057.KH.1	Button, Collar: chrome / glossy Design ring/-s: chrome / matt	Plastic
116.057.KJ.1	Button, Collar: white alpine / glossy Design ring/-s: chrome / glossy	Plastic
116.057.KK.1	Button, Collar: white alpine / glossy Design ring/-s: gold-coloured / glossy	Plastic
116.057.KM.1	Button, Collar: black / glossy Design ring/-s: chrome / glossy	Plastic
116.057.SN.1	Button, Collar: brushed, easy-to-clean coated Design ring: polished	Die-cast zinc



Geberit Type 10 remote flush actuation, round, pneumatic, dual flush, for Sigma concealed cistern 8 cm, concealed actuator

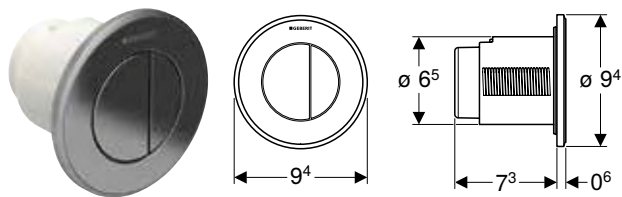

click & scan

Application purposes

- For pneumatic remote flush actuation of Geberit concealed cisterns
- For dual flush
- For solid and drywall construction
- For concealed installation
- For Sigma concealed cisterns 8 cm
- For Alpha concealed cisterns 8 cm

Characteristics

- Round design
- Can be combined with Geberit actuator plates for single flush and stop-and-go flush or Geberit cover plate

Scope of delivery


- Actuator
- Pneumatic flushing device
- Pneumatic hose, length 2 m
- Conduit pipe, length 1.7 m
- Flush-mounting box with protection cover
- Fastening material

Technical data

Actuation force (N) max.	25 N
--------------------------	------

Art. no.	Colour / surface	Product material
116.056.16.1	Button, Collar: black matt / easy-to-clean coated Design ring/-s: black / glossy	Plastic
116.056.DW.1	Button, Collar: black / glossy Design ring/-s: black matt	Plastic
116.056.JQ.1	Button, Collar: chrome / matt, easy-to-clean coated Design ring/-s: chrome / glossy	Plastic
116.056.KH.1	Button, Collar: chrome / glossy Design ring/-s: chrome / matt Collar: natura / glossy	Plastic
116.056.KJ.1	Button, Collar: white alpine / glossy Design ring/-s: chrome / glossy	Plastic
116.056.KK.1	Button, Collar: white alpine / glossy Design ring/-s: gold-coloured / glossy	Plastic
116.056.KM.1	Button, Collar: black / glossy Design ring/-s: chrome / glossy	Plastic

Geberit remote pneumatic flush actuation, for dual flush, for Sigma concealed cistern 8 cm, concealed actuator, protruding

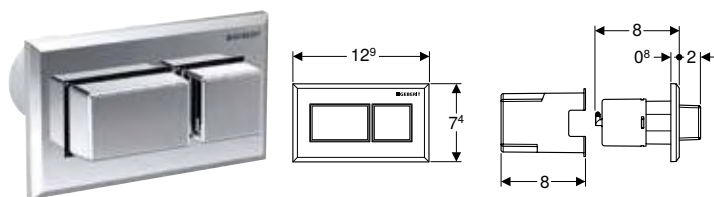

click & scan

Application purposes

- For pneumatic remote flush actuation of Geberit concealed cisterns
- For Sigma concealed cisterns 8 cm
- For Alpha concealed cisterns 8 cm
- For releasing a dual flush
- For solid and drywall construction
- For concealed installation

Characteristics

- Can be combined with Geberit actuator plates for single flush and stop-and-go flush or Geberit cover plate
- Actuator buttons protruding
- Square design

Scope of delivery


- Actuator
- Pneumatic flushing device
- Pneumatic hose, length 2 m
- Conduit pipe, length 1.7 m
- Fastening material

Technical data

Actuation force (N) max.	22 N
--------------------------	------

Art. no.	Colour / surface	Product material
116.054.21.1	Plate, Button: chrome / glossy	Plastic

Geberit remote pneumatic flush actuation, for dual flush, for Sigma concealed cistern 8 cm, concealed actuator

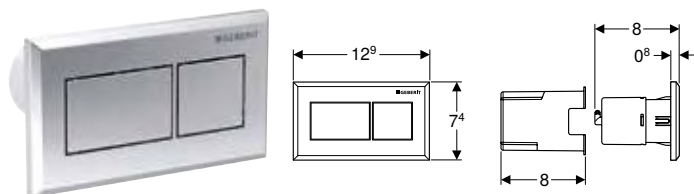

Application purposes

- For pneumatic remote flush actuation of Geberit concealed cisterns
- For Sigma concealed cisterns 8 cm
- For Alpha concealed cisterns 8 cm
- For releasing a dual flush
- For solid and drywall construction
- For concealed installation

Characteristics

- Can be combined with Geberit actuator plates for single flush and stop-and-go flush or Geberit cover plate
- Square design

Scope of delivery


- Actuator
- Pneumatic flushing device
- Pneumatic hose, length 2 m
- Conduit pipe, length 1.7 m
- Fastening material

Technical data

Actuation force (N) max.	22 N
--------------------------	------

Art. no.	Colour / surface	Product material
116.053.GH.1	Plate, Button: chrome / brushed, easy-to-clean coated	Die-cast zinc
116.053.KA.1	Plate: chrome / glossy Button: chrome / brushed	Plastic
116.053.KT.1	Plate: white alpine / glossy Button: chrome / brushed	Plastic
116.053.KV.1	Plate: jet black / glossy Button: chrome / brushed	Plastic

Geberit remote flush actuation, square design, pneumatic, for dual flush, concealed actuator, protruding

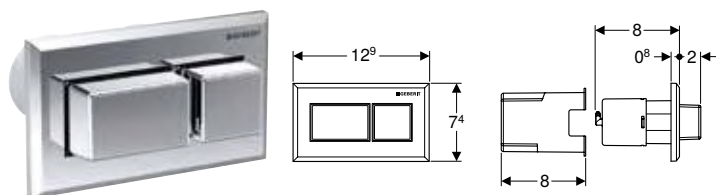

Application purposes

- For pneumatic remote flush actuation of Geberit exposed and concealed cisterns
- For releasing a dual flush
- For solid and drywall construction
- For concealed installation
- For Sigma concealed cisterns 12 cm
- For Omega concealed cisterns 12 cm
- For AP123 exposed cisterns
- For bathroom furniture

Characteristics

- Can be combined with Geberit actuator plates for single flush, dual flush and stop-and-go flush or Geberit cover plate
- Actuator buttons protruding
- Square design

Scope of delivery


- Actuator
- Pneumatic flushing device
- Pneumatic hose, length 2 m
- Conduit pipe, length 1.7 m
- Fastening material

Technical data

Actuation force (N) max.	22 N
--------------------------	------

Art. no.	Colour / surface	Product material
116.052.21.1	Plate, Button: chrome / glossy	Plastic

Geberit remote flush actuation, square design, pneumatic, for dual flush, concealed actuator

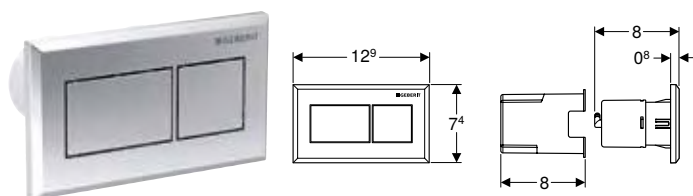

click & scan

Application purposes

- For pneumatic remote flush actuation of Geberit exposed and concealed cisterns
- For releasing a dual flush
- For solid and drywall construction
- For concealed installation
- For Sigma concealed cisterns 12 cm
- For Omega concealed cisterns 12 cm
- For AP123 exposed cisterns
- For bathroom furniture

Characteristics

- Can be combined with Geberit actuator plates for single flush, dual flush and stop-and-go flush or Geberit cover plate
- Square design

Scope of delivery

- Actuator
- Pneumatic flushing device
- Pneumatic hose, length 2 m
- Conduit pipe, length 1.7 m
- Fastening material


Technical data

Actuation force (N) max.	22 N
--------------------------	------

Art. no.	Colour / surface	Product material
116.051.GH.1	Plate, Button: chrome / brushed, easy-to-clean coated	Die-cast zinc
116.051.KA.1	Plate: chrome / glossy Button: chrome / brushed	Plastic
116.051.KT.1	Plate: white alpine / glossy Button: chrome / brushed	Plastic
116.051.KV.1	Plate: jet black / glossy Button: chrome / brushed	Plastic

For single flush

Geberit Type 01 remote flush actuation, round, pneumatic, single flush, concealed actuator

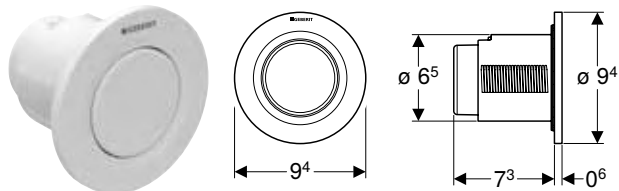

click & scan

Application purposes

- For pneumatic remote flush actuation of Geberit exposed and concealed cisterns
- For single flush
- For solid and drywall construction
- For concealed installation
- For Sigma concealed cisterns 12 cm
- For Omega concealed cisterns 12 cm
- For AP123 exposed cisterns

Characteristics

- Round design
- Can be combined with Geberit actuator plates for single flush, dual flush and stop-and-go flush or Geberit cover plate

Scope of delivery


- Actuator
- Pneumatic flushing device
- Pneumatic hose, length 2 m
- Conduit pipe, length 1.7 m
- Flush-mounting box with protection cover
- Fastening material

Technical data

Actuation force (N) max.	25 N
--------------------------	------

Art. no.	Colour / surface	Product material
116.040.11.1	white	Plastic
116.040.21.1	chrome / glossy	Plastic
116.040.JQ.1	chrome / matt, easy-to-clean coated	Plastic

Geberit Type 01 remote flush actuation, round, pneumatic, single flush, exposed actuator

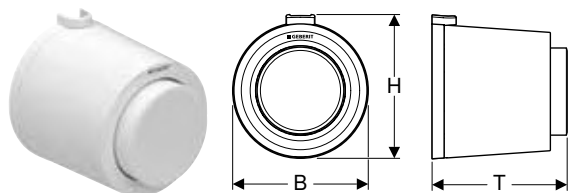

click & scan

Application purposes

- For pneumatic remote flush actuation of Geberit exposed and concealed cisterns
- For single flush
- For solid and drywall construction
- For exposed installation
- For Sigma concealed cisterns 12 cm
- For Omega concealed cisterns 12 cm
- For AP123 exposed cisterns

Characteristics

- Round design
- Actuator button protruding
- Can be combined with Geberit actuator plates for single flush, dual flush and stop-and-go flush or Geberit cover plate

Scope of delivery


- Actuator
- Pneumatic flushing device
- Pneumatic hose, length 2 m
- Conduit pipe, length 0.9 m
- Fastening material

Technical data

Actuation force (N) max.	25 N
--------------------------	------

Art. no.	Colour / surface	Product material	B [cm]	H [cm]	T [cm]
116.046.11.1	white alpine	Plastic	8.5	9	8.5

Geberit Type 01 remote flush actuation, round, pneumatic, single flush, for Sigma concealed cistern 8 cm, concealed actuator

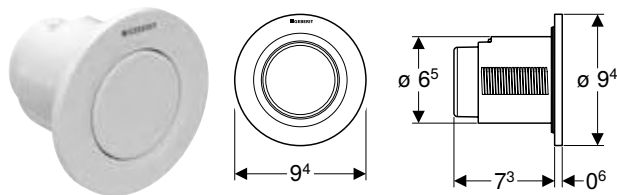

click & scan

Application purposes

- For pneumatic remote flush actuation of Geberit concealed cisterns
- For single flush
- For solid and drywall construction
- For concealed installation
- For Sigma concealed cisterns 8 cm

Characteristics

- Round design
- Can be combined with Geberit actuator plates for single flush and stop-and-go flush or Geberit cover plate

Scope of delivery


- Actuator
- Pneumatic flushing device
- Pneumatic hose, length 2 m
- Conduit pipe, length 1.7 m
- Flush-mounting box with protection cover
- Fastening material

Technical data

Actuation force (N) max.	25 N
--------------------------	------

Art. no.	Colour / surface	Product material
116.041.11.1	white alpine	Plastic
116.041.21.1	chrome / glossy	Plastic
116.041.JQ.1	chrome / matt, easy-to-clean coated	Plastic

Geberit Type 01 remote flush actuation, round, pneumatic, single flush, for Sigma concealed cistern 8 cm, exposed actuator

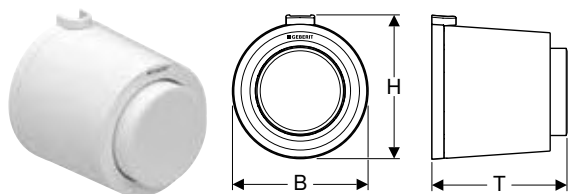

click & scan

Application purposes

- For pneumatic remote flush actuation of Geberit concealed cisterns
- For single flush
- For solid and drywall construction
- For exposed installation
- For Sigma concealed cisterns 8 cm

Characteristics

- Round design
- Actuator button protruding
- Can be combined with Geberit actuator plates for single flush and stop-and-go flush or Geberit cover plate

Technical data


Actuation force (N) max.	25 N
--------------------------	------

Scope of delivery

- Actuator
- Pneumatic flushing device
- Pneumatic hose, length 2 m
- Fastening material

Art. no.	Colour / surface	Product material	B [cm]	H [cm]	T [cm]
116.047.11.1	white alpine	Plastic	8.5	9	8.5

Geberit pneumatic WC flush control, single flush, with locked nuts, for furniture

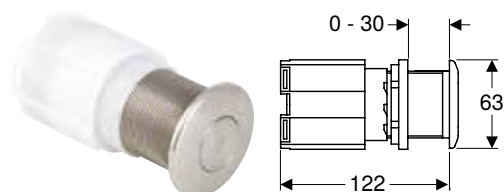

click & scan

Application purposes

- For pneumatic remote flush actuation of Geberit exposed and concealed cisterns
- For pneumatic remote control flush actuation of Geberit low-height concealed cisterns
- For single flush
- For drywall construction
- For concealed installation
- For Sigma concealed cisterns 12 cm
- For Omega concealed cisterns 12 cm
- For AP123 exposed cisterns
- For bathroom furniture
- For wall thicknesses of max. 30 mm

Technical data

Actuation force (N) max.	25 N
--------------------------	------

Characteristics


- Actuator made of stainless steel
- Can be combined with Geberit actuator plates for single flush, dual flush and stop-and-go flush or Geberit cover plate
- Round design

Scope of delivery

- Actuator
- Pneumatic flushing device
- Pneumatic hose, length 2 m

Art. no.	Colour / surface	Product material
115.947.00.1	stainless steel	Stainless steel
115.947.21.1	chrome / glossy	Stainless steel

Geberit pneumatic WC flush control, single flush, with locked nuts, for institutions

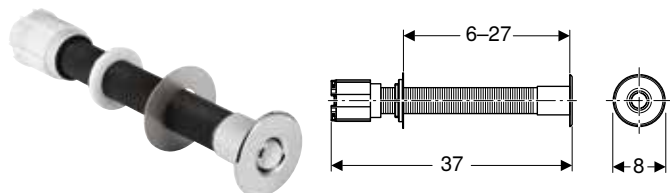

click & scan

Application purposes

- For pneumatic remote flush actuation of Geberit exposed and concealed cisterns
- For single flush
- For solid and drywall construction
- For concealed installation
- For institutions
- For Sigma concealed cisterns 12 cm
- For Omega concealed cisterns 12 cm
- For AP123 exposed cisterns
- For bathroom furniture

Characteristics

- Actuator made of brass, chrome-plated
- Can be combined with Geberit actuator plates for single flush, dual flush and stop-and-go flush or Geberit cover plate
- Round design

Scope of delivery


- Actuator
- Pneumatic flushing device
- Pneumatic hose, length 2 m

Technical data

Actuation force (N) max.	25 N
--------------------------	------

Art. no.	Colour / surface	Product material
115.943.21.1	chrome / glossy	Brass

Geberit WC flush control, pneumatic, single flush, wall-mounted foot actuator

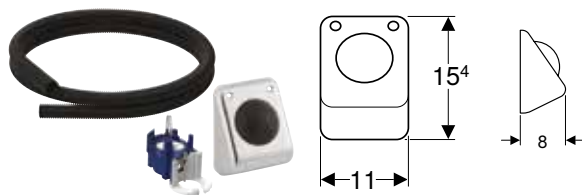

click & scan

Application purposes

- For pneumatic remote flush actuation of Geberit exposed and concealed cisterns
- For exposed installation
- For single flush
- For solid and drywall construction
- For Sigma concealed cisterns 12 cm
- For Omega concealed cisterns 12 cm
- For AP123 exposed cisterns
- For bathroom furniture

Characteristics

- Actuator made of stainless steel
- Can be combined with Geberit actuator plates for single flush, dual flush and stop-and-go flush or Geberit cover plate

Scope of delivery


- Actuator
- Pneumatic flushing device
- Pneumatic hose, length 3.5 m
- Block made of EPS
- Conduit pipe, length 3 m
- Fastening material

Technical data

Actuation force (N) max.	25 N
--------------------------	------

Art. no.	Colour / surface	Product material	B [cm]	H [cm]	T [cm]
115.918.00.1	stainless steel	Stainless steel	11	15.4	7.8

Geberit WC flush control, pneumatic, single flush, wall-mounted foot actuator

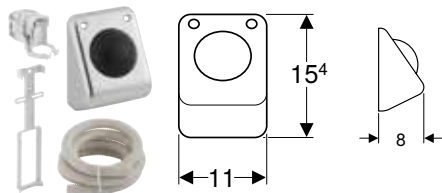

click & scan

Application purposes

- For pneumatic remote flush actuation of Geberit concealed cisterns
- For exposed installation
- For single flush
- For solid and drywall construction
- For Sigma concealed cisterns 8 cm
- For Alpha concealed cisterns 8 cm

Characteristics

- Actuator made of stainless steel
- Can be combined with Geberit actuator plates for single flush and stop-and-go flush or Geberit cover plate

Scope of delivery

- Actuator
- Pneumatic flushing device
- Pneumatic hose, length 3.5 m
- Block made of EPS
- Conduit pipe, length 3 m
- Fastening material

Technical data

Actuation force (N) max.	25 N
--------------------------	------

Art. no.	Colour / surface	Product material	B [cm]	H [cm]	T [cm]
115.993.00.1	stainless steel	Stainless steel	11	15.4	7.8

Accessories for flush controls

Installation sets

Geberit installation set with power supply unit, for WC flush controls with electronic flush actuation, 12 V



click & scan

Application purposes

- For solid and drywall construction
- For concealed installation
- For preparing the mains connections of Geberit WC flush controls
- For preparing the mains connections of Geberit DuoFresh modules

Characteristics

- Transformation of mains voltage to extra-low voltage, 12 V DC

Scope of delivery

- Cover for flush-mounting box
- Flush-mounting box for drilling hole \varnothing 76 mm
- Pipe entry
- Power supply unit
- Connection cable, length 1.8 m
- Conduit pipe, length 1.5 m

Technical data

Degree of protection	IP45
Nominal voltage	90–260 V AC
Mains frequency	50–60 Hz
Output voltage	12 V DC
Output power	12 W

Art. no.

115.861.00.6

Can be combined with

- Geberit electronic WC flush control, mains operation, for Sigma concealed cistern 12 cm, with Sigma10 actuator plate, round, automatic / touchless → p. 214
- Geberit electronic WC flush control, mains operation, for Sigma concealed cistern 12 cm, with Sigma10 actuator plate, round, automatic / touchless, screwable → p. 213
- Geberit electronic WC flush control, mains operation, for Sigma concealed cistern 12 cm, with Sigma10 actuator plate, round, automatic / touchless / manual → p. 212
- Geberit electronic WC flush control, mains operation, for Sigma concealed cistern 12 cm, with Sigma80 actuator plate, square, touchless → p. 218
- Geberit electronic WC flush control, mains operation, for Sigma concealed cistern 12 cm, with Sigma10 actuator plate, round, for pull-down rail, radio → p. 216
- Geberit electronic WC flush control, mains operation, for Sigma concealed cistern 12 cm, with Sigma10 actuator plate, round, for pull-down rail, for Bluetooth® remote flush actuation → p. 217
- Geberit electronic WC flush control, mains operation, for Sigma concealed cistern 12 cm, with Sigma10 actuator plate, round, for pull-down rail, manual → p. 215
- Geberit electronic WC flush control, mains operation, for Sigma concealed cistern 12 cm, for external button → p. 219
- Geberit electronic WC flush control, mains operation, for Omega concealed cistern 12 cm, for external button → p. 225
- Geberit electronic WC flush control, mains operation, for Sigma concealed cistern 12 cm, for RF-controlled button → p. 220
- Geberit electronic WC flush control, mains operation, for Sigma concealed cistern 12 cm, for Bluetooth® remote flush actuation → p. 221
- Geberit electronic WC flush control, mains operation, for Sigma concealed cistern 12 cm, with Type 10 IR button, round → p. 222
- Geberit electronic WC flush control, mains operation, for Omega concealed cistern 12 cm, with Type 10 IR button, round → p. 226

Geberit power supply unit for Power & Connect box



click & scan

Application purposes

- For installation in Geberit Power & Connect boxes
- For supplying 12 V DC power to Geberit WC flush controls and Geberit DuoFresh modules
- For the power supply of Geberit hygiene flush units in concealed cisterns
- Not suitable for combining with fire protection set for Geberit Duofix element for wall-hung WC or fire protection for flush pipe and connection bend

Characteristics

- Separation of trades
- Connection cable with LED display

Scope of delivery

- Power supply unit with LED display
- Connection cable
- Intermediate bottom with terminal

Technical data

Degree of protection	IPX4
Nominal voltage	90–260 V AC
Mains frequency	50–60 Hz
Output voltage	12 V DC
Output power	12 W

Art. no.

116.096.00.1

Geberit set of Power & Connect box and power supply unit for element for wall-hung WC



click & scan

Application purposes

- For Geberit DuoFix and Geberit GIS elements for wall-hung WC, with Sigma concealed cistern 12 cm
- For Geberit DuoFix and Geberit GIS elements for wall-hung WC, with Omega concealed cistern 12 cm
- For supplying 12 V DC power to Geberit WC flush controls and Geberit DuoFresh modules
- For the power supply of Geberit hygiene flush units in concealed cisterns
- For preparing the mains connections of Geberit AquaClean shower toilets
- For hidden mains connection behind the WC ceramic appliance
- Not suitable for combining with fire protection set for Geberit DuoFix element for wall-hung WC or fire protection for flush pipe and connection bend

Characteristics

- 2025 range
- Can be installed without tools
- Separation of trades
- Connection cable with LED display
- Connection option for Geberit AquaClean

Scope of delivery

- Power & Connect Box
- Power supply unit with LED display
- Connection cable
- Intermediate bottom with terminal
- Protection box
- Conduit pipe, length 0.32 m, for connection of Geberit AquaClean

Technical data

Degree of protection	IPX4
Nominal voltage	90–260 V AC
Mains frequency	50–60 Hz
Output voltage	12 V DC
Output power	12 W

Art. no.

116.098.00.6

Can be combined with

- Geberit electronic WC flush control, mains operation, for Sigma concealed cistern 12 cm, with Sigma80 actuator plate, square, touchless → p. 218
- Geberit electronic WC flush control, mains operation, for Sigma concealed cistern 12 cm, with Sigma10 actuator plate, round, automatic / touchless / manual → p. 212
- Geberit electronic WC flush control, mains operation, for Sigma concealed cistern 12 cm, with Sigma10 actuator plate, round, automatic / touchless, screwable → p. 213
- Geberit electronic WC flush control, mains operation, for Sigma concealed cistern 12 cm, with Sigma10 actuator plate, round, automatic / touchless → p. 214
- Geberit electronic WC flush control, mains operation, for Sigma concealed cistern 12 cm, for external button → p. 219
- Geberit electronic WC flush control, mains operation, for Omega concealed cistern 12 cm, for external button → p. 225
- Geberit electronic WC flush control, mains operation, for Sigma concealed cistern 12 cm, with Sigma10 actuator plate, round, for pull-down rail, manual → p. 215
- Geberit electronic WC flush control, mains operation, for Sigma concealed cistern 12 cm, with Type 10 IR button, round → p. 222
- Geberit electronic WC flush control, mains operation, for Omega concealed cistern 12 cm, with Type 10 IR button, round → p. 226
- Geberit electronic WC flush control, mains operation, for Sigma concealed cistern 12 cm, for RF-controlled button → p. 220
- Geberit electronic WC flush control, mains operation, for Sigma concealed cistern 12 cm, for Bluetooth® remote flush actuation → p. 221
- Geberit electronic WC flush control, mains operation, for Sigma concealed cistern 12 cm, with Sigma10 actuator plate, round, for pull-down rail, radio → p. 216
- Geberit electronic WC flush control, mains operation, for Sigma concealed cistern 12 cm, with Sigma10 actuator plate, round, for pull-down rail, for Bluetooth® remote flush actuation → p. 217
- Geberit DuoFresh module with automatic actuation, for Sigma concealed cistern 12 cm → p. 193
- Geberit DuoFresh module with manual actuation, for Sigma concealed cistern 12 cm → p. 194

Geberit installation set for WC flush control with mechanical flush actuation, push-button



click & scan

Application purposes

- For solid and drywall construction
- For concealed installation
- For installation preparation of remote flush actuation connected by wire for Sigma concealed cisterns 12 cm
- For connecting cables between flush-mounting boxes and concealed cisterns

Scope of delivery

- Flush-mounting box for drilling hole \varnothing 68 mm, for electrical connection
- Conduit pipe, length 1.7 m

Art. no.

241.155.00.1

Geberit installation set for WC flush control with electronic flush actuation, for pull-down rail



click & scan

Application purposes

- For solid and drywall construction
- For installation preparation of remote flush actuation connected by wire for Sigma concealed cisterns 12 cm
- For connecting cables between flush-mounting boxes and concealed cisterns


Scope of delivery

- Flush-mounting box for drilling hole \varnothing 68 mm, for electrical connection
- Conduit pipe, length 0.8 m

Art. no.

241.154.00.1

Installation set with flush-mounting box, for Geberit DuoFresh module

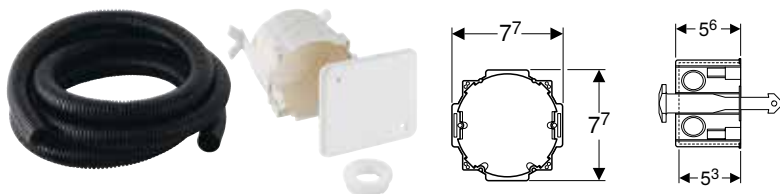

click & scan

Scope of delivery


- Cover for flush-mounting box
- Flush-mounting box for drilling hole \varnothing 76 mm
- Conduit pipe, length 1.7 m
- Plug
- Securing clip

Art. no.

244.999.00.1

For WC flush controls with electronic flush actuation

Geberit RF-controlled button for electronic flush actuation

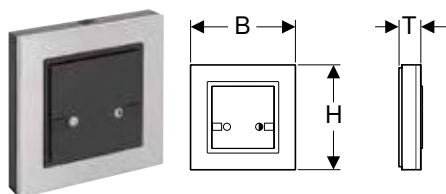

click & scan

Application purposes

- For manual, wireless flush actuation of Sigma concealed cisterns 12 cm using an electronic Geberit WC flush control

Technical data

Operating voltage	3 V DC
Radio frequency	868.4 MHz
Radio frequency distance	10 m

Characteristics

- Dual flush can be actuated
- Easy to install and service

Scope of delivery

- 2 alkaline manganese batteries type AAA 1.5 V
- Fastening material

Art. no.	B [cm]	H [cm]	T [cm]
241.568.00.1	8.8	8.8	1.8

New

Geberit remote flush actuation for single flush, Bluetooth®



click & scan

Application purposes

- For mounting on pull-down rails with rail diameter 29–34 mm
- For wall mounting
- For Geberit WC flush controls, electronic, for RF-controlled button
- For Geberit WC flush controls, electronic, for Bluetooth® remote flush actuation
- For Geberit WC flush controls, electronic, with Sigma10 actuator plate
- For Geberit WC flush controls, electronic, with Sigma80 actuator plate

Technical data

Operating voltage	3 V DC
Actuation force (N) max.	4 N
Radio frequency	2400 MHz
Radio frequency distance	10 m

Characteristics

- Single flush can be actuated
- Easy to install and service

Scope of delivery

- Lithium battery type CR2032
- Fastening material for mounting on the pull-down rail
- Fastening material for wall mounting

Art. no.	Colour / surface
115.707.00.1	white alpine


Available as of April 2026



- Exclusively compatible with Geberit WC controls as per compatibility list

New

Geberit remote flush actuation for dual flush, Bluetooth®



click & scan

Application purposes

- For mounting on pull-down rails with rail diameter 29–34 mm
- For wall mounting
- For Geberit WC flush controls, electronic, for RF-controlled button
- For Geberit WC flush controls, electronic, for Bluetooth® remote flush actuation
- For Geberit WC flush controls, electronic, with Sigma10 actuator plate
- For Geberit WC flush controls, electronic, with Sigma80 actuator plate

Characteristics

- Dual flush can be actuated
- Easy to install and service

Scope of delivery

- Lithium battery type CR2032
- Fastening material for mounting on the pull-down rail
- Fastening material for wall mounting

Technical data

Operating voltage	3 V DC
Actuation force (N) max.	4 N
Radio frequency	2400 MHz
Radio frequency distance	10 m

Art. no. Colour / surface

115.708.00.1 white alpine

Available as of April 2026



- Exclusively compatible with Geberit WC controls as per compatibility list















Urinal flush controls

Assortment overview – Geberit urinal flush controls	256
Concealed	258
With electronic flush actuation, mains operation.....	258
With electronic flush actuation, battery operation	266
With pneumatic flush actuation.....	273
Basic.....	281
Surface-mounted.....	283
With electronic flush actuation, mains operation.....	283
With electronic flush actuation, battery operation	284
Accessories	286
Installation and conversion sets	286
Flush pipes, flush bends and adapters.....	291
Cover plates	292
Integrated controls.....	293
Other accessories	295












Assortment overview – Geberit urinal flush controls

Geberit International Sales, version: October 2025

Design	Exposed			Concealed			
	Mains operation	Battery operation		Mains operation, hidden	Pneumatic	Basic (16x16)	
		Mains operation	Battery operation			Mains operation	Battery operation
Others							
	116.076.00.1	116.077.00.1	115.805.21.5	116.086.00.1	116.016.00.1	115.817.xx.5	115.818.xx.5
Type 01 round					116.011.xx.5		
Type 01 square					116.064.XX.1		
Type 10 round					116.015.xx.1		
Type 40 round					116.014.xx.1		
Type 40 square					116.217.xx.1		
Type 50 square					116.016.xx.5		
Geberit Duofix elements for urinals							
111.616.00.2 Geberit Duofix element for urinal, 112–130 cm, universal					✓		
111.676.00.2 Geberit Duofix element for urinal, 112–130 cm, universal, for spray head					✓		
111.686.00.2 Geberit Duofix element for urinal, 112–130 cm, universal, for exposed flushing valve	✓	✓					
111.689.00.2 Geberit Duofix element for urinal, 112–130 cm, universal, for hidden urinal flush control				✓			
111.665.00.6 Geberit Duofix element for urinal, 130 cm, universal, for Basic urinal flush control						✓	✓
Geberit GIS elements for urinals							
461.621.00.1 Geberit GIS element for urinal, 114 cm, universal					✓		
461.606.00.1 Geberit GIS element for urinal, 114 cm, universal, for spray head					✓		
461.689.00.1 Geberit GIS element for urinal, 114–132 cm, universal, for hidden urinal flush control				✓			
461.686.00.1 Geberit GIS element for urinal, 114 cm, universal, for exposed flushing valve	✓	✓					
Geberit Kombifix elements for urinals							
457.611.00.1 Geberit Kombifix element for urinal, 109–127 cm, universal					✓		
457.606.00.1 Geberit Kombifix element for urinal, 109–127 cm, universal, for spray head					✓		
457.689.00.1 Geberit Kombifix element for urinal, 109–127 cm, universal, for hidden urinal flush control				✓			
457.686.00.1 Geberit Kombifix element for urinal, 109–127 cm, universal, for exposed flushing valve	✓	✓					
Installation sets							
116.003.00.1 Geberit installation set with flush pipe, for urinal flush control, universal 					✓		
116.004.00.1 Geberit installation set with nipple made of brass, for urinal flush control, universal 					✓		
115.801.00.5 Geberit installation set for Basic urinal flush control 						✓	✓

Geberit International Sales, version: October 2025

Design	Exposed			Concealed			
	Mains operation	Battery operation		Mains operation, hidden	Pneumatic	Basic (16x16)	
		Mains operation	Battery operation			Mains operation	Battery operation
115.985.00.5 Geberit installation set with flush bend and flush bend extension, for Basic urinal flush control 							
116.005.00.1 Geberit installation set for urinal flush controls with 1/2" connection 					✓		


✓ Compatible



Concealed

With electronic flush actuation, mains operation

Geberit urinal flush control with electronic flush actuation, mains operation, Type 01 cover plate, round

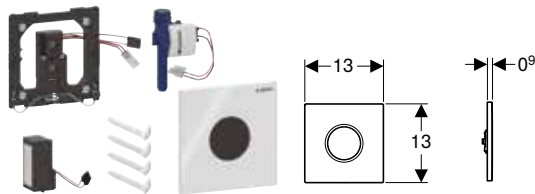

click & scan

Application purposes

- For automatic flush actuation of urinals

Technical data

Degree of protection	IP45
Nominal voltage	110–240 V AC
Mains frequency	50–60 Hz
Operating voltage	4.5 V DC
Flow pressure	1–8 bar
Water test pressure max.	16 bar
Test pressure air / inert gas max.	3 bar
Flow rate at 100 kPa / 1 bar without flow limiter	0.3 l/s
Flow rate at 100 kPa / 1 bar with flow limiter	0.18 l/s
Interval flush time, factory setting	5 s
Detection time, factory setting	7 s
Flush time, adjustment range	1–15 s
Flush time, factory setting	7 s

Characteristics

- Cover plate with securing bar
- Water-saving hybrid mode can be set
- Adjustable interval flush
- Preflush can be set
- Power failure control unit
- Valve-closing function when power fails
- Functions can be set and queried with the Geberit Service Handy
- Device settings and operation with mobile device via integrated Bluetooth® interface
- Compatible with Geberit Control App
- Wired networkable with Geberit gateway via GEBUS converter
- Wirelessly connectable with Geberit Gateway via Bluetooth®
- Compatible with Geberit Connect
- Flush volume can be reduced to 0.5 l per flush with regulating screw of installation set
- Tap group II in accordance with DIN 4109
- Components in contact with drinking water lead-free

Scope of delivery


- Type 01 cover plate, IR window, round
- Mounting frame
- Infrared control, premounted on mounting frame
- Solenoid valve
- Power supply unit
- Fastening material

Art. no.	Colour / surface	Product material	Power consumption [W]
116.021.11.5	Plate: white / glossy	Die-cast zinc	≤ 0.5
116.021.21.5	Plate: chrome / glossy	Die-cast zinc	≤ 0.5
116.021.DW.5	Plate: black / glossy	Die-cast zinc	≤ 0.5
116.021.JQ.5	Plate: chrome / matt, easy-to-clean coated	Die-cast zinc	≤ 0.5

Can be combined with

- Geberit installation set with flush pipe, for urinal flush control, universal → p. 288
- Geberit installation set with nipple made of brass, for urinal flush control, universal → p. 289
- Geberit Duofix element for urinal, 112–130 cm, universal → p. 72
- Geberit Duofix element for urinal, 112–130 cm, universal, for spray head → p. 73
- Geberit GIS element for urinal, 114 cm, universal → p. 120
- Geberit GIS element for urinal, 114 cm, universal, for spray head → p. 121
- Geberit Kombifix element for urinal, 109–127 cm, universal → p. 27
- Geberit Kombifix element for urinal, 109–127 cm, universal, for spray head → p. 28

Geberit urinal flush control with electronic flush actuation, mains operation, Type 01 cover plate, square

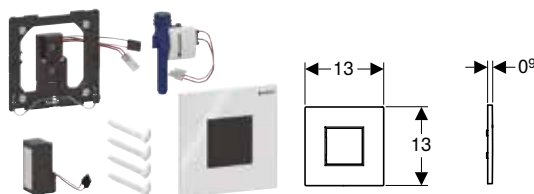

click & scan

Application purposes

- For automatic flush actuation of urinals

Technical data

Degree of protection	IP45
Nominal voltage	110–240 V AC
Mains frequency	50–60 Hz
Operating voltage	4.5 V DC
Flow pressure	1–8 bar
Water test pressure max.	16 bar
Test pressure air / inert gas max.	3 bar
Flow rate at 100 kPa / 1 bar without flow limiter	0.3 l/s
Flow rate at 100 kPa / 1 bar with flow limiter	0.18 l/s
Interval flush time, factory setting	5 s
Detection time, factory setting	7 s
Flush time, adjustment range	1–15 s
Flush time, factory setting	7 s

Characteristics

- Cover plate with securing bar
- Water-saving hybrid mode can be set
- Adjustable interval flush
- Preflush can be set
- Power failure control unit
- Valve-closing function when power fails
- Functions can be set and queried with the Geberit Service Handy
- Device settings and operation with mobile device via integrated Bluetooth® interface
- Compatible with Geberit Control App
- Wired networkable with Geberit gateway via GEBUS converter
- Wirelessly connectable with Geberit Gateway via Bluetooth®
- Compatible with Geberit Connect
- Flush volume can be reduced to 0.5 l per flush with regulating screw of installation set
- Tap group II in accordance with DIN 4109
- Components in contact with drinking water lead-free

Scope of delivery

- Type 01 cover plate, IR window, square
- Mounting frame
- Infrared control, premounted on mounting frame
- Solenoid valve
- Power supply unit
- Fastening material

Art. no.	Colour / surface	Product material	Power consumption [W]
116.093.11.1	Plate: white / glossy	Die-cast zinc	≤ 0.5
116.093.21.1	Plate: chrome / glossy	Die-cast zinc	≤ 0.5
116.093.DW.1	Plate: black / glossy	Die-cast zinc	≤ 0.5
116.093.JQ.1	Plate: chrome / matt, easy-to-clean coated	Die-cast zinc	≤ 0.5

Can be combined with


- Geberit installation set with flush pipe, for urinal flush control, universal → p. 288
- Geberit installation set with nipple made of brass, for urinal flush control, universal → p. 289
- Geberit Duofix element for urinal, 112–130 cm, universal → p. 72
- Geberit Duofix element for urinal, 112–130 cm, universal, for spray head → p. 73
- Geberit GIS element for urinal, 114 cm, universal → p. 120
- Geberit GIS element for urinal, 114 cm, universal, for spray head → p. 121
- Geberit Kombifix element for urinal, 109–127 cm, universal → p. 27
- Geberit Kombifix element for urinal, 109–127 cm, universal, for spray head → p. 28

Urinal flush controls

Concealed

With electronic flush actuation, mains operation

Geberit urinal flush control with electronic flush actuation, mains operation, Type 10 cover plate, round

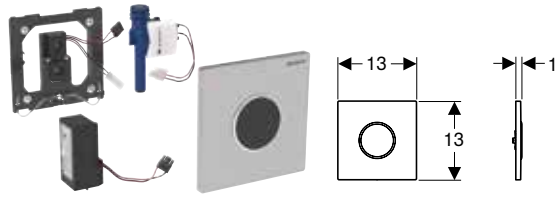

click & scan

Application purposes

- For automatic flush actuation of urinals

Technical data

Degree of protection	IP45
Nominal voltage	110–240 V AC
Mains frequency	50–60 Hz
Operating voltage	4.5 V DC
Flow pressure	1–8 bar
Water test pressure max.	16 bar
Test pressure air / inert gas max.	3 bar
Flow rate at 100 kPa / 1 bar without flow limiter	0.3 l/s
Flow rate at 100 kPa / 1 bar with flow limiter	0.18 l/s
Interval flush time, factory setting	5 s
Detection time, factory setting	7 s
Flush time, adjustment range	1–15 s
Flush time, factory setting	7 s

Characteristics

- Cover plate with securing bar
- Water-saving hybrid mode can be set
- Adjustable interval flush
- Preflush can be set
- Power failure control unit
- Valve-closing function when power fails
- Functions can be set and queried with the Geberit Service Handy
- Device settings and operation with mobile device via integrated Bluetooth® interface
- Compatible with Geberit Control App
- Wired networkable with Geberit gateway via GEBUS converter
- Wirelessly connectable with Geberit Gateway via Bluetooth®
- Compatible with Geberit Connect
- Flush volume can be reduced to 0.5 l per flush with regulating screw of installation set
- Tap group II in accordance with DIN 4109
- Components in contact with drinking water lead-free

Scope of delivery


- Type 10 cover plate with IR window
- Infrared control, premounted on mounting frame
- Solenoid valve
- Power supply unit
- Fastening material

Art. no.	Colour / surface	Product material	Power consumption [W]
116.025.16.1	Plate: black matt / easy-to-clean coated Design ring/-s: black / glossy	Stainless steel	≤ 0.5
116.025.DW.1	Plate: black / glossy Design ring/-s: black / matt	Stainless steel	≤ 0.5
116.025.JQ.1	Plate: chrome / matt, easy-to-clean coated Design ring/-s: chrome / glossy	Die-cast zinc	≤ 0.5
116.025.KH.1	Plate: chrome / glossy Design ring/-s: chrome / matt	Die-cast zinc	≤ 0.5
116.025.KJ.1	Plate: white alpine / glossy Design ring/-s: chrome / glossy	Die-cast zinc	≤ 0.5
116.025.KK.1	Plate: white alpine / glossy Design ring/-s: gold-coloured / glossy	Die-cast zinc	≤ 0.5
116.025.KM.1	Plate: black / glossy Design ring/-s: chrome / glossy	Die-cast zinc	≤ 0.5
116.025.SN.1	Plate: brushed, easy-to-clean coated Design ring: polished	Stainless steel	≤ 0.5

Can be combined with

- Geberit installation set with flush pipe, for urinal flush control, universal → p. 288
- Geberit installation set with nipple made of brass, for urinal flush control, universal → p. 289
- Geberit Duofix element for urinal, 112–130 cm, universal → p. 72
- Geberit Duofix element for urinal, 112–130 cm, universal, for spray head → p. 73
- Geberit GIS element for urinal, 114 cm, universal → p. 120
- Geberit GIS element for urinal, 114 cm, universal, for spray head → p. 121
- Geberit Kombifix element for urinal, 109–127 cm, universal → p. 27
- Geberit Kombifix element for urinal, 109–127 cm, universal, for spray head → p. 28

Geberit urinal flush control with electronic flush actuation, mains operation, Type 40 cover plate, round

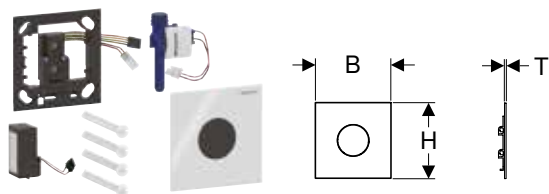

click & scan

Application purposes

- For automatic flush actuation of urinals

Technical data

Degree of protection	IP45
Nominal voltage	110–240 V AC
Mains frequency	50–60 Hz
Operating voltage	4.5 V DC
Flow pressure	1–8 bar
Water test pressure max.	16 bar
Test pressure air / inert gas max.	3 bar
Flow rate at 100 kPa / 1 bar without flow limiter	0.3 l/s
Flow rate at 100 kPa / 1 bar with flow limiter	0.18 l/s
Interval flush time, factory setting	5 s
Detection time, factory setting	7 s
Flush time, adjustment range	1–15 s
Flush time, factory setting	7 s

Characteristics

- Cover plate with securing bar
- Water-saving hybrid mode can be set
- Adjustable interval flush
- Preflush can be set
- Power failure control unit
- Valve-closing function when power fails
- Functions can be set and queried with the Geberit Service Handy
- Device settings and operation with mobile device via integrated Bluetooth® interface
- Compatible with Geberit Control App
- Wired networkable with Geberit gateway via GEBUS converter
- Wirelessly connectable with Geberit Gateway via Bluetooth®
- Compatible with Geberit Connect
- Flush volume can be reduced to 0.5 l per flush with regulating screw of installation set
- Tap group II in accordance with DIN 4109
- Components in contact with drinking water lead-free

Scope of delivery

- Type 40 cover plate, IR window, round
- Mounting frame
- Infrared control, premounted on mounting frame
- Solenoid valve
- Power supply unit
- Fastening material

Art. no.	Colour / surface	Product material	B [cm]	H [cm]	T [cm]	Power consumption [W]
116.024.14.1	Plate: black matt / easy-to-clean coated	Stainless steel	12.5	12.5	0.2	≤ 0.5
116.024.FW.1	Plate: brushed, easy-to-clean coated	Stainless steel	12.5	12.5	0.2	≤ 0.5
116.024.JK.1	Plate: lava / glossy glass	Glass	12.5	12.5	0.4	≤ 0.5
116.024.JL.1	Plate: sand grey / glossy glass	Glass	12.5	12.5	0.4	≤ 0.5
116.024.JT.1	Plate: white matt / easy-to-clean coated	Stainless steel	12.5	12.5	0.2	≤ 0.5
116.024.QB.1	Plate: red gold / brushed, easy-to-clean coated	Stainless steel	12.5	12.5	0.2	≤ 0.5
116.024.QD.1	Plate: black chrome / brushed, easy-to-clean coated	Stainless steel	12.5	12.5	0.2	≤ 0.5
116.024.QF.1	Plate: brass-coloured / brushed, easy-to-clean coated	Stainless steel	12.5	12.5	0.2	≤ 0.5
116.024.SI.1	Plate: white / glossy glass	Glass	12.5	12.5	0.4	≤ 0.5
116.024.SJ.1	Plate: black / glossy glass	Glass	12.5	12.5	0.4	≤ 0.5
116.024.ID.1	N Plate: nickel / brushed, easy-to-clean coated	Stainless steel	12.5	12.5	0.2	≤ 0.5



N: New, available as of July 2026

Can be combined with

- Geberit installation set with flush pipe, for urinal flush control, universal → p. 288
- Geberit installation set with nipple made of brass, for urinal flush control, universal → p. 289
- Geberit Duofix element for urinal, 112–130 cm, universal → p. 72
- Geberit Duofix element for urinal, 112–130 cm, universal, for spray head → p. 73
- Geberit GIS element for urinal, 114 cm, universal → p. 120
- Geberit GIS element for urinal, 114 cm, universal, for spray head → p. 121
- Geberit Kombifix element for urinal, 109–127 cm, universal → p. 27
- Geberit Kombifix element for urinal, 109–127 cm, universal, for spray head → p. 28

New

Geberit urinal flush control with electronic flush actuation, mains operation, Type 40 cover plate, round, customised finish

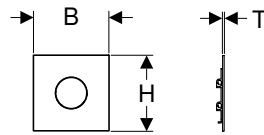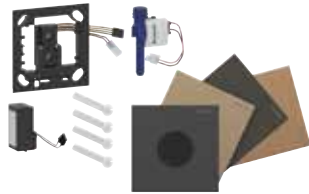

click & scan

Application purposes

- For automatic flush actuation of urinals

Technical data

Degree of protection	IP45
Nominal voltage	110–240 V AC
Mains frequency	50–60 Hz
Operating voltage	4.5 V DC
Flow pressure	1–8 bar
Water test pressure max.	16 bar
Test pressure air / inert gas max.	3 bar
Flow rate at 100 kPa / 1 bar without flow limiter	0.3 l/s
Flow rate at 100 kPa / 1 bar with flow limiter	0.18 l/s
Interval flush time, factory setting	5 s
Detection time, factory setting	7 s
Flush time, adjustment range	1–15 s
Flush time, factory setting	7 s

Characteristics

- Cover plate with securing bar
- Water-saving hybrid mode can be set
- Adjustable interval flush
- Preflush can be set
- Power failure control unit
- Valve-closing function when power fails
- Functions can be set and queried with the Geberit Service Handy
- Device settings and operation with mobile device via integrated Bluetooth® interface
- Compatible with Geberit Control App
- Wired networkable with Geberit gateway via GEBUS converter
- Wirelessly connectable with Geberit Gateway via Bluetooth®
- Compatible with Geberit Connect
- Flush volume can be reduced to 0.5 l per flush with regulating screw of installation set
- Tap group II in accordance with DIN 4109
- Components in contact with drinking water lead-free

Scope of delivery

- Type 40 cover plate, IR window, round
- Mounting frame
- Infrared control, premounted on mounting frame
- Solenoid valve
- Power supply unit
- Fastening material

Art. no.	Colour / surface	Product material	B [cm]	H [cm]	T [cm]	Power consumption [W]
004.790.00.2 *	galvanized	Stainless steel	12.5	12.5	0.2	≤ 0.5
004.790.00.3 *	galvanized and varnished	Stainless steel	12.5	12.5	0.2	≤ 0.5

Available as of April 2026; * Order-based production


Can be combined with

- Geberit installation set with flush pipe, for urinal flush control, universal → p. 288
- Geberit installation set with nipple made of brass, for urinal flush control, universal → p. 289
- Geberit Duofix element for urinal, 112–130 cm, universal → p. 72
- Geberit Duofix element for urinal, 112–130 cm, universal, for spray head → p. 73
- Geberit GIS element for urinal, 114 cm, universal → p. 120
- Geberit GIS element for urinal, 114 cm, universal, for spray head → p. 121
- Geberit Kombifix element for urinal, 109–127 cm, universal → p. 27
- Geberit Kombifix element for urinal, 109–127 cm, universal, for spray head → p. 28



- All available colours and surfaces as well as delivery times are listed in the document entitled "Actuator plates and urinal flush controls with customer-specific finish". The document is available online in the "Documents" section of the product catalogue. In the printed product catalogue, the QR code leads to the online product page with the document.

Geberit urinal flush control with electronic flush actuation, mains operation, Type 40 cover plate, square

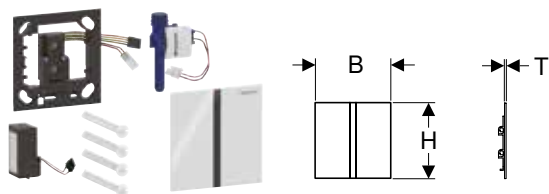

click & scan

Application purposes

- For automatic flush actuation of urinals

Technical data

Degree of protection	IP45
Nominal voltage	110–240 V AC
Mains frequency	50–60 Hz
Operating voltage	4.5 V DC
Flow pressure	1–8 bar
Water test pressure max.	16 bar
Test pressure air / inert gas max.	3 bar
Flow rate at 100 kPa / 1 bar without flow limiter	0.3 l/s
Flow rate at 100 kPa / 1 bar with flow limiter	0.18 l/s
Interval flush time, factory setting	5 s
Detection time, factory setting	7 s
Flush time, adjustment range	1–15 s
Flush time, factory setting	7 s

Characteristics

- Cover plate with securing bar
- Water-saving hybrid mode can be set
- Adjustable interval flush
- Preflush can be set
- Power failure control unit
- Valve-closing function when power fails
- Functions can be set and queried with the Geberit Service Handy
- Device settings and operation with mobile device via integrated Bluetooth® interface
- Compatible with Geberit Control App
- Wired networkable with Geberit gateway via GEBUS converter
- Wirelessly connectable with Geberit Gateway via Bluetooth®
- Compatible with Geberit Connect
- Flush volume can be reduced to 0.5 l per flush with regulating screw of installation set
- Tap group II in accordance with DIN 4109
- Components in contact with drinking water lead-free

Scope of delivery

- Type 40 cover plate, IR window, square
- Mounting frame
- Infrared control, premounted on mounting frame
- Solenoid valve
- Power supply unit
- Fastening material

Art. no.	Colour / surface	Product material	B	H	T	Power consumption [W]
			[cm]	[cm]	[cm]	
116.227.14.1	Plate: black matt	Stainless steel	12.5	12.5	0.2	≤ 0.5
116.227.FW.1	Plate: brushed, easy-to-clean coated	Stainless steel	12.5	12.5	0.2	≤ 0.5
116.227.JK.1	Plate: lava / glossy glass	Glass	12.5	12.5	0.4	≤ 0.5
116.227.JL.1	Plate: sand grey	Glass	12.5	12.5	0.4	≤ 0.5
116.227.JT.1	Plate: white matt / easy-to-clean coated	Stainless steel	12.5	12.5	0.2	≤ 0.5
116.227.QB.1	Plate: red gold / brushed, easy-to-clean coated	Stainless steel	12.5	12.5	0.2	≤ 0.5
116.227.QD.1	Plate: black chrome	Stainless steel	12.5	12.5	0.2	≤ 0.5
116.227.QF.1	Plate: brass-coloured	Stainless steel	12.5	12.5	0.2	≤ 0.5
116.227.SI.1	Plate: white	Glass	12.5	12.5	0.4	≤ 0.5
116.227.SJ.1	Plate: black / glossy glass	Glass	12.5	12.5	0.4	≤ 0.5
116.227.ID.1	N Plate: nickel / brushed, easy-to-clean coated	Stainless steel	12.5	12.5	0.2	≤ 0.5



N: New, available as of July 2026

Can be combined with

- Geberit installation set with flush pipe, for urinal flush control, universal → p. 288
- Geberit installation set with nipple made of brass, for urinal flush control, universal → p. 289
- Geberit Duofix element for urinal, 112–130 cm, universal → p. 72
- Geberit Duofix element for urinal, 112–130 cm, universal, for spray head → p. 73
- Geberit GIS element for urinal, 114 cm, universal → p. 120
- Geberit GIS element for urinal, 114 cm, universal, for spray head → p. 121
- Geberit Kombifix element for urinal, 109–127 cm, universal → p. 27
- Geberit Kombifix element for urinal, 109–127 cm, universal, for spray head → p. 28

New

Geberit urinal flush control with electronic flush actuation, mains operation, Type 40 cover plate, square, customised finish

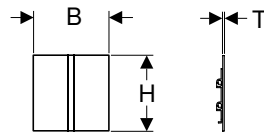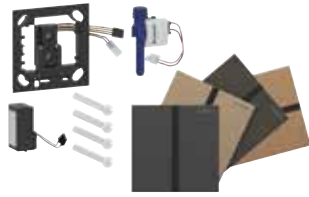

click & scan

Application purposes

- For automatic flush actuation of urinals

Technical data

Degree of protection	IP45
Nominal voltage	110–240 V AC
Mains frequency	50–60 Hz
Operating voltage	4.5 V DC
Flow pressure	1–8 bar
Water test pressure max.	16 bar
Test pressure air / inert gas max.	3 bar
Flow rate at 100 kPa / 1 bar without flow limiter	0.3 l/s
Flow rate at 100 kPa / 1 bar with flow limiter	0.18 l/s
Interval flush time, factory setting	5 s
Detection time, factory setting	7 s
Flush time, adjustment range	1–15 s
Flush time, factory setting	7 s

Characteristics

- Cover plate with securing bar
- Water-saving hybrid mode can be set
- Adjustable interval flush
- Preflush can be set
- Power failure control unit
- Valve-closing function when power fails
- Functions can be set and queried with the Geberit Service Handy
- Device settings and operation with mobile device via integrated Bluetooth® interface
- Compatible with Geberit Control App
- Wired networkable with Geberit gateway via GEBUS converter
- Wirelessly connectable with Geberit Gateway via Bluetooth®
- Compatible with Geberit Connect
- Flush volume can be reduced to 0.5 l per flush with regulating screw of installation set
- Tap group II in accordance with DIN 4109
- Components in contact with drinking water lead-free

Scope of delivery

- Type 40 cover plate, IR window, square
- Mounting frame
- Infrared control, premounted on mounting frame
- Solenoid valve
- Power supply unit
- Fastening material

Art. no.	Colour / surface	Product material	B [cm]	H [cm]	T [cm]	Power consumption [W]
004.791.00.2 *	galvanized	Stainless steel	12.5	12.5	0.2	≤ 0.5
004.791.00.3 *	galvanized and varnished	Stainless steel	12.5	12.5	0.2	≤ 0.5

Available as of April 2026; * Order-based production

Can be combined with

- Geberit installation set with flush pipe, for urinal flush control, universal → p. 288
- Geberit installation set with nipple made of brass, for urinal flush control, universal → p. 289
- Geberit Duofix element for urinal, 112–130 cm, universal → p. 72
- Geberit Duofix element for urinal, 112–130 cm, universal, for spray head → p. 73
- Geberit GIS element for urinal, 114 cm, universal → p. 120
- Geberit GIS element for urinal, 114 cm, universal, for spray head → p. 121
- Geberit Kombifix element for urinal, 109–127 cm, universal → p. 27
- Geberit Kombifix element for urinal, 109–127 cm, universal, for spray head → p. 28



- All available colours and surfaces as well as delivery times are listed in the document entitled "Actuator plates and urinal flush controls with customer-specific finish". The document is available online in the "Documents" section of the product catalogue. In the printed product catalogue, the QR code leads to the online product page with the document.

Geberit urinal flush control with electronic flush actuation, mains operation, concealed installation, hidden



click & scan

Application purposes

- For automatic flush actuation of urinals
- For installation in Geberit elements for urinal with urinal flush control for covered installation
- For urinal installations with inlet from the rear and outlet to the rear

Technical data

Degree of protection	IPX4
Nominal voltage	110–240 V AC
Mains frequency	50–60 Hz
Operating voltage	4.5 V DC
Flow pressure	1–8 bar
Water test pressure max.	16 bar
Flow rate at 100 kPa / 1 bar with flow limiter	0.18 l/s
Interval flush time, factory setting	5 s
Flush time, adjustment range	1–15 s
Flush time, factory setting	7 s

Characteristics

- Integrated power supply unit with LED display
- Control with LED display
- Device settings and operation with mobile device via integrated Bluetooth® interface
- Compatible with Geberit Control App
- Function statistics available via Geberit Control App
- Adjustable interval flush
- Water-saving hybrid mode can be set
- Flush volume can be reduced to 0.5 l per flush with regulating screw of installation set
- Vandal-resistant
- Power failure control unit
- Valve-closing function when power fails
- Brightness sensor to deactivate the control when urinal is removed
- Components in contact with drinking water lead-free

Scope of delivery

- Control electronics
- Urinal trap with sensor
- Spray shield
- Solenoid valve
- Power supply unit
- Straight connector
- Fastening material


Art. no.	Power consumption [W]
116.086.00.1	≤ 0.5

Can be combined with

- Geberit Duofix element for urinal, 112–130 cm, universal, for hidden urinal flush control → p. 74
- Geberit GIS element for urinal, 114–132 cm, universal, for hidden urinal flush control → p. 118
- Geberit Kombifix element for urinal, 109–127 cm, universal, for hidden urinal flush control → p. 29

With electronic flush actuation, battery operation

Geberit urinal flush control with electronic flush actuation, battery operation, Type 01 cover plate, round

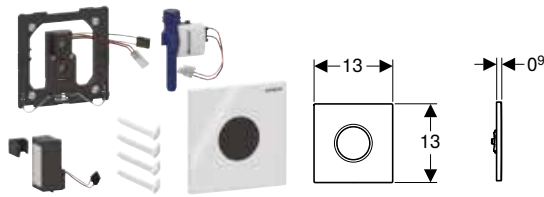

click & scan

Application purposes

- For automatic flush actuation of urinals

Technical data

Battery type	Alkaline (1.5 V AA)
Service life, supplied battery	2 years
Degree of protection	IP45
Operating voltage	3 V DC
Flow pressure	1–8 bar
Water test pressure max.	16 bar
Test pressure air / inert gas max.	3 bar
Flow rate at 100 kPa / 1 bar without flow limiter	0.3 l/s
Flow rate at 100 kPa / 1 bar with flow limiter	0.18 l/s
Interval flush time, factory setting	5 s
Detection time, factory setting	7 s
Flush time, adjustment range	1–15 s
Flush time, factory setting	7 s

Characteristics

- Cover plate with securing bar
- Water-saving hybrid mode can be set
- Adjustable interval flush
- Preflush can be set
- Functions can be set and queried with the Geberit Service Handy
- Device settings and operation with mobile device via integrated Bluetooth® interface
- Compatible with Geberit Control App
- Wired networkable with Geberit gateway via GEBUS converter
- Wirelessly connectable with Geberit Gateway via Bluetooth®
- Compatible with Geberit Connect
- Warning when the battery is low
- Valve-closing function when battery is flat
- Flush volume can be reduced to 0.5 l per flush with regulating screw of installation set
- Tap group II in accordance with DIN 4109
- Components in contact with drinking water lead-free

Scope of delivery


- Type 01 cover plate, IR window, round
- Infrared control, premounted on mounting frame
- Solenoid valve
- Battery compartment
- 2 alkaline manganese batteries type AA 1.5 V
- Fastening material

Art. no.	Colour / surface	Product material	Power consumption [W]
116.031.11.5	Plate: white / glossy	Die-cast zinc	≤ 0.5
116.031.21.5	Plate: chrome / glossy	Die-cast zinc	≤ 0.5
116.031.DW.5	Plate: black / glossy	Die-cast zinc	≤ 0.5

Can be combined with

- Geberit installation set with flush pipe, for urinal flush control, universal → p. 288
- Geberit installation set with nipple made of brass, for urinal flush control, universal → p. 289
- Geberit Duofix element for urinal, 112–130 cm, universal → p. 72
- Geberit Duofix element for urinal, 112–130 cm, universal, for spray head → p. 73
- Geberit GIS element for urinal, 114 cm, universal → p. 120
- Geberit GIS element for urinal, 114 cm, universal, for spray head → p. 121
- Geberit Kombifix element for urinal, 109–127 cm, universal → p. 27
- Geberit Kombifix element for urinal, 109–127 cm, universal, for spray head → p. 28

Geberit urinal flush control with electronic flush actuation, battery operation, Type 01 cover plate, square

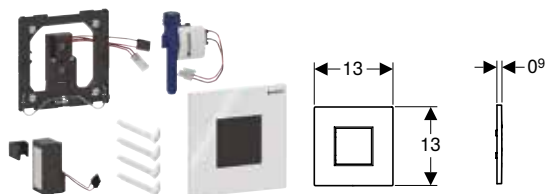

click & scan

Application purposes

- For automatic flush actuation of urinals

Technical data

Battery type	Alkaline (1.5 V AA)
Service life, supplied battery	2 years
Degree of protection	IP45
Operating voltage	3 V DC
Flow pressure	1–8 bar
Water test pressure max.	16 bar
Test pressure air / inert gas max.	3 bar
Flow rate at 100 kPa / 1 bar without flow limiter	0.3 l/s
Flow rate at 100 kPa / 1 bar with flow limiter	0.18 l/s
Interval flush time, factory setting	5 s
Detection time, factory setting	7 s
Flush time, adjustment range	1–15 s
Flush time, factory setting	7 s

Characteristics

- Cover plate with securing bar
- Water-saving hybrid mode can be set
- Adjustable interval flush
- Preflush can be set
- Functions can be set and queried with the Geberit Service Handy
- Device settings and operation with mobile device via integrated Bluetooth® interface
- Compatible with Geberit Control App
- Wired networkable with Geberit gateway via GEBUS converter
- Wirelessly connectable with Geberit Gateway via Bluetooth®
- Compatible with Geberit Connect
- Warning when the battery is low
- Valve-closing function when battery is flat
- Flush volume can be reduced to 0.5 l per flush with regulating screw of installation set
- Tap group II in accordance with DIN 4109
- Components in contact with drinking water lead-free

Scope of delivery


- Type 01 cover plate, IR window, square
- Infrared control, premounted on mounting frame
- Solenoid valve
- Battery compartment
- 2 alkaline manganese batteries type AA 1.5 V
- Fastening material

Art. no.	Colour / surface	Product material	Power consumption [W]
116.094.11.1	Plate: white / glossy	Die-cast zinc	≤ 0.5
116.094.21.1	Plate: chrome / glossy	Die-cast zinc	≤ 0.5
116.094.DW.1	Plate: black / glossy	Die-cast zinc	≤ 0.5
116.094.JQ.1	Plate: chrome / matt, easy-to-clean coated	Die-cast zinc	≤ 0.5

Can be combined with

- Geberit installation set with flush pipe, for urinal flush control, universal → p. 288
- Geberit installation set with nipple made of brass, for urinal flush control, universal → p. 289
- Geberit Duofix element for urinal, 112–130 cm, universal → p. 72
- Geberit Duofix element for urinal, 112–130 cm, universal, for spray head → p. 73
- Geberit GIS element for urinal, 114 cm, universal → p. 120
- Geberit GIS element for urinal, 114 cm, universal, for spray head → p. 121
- Geberit Kombifix element for urinal, 109–127 cm, universal → p. 27
- Geberit Kombifix element for urinal, 109–127 cm, universal, for spray head → p. 28

Geberit urinal flush control with electronic flush actuation, battery operation, Type 10 cover plate, round

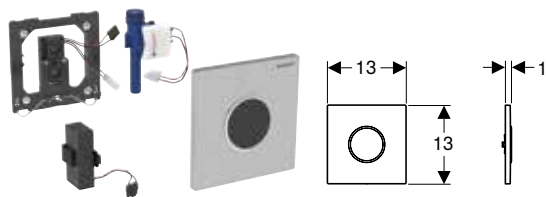

click & scan

Application purposes

- For automatic flush actuation of urinals

Technical data

Battery type	Alkaline (1.5 V AA)
Service life, supplied battery	2 years
Degree of protection	IP45
Operating voltage	3 V DC
Flow pressure	1–8 bar
Water test pressure max.	16 bar
Test pressure air / inert gas max.	3 bar
Flow rate at 100 kPa / 1 bar without flow limiter	0.3 l/s
Flow rate at 100 kPa / 1 bar with flow limiter	0.18 l/s
Interval flush time, factory setting	5 s
Detection time, factory setting	7 s
Flush time, adjustment range	1–15 s
Flush time, factory setting	7 s

Characteristics

- Cover plate with securing bar
- Water-saving hybrid mode can be set
- Adjustable interval flush
- Preflush can be set
- Functions can be set and queried with the Geberit Service Handy
- Device settings and operation with mobile device via integrated Bluetooth® interface
- Compatible with Geberit Control App
- Wired networkable with Geberit gateway via GEBUS converter
- Wirelessly connectable with Geberit Gateway via Bluetooth®
- Compatible with Geberit Connect
- Warning when the battery is low
- Valve-closing function when battery is flat
- Flush volume can be reduced to 0.5 l per flush with regulating screw of installation set
- Tap group II in accordance with DIN 4109
- Components in contact with drinking water lead-free

Scope of delivery


- Type 10 cover plate with IR window
- Infrared control, premounted on mounting frame
- Solenoid valve
- Battery compartment
- 2 alkaline manganese batteries type AA 1.5 V
- Fastening material

Art. no.	Colour / surface	Product material	Power consumption [W]
116.035.16.1	Plate: black matt / easy-to-clean coated Design ring/-s: black matt / glossy	Stainless steel	≤ 0.5
116.035.DW.1	Plate: black / glossy Design ring/-s: black matt / matt	Stainless steel	≤ 0.5
116.035.JQ.1	Plate: chrome / matt, easy-to-clean coated Design ring/-s: chrome / glossy	Die-cast zinc	≤ 0.5
116.035.KH.1	Plate: chrome / glossy Design ring/-s: chrome / matt	Die-cast zinc	≤ 0.5
116.035.KJ.1	Plate: white alpine / glossy Design ring/-s: chrome / glossy	Die-cast zinc	≤ 0.5
116.035.KK.1	Plate: white alpine / glossy Design ring/-s: gold-coloured / glossy	Die-cast zinc	≤ 0.5
116.035.KM.1	Plate: black / glossy Design ring/-s: chrome / glossy	Die-cast zinc	≤ 0.5
116.035.SN.1	Plate: brushed, easy-to-clean coated Design ring: polished	Stainless steel	≤ 0.5

Can be combined with

- Geberit installation set with flush pipe, for urinal flush control, universal → p. 288
- Geberit installation set with nipple made of brass, for urinal flush control, universal → p. 289
- Geberit Duofix element for urinal, 112–130 cm, universal → p. 72
- Geberit Duofix element for urinal, 112–130 cm, universal, for spray head → p. 73
- Geberit GIS element for urinal, 114 cm, universal → p. 120
- Geberit GIS element for urinal, 114 cm, universal, for spray head → p. 121
- Geberit Kombifix element for urinal, 109–127 cm, universal → p. 27
- Geberit Kombifix element for urinal, 109–127 cm, universal, for spray head → p. 28

Geberit urinal flush control with electronic flush actuation, battery operation, Type 40 cover plate, round

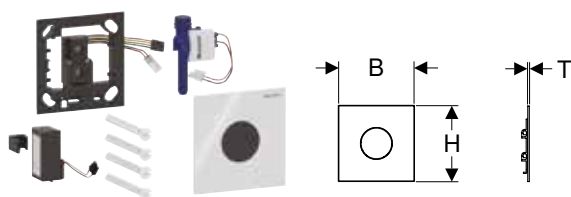

click & scan

Application purposes

- For automatic flush actuation of urinals

Technical data

Battery type	Alkaline (1.5 V AA)
Service life, supplied battery	2 years
Degree of protection	IP45
Operating voltage	3 V DC
Flow pressure	1–8 bar
Water test pressure max.	16 bar
Test pressure air / inert gas max.	3 bar
Flow rate at 100 kPa / 1 bar without flow limiter	0.3 l/s
Flow rate at 100 kPa / 1 bar with flow limiter	0.18 l/s
Interval flush time, factory setting	5 s
Detection time, factory setting	7 s
Flush time, adjustment range	1–15 s
Flush time, factory setting	7 s

Characteristics

- Cover plate with securing bar
- Water-saving hybrid mode can be set
- Adjustable interval flush
- Preflush can be set
- Functions can be set and queried with the Geberit Service Handy
- Device settings and operation with mobile device via integrated Bluetooth® interface
- Compatible with Geberit Control App
- Wired networkable with Geberit gateway via GEBUS converter
- Wirelessly connectable with Geberit Gateway via Bluetooth®
- Compatible with Geberit Connect
- Warning when the battery is low
- Valve-closing function when battery is flat
- Flush volume can be reduced to 0.5 l per flush with regulating screw of installation set
- Tap group II in accordance with DIN 4109
- Components in contact with drinking water lead-free

Scope of delivery

- Type 40 cover plate, IR window, round
- Infrared control, premounted on mounting frame
- Solenoid valve
- Battery compartment
- 2 alkaline manganese batteries type AA 1.5 V
- Fastening material

Art. no.	Colour / surface	Product material	B [cm]	H [cm]	T [cm]	Power consumption [W]
116.034.14.1	Plate: black matt / easy-to-clean coated	Stainless steel	12.5	12.5	0.2	≤ 0.5
116.034.FW.1	Plate: brushed, easy-to-clean coated	Stainless steel	12.5	12.5	0.2	≤ 0.5
116.034.JK.1	Plate: lava	Glass	12.5	12.5	0.4	≤ 0.5
116.034.JL.1	Plate: sand grey / glossy glass	Glass	12.5	12.5	0.4	≤ 0.5
116.034.JT.1	Plate: white matt / easy-to-clean coated	Stainless steel	12.5	12.5	0.2	≤ 0.5
116.034.QB.1	Plate: red gold / brushed, easy-to-clean coated	Stainless steel	12.5	12.5	0.2	≤ 0.5
116.034.QD.1	Plate: black chrome / brushed, easy-to-clean coated	Stainless steel	12.5	12.5	0.2	≤ 0.5
116.034.QF.1	Plate: brass-coloured / brushed, easy-to-clean coated	Stainless steel	12.5	12.5	0.2	≤ 0.5
116.034.SI.1	Plate: white / glossy glass	Glass	12.5	12.5	0.4	≤ 0.5
116.034.SJ.1	Plate: black / glossy glass	Glass	12.5	12.5	0.4	≤ 0.5
116.034.ID.1	N Plate: nickel / brushed, easy-to-clean coated	Stainless steel	12.5	12.5	0.2	≤ 0.5



N: New, available as of July 2026

Can be combined with

- Geberit installation set with flush pipe, for urinal flush control, universal → p. 288
- Geberit installation set with nipple made of brass, for urinal flush control, universal → p. 289
- Geberit Duofix element for urinal, 112–130 cm, universal → p. 72
- Geberit Duofix element for urinal, 112–130 cm, universal, for spray head → p. 73
- Geberit GIS element for urinal, 114 cm, universal → p. 120
- Geberit GIS element for urinal, 114 cm, universal, for spray head → p. 121
- Geberit Kombifix element for urinal, 109–127 cm, universal → p. 27
- Geberit Kombifix element for urinal, 109–127 cm, universal, for spray head → p. 28

New

Geberit urinal flush control with electronic flush actuation, battery operation, Type 40 cover plate, round, customised finish

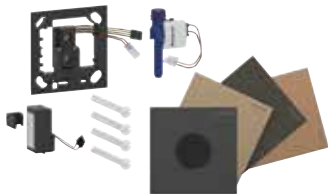

click & scan

Application purposes

- For automatic flush actuation of urinals

Technical data

Battery type	Alkaline (1.5 V AA)
Service life, supplied battery	2 years
Degree of protection	IP45
Operating voltage	3 V DC
Flow pressure	1–8 bar
Water test pressure max.	16 bar
Test pressure air / inert gas max.	3 bar
Flow rate at 100 kPa / 1 bar without flow limiter	0.3 l/s
Flow rate at 100 kPa / 1 bar with flow limiter	0.18 l/s
Interval flush time, factory setting	5 s
Detection time, factory setting	7 s
Flush time, adjustment range	1–15 s
Flush time, factory setting	7 s

Characteristics

- Cover plate with securing bar
- Water-saving hybrid mode can be set
- Adjustable interval flush
- Preflush can be set
- Functions can be set and queried with the Geberit Service Handy
- Device settings and operation with mobile device via integrated Bluetooth® interface
- Compatible with Geberit Control App
- Wired networkable with Geberit gateway via GEBUS converter
- Wirelessly connectable with Geberit Gateway via Bluetooth®
- Compatible with Geberit Connect
- Warning when the battery is low
- Valve-closing function when battery is flat
- Flush volume can be reduced to 0.5 l per flush with regulating screw of installation set
- Tap group II in accordance with DIN 4109
- Components in contact with drinking water lead-free

Scope of delivery

- Type 40 cover plate, IR window, round
- Infrared control, premounted on mounting frame
- Solenoid valve
- Battery compartment
- 2 alkaline manganese batteries type AA 1.5 V
- Fastening material

Art. no.	Colour / surface	Product material	B [cm]	H [cm]	T [cm]	Power consumption [W]
004.800.00.2 *	galvanized	Stainless steel	12.5	12.5	0.2	≤ 0.5
004.800.00.3 *	galvanized and varnished	Stainless steel	12.5	12.5	0.2	≤ 0.5

Available as of April 2026; * Order-based production


Can be combined with

- Geberit installation set with flush pipe, for urinal flush control, universal → p. 288
- Geberit installation set with nipple made of brass, for urinal flush control, universal → p. 289
- Geberit Duofix element for urinal, 112–130 cm, universal → p. 72
- Geberit Duofix element for urinal, 112–130 cm, universal, for spray head → p. 73
- Geberit GIS element for urinal, 114 cm, universal → p. 120
- Geberit GIS element for urinal, 114 cm, universal, for spray head → p. 121
- Geberit Kombifix element for urinal, 109–127 cm, universal → p. 27
- Geberit Kombifix element for urinal, 109–127 cm, universal, for spray head → p. 28



- All available colours and surfaces as well as delivery times are listed in the document entitled "Actuator plates and urinal flush controls with customer-specific finish". The document is available online in the "Documents" section of the product catalogue. In the printed product catalogue, the QR code leads to the online product page with the document.

Geberit urinal flush control with electronic flush actuation, battery operation, Type 40 cover plate, square

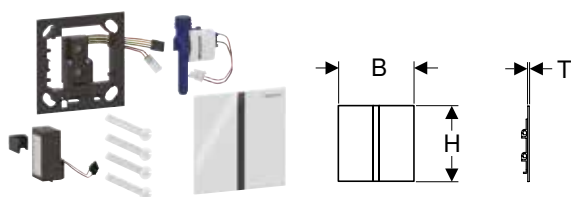

click & scan

Application purposes

- For automatic flush actuation of urinals

Technical data

Battery type	Alkaline (1.5 V AA)
Service life, supplied battery	2 years
Degree of protection	IP45
Operating voltage	3 V DC
Flow pressure	1–8 bar
Water test pressure max.	16 bar
Test pressure air / inert gas max.	3 bar
Flow rate at 100 kPa / 1 bar without flow limiter	0.3 l/s
Flow rate at 100 kPa / 1 bar with flow limiter	0.18 l/s
Interval flush time, factory setting	5 s
Detection time, factory setting	7 s
Flush time, adjustment range	1–15 s
Flush time, factory setting	7 s

Characteristics

- Cover plate with securing bar
- Water-saving hybrid mode can be set
- Adjustable interval flush
- Preflush can be set
- Functions can be set and queried with the Geberit Service Handy
- Device settings and operation with mobile device via integrated Bluetooth® interface
- Compatible with Geberit Control App
- Wired networkable with Geberit gateway via GEBUS converter
- Wirelessly connectable with Geberit Gateway via Bluetooth®
- Compatible with Geberit Connect
- Warning when the battery is low
- Valve-closing function when battery is flat
- Flush volume can be reduced to 0.5 l per flush with regulating screw of installation set
- Tap group II in accordance with DIN 4109
- Components in contact with drinking water lead-free

Scope of delivery

- Type 40 cover plate, IR window, square
- Infrared control, premounted on mounting frame
- Solenoid valve
- Battery compartment
- 2 alkaline manganese batteries type AA 1.5 V
- Fastening material

Art. no.	Colour / surface	Product material	B	H	T	Power consumption [W]
			[cm]	[cm]	[cm]	
116.237.14.1	Plate: black matt / easy-to-clean coated	Stainless steel	12.5	12.5	0.2	≤ 0.5
116.237.FW.1	Plate: brushed, easy-to-clean coated	Stainless steel	12.5	12.5	0.2	≤ 0.5
116.237.JK.1	Plate: lava	Glass	12.5	12.5	0.4	≤ 0.5
116.237.JL.1	Plate: sand grey / glossy glass	Glass	12.5	12.5	0.4	≤ 0.5
116.237.JT.1	Plate: white matt / easy-to-clean coated	Stainless steel	12.5	12.5	0.2	≤ 0.5
116.237.QB.1	Plate: red gold / brushed, easy-to-clean coated	Stainless steel	12.5	12.5	0.2	≤ 0.5
116.237.QD.1	Plate: black chrome / brushed, easy-to-clean coated	Stainless steel	12.5	12.5	0.2	≤ 0.5
116.237.QF.1	Plate: brass-coloured / brushed, easy-to-clean coated	Stainless steel	12.5	12.5	0.2	≤ 0.5
116.237.SI.1	Plate: white / glossy glass	Glass	12.5	12.5	0.4	≤ 0.5
116.237.SJ.1	Plate: black / glossy glass	Glass	12.5	12.5	0.4	≤ 0.5
116.237.ID.1	N Plate: nickel / brushed, easy-to-clean coated	Stainless steel	12.5	12.5	0.2	≤ 0.5



N: New, available as of July 2026

Can be combined with

- Geberit installation set with flush pipe, for urinal flush control, universal → p. 288
- Geberit installation set with nipple made of brass, for urinal flush control, universal → p. 289
- Geberit Duofix element for urinal, 112–130 cm, universal → p. 72
- Geberit Duofix element for urinal, 112–130 cm, universal, for spray head → p. 73
- Geberit GIS element for urinal, 114 cm, universal → p. 120
- Geberit GIS element for urinal, 114 cm, universal, for spray head → p. 121
- Geberit Kombifix element for urinal, 109–127 cm, universal → p. 27
- Geberit Kombifix element for urinal, 109–127 cm, universal, for spray head → p. 28

New

Geberit urinal flush control with electronic flush actuation, battery operation, Type 40 cover plate, square, customised finish

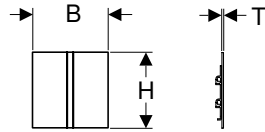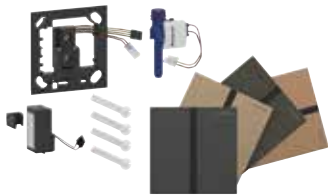

click & scan

Application purposes

- For automatic flush actuation of urinals

Technical data

Battery type	Alkaline (1.5 V AA)
Service life, supplied battery	2 years
Degree of protection	IP45
Operating voltage	3 V DC
Flow pressure	1–8 bar
Water test pressure max.	16 bar
Test pressure air / inert gas max.	3 bar
Flow rate at 100 kPa / 1 bar without flow limiter	0.3 l/s
Flow rate at 100 kPa / 1 bar with flow limiter	0.18 l/s
Interval flush time, factory setting	5 s
Detection time, factory setting	7 s
Flush time, adjustment range	1–15 s
Flush time, factory setting	7 s

Characteristics

- Cover plate with securing bar
- Water-saving hybrid mode can be set
- Adjustable interval flush
- Preflush can be set
- Functions can be set and queried with the Geberit Service Handy
- Device settings and operation with mobile device via integrated Bluetooth® interface
- Compatible with Geberit Control App
- Wired networkable with Geberit gateway via GEBUS converter
- Wirelessly connectable with Geberit Gateway via Bluetooth®
- Compatible with Geberit Connect
- Warning when the battery is low
- Valve-closing function when battery is flat
- Flush volume can be reduced to 0.5 l per flush with regulating screw of installation set
- Tap group II in accordance with DIN 4109
- Components in contact with drinking water lead-free

Scope of delivery

- Type 40 cover plate, IR window, square
- Infrared control, premounted on mounting frame
- Solenoid valve
- Battery compartment
- 2 alkaline manganese batteries type AA 1.5 V
- Fastening material

Art. no.	Colour / surface	Product material	B [cm]	H [cm]	T [cm]	Power consumption [W]
004.801.00.2 *	galvanized	Stainless steel	12.5	12.5	0.2	≤ 0.5
004.801.00.3 *	galvanized and varnished	Stainless steel	12.5	12.5	0.2	≤ 0.5

Available as of April 2026; * Order-based production

Can be combined with


- Geberit installation set with flush pipe, for urinal flush control, universal → p. 288
- Geberit installation set with nipple made of brass, for urinal flush control, universal → p. 289
- Geberit Duofix element for urinal, 112–130 cm, universal → p. 72
- Geberit Duofix element for urinal, 112–130 cm, universal, for spray head → p. 73
- Geberit GIS element for urinal, 114 cm, universal → p. 120
- Geberit GIS element for urinal, 114 cm, universal, for spray head → p. 121
- Geberit Kombifix element for urinal, 109–127 cm, universal → p. 27
- Geberit Kombifix element for urinal, 109–127 cm, universal, for spray head → p. 28



- All available colours and surfaces as well as delivery times are listed in the document entitled "Actuator plates and urinal flush controls with customer-specific finish". The document is available online in the "Documents" section of the product catalogue. In the printed product catalogue, the QR code leads to the online product page with the document.

With pneumatic flush actuation

Geberit urinal flush control with pneumatic flush actuation, Type 01 actuator plate, round

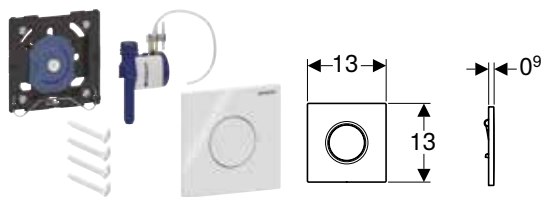

click & scan

Application purposes

- For manual flush actuation of urinals

Technical data

Flow pressure	1–8 bar
Water test pressure max.	16 bar
Test pressure air / inert gas max.	3 bar
Actuation force (N) max.	12 N
Flow rate at 100 kPa / 1 bar without flow limiter	0.3 l/s
Flow rate at 100 kPa / 1 bar with flow limiter	0.18 l/s
Flush time, adjustment range	4 s / 8 s / 12 s

Characteristics

- Actuator plate with securing bar
- Flush time setting with air nozzles (pneumatic)
- Low flush actuation force
- Short stroke movement
- Flush volume can be reduced to 0.5 l per flush with regulating screw of installation set
- Tap group II in accordance with DIN 4109
- Components in contact with drinking water lead-free

Scope of delivery


- Type 01 actuator plate, round
- Pneumatic flush actuation, premounted on mounting frame
- Pneumatic valve
- Fastening material

Art. no.	Colour / surface	Product material
116.011.11.5	Plate, Button: white / glossy	Plastic
116.011.21.5	Plate, Button: chrome / glossy	Plastic
116.011.DW.5	Plate, Button: black / glossy	Plastic
116.011.JQ.5	Plate, Button: chrome / matt, easy-to-clean coated	Plastic

Can be combined with

- Geberit installation set with flush pipe, for urinal flush control, universal → p. 288
- Geberit installation set with nipple made of brass, for urinal flush control, universal → p. 289
- Geberit Duofix element for urinal, 112–130 cm, universal → p. 72
- Geberit Duofix element for urinal, 112–130 cm, universal, for spray head → p. 73
- Geberit GIS element for urinal, 114 cm, universal → p. 120
- Geberit GIS element for urinal, 114 cm, universal, for spray head → p. 121
- Geberit Kombifix element for urinal, 109–127 cm, universal → p. 27
- Geberit Kombifix element for urinal, 109–127 cm, universal, for spray head → p. 28

Geberit urinal flush control with pneumatic flush actuation, Type 01 actuator plate, square

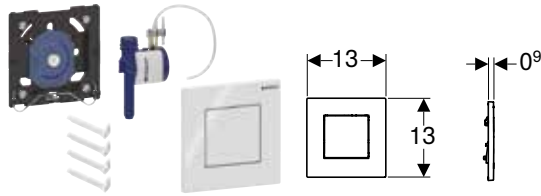

click & scan

Application purposes

- For manual flush actuation of urinals

Technical data

Flow pressure	1–8 bar
Water test pressure max.	16 bar
Test pressure air / inert gas max.	3 bar
Actuation force (N) max.	12 N
Flow rate at 100 kPa / 1 bar without flow limiter	0.3 l/s
Flow rate at 100 kPa / 1 bar with flow limiter	0.18 l/s
Flush time, adjustment range	4 s / 8 s / 12 s

Characteristics

- Actuator plate with securing bar
- Flush time setting with air nozzles (pneumatic)
- Low flush actuation force
- Short stroke movement
- Flush volume can be reduced to 0.5 l per flush with regulating screw of installation set
- Tap group II in accordance with DIN 4109
- Components in contact with drinking water lead-free

Scope of delivery


- Type 01 actuator plate, square
- Pneumatic flush actuation, premounted on mounting frame
- Pneumatic valve
- Fastening material

Art. no.	Colour / surface	Product material
116.064.11.1	Plate: white / glossy Button: white / glossy	Plastic
116.064.21.1	Plate, Button: chrome / glossy	Plastic
116.064.DW.1	Plate, Button: black / glossy	Plastic
116.064.JQ.1	Plate, Button: chrome / matt, easy-to-clean coated	Plastic

Can be combined with

- Geberit installation set with flush pipe, for urinal flush control, universal → p. 288
- Geberit installation set with nipple made of brass, for urinal flush control, universal → p. 289
- Geberit Duofix element for urinal, 112–130 cm, universal → p. 72
- Geberit Duofix element for urinal, 112–130 cm, universal, for spray head → p. 73
- Geberit GIS element for urinal, 114 cm, universal → p. 120
- Geberit GIS element for urinal, 114 cm, universal, for spray head → p. 121
- Geberit Kombifix element for urinal, 109–127 cm, universal → p. 27
- Geberit Kombifix element for urinal, 109–127 cm, universal, for spray head → p. 28

Geberit urinal flush control with pneumatic flush actuation, Type 10 actuator plate, round

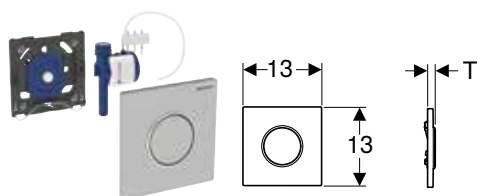

click & scan

Application purposes

- For manual flush actuation of urinals

Technical data

Flow pressure	1–8 bar
Water test pressure max.	16 bar
Test pressure air / inert gas max.	3 bar
Actuation force (N) max.	12 N
Flow rate at 100 kPa / 1 bar without flow limiter	0.3 l/s
Flow rate at 100 kPa / 1 bar with flow limiter	0.18 l/s
Flush time, adjustment range	4 s / 8 s / 12 s

Characteristics

- Actuator plate with securing bar
- Flush time setting with air nozzles (pneumatic)
- Low flush actuation force
- Short stroke movement
- Flush volume can be reduced to 0.5 l per flush with regulating screw of installation set
- Tap group II in accordance with DIN 4109
- Components in contact with drinking water lead-free

Scope of delivery


- Type 10 actuator plate
- Pneumatic flush actuation, premounted on mounting frame
- Pneumatic valve
- Fastening material

Art. no.	Colour / surface	Product material	B	H	T
			[cm]	[cm]	[cm]
116.015.16.1	Plate, Button: black matt / easy-to-clean coated Design ring/-s: black / glossy	Stainless steel	13	13	1.1
116.015.DW.1	Plate, Button: black / glossy Design ring/-s: black / matt	Stainless steel	13	13	1.1
116.015.JQ.1	Plate, Button: chrome / matt, easy-to-clean coated Design ring/-s: chrome / glossy	Plastic	13	13	1.3
116.015.KH.1	Plate, Button: chrome / glossy Design ring/-s: chrome / matt	Plastic	13	13	1.3
116.015.KJ.1	Plate, Button: white alpine / glossy Design ring/-s: chrome / glossy	Plastic	13	13	1.3
116.015.KK.1	Plate, Button: white alpine / glossy Design ring/-s: gold-coloured / glossy	Plastic	13	13	1.3
116.015.KM.1	Plate, Button: black / glossy Design ring/-s: chrome / glossy	Plastic	13	13	1.3
116.015.SN.1	Plate, Button: brushed, easy-to-clean coated Design ring: polished	Stainless steel	13	13	1.1

Can be combined with

- Geberit installation set with flush pipe, for urinal flush control, universal → p. 288
- Geberit installation set with nipple made of brass, for urinal flush control, universal → p. 289
- Geberit Duofix element for urinal, 112–130 cm, universal → p. 72
- Geberit Duofix element for urinal, 112–130 cm, universal, for spray head → p. 73
- Geberit GIS element for urinal, 114 cm, universal → p. 120
- Geberit GIS element for urinal, 114 cm, universal, for spray head → p. 121
- Geberit Kombifix element for urinal, 109–127 cm, universal → p. 27
- Geberit Kombifix element for urinal, 109–127 cm, universal, for spray head → p. 28

Geberit urinal flush control with pneumatic flush actuation, Type 40 actuator plate, round

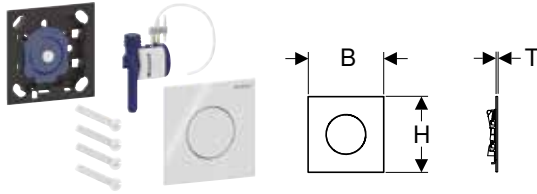

click & scan

Application purposes

- For manual flush actuation of urinals

Technical data

Flow pressure	1–8 bar
Water test pressure max.	16 bar
Test pressure air / inert gas max.	3 bar
Actuation force (N) max.	12 N
Flow rate at 100 kPa / 1 bar without flow limiter	0.3 l/s
Flow rate at 100 kPa / 1 bar with flow limiter	0.18 l/s
Flush time, adjustment range	4 s / 8 s / 12 s

Characteristics

- Actuator plate with securing bar
- Flush time setting with air nozzles (pneumatic)
- Low flush actuation force
- Short stroke movement
- Flush volume can be reduced to 0.5 l per flush with regulating screw of installation set
- Tap group II in accordance with DIN 4109
- Components in contact with drinking water lead-free

Scope of delivery

- Type 40 actuator plate, round
- Pneumatic flush actuation, premounted on mounting frame
- Pneumatic valve
- Fastening material

Art. no.	Colour / surface	Product material	B	H	T
			[cm]	[cm]	[cm]
116.014.14.1	Plate, Button: black matt / easy-to-clean coated	Stainless steel	12.5	12.5	0.2
116.014.FW.1	Plate, Button: brushed, easy-to-clean coated	Stainless steel	12.5	12.5	0.2
116.014.JK.1	Plate, Button: lava / glossy glass	Glass	12.5	12.5	0.4
116.014.JL.1	Plate, Button: sand grey / glossy glass	Glass	12.5	12.5	0.4
116.014.JT.1	Plate, Button: white matt / easy-to-clean coated	Stainless steel	12.5	12.5	0.2
116.014.QB.1	Plate, Button: red gold / brushed, easy-to-clean coated	Stainless steel	12.5	12.5	0.2
116.014.QD.1	Plate, Button: black chrome / brushed, easy-to-clean coated	Stainless steel	12.5	12.5	0.2
116.014.QF.1	Plate, Button: brass-coloured / brushed, easy-to-clean coated	Stainless steel	12.5	12.5	0.2
116.014.SI.1	Plate, Button: white / glossy glass	Glass	12.5	12.5	0.4
116.014.SJ.1	Plate, Button: black / glossy glass	Glass	12.5	12.5	0.4
116.014.ID.1	N Plate, Button: nickel / brushed, easy-to-clean coated	Stainless steel	12.5	12.5	0.2


N: New, available as of July 2026

Can be combined with

- Geberit installation set with flush pipe, for urinal flush control, universal → p. 288
- Geberit installation set with nipple made of brass, for urinal flush control, universal → p. 289
- Geberit Duofix element for urinal, 112–130 cm, universal → p. 72
- Geberit Duofix element for urinal, 112–130 cm, universal, for spray head → p. 73
- Geberit GIS element for urinal, 114 cm, universal → p. 120
- Geberit GIS element for urinal, 114 cm, universal, for spray head → p. 121
- Geberit Kombifix element for urinal, 109–127 cm, universal → p. 27
- Geberit Kombifix element for urinal, 109–127 cm, universal, for spray head → p. 28

New

Geberit urinal flush control with pneumatic flush actuation, Type 40 actuator plate, round, customised finish

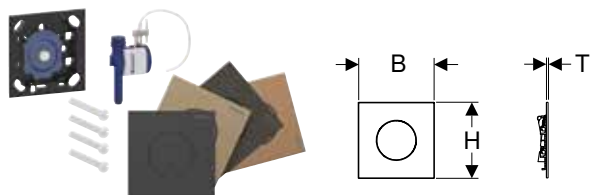

click & scan

Application purposes

- For manual flush actuation of urinals

Technical data

Flow pressure	1–8 bar
Water test pressure max.	16 bar
Test pressure air / inert gas max.	3 bar
Actuation force (N) max.	12 N
Flow rate at 100 kPa / 1 bar without flow limiter	0.3 l/s
Flow rate at 100 kPa / 1 bar with flow limiter	0.18 l/s
Flush time, adjustment range	4 s / 8 s / 12 s

Characteristics

- Actuator plate with securing bar
- Flush time setting with air nozzles (pneumatic)
- Low flush actuation force
- Short stroke movement
- Flush volume can be reduced to 0.5 l per flush with regulating screw of installation set
- Tap group II in accordance with DIN 4109
- Components in contact with drinking water lead-free

Scope of delivery

- Type 40 actuator plate, round
- Pneumatic flush actuation, premounted on mounting frame
- Pneumatic valve
- Fastening material

Art. no.	Colour / surface	Product material	B [cm]	H [cm]	T [cm]
004.780.00.2 *	galvanized	Stainless steel	12.5	12.5	0.2
004.780.00.3 *	galvanized and varnished	Stainless steel	12.5	12.5	0.2

Available as of April 2026; * Order-based production


Can be combined with

- Geberit installation set with flush pipe, for urinal flush control, universal → p. 288
- Geberit installation set with nipple made of brass, for urinal flush control, universal → p. 289
- Geberit Duofix element for urinal, 112–130 cm, universal → p. 72
- Geberit Duofix element for urinal, 112–130 cm, universal, for spray head → p. 73
- Geberit GIS element for urinal, 114 cm, universal → p. 120
- Geberit GIS element for urinal, 114 cm, universal, for spray head → p. 121
- Geberit Kombifix element for urinal, 109–127 cm, universal → p. 27
- Geberit Kombifix element for urinal, 109–127 cm, universal, for spray head → p. 28



- All available colours and surfaces as well as delivery times are listed in the document entitled "Actuator plates and urinal flush controls with customer-specific finish". The document is available online in the "Documents" section of the product catalogue. In the printed product catalogue, the QR code leads to the online product page with the document.

Geberit urinal flush control with pneumatic flush actuation, Type 40 actuator plate, square

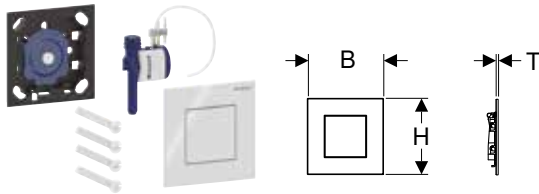

click & scan

Application purposes

- For manual flush actuation of urinals

Technical data

Flow pressure	1–8 bar
Water test pressure max.	16 bar
Test pressure air / inert gas max.	3 bar
Actuation force (N) max.	12 N
Flow rate at 100 kPa / 1 bar without flow limiter	0.3 l/s
Flow rate at 100 kPa / 1 bar with flow limiter	0.18 l/s
Flush time, adjustment range	4 s / 8 s / 12 s

Characteristics

- Actuator plate with securing bar
- Flush time setting with air nozzles (pneumatic)
- Low flush actuation force
- Short stroke movement
- Flush volume can be reduced to 0.5 l per flush with regulating screw of installation set
- Tap group II in accordance with DIN 4109
- Components in contact with drinking water lead-free

Scope of delivery

- Type 40 actuator plate, square
- Pneumatic flush actuation, premounted on mounting frame
- Pneumatic valve
- Fastening material

Art. no.	Colour / surface	Product material	B	H	T
			[cm]	[cm]	[cm]
116.217.14.1	Plate, Button: black matt / easy-to-clean coated	Stainless steel	12.5	12.5	0.2
116.217.FW.1	Plate, Button: brushed, easy-to-clean coated	Stainless steel	12.5	12.5	0.2
116.217.JK.1	Plate, Button: lava / glossy glass	Glass	12.5	12.5	0.4
116.217.JL.1	Plate, Button: sand grey / glossy glass	Glass	12.5	12.5	0.4
116.217.JT.1	Plate, Button: white matt / easy-to-clean coated	Stainless steel	12.5	12.5	0.2
116.217.QB.1	Plate, Button: red gold / brushed, easy-to-clean coated	Stainless steel	12.5	12.5	0.2
116.217.QD.1	Plate, Button: black chrome / brushed, easy-to-clean coated	Stainless steel	12.5	12.5	0.2
116.217.QF.1	Plate, Button: brass-coloured / brushed, easy-to-clean coated	Stainless steel	12.5	12.5	0.2
116.217.SI.1	Plate, Button: white / glossy glass	Glass	12.5	12.5	0.4
116.217.SJ.1	Plate, Button: black / glossy glass	Glass	12.5	12.5	0.4
116.217.ID.1	N Plate, Button: nickel / brushed, easy-to-clean coated	Stainless steel	12.5	12.5	0.2


N: New, available as of July 2026

Can be combined with

- Geberit installation set with flush pipe, for urinal flush control, universal → p. 288
- Geberit installation set with nipple made of brass, for urinal flush control, universal → p. 289
- Geberit Duofix element for urinal, 112–130 cm, universal → p. 72
- Geberit Duofix element for urinal, 112–130 cm, universal, for spray head → p. 73
- Geberit GIS element for urinal, 114 cm, universal → p. 120
- Geberit GIS element for urinal, 114 cm, universal, for spray head → p. 121
- Geberit Kombifix element for urinal, 109–127 cm, universal → p. 27
- Geberit Kombifix element for urinal, 109–127 cm, universal, for spray head → p. 28

New

Geberit urinal flush control with pneumatic flush actuation, Type 40 actuator plate, square, customised finish

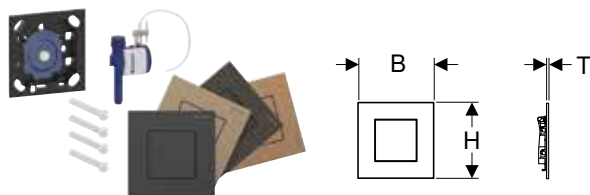

click & scan

Application purposes

- For manual flush actuation of urinals

Technical data

Flow pressure	1–8 bar
Water test pressure max.	16 bar
Test pressure air / inert gas max.	3 bar
Actuation force (N) max.	12 N
Flow rate at 100 kPa / 1 bar without flow limiter	0.3 l/s
Flow rate at 100 kPa / 1 bar with flow limiter	0.18 l/s
Flush time, adjustment range	4 s / 8 s / 12 s

Characteristics

- Actuator plate with securing bar
- Flush time setting with air nozzles (pneumatic)
- Low flush actuation force
- Short stroke movement
- Flush volume can be reduced to 0.5 l per flush with regulating screw of installation set
- Tap group II in accordance with DIN 4109
- Components in contact with drinking water lead-free

Scope of delivery

- Type 40 actuator plate, square
- Pneumatic flush actuation, premounted on mounting frame
- Pneumatic valve
- Fastening material

Art. no.	Colour / surface	Product material	B [cm]	H [cm]	T [cm]
004.781.00.2*	galvanized	Stainless steel	12.5	12.5	0.2
004.781.00.3*	galvanized and varnished	Stainless steel	12.5	12.5	0.2

Available as of April 2026; * Order-based production

Can be combined with

- Geberit installation set with flush pipe, for urinal flush control, universal → p. 288
- Geberit installation set with nipple made of brass, for urinal flush control, universal → p. 289
- Geberit Duofix element for urinal, 112–130 cm, universal → p. 72
- Geberit Duofix element for urinal, 112–130 cm, universal, for spray head → p. 73
- Geberit GIS element for urinal, 114 cm, universal → p. 120
- Geberit GIS element for urinal, 114 cm, universal, for spray head → p. 121
- Geberit Kombifix element for urinal, 109–127 cm, universal → p. 27
- Geberit Kombifix element for urinal, 109–127 cm, universal, for spray head → p. 28




- All available colours and surfaces as well as delivery times are listed in the document entitled "Actuator plates and urinal flush controls with customer-specific finish". The document is available online in the "Documents" section of the product catalogue. In the printed product catalogue, the QR code leads to the online product page with the document.

Urinal flush controls

Concealed
With pneumatic flush actuation

Geberit urinal flush control with pneumatic flush actuation, Type 50 actuator plate, square

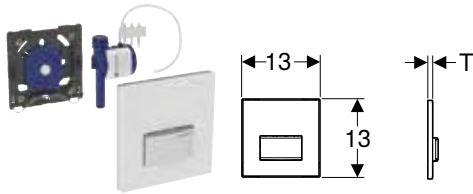

click & scan

Application purposes

- For manual flush actuation of urinals

Technical data

Flow pressure	1–8 bar
Water test pressure max.	16 bar
Test pressure air / inert gas max.	3 bar
Actuation force (N) max.	12 N
Flow rate at 100 kPa / 1 bar without flow limiter	0.3 l/s
Flow rate at 100 kPa / 1 bar with flow limiter	0.18 l/s
Flush time, adjustment range	4 s / 8 s / 12 s

Characteristics

- Actuator plate with securing bar
- Flush time setting with air nozzles (pneumatic)
- Low flush actuation force
- Short stroke movement
- Flush volume can be reduced to 0.5 l per flush with regulating screw of installation set
- Tap group II in accordance with DIN 4109
- Components in contact with drinking water lead-free

Scope of delivery


- Type 50 actuator plate
- Pneumatic flush actuation, premounted on mounting frame
- Pneumatic valve
- Fastening material

Art. no.	Colour / surface	Product material	B	H	T
			[cm]	[cm]	[cm]
116.016.00.5	customised	Die-cast zinc	13	13	0.8
116.016.11.5	Plate: white alpine / glossy Button: chrome / brushed	Die-cast zinc / plastic	13	13	1.1
116.016.DW.5	Plate: black / glossy Button: chrome / brushed	Die-cast zinc / plastic	13	13	1.1
116.016.GH.5	Plate, Button: chrome / brushed	Die-cast zinc / brass	13	13	1
116.016.JK.5	Plate: lava / glossy glass Button: chrome / brushed	Die-cast zinc / glass	13	13	1.2
116.016.JL.5	Plate: sand grey / glossy glass Button: chrome / brushed	Die-cast zinc / glass	13	13	1.2
116.016.SD.5	Plate: reflective smoked glass Button: chrome / brushed	Die-cast zinc / glass	13	13	1.2

Can be combined with

- Geberit installation set with flush pipe, for urinal flush control, universal → p. 288
- Geberit installation set with nipple made of brass, for urinal flush control, universal → p. 289
- Geberit Duofix element for urinal, 112–130 cm, universal → p. 72
- Geberit Duofix element for urinal, 112–130 cm, universal, for spray head → p. 73
- Geberit GIS element for urinal, 114 cm, universal → p. 120
- Geberit GIS element for urinal, 114 cm, universal, for spray head → p. 121
- Geberit Kombifix element for urinal, 109–127 cm, universal → p. 27
- Geberit Kombifix element for urinal, 109–127 cm, universal, for spray head → p. 28

Geberit urinal flush control with pneumatic flush actuation, Type 50 actuator plate, square, customised

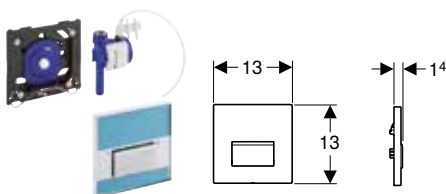

click & scan

Application purposes

- For manual flush actuation of urinals

Technical data

Flow pressure	1–8 bar
Water test pressure max.	16 bar
Test pressure air / inert gas max.	3 bar
Actuation force (N) max.	12 N
Flow rate at 100 kPa / 1 bar without flow limiter	0.3 l/s
Flow rate at 100 kPa / 1 bar with flow limiter	0.18 l/s
Flush time, adjustment range	4 s / 8 s / 12 s

Characteristics

- Actuator plate made of die-cast zinc
- Actuator plate with securing bar
- Flush time setting with air nozzles (pneumatic)
- Low flush actuation force
- Short stroke movement
- Flush volume can be reduced to 0.5 l per flush with regulating screw of installation set
- Tap group II in accordance with DIN 4109
- Components in contact with drinking water lead-free

Scope of delivery

- Type 50 actuator plate
- Pneumatic flush actuation, premounted on mounting frame
- Pneumatic valve
- Fastening material


Art. no.	Colour / surface	Product material
116.016.00.1	customised	Die-cast zinc

Can be combined with

- Geberit installation set with flush pipe, for urinal flush control, universal → p. 288
- Geberit installation set with nipple made of brass, for urinal flush control, universal → p. 289
- Geberit Duofix element for urinal, 112–130 cm, universal → p. 72
- Geberit Duofix element for urinal, 112–130 cm, universal, for spray head → p. 73
- Geberit GIS element for urinal, 114 cm, universal → p. 120
- Geberit GIS element for urinal, 114 cm, universal, for spray head → p. 121
- Geberit Kombifix element for urinal, 109–127 cm, universal → p. 27
- Geberit Kombifix element for urinal, 109–127 cm, universal, for spray head → p. 28

Basic

Geberit Basic urinal flush control with electronic flush actuation, mains operation, actuator plate, square, made of plastic

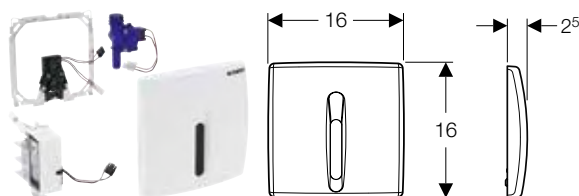

click & scan

Application purposes

- For automatic flush actuation of urinals
- For installation in Geberit Duofix elements for urinal, 130 cm, universal, for urinal flush control Basic

Technical data

Degree of protection	IP45
Nominal voltage	110–240 V AC
Mains frequency	50 Hz
Operating voltage	4.5 V DC
Flow pressure	1–8 bar
Water test pressure max.	16 bar
Storage temperature	-20 – +70 °C
Operating temperature	1–50 °C
Detection time, factory setting	7 s
Flush time, adjustment range	1–15 s
Flush time, factory setting	7 s

Characteristics

- Cover plate with securing bar
- Adjustable interval flush
- Preflush can be set
- Power failure control unit
- Valve-closing function when power fails
- Device settings and operation with mobile device via integrated Bluetooth® interface
- Compatible with Geberit Control App
- Functions can be set and queried with the Geberit Service Handy
- Components in contact with drinking water lead-free

Scope of delivery

- Cover plate with IR window
- Mounting frame
- Infrared control
- Solenoid valve
- Power supply unit
- Fastening material

Art. no.	Colour / surface	Product material	Power consumption [W]
115.817.11.5	white alpine	Plastic	≤ 0.5
115.817.46.5	chrome / matt	Plastic	≤ 0.5


Can be combined with

- Geberit installation set for Basic urinal flush control → p. 290
- Geberit installation set with flush bend and flush bend extension, for Basic urinal flush control → p. 290
- Geberit Duofix element for urinal, 130 cm, universal, for Basic urinal flush control → p. 76



- Only compatible with art. no. 115.801.00.5, 111.665.00.5 and 115.985.00.5

Geberit Basic urinal flush control with electronic flush actuation, battery operation, actuator plate, square, made of plastic

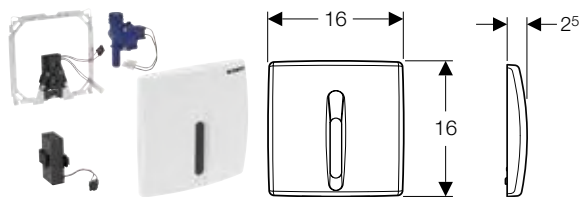

click & scan

Application purposes

- For automatic flush actuation of urinals

Technical data

Battery type	Alkaline (1.5 V AA)
Degree of protection	IP45
Operating voltage	3 V DC
Flow pressure	1–8 bar
Water test pressure max.	16 bar
Storage temperature	-20 – +70 °C
Detection time, factory setting	7 s
Flush time, adjustment range	1–15 s
Flush time, factory setting	7 s

Characteristics

- Cover plate with securing bar
- Adjustable interval flush
- Preflush can be set
- Device settings and operation with mobile device via integrated Bluetooth® interface
- Compatible with Geberit Control App
- Warning when the battery is low
- Valve-closing function when battery is flat
- Functions can be set and queried with the Geberit Service Handy
- Components in contact with drinking water lead-free

Scope of delivery

- Cover plate with IR window
- Mounting frame
- Infrared control
- Solenoid valve
- 2 alkaline manganese batteries type AA 1.5 V
- Fastening material

Art. no.	Colour / surface	Product material	Power consumption [W]
115.818.11.5	white alpine	Plastic	≤ 0.5
115.818.46.5	chrome / matt	Plastic	≤ 0.5

Can be combined with

- Geberit installation set for Basic urinal flush control → p. 290
- Geberit installation set with flush bend and flush bend extension, for Basic urinal flush control → p. 290
- Geberit Duofix element for urinal, 130 cm, universal, for Basic urinal flush control → p. 76



- Only compatible with art. no. 115.801.00.5, 111.665.00.5 and 115.985.00.5

Surface-mounted

With electronic flush actuation, mains operation

Geberit urinal flush control with electronic flush actuation, mains operation, surface-mounted, hidden



Application purposes

- For automatic flush actuation of urinals
- For installation behind the ceramic appliance
- For urinal installations with inlet from the rear and outlet to the rear
- For Geberit installation elements for urinal, for integrated urinal flush control or hidden exposed urinal flush control

Technical data

Degree of protection	IPX4
Nominal voltage	110–240 V AC
Mains frequency	50–60 Hz
Operating voltage	6.6 V DC
Flow pressure	1–8 bar
Water test pressure max.	16 bar
Flow rate at 100 kPa / 1 bar with flow limiter	0.18 l/s
Interval flush time, factory setting	5 s
Flush time, adjustment range	1–15 s
Flush time, factory setting	7 s
Product material	Brass / plastic

Art. no.	Power consumption [W]
116.076.00.1	≤ 0.5

Characteristics

- Integrated power supply unit with LED display
- Control with LED display
- Device settings and operation with mobile device via integrated Bluetooth® interface
- Compatible with Geberit Control App
- Function statistics available via Geberit Control App
- Adjustable interval flush
- Water-saving hybrid mode can be set
- Vandal-resistant
- Power failure control unit
- Valve-closing function when power fails
- Brightness sensor to deactivate the control when urinal is removed

Scope of delivery

- Control electronics
- Urinal trap with sensor
- Water section with solenoid valve

Can be combined with

- Geberit Duofix element for urinal, 112–130 cm, universal, for exposed flushing valve → p. 75
- Geberit GIS element for urinal, 114 cm, universal, for exposed flushing valve → p. 119
- Geberit Kombifix element for urinal, 109–127 cm, universal, for exposed flushing valve → p. 30

Accessories

- Geberit extension cable for urinal flush control, surface-mounted, concealed → p. 295



With electronic flush actuation, battery operation

Geberit urinal flush control with electronic flush actuation, battery operation, surface-mounted, hidden



Application purposes

- For automatic flush actuation of urinals
- For installation behind the ceramic appliance
- For urinal installations with inlet from the rear and outlet to the rear
- For Geberit installation elements for urinal, for integrated urinal flush control or hidden exposed urinal flush control

Technical data

Battery type	Alkaline (1.5 V AA)
Service life, supplied battery	2 years
Degree of protection	IPX4
Operating voltage	3 V DC
Flow pressure	1–8 bar
Water test pressure max.	16 bar
Flow rate at 100 kPa / 1 bar with flow limiter	0.18 l/s
Interval flush time, factory setting	5 s
Flush time, adjustment range	1–15 s
Flush time, factory setting	7 s
Product material	Brass / plastic

Characteristics

- Control with LED display
- Device settings and operation with mobile device via integrated Bluetooth® interface
- Compatible with Geberit Control App
- Function statistics available via Geberit Control App
- State of charge of battery available via Geberit Control App
- Adjustable interval flush
- Water-saving hybrid mode can be set
- Vandal-resistant
- Warning when the battery is low
- Valve-closing function when battery is flat
- Brightness sensor to deactivate the control when urinal is removed

Scope of delivery

- Control electronics
- Urinal trap with sensor
- Water section with solenoid valve
- 2 alkaline manganese batteries type AA 1.5 V

Art. no.	Power consumption [W]
116.077.00.1	≤ 0.5


Can be combined with

- Geberit Duofix element for urinal, 112–130 cm, universal, for exposed flushing valve → p. 75
- Geberit GIS element for urinal, 114 cm, universal, for exposed flushing valve → p. 119
- Geberit Kombifix element for urinal, 109–127 cm, universal, for exposed flushing valve → p. 30

Accessories

- Geberit extension cable for urinal flush control, surface-mounted, concealed → p. 295

Geberit pressure flushing valve for urinal with electronic flush actuation, battery operation, for surface mounting

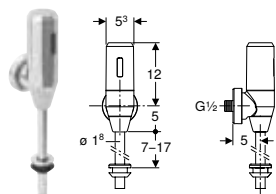

click & scan

Application purposes

- For automatic flush actuation of urinals
- For replacing manual surface-mounted urinal flushing valves
- For renovations, conversions and new buildings
- For concealed water supply connections at the rear
- For rooms with low minimum distance to opposite wall

Technical data

Battery type	CR-P2 (6 V)
Degree of protection	IP45
Operating voltage	6 V DC
Flow pressure	1–10 bar
Water test pressure max.	16 bar
Flow rate at 100 kPa / 1 bar with flow limiter	0.23 l/s
Detection time, factory setting	7 s
Flush time, adjustment range	2–30 s
Flush time, factory setting	7 s
Product material	Chrome-plated

Art. no. Colour / surface

115.805.21.5 chrome / glossy

Characteristics

- Adjustable interval flush
- With flow limiter, 14 l/min
- Warning when the battery is low
- Valve-closing function when battery is flat

Scope of delivery

- Tap housing
- Infrared control
- Solenoid valve
- Lithium battery, type CR-P2, 6 V
- Wall connection flange R 1/2"

Can be combined with


- Geberit Duofix element for urinal, 112–130 cm, universal, for exposed flushing valve → p. 75
- Geberit GIS element for urinal, 114 cm, universal, for exposed flushing valve → p. 119
- Geberit Kombifix element for urinal, 109–127 cm, universal, for exposed flushing valve → p. 30



Accessories

Installation and conversion sets

Geberit replacement set for urinal flush control, mains operation

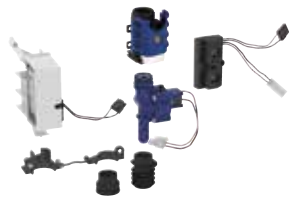

click & scan

Application purposes

- For converting existing Geberit urinal flush controls with mains operation and cover plate 16 x 16 cm
- For converting existing Geberit urinal flush controls art. no. 115.802.xx.x, 115.825.00.1, 115.837.00.1, 115.817.xx.x
- For automatic flush actuation of urinals
- Not suitable for installation in Geberit installation elements for urinal with top actuation
- Not suitable for installation in Geberit installation elements for urinal with side actuation
- Not suitable for conversion of urinals with spray head

Technical data

Degree of protection	IP45
Nominal voltage	110–240 V AC
Mains frequency	50–60 Hz
Operating voltage	4.5 V DC
Flow pressure	1–8 bar
Water test pressure max.	16 bar
Test pressure air / inert gas max.	3 bar
Flow rate at 100 kPa / 1 bar without flow limiter	0.3 l/s
Flow rate at 100 kPa / 1 bar with flow limiter	0.18 l/s
Detection time, factory setting	7 s
Flush time, adjustment range	1–15 s
Flush time, factory setting	7 s

Characteristics

- Power failure control unit
- Functions can be set and queried with the Geberit Service Handy
- Device settings and operation with mobile device via integrated Bluetooth® interface
- Compatible with Geberit Control App
- Wired networkable with Geberit gateway via GEBUS converter
- Wirelessly connectable with Geberit Gateway via Bluetooth®
- Compatible with Geberit Connect

Scope of delivery

- Infrared control
- Solenoid valve
- Power supply unit with adapter
- Stop valve with throttle
- Holding-down clamp
- Seals
- Fastening material

Art. no.	Power consumption [W]
115.848.00.1	≤ 0.5

Geberit replacement set for urinal flush control, battery operation



Application purposes

- For converting existing Geberit urinal flush controls with battery operation and cover plate 16 x 16 cm
- For automatic flush actuation of urinals
- Not suitable for installation in Geberit installation elements for urinal with top actuation
- Not suitable for installation in Geberit installation elements for urinal with side actuation
- Not suitable for conversion of urinals with spray head

Technical data

Battery type	Alkaline (1.5 V AA)
Service life, supplied battery	2 years
Degree of protection	IP45
Operating voltage	3 V DC
Flow pressure	1–8 bar
Water test pressure max.	16 bar
Test pressure air / inert gas max.	3 bar
Flow rate at 100 kPa / 1 bar without flow limiter	0.3 l/s
Flow rate at 100 kPa / 1 bar with flow limiter	0.18 l/s
Detection time, factory setting	7 s
Flush time, adjustment range	1–15 s
Flush time, factory setting	7 s

Art. no.	Power consumption [W]
115.849.00.1	≤ 0.5

Characteristics


- Functions can be set and queried with the Geberit Service Handy
- Device settings and operation with mobile device via integrated Bluetooth® interface
- Compatible with Geberit Control App
- Wired networkable with Geberit gateway via GEBUS converter
- Wirelessly connectable with Geberit Gateway via Bluetooth®
- Compatible with Geberit Connect

Scope of delivery

- Infrared control
- Solenoid valve
- 2 alkaline manganese batteries type AA 1.5 V
- Stop valve with throttle
- Holding-down clamp
- Seals
- Fastening material



Geberit installation set with flush pipe, for urinal flush control, universal

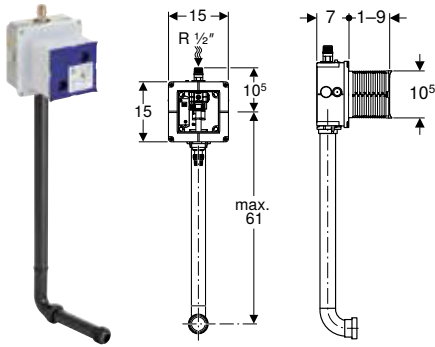

click & scan

Application purposes

- For concealed installation in solid construction

Technical data

Flow pressure	1–8 bar
Water test pressure max.	16 bar
Flow rate at 100 kPa / 1 bar without flow limiter	0.3 l/s
Flow rate at 100 kPa / 1 bar with flow limiter	0.24 l/s

Characteristics

- Water supply connection on the top centre
- Premounted conduit pipe for rinsing pipeline
- With nipple made of plastic
- Premounted stop valve with throttle
- Electrical connection prepared
- Protection box for service opening can be cut to length without tools

Scope of delivery

- Protection box with cover
- Water supply connection R 1/2"
- Concealed housing
- Stop valve with throttle
- Conduit pipe
- Terminal
- Flush pipe made of PE-HD, \varnothing 32 mm

Art. no.

116.003.00.1


Can be combined with

- Geberit urinal flush control with electronic flush actuation, mains operation, Type 01 cover plate, round → p. 258
- Geberit urinal flush control with electronic flush actuation, battery operation, Type 01 cover plate, round → p. 266
- Geberit urinal flush control with electronic flush actuation, mains operation, Type 10 cover plate, round → p. 260
- Geberit urinal flush control with electronic flush actuation, battery operation, Type 10 cover plate, round → p. 268
- Geberit urinal flush control with pneumatic flush actuation, Type 10 actuator plate, round → p. 275
- Geberit urinal flush control with pneumatic flush actuation, Type 01 actuator plate, round → p. 273
- Geberit urinal flush control with electronic flush actuation, mains operation, Type 40 cover plate, round → p. 261
- Geberit urinal flush control with electronic flush actuation, mains operation, Type 40 cover plate, square → p. 263
- Geberit urinal flush control with electronic flush actuation, battery operation, Type 40 cover plate, round → p. 269
- Geberit urinal flush control with electronic flush actuation, battery operation, Type 40 cover plate, square → p. 271
- Geberit urinal flush control with pneumatic flush actuation, Type 40 actuator plate, round → p. 276
- Geberit urinal flush control with pneumatic flush actuation, Type 40 actuator plate, square → p. 278
- Geberit urinal flush control with electronic flush actuation, mains operation, Type 01 cover plate, square → p. 259
- Geberit urinal flush control with electronic flush actuation, battery operation, Type 01 cover plate, square → p. 267
- Geberit urinal flush control with pneumatic flush actuation, Type 01 actuator plate, square → p. 274
- Geberit urinal flush control with pneumatic flush actuation, Type 40 actuator plate, round, customised finish → p. 277
- Geberit urinal flush control with pneumatic flush actuation, Type 40 actuator plate, square, customised finish → p. 279
- Geberit urinal flush control with electronic flush actuation, mains operation, Type 40 cover plate, round, customised finish → p. 262
- Geberit urinal flush control with electronic flush actuation, mains operation, Type 40 cover plate, square, customised finish → p. 264
- Geberit urinal flush control with electronic flush actuation, battery operation, Type 40 cover plate, round, customised finish → p. 270
- Geberit urinal flush control with electronic flush actuation, battery operation, Type 40 cover plate, square, customised finish → p. 272
- Geberit urinal flush control with pneumatic flush actuation, Type 50 actuator plate, square → p. 280
- Geberit urinal flush control with pneumatic flush actuation, Type 50 actuator plate, square, customised → p. 280



- Not compatible with art. no. 115.817.xx.5 and 115.818.xx.5

Geberit installation set with nipple made of brass, for urinal flush control, universal

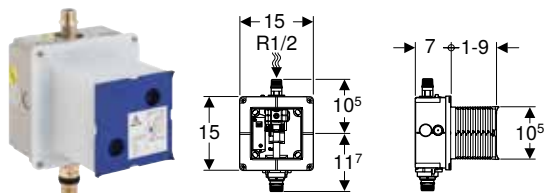

click & scan

Application purposes

- For concealed installation in solid construction

Technical data

Flow pressure	1–8 bar
Water test pressure max.	16 bar
Flow rate at 100 kPa / 1 bar without flow limiter	0.3 l/s
Flow rate at 100 kPa / 1 bar with flow limiter	0.24 l/s

Characteristics

- Water supply connection on the top centre
- Premounted conduit pipe for rinsing pipeline
- Premounted stop valve with throttle
- Electrical connection prepared
- Protection box for service opening can be cut to length without tools

Scope of delivery

- Protection box with cover
- Water supply connection R 1/2"
- Concealed housing
- Stop valve with throttle
- Conduit pipe
- Terminal

Art. no.

116.004.00.1


Can be combined with

- Geberit urinal flush control with electronic flush actuation, mains operation, Type 01 cover plate, round → p. 258
- Geberit urinal flush control with electronic flush actuation, battery operation, Type 01 cover plate, round → p. 266
- Geberit urinal flush control with pneumatic flush actuation, Type 01 actuator plate, round → p. 273
- Geberit urinal flush control with electronic flush actuation, mains operation, Type 10 cover plate, round → p. 260
- Geberit urinal flush control with electronic flush actuation, battery operation, Type 10 cover plate, round → p. 268
- Geberit urinal flush control with pneumatic flush actuation, Type 10 actuator plate, round → p. 275
- Geberit urinal flush control with electronic flush actuation, mains operation, Type 40 cover plate, round → p. 261
- Geberit urinal flush control with electronic flush actuation, mains operation, Type 40 cover plate, square → p. 263
- Geberit urinal flush control with electronic flush actuation, battery operation, Type 40 cover plate, round → p. 269
- Geberit urinal flush control with electronic flush actuation, battery operation, Type 40 cover plate, square → p. 271
- Geberit urinal flush control with pneumatic flush actuation, Type 40 actuator plate, round → p. 276
- Geberit urinal flush control with pneumatic flush actuation, Type 40 actuator plate, square → p. 278
- Geberit urinal flush control with electronic flush actuation, mains operation, Type 01 cover plate, square → p. 259
- Geberit urinal flush control with electronic flush actuation, battery operation, Type 01 cover plate, square → p. 267
- Geberit urinal flush control with pneumatic flush actuation, Type 01 actuator plate, square → p. 274
- Geberit urinal flush control with pneumatic flush actuation, Type 40 actuator plate, round, customised finish → p. 277
- Geberit urinal flush control with pneumatic flush actuation, Type 40 actuator plate, square, customised finish → p. 279
- Geberit urinal flush control with electronic flush actuation, mains operation, Type 40 cover plate, round, customised finish → p. 262
- Geberit urinal flush control with electronic flush actuation, mains operation, Type 40 cover plate, square, customised finish → p. 264
- Geberit urinal flush control with electronic flush actuation, battery operation, Type 40 cover plate, round, customised finish → p. 270
- Geberit urinal flush control with electronic flush actuation, battery operation, Type 40 cover plate, square, customised finish → p. 272
- Geberit urinal flush control with pneumatic flush actuation, Type 50 actuator plate, square → p. 280
- Geberit urinal flush control with pneumatic flush actuation, Type 50 actuator plate, square, customised → p. 280



- Not compatible with art. no. 115.817.xx.5 and 115.818.xx.5

Geberit installation set for Basic urinal flush control

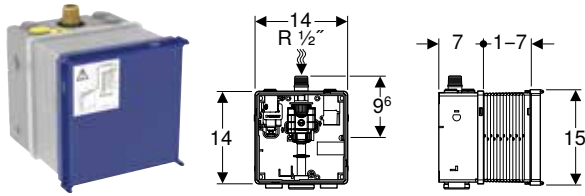

click & scan

Application purposes

- For concealed installation in solid construction

Technical data

Flow pressure	1–8 bar
Water test pressure max.	16 bar
Flow rate at 100 kPa / 1 bar without flow limiter	0.3 l/s
Flow rate at 100 kPa / 1 bar with flow limiter	0.22 l/s

Characteristics

- Protection box for service opening can be cut to length
- Water section premounted
- Electrical connection prepared

Scope of delivery

- Concealed housing
- Filter
- Shut-off and regulating screw
- Sleeve

Art. no.

115.801.00.5


Can be combined with

- Geberit Basic urinal flush control with electronic flush actuation, mains operation, actuator plate, square, made of plastic → p. 281
- Geberit Basic urinal flush control with electronic flush actuation, battery operation, actuator plate, square, made of plastic → p. 282



- Only compatible with art. no. 115.817.xx.5 and 115.818.xx.5

Geberit installation set with flush bend and flush bend extension, for Basic urinal flush control

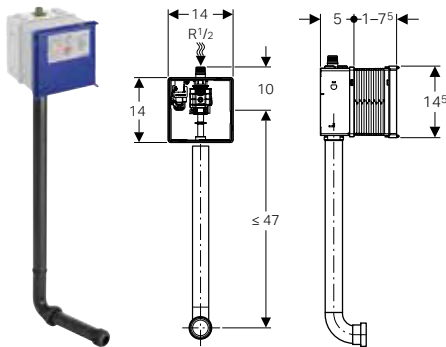

click & scan

Application purposes

- For concealed installation in solid construction

Technical data

Flow pressure	1–8 bar
Water test pressure max.	16 bar
Flow rate at 100 kPa / 1 bar without flow limiter	0.3 l/s
Flow rate at 100 kPa / 1 bar with flow limiter	0.22 l/s

Characteristics

- Water supply connection on the top centre
- Premounted conduit pipe for rinsing pipeline
- Premounted stop valve with throttle
- Electrical connection prepared
- Protection box for service opening can be cut to length without tools

Scope of delivery

- Protection box with cover
- Water supply connection R 1/2"
- Concealed housing
- Stop valve with throttle
- Conduit pipe
- Terminal
- Flush pipe
- Sleeve
- Straight connector

Art. no.

115.985.00.5


Can be combined with

- Geberit Basic urinal flush control with electronic flush actuation, mains operation, actuator plate, square, made of plastic → p. 281
- Geberit Basic urinal flush control with electronic flush actuation, battery operation, actuator plate, square, made of plastic → p. 282



- Only compatible with art. no. 115.817.xx.5 and 115.818.xx.5

Geberit installation set for urinal flush controls with 1/2" connection

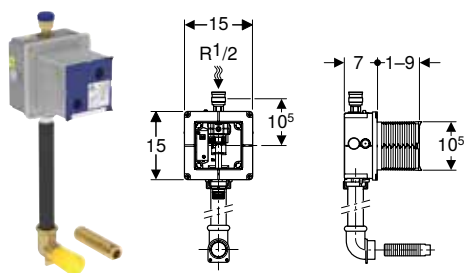

click & scan

Application purposes

- For concealed installation in solid construction
- For Preda and Selva urinals for concealed urinal flush controls

Technical data

Flow pressure	1–8 bar
Water test pressure max.	16 bar
Flow rate at 100 kPa / 1 bar without flow limiter	0.3 l/s
Flow rate at 100 kPa / 1 bar with flow limiter	0.24 l/s

Characteristics

- Water supply connection on the top centre
- Premounted conduit pipe for rinsing pipeline
- With nipple made of plastic
- Premounted stop valve with throttle
- Electrical connection prepared
- Protection box for service opening can be cut to length without tools

Scope of delivery

- Protection box with cover
- Water supply connection R 1/2"
- Concealed housing
- Stop valve with throttle
- Conduit pipe
- Terminal
- Flush pipe made of PE-HD, \varnothing 32 mm
- Elbow tap connector 90° with female thread G 1"
- Connecting fitting

Art. no.

116.005.00.1

Can be combined with


- Geberit Preda urinal for concealed flush control
- Geberit Selva urinal for concealed flush control
- Geberit Tamina urinal for concealed flush control



- Not compatible with art. no. 115.817.xx.5 and 115.818.xx.5

Flush pipes, flush bends and adapters

Geberit flush bend extension for urinal, with sleeve

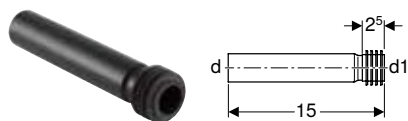

click & scan

Application purposes

- For connecting to urinals

Scope of delivery


- Sleeve made of EPDM

Technical data

Product material	PE-HD
------------------	-------

Art. no.	d, \varnothing [mm]	d1, \varnothing [mm]
152.489.16.1	32	35

Geberit flush pipe for urinal with inlet from the top

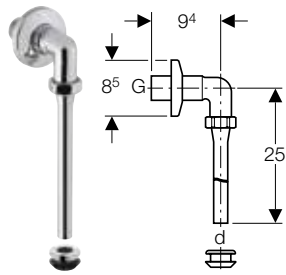

click & scan

Application purposes

- For urinals with inlet connection piece with sleeve, plug-in, exposed

Scope of delivery

- Seal


Technical data

Product material	Copper
------------------	--------

Art. no.	Colour / surface	d, ø [mm]	G ["]
119.688.21.1	chrome / glossy	19	1

Cover plates

Geberit cover plate made of stainless steel, for urinal flush control

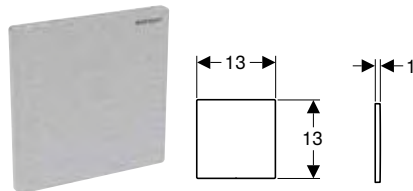

click & scan

Application purposes

- For covering the service opening of installation sets for Geberit urinal flush control with waterless operation
- For preparing to retrofit waterless operation to operation with flush
- For installation sets (from year of manufacture 2009)

Scope of delivery

- Mounting frame
- Ratchet pin

Art. no.	Colour / surface
116.069.FW.1	brushed



- Pre-install circular pipe if retrofitting to flush operation is to take place later. Avoid dead-end pipes.

Integrated controls

Geberit urinal flush control for Preda, Selva and Tamina urinals, mains operation



click & scan

Application purposes

- For automatic flush actuation of urinals
- For retrofitting Preda, Selva and Tamina urinals for integrated control to flush operation

Technical data

Degree of protection	IPX4
Nominal voltage	110–240 V AC
Mains frequency	50–60 Hz
Operating voltage	4.5 V DC
Power consumption in standby mode max.	0.1 W
Flow pressure	1–8 bar
Water test pressure max.	16 bar
Operating temperature	1–40 °C
Flow rate at 100 kPa / 1 bar with flow limiter	0.18 l/s
Interval flush time, factory setting	5 s
Detection time, factory setting	7 s
Flush time, adjustment range	1–15 s
Flush time, factory setting	7 s

Characteristics

- IR user detection with leg detection
- Water-saving hybrid mode can be set
- Adjustable interval flush
- Preflush can be set
- Power failure control unit
- Wired networkable with Geberit gateway via GEBUS converter
- Wirelessly connectable with Geberit Gateway via Bluetooth®
- Valve-closing function when power fails
- Functions can be set and queried with the Geberit Service Handy
- Device settings and operation with mobile device via integrated Bluetooth® interface
- Compatible with Geberit Control App
- Compatible with Geberit Connect
- Flush volume can be reduced to 0.5 l per flush with flush time
- Tap group II in accordance with DIN 4109
- Components in contact with drinking water lead-free

Scope of delivery

- Mains connection cable
- Power supply unit
- Sensor
- Water section with solenoid valve
- Housing

Art. no.	Power consumption [W]
243.275.00.1	≤ 0.5



Geberit urinal flush control for Preda, Selva and Tamina urinals, battery operation



click & scan

Application purposes

- For automatic flush actuation of urinals
- For retrofitting Preda, Selva and Tamina urinals for integrated control to flush operation

Technical data

Battery type	Alkaline (1.5 V AA)
Service life, supplied battery	2 years
Degree of protection	IPX4
Operating voltage	3 V DC
Power consumption in standby mode max.	0.1 W
Flow pressure	1–8 bar
Water test pressure max.	16 bar
Operating temperature	1–40 °C
Flow rate at 100 kPa / 1 bar with flow limiter	0.18 l/s
Interval flush time, factory setting	5 s
Detection time, factory setting	7 s
Flush time, adjustment range	1–15 s
Flush time, factory setting	7 s

Characteristics

- IR user detection with leg detection
- Water-saving hybrid mode can be set
- Adjustable interval flush
- Preflush can be set
- Warning when the battery is low
- Valve-closing function when battery is flat
- Functions can be set and queried with the Geberit Service Handy
- Device settings and operation with mobile device via integrated Bluetooth® interface
- Compatible with Geberit Control App
- Wired networkable with Geberit gateway via GEBUS converter
- Wirelessly connectable with Geberit Gateway via Bluetooth®
- Compatible with Geberit Connect
- Flush volume can be reduced to 0.5 l per flush with flush time
- Tap group II in accordance with DIN 4109
- Components in contact with drinking water lead-free

Scope of delivery

- Battery compartment
- 2 alkaline manganese batteries type AA 1.5 V
- Sensor
- Water section with solenoid valve
- Housing

Art. no.	Power consumption [W]
243.276.00.1	≤ 0.5

Geberit urinal flush control for Preda, Selva and Tamina urinals, self-sustaining power supply



click & scan

Application purposes

- For automatic flush actuation of urinals
- For retrofitting Preda, Selva and Tamina urinals for integrated control to flush operation

Technical data

Degree of protection	IPX4
Operating voltage	6.6 V DC
Power consumption in standby mode max.	0.1 W
Flow pressure	1–8 bar
Water test pressure max.	16 bar
Operating temperature	1–40 °C
Flow rate at 100 kPa / 1 bar with flow limiter	0.18 l/s
Interval flush time, factory setting	5 s
Detection time, factory setting	7 s
Flush time, adjustment range	1–15 s
Flush time, factory setting	7 s

Characteristics

- IR user detection with leg detection
- Water-saving hybrid mode can be set
- Adjustable interval flush
- Preflush can be set
- Continuous flush readiness due to self-sustaining power supply from 30 flushes per day of around 7 s each
- Functions can be set and queried with the Geberit Service Handy
- Device settings and operation with mobile device via integrated Bluetooth® interface
- Compatible with Geberit Control App
- Wired networkable with Geberit gateway via GEBUS converter
- Wirelessly connectable with Geberit Gateway via Bluetooth®
- Compatible with Geberit Connect
- Flush volume can be reduced to 0.5 l per flush with flush time
- Tap group II in accordance with DIN 4109
- Components in contact with drinking water lead-free

Scope of delivery

- Generator with rechargeable battery
- Sensor
- Water section with solenoid valve
- Housing

Art. no.	Power consumption [W]
243.277.00.1	≤ 0.5

Other accessories

Geberit extension cable for urinal flush control, surface-mounted, concealed



[click & scan](#)

Technical data

Cable length	0.3 m
--------------	-------

Art. no.

246.110.00.1





Waste fittings and traps for WCs, urinals and bidets

Drain assemblies for WCs and slop hoppers.....	298
Traps.....	298
Connection bends	299
Straight connector	299
Connection sets	301
Flush bend extensions	302
Waste couplings made of PVC.....	303
Sleeves and cover caps	303
Adapters and connecting pieces	304
Drain assemblies for urinals.....	305
Urinal traps.....	305
Concealed traps	306
P-traps.....	306
Flush pipe and flush bend extensions.....	307
Connection bends	307
Drain assemblies for bidets.....	307
P-traps.....	307
Covers	308
Connections	309
Seals.....	309



Drain assemblies for WCs and slop hoppers

Traps

Geberit trap for squat WC, horizontal outlet



click & scan

Application purposes

- For squat WCs

Technical data

Depth of water seal (mm)	70 mm
Product material	PE-HD

Characteristics


- Horizontal outlet

Scope of delivery

- Sleeve made of EPDM
- Ring seal socket made of PE-HD, \varnothing 110 mm

Art. no.	d, \varnothing [mm]	h [cm]
167.733.16.1	110	27-37

Geberit trap for squat WC, vertical outlet

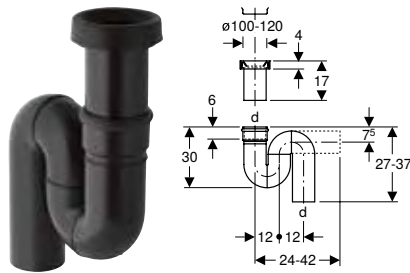

click & scan

Application purposes

- For squat WCs

Technical data

Depth of water seal (mm)	70 mm
Product material	PE-HD

Characteristics

- Vertical outlet


Scope of delivery

- Sleeve made of EPDM
- Ring seal socket made of PE-HD, \varnothing 110 mm

Art. no.	d, \varnothing [mm]	h [cm]
167.734.16.1	110	27-37

Connection bends

Geberit connection bend 90° set with extension

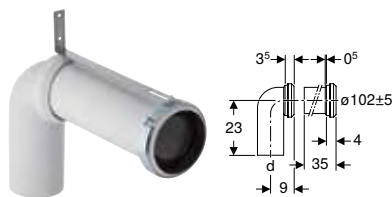

click & scan

Application purposes

- For floor-standing WCs with horizontal and open outlet \varnothing 105 mm
- For connecting floor-standing WCs to floor drains
- For floor drains with wall distance 7–15 cm
- For floor drains with wall distance 20.5 cm
- For connecting floor-standing WCs to wall drains

Scope of delivery

- Connection bend made of EPDM, with sleeve
- Connection piece with sleeve made of EPDM
- Fixing bracket

Technical data

Product material	PP
------------------	----


Art. no.	d, \varnothing [mm]	arc [°]	AB [mm]	L [cm]
152.647.00.1	110	90	97–107	23

Accessories

- Geberit sleeve → p. 304

Straight connector

Geberit straight connector with sleeve and lip seals

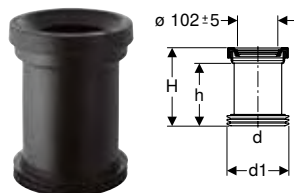

click & scan

Application purposes

- For coupling sockets for floor-standing WCs
- For floor-standing WCs with hidden or open outlet

Scope of delivery


- Sleeve made of EPDM
- Lip seal made of EPDM

Technical data

Product material	PE-HD
------------------	-------

Art. no.	d, \varnothing [mm]	d1, \varnothing [mm]	AB [mm]	H [cm]	h [cm]
152.400.16.1	110	120–125	97–107	18	14.5

Geberit straight connector with sleeve and round cord ring

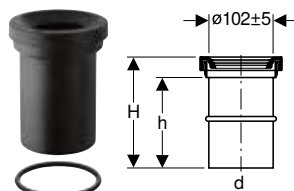

click & scan

Application purposes

- For Geberit ring seal sockets \varnothing 110 mm
- For floor-standing WCs with outlet \varnothing 102 mm
- For floor-standing WCs with hidden or open outlet

Scope of delivery


- Sleeve made of EPDM
- Round cord ring made of EPDM

Technical data

Product material	PE-HD
------------------	-------

Art. no.	d, \varnothing [mm]	AB [mm]	H [cm]	h [cm]
152.402.16.1	110	97–107	18	14.5

Geberit straight connector with sleeve



click & scan

Application purposes

- For floor-standing WCs with horizontal and open outlet $\varnothing 105$ mm

Scope of delivery

- Sleeve made of EPDM

Technical data


Product material	PP
------------------	----

Art. no.	Colour / surface	d, \varnothing [mm]	AB [mm]	H [cm]	h [cm]
152.613.11.1	white alpine	110	97-107	35	31

Accessories

- Geberit sleeve → p. 304

Geberit straight connector with sleeve and cover caps

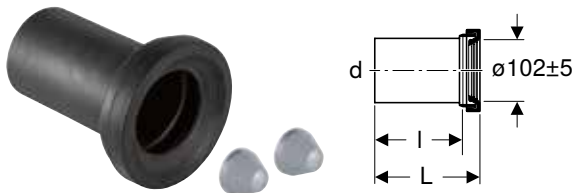

click & scan

Application purposes

- For wall-hung WCs

Scope of delivery

- Sleeve made of EPDM
- 2 cover caps


Technical data

Product material	PE-HD
------------------	-------

Art. no.	Colour / surface	d, \varnothing [mm]	arc [°]	AB [mm]	L [cm]	l [cm]
152.420.46.1	chrome / matt	110	0	97-107	18	14.5
152.425.46.1	chrome / matt	90	0	97-107	18	14.5
152.428.46.1	chrome / matt	90	0	97-107	30	26.5
152.429.46.1	chrome / matt	110	0	97-107	30	26.5

Connection sets

Geberit connection set for wall-hung WC, length 18.5 cm

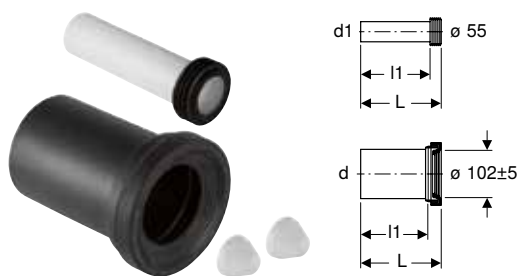

click & scan

Application purposes

- For wall-hung WCs

Technical data

Product material	PE / PP
------------------	---------

Scope of delivery

- Flush pipe with sleeve, made of PE-HD
- Straight connector with sleeve, made of PP
- 2 cover caps

Art. no.	Colour / surface	d, \emptyset [mm]	d1, \emptyset [mm]	AB [mm]	L [cm]	l1 [cm]
152.422.46.1	chrome / matt	110	45	97-107	18.5	16
152.426.46.1	chrome / matt	90	45	97-107	18.5	16

Geberit connection set for wall-hung WC, length 18.5 cm, with lip seal



click & scan

Application purposes

- For wall-hung WCs

Technical data


Product material	PE / PP
------------------	---------

Scope of delivery

- Flush pipe with sleeve, made of PE-HD
- Straight connector with sleeve, made of PP
- 2 cover caps
- Lip seal made of EPDM
- Fastening material

Art. no.	Colour / surface	d, \emptyset [mm]	d1, \emptyset [mm]	AB [mm]	L [cm]	L1 [cm]	l [cm]	l1 [cm]
152.404.46.1	chrome / matt	90	45	97-107	18.5	18.5	14.5	16

Geberit connection set for wall-hung WC, length 30 cm

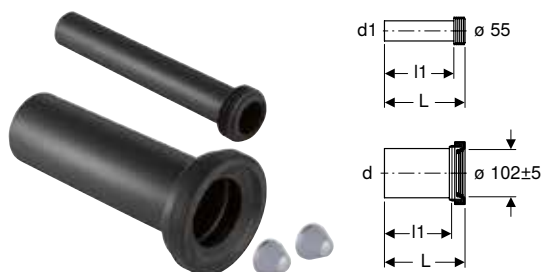

click & scan

Application purposes

- For wall-hung WCs

Technical data

Product material	PE-HD
------------------	-------

Characteristics

- Extended connection set

Scope of delivery


- Flush pipe with sleeve, made of PE-HD
- Straight connector with sleeve, made of PE-HD
- 2 cover caps
- Fastening material

Art. no.	Colour / surface	d, \emptyset [mm]	d1, \emptyset [mm]	AB [mm]	L [cm]	l [cm]	l1 [cm]
152.439.46.1	chrome / matt	110	45	97-107	30	26.5	27.5
152.441.46.1	chrome / matt	90	45	97-107	30	26.5	27.5

Waste fittings and traps for WCs, urinals and bidets

Drain assemblies for WCs and slop hoppers
Flush bend extensions

Geberit connection set for wall-hung WC, with fastening material, stepped

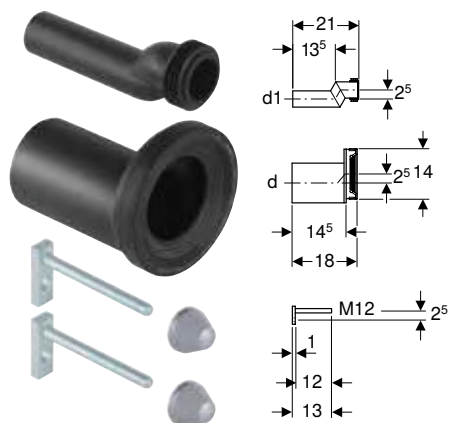

click & scan

Application purposes

- For wall-hung WCs
- For wall-hung WCs with projection up to 70 cm
- For compensating measuring discrepancies of up to 25 mm
- Not suitable for Geberit AquaClean 8000 / 8000plus
- Not suitable for Geberit AquaClean Mera
- Not suitable for Geberit AquaClean Sela
- Not suitable for WCs with small projection
- Not suitable for Geberit AquaClean Alba
- Not suitable for Geberit ONE WCs

Scope of delivery

- Flush pipe with sleeve, made of PE-HD
- Straight connector with sleeve, made of PE-HD
- 2 cover caps
- Fastening material

Technical data

Product material	PE-HD	
Art. no.	d, \emptyset [mm]	d1, \emptyset [mm]
405.012.00.1	110	45
405.116.00.1	90	45

Geberit connection set for wall-hung WC, length 26.5 cm



click & scan

Application purposes

- For wall-hung WCs

Scope of delivery


- Flush pipe with sleeve, made of PE-HD
- Straight connector with sleeve, made of PE-HD
- 2 cover caps
- Lip seal made of EPDM
- Fastening material

Technical data

Product material	PE-HD							
Art. no.	Colour / surface	d, \emptyset [mm]	d1, \emptyset [mm]	AB [mm]	L [cm]	L1 [cm]	I [cm]	I1 [cm]
152.438.46.1	chrome / matt	90	45	97-107	26.5	26.5	22	24

Flush bend extensions

Geberit flush bend extension

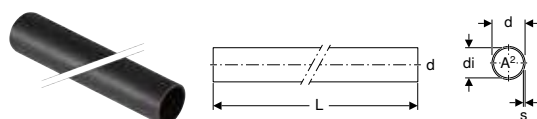

click & scan

Application purposes


- For extending inlet connection pieces with sleeve
- For overflow pipe cone

Technical data

Product material	PE-HD
------------------	-------

Art. no.	DN	d, \varnothing [mm]	di, \varnothing [mm]	s [mm]	L [cm]	A ² [cm ²]
152.170.16.1	40	45	40	2.5	100	12.6

Geberit flush bend extension with sleeve



click & scan

Application purposes

- For connecting to \varnothing 55 mm

Scope of delivery

- Pipe
- Sleeve made of EPDM


Technical data

Product material	EPDM / PE-HD
------------------	--------------

Art. no.	d, \varnothing [mm]	Product material	L [cm]	l [cm]
152.434.16.1	45	PE	18.5	16

Waste couplings made of PVC

Geberit PVC S-bend

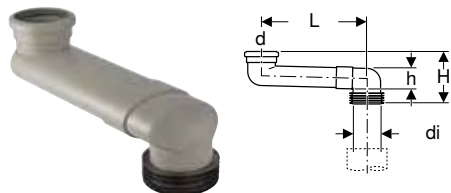

click & scan

Application purposes

- For transition of floor-standing WCs to prewall installation

Scope of delivery

- Lip seal made of EPDM
- Sleeve made of EPDM

Technical data

Product material	PVC
------------------	-----

Art. no.	Colour / surface	DN	d, \varnothing [mm]	di, \varnothing [mm]	L [cm]	H [cm]	h [cm]
388.350.29.1	grey	90	90	100–105.6	14.5–34.5	16.7	6.5

To order additionally

- PVC adhesive, standard

Sleeves and cover caps

Geberit set of cover caps



click & scan

Application purposes

- For covering the fastenings on WC and urinal ceramics

Characteristics

- With washers

Technical data

Product material	Plastic
------------------	---------

Scope of delivery

- Set of 2 pieces

Art. no.	Colour / surface
217.713.11.1	white alpine
217.713.46.1	chrome / matt

Waste fittings and traps for WCs, urinals and bidets

Drain assemblies for WCs and slop hoppers
Adapters and connecting pieces

Geberit sleeve



click & scan

Technical data

Product material	EPDM
Art. no.	d, \emptyset [mm]
152.497.00.1	105

Geberit sleeve



click & scan

Application purposes

- For Geberit connection sets for wall-hung WC

Technical data

Product material	EPDM	
Art. no.	d, \emptyset [mm]	d1, \emptyset [mm]
152.424.00.1	80-100	122

Adapters and connecting pieces

Geberit adapter to PVC



click & scan


Application purposes

- For floor-standing WCs

Technical data

Product material	PVC								
Art. no.	Colour / surface	DN	d, \emptyset [mm]	d1, \emptyset [mm]	d2, \emptyset [mm]	d3, \emptyset [mm]	D [cm]	L [cm]	l1 [cm]
359.144.11.1	white alpine	90 / 100	90	100	94	98	10.8	9.5	2.8

Geberit adapter to PVC



click & scan

Application purposes

- For sockets made of PVC, \emptyset 110 mm
- For floor-standing WCs


Technical data

Product material	Plastic			
Art. no.	DN	d, \emptyset [mm]	d1, \emptyset [mm]	L [cm]
152.465.00.1	100 / 90	110	90	7

Drain assemblies for urinals

Urinal traps

Geberit urinal trap, horizontal outlet

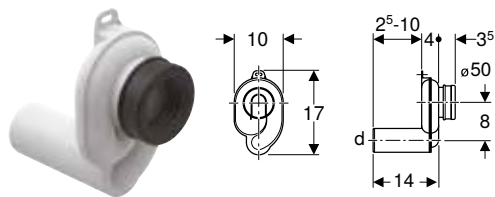

click & scan

Application purposes

- For urinals with outlet to the rear
- For urinals with flush volume 1–4 l

Technical data

Depth of water seal (mm)	50 mm
Product material	Plastic

Characteristics


- Horizontal outlet

Scope of delivery

- Sleeve made of EPDM

Art. no.	Colour / surface	d, ø [mm]
152.950.11.1	white alpine	50

Geberit urinal trap, vertical outlet

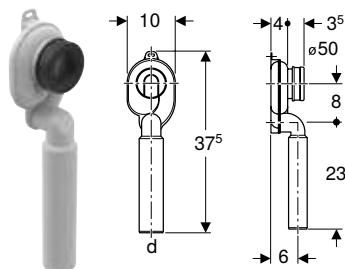

click & scan

Application purposes

- For urinals with outlet to the rear
- For urinals with flush volume 1–4 l

Technical data

Depth of water seal (mm)	50 mm
Product material	Plastic

Characteristics

- Vertical outlet

Scope of delivery


- Sleeve made of EPDM

Art. no.	Colour / surface	d, ø [mm]
152.951.11.1	white alpine	50



Concealed traps

Geberit concealed trap for urinal, vertical outlet

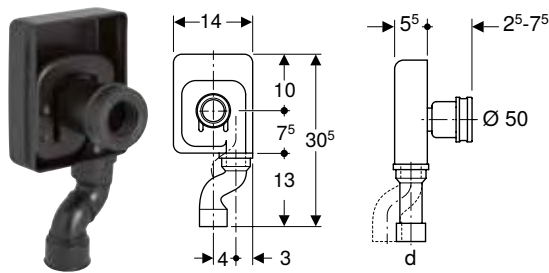

click & scan

Application purposes

- For urinals with outlet to the rear
- For concealed installation
- For connecting to urinals

Scope of delivery

- Connection bend made of PE-HD, \varnothing 50 mm
- Blockout form
- Housing


Technical data

Product material	PE-HD
------------------	-------

Art. no.	d, \varnothing [mm]
152.627.16.1	50

P-traps

Geberit P-trap for sink, with wall collar, horizontal outlet

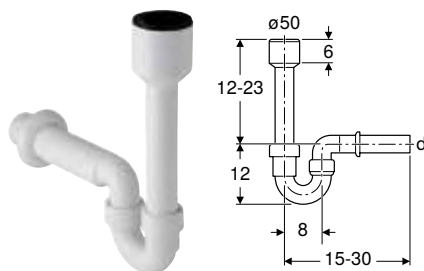

click & scan

Application purposes

- For connecting to sinks
- For urinals with outlet downwards

Characteristics

- Horizontal outlet

Scope of delivery

- Inlet connection piece with sleeve, made of PP, \varnothing 50 mm
- Wall collar


Technical data

Depth of water seal (mm)	70 mm
Product material	PP

Art. no.	Colour / surface	d, \varnothing [mm]	h [cm]
152.607.11.1	white alpine	40	12-23
152.701.11.1	white alpine	50	12-23

Flush pipe and flush bend extensions

Geberit flush bend extension for urinal, with sleeve



Application purposes

- For connecting to urinals

Scope of delivery

- Sleeve made of EPDM



[click & scan](#)


Technical data

Product material	PE-HD
------------------	-------

Art. no.	d, \emptyset [mm]	d1, \emptyset [mm]
152.489.16.1	32	35

Connection bends

Geberit connection bend 90° for urinal, with wall collar

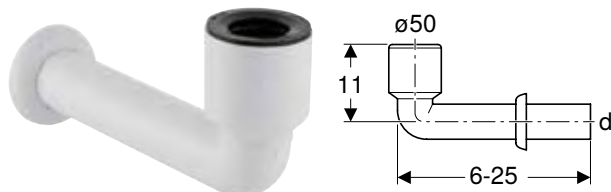

Application purposes

- For urinals with outlet downwards
- For connecting to urinals

Scope of delivery

- Wall collar
- Sleeve made of EPDM



[click & scan](#)

Technical data


Product material	Plastic
------------------	---------

Art. no.	Colour / surface	d, \emptyset [mm]	arc [°]
152.231.11.1	white alpine	50	90

Drain assemblies for bidets

P-traps

Geberit P-trap for bidet, horizontal outlet

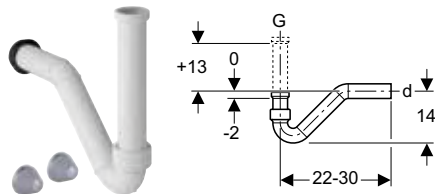

Application purposes

- For wall-hung bidets with threaded connectors

Technical data

Product material	PP
------------------	----

Characteristics

- Quality-monitored in accordance with EN 274-3
- Horizontal outlet

Scope of delivery


- Connection bend
- Straight connector with female thread
- Seal
- Fastening material



[click & scan](#)

Art. no.	Colour / surface	d, \emptyset [mm]	G [°]	h [cm]
151.016.11.1	white alpine	40	1 1/4	0-13

Geberit P-trap for washbasin, horizontal outlet

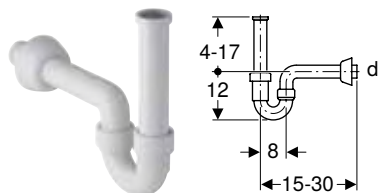

click & scan

Application purposes

- For washbasins
- For bidets

Technical data

Depth of water seal (mm)	70 mm
Product material	PP

Characteristics

- Quality-monitored in accordance with EN 274-3
- Horizontal outlet

Scope of delivery

- Straight connector with female thread
- Connection bend
- Wall collar

Art. no.	Colour / surface	d, \emptyset [mm]	G ["]	h [cm]
151.100.11.1	white alpine	40	1 1/4	4-17

Covers


Geberit wall collar, large



click & scan

Art. no.	Colour / surface	d, \emptyset [mm]	Product material	D [cm]	H [cm]
241.507.11.1	white alpine	32	Plastic	8.5	3.7
241.507.21.1	chrome / glossy	32	Plastic	8.5	3.7
241.508.11.1	white alpine	40	Plastic	8.5	3.7
241.508.21.1	chrome / glossy	40	Plastic	8.5	3.7
854.909.11.1	white alpine	50	PP	8.5	3.5
894.094.11.1	white alpine	50	PP	9	7

Geberit wall collar, flat




click & scan

Art. no.	Colour / surface	d, \emptyset [mm]	Product material	D [cm]	H [cm]
854.187.11.1	white alpine	40	PP	8.5	1.5
854.188.11.1	white alpine	50	PP	8.5	1.5

Connections

Geberit Clou washbasin connector with lever actuation

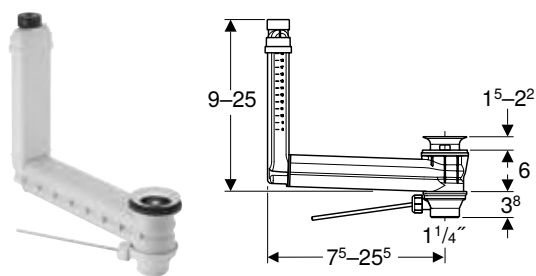

click & scan

Application purposes

- For washbasins without visible overflow
- For washbasins without visible overflow

Technical data

Product material	Plastic
------------------	---------

Characteristics

- Quality-monitored in accordance with EN 274-3
- Hygienic with optimum flow behaviour
- Waste outlet can be closed
- Actuation using rod
- Hidden overflow function
- Length and height can be adapted to washbasin

Scope of delivery

- Waste outlet
- Actuator lever
- Plug
- Washbasin connector

Art. no.	Colour / surface	d, ø [mm]	G ["]	AB [mm]
152.018.00.1	white alpine / polished stainless steel	32	1 1/4	15-22

To order additionally

- Geberit valve cover for waste outlet with free outlet → p. 372
- Geberit valve cover for waste outlet with free outlet → p. 371

Seals

Geberit sleeve



click & scan

Application purposes


- For bidets and washbasins

Technical data

Product material	EPDM
------------------	------

Art. no.	d, ø [mm]	d1, ø [mm]	L [cm]
152.796.00.1	40	44	2.3
152.495.00.1	32	46	2.3
152.496.00.1	40	46	2.3
153.564.16.1	32	58	2.3
153.565.16.1	40	58	2.3
153.566.16.1	50	58	2.3

Geberit sleeve



click & scan

Application purposes

- For bidets and washbasins

Technical data

Product material	EPDM
------------------	------

Art. no.	DN	d, \emptyset [mm]	di, \emptyset [mm]
152.682.00.1	50	32	44
152.689.00.1	56	32	50
152.690.00.1	56	40	50
152.691.00.1	60	32	57
152.692.00.1	60	40	57
152.693.00.1	60	50	57





Taps

















Washbasin taps	314
Assortment overview – Geberit deck-mounted taps for washbasins	315
Assortment overview – Geberit wall-mounted taps for washbasins	319
Deck-mounted, mains operation	322
Deck-mounted, battery operation	329
Deck-mounted, generator operation	336
Wall-mounted, mains operation	342
Wall-mounted, battery operation	346
Wall-mounted, generator operation	350
Wall-mounted, two-handle mixer	352
Accessories	353
For washbasin taps	353







Washbasin taps

Assortment overview – Geberit deck-mounted taps for washbasins




















Geberit International Sales, version: October 2025

		Type 185	Type 186	Piave							
Design											
											
		glossy chrome	glossy chrome	glossy chrome	black matt	stainless steel finish	glossy chrome	black matt	stainless steel finish		
Battery operation	Cold / mixed water, without mixer	116.235.21.1	116.236.21.1	116.163.21.1	116.163.14.1	116.163.SN.1	116.183.21.1	116.183.14.1	116.183.SN.1		
	Cold and hot water, with mixer	116.245.21.1	116.246.21.1	116.164.21.1	116.164.14.1	116.164.SN.1	116.184.21.1	116.184.14.1	116.184.SN.1		
	Cold and hot water, with mixer and handle	116.255.21.1	116.256.21.1								
	Cold and hot water, with thermostatic mixer			116.168.21.1	116.168.14.1	116.168.SN.1	116.188.21.1	116.188.14.1	116.188.SN.1		
Mains operation	Cold / mixed water, without mixer	116.135.21.1	116.136.21.1	116.161.21.1	116.161.14.1	116.161.SN.1	116.181.21.1	116.181.14.1	116.181.SN.1		
	Cold and hot water, with mixer	116.145.21.1	116.146.21.1	116.162.21.1	116.162.14.1	116.162.SN.1	116.182.21.1	116.182.14.1	116.182.SN.1		
	Cold and hot water, with mixer and handle	116.155.21.1	116.156.21.1								
	Cold and hot water, with thermostatic mixer			116.167.21.1	116.167.14.1	116.167.SN.1	116.187.21.1	116.187.14.1	116.187.SN.1		
Generator operation	Cold / mixed water, without mixer	116.335.21.1	116.336.21.1	116.165.21.1	116.165.14.1	116.165.SN.1	116.185.21.1	116.185.14.1	116.185.SN.1		
	Cold and hot water, with mixer	116.365.21.1	116.366.21.1	116.166.21.1	116.166.14.1	116.166.SN.1	116.186.21.1	116.186.14.1	116.186.SN.1		
Single-lever mixer	Cold and hot water, with mixer										
To order additionally for installation phase - select one option											
Duofix installation	111.553.00.2 Geberit Duofix element for washbasin, 112 cm, electronic deck-mounted tap with concealed function box							✓	✓	✓	
	111.563.00.2 Geberit Duofix element for washbasin, 112 cm, electronic deck-mounted tap with concealed function box, with concealed trap							✓	✓	✓	
GIS installation	461.145.00.1 Geberit GIS crossbar for electronic deck-mounted tap with concealed function box							✓	✓	✓	
Solid construction	116.130.00.1 Geberit installation set for Piave and Brenta washbasin taps, deck-mounted, with concealed function box							✓	✓	✓	
To order additionally - required depending on the selected installation phase option											
Cover plates	116.425.11.1 Geberit cover plate for concealed function box							✓	✓	✓	
	116.426.11.1 Geberit cover plate for concealed function box and concealed trap							Only for use with Geberit Duofix	Only for use with Geberit Duofix	Only for use with Geberit Duofix	
Accessories											
Geberit installation set with concealed power supply unit, for Types 8x and 18x washbasin taps	241.631.00.1		✓	✓							
Geberit extension cable for power supply unit, for Types 8x and 18x washbasin taps	242.349.00.1		✓	✓							

Brenta						Bambini							
													
glossy chrome	black matt	stainless steel finish	glossy chrome	black matt	stainless steel finish	Multicolour	glossy chrome	Multicolour	glossy chrome	carmine red	forest green	ocean blue	
116.173.21.1	116.173.14.1	116.173.SN.1	116.193.21.1	116.193.14.1	116.193.SN.1								
116.174.21.1	116.174.14.1	116.174.SN.1	116.194.21.1	116.194.14.1	116.194.SN.1	116.208.00.5	116.208.21.5						
116.178.21.1	116.178.14.1	116.178.SN.1	116.198.21.1	116.198.14.1	116.198.SN.1								
116.171.21.1	116.171.14.1	116.171.SN.1	116.191.21.1	116.191.14.1	116.191.SN.1								
116.172.21.1	116.172.14.1	116.172.SN.1	116.192.21.1	116.192.14.1	116.192.SN.1	116.209.00.5	116.209.21.5						
116.177.21.1	116.177.14.1	116.177.SN.1	116.197.21.1	116.197.14.1	116.197.SN.1								
116.175.21.1	116.175.14.1	116.175.SN.1	116.195.21.1	116.195.14.1	116.195.SN.1								
116.176.21.1	116.176.14.1	116.176.SN.1	116.196.21.1	116.196.14.1	116.196.SN.1								
								571600000	116.207.21.1	116.207.FY.1	116.207.79.1	116.207.SX.1	
			✓	✓	✓								
			✓	✓	✓								
			✓	✓	✓								
			✓	✓	✓								
			✓	✓	✓								
			✓	✓	✓								
			Only for use with Geberit Duofix	Only for use with Geberit Duofix	Only for use with Geberit Duofix								



Geberit International Sales, version: October 2025

Design				Type 185	Type 186	Piave						
												
Geberit tap aerator for Types 6x, 8x and 18x washbasin taps	242.307.21.1	6.0 l/min, swivelling		✓	✓							
	242.834.21.1	3.8 l/min		✓	✓							
	242.645.21.1	1.9 l/min		✓ ¹⁾	✓ ¹⁾							
	243.626.21.1	1.3 l/min		✓ ¹⁾	✓ ¹⁾							
Geberit tap aerator for Piave and Brenta washbasin taps	243.625.00.1	5.0 l/min				✓ ²⁾	✓ ²⁾	✓ ²⁾	✓ ²⁾	✓ ²⁾	✓ ²⁾	
	243.635.00.1	5.0 l/min, swivelling				✓	✓	✓	✓	✓	✓	
	243.636.00.1	3.8 l/min, spray				✓	✓	✓	✓	✓	✓	
	243.637.00.1	1.9 l/min, spray				✓ ¹⁾	✓ ¹⁾	✓ ¹⁾	✓ ¹⁾	✓ ¹⁾	✓ ¹⁾	
	243.638.00.1	1.3 l/min, spray				✓ ¹⁾	✓ ¹⁾	✓ ¹⁾	✓ ¹⁾	✓ ¹⁾	✓ ¹⁾	
Geberit Bambini tap aerator for washbasin tap	571410000	5.7 l/min, swivelling										
Geberit Bambini mini thermostat for washbasin tap	599113000			✓	✓	✓	✓	✓				




✓ Compatible

¹⁾ Not suitable for generator






²⁾ Already included in the scope of delivery

Assortment overview – Geberit wall-mounted taps for washbasins




Geberit International Sales, version: October 2025






Design		Piave			Piave			Brenta		
										
		Length 17 cm			Length 22 cm			Length 17 cm		
		glossy chrome	black matt	stainless steel finish	glossy chrome	black matt	stainless steel finish	glossy chrome	black matt	stainless steel finish
Battery operation	Cold / mixed water, without mixer	116.263.21.1	116.263.14.1	116.263.SN.1	116.283.21.1	116.283.14.1	116.283.SN.1	116.273.21.1	116.273.14.1	116.273.SN.1
	Cold and hot water, with mixer	116.264.21.1	116.264.14.1	116.264.SN.1	116.284.21.1	116.284.14.1	116.284.SN.1	116.274.21.1	116.274.14.1	116.274.SN.1
	Cold and hot water, with thermostatic mixer	116.268.21.1	116.268.14.1	116.268.SN.1	116.288.21.1	116.288.14.1	116.288.SN.1	116.278.21.1	116.278.14.1	116.278.SN.1
Mains operation	Cold / mixed water, without mixer	116.261.21.1	116.261.14.1	116.261.SN.1	116.281.21.1	116.281.14.1	116.281.SN.1	116.271.21.1	116.271.14.1	116.271.SN.1
	Cold and hot water, with mixer	116.262.21.1	116.262.14.1	116.262.SN.1	116.282.21.1	116.282.14.1	116.282.SN.1	116.272.21.1	116.272.14.1	116.272.SN.1
	Cold and hot water, with thermostatic mixer	116.267.21.1	116.267.14.1	116.267.SN.1	116.287.21.1	116.287.14.1	116.287.SN.1	116.277.21.1	116.277.14.1	116.277.SN.1
Generator operation	Cold / mixed water, without mixer	116.265.21.1	116.265.14.1	116.265.SN.1	116.285.21.1	116.285.14.1	116.285.SN.1	116.275.21.1	116.275.14.1	116.275.SN.1
	Cold and hot water, with mixer	116.266.21.1	116.266.14.1	116.266.SN.1	116.286.21.1	116.286.14.1	116.286.SN.1	116.276.21.1	116.276.14.1	116.276.SN.1
Two-handle mixer	Cold and hot water, with mixer									

To order additionally for installation phase - select one option

Duofix installation	111.560.00.2 Geberit Duofix element for washbasin, 130 cm, electronic wall-mounted tap with concealed function box		✓	✓	✓	✓	✓	✓	✓	✓	✓
	111.562.00.2 Geberit Duofix element for washbasin, 130 cm, electronic wall-mounted tap with concealed function box, with concealed trap		✓	✓	✓	✓	✓	✓	✓	✓	✓
	111.271.00.2 Geberit Duofix element, 130 cm, for electronic wall-mounted tap with concealed function box, for ablution		✓	✓	✓	✓	✓	✓	✓	✓	✓
	111.069.00.2 Geberit Duofix element for washbasin, 112–130 cm, Geberit ONE wall-mounted tap with concealed function box										
GIS installation	461.146.00.1 Geberit GIS crossbar for electronic wall-mounted tap with concealed function box		✓	✓	✓	✓	✓	✓	✓	✓	✓




To order additionally - required depending on the selected installation phase option

Cover plates	116.425.11.1 Geberit cover plate for concealed function box		✓	✓	✓	✓	✓	✓	✓	✓	✓
	116.426.11.1 Geberit cover plate for concealed function box and concealed trap		Only for use with Geberit Duofix	Only for use with Geberit Duofix	Only for use with Geberit Duofix	Only for use with Geberit Duofix	Only for use with Geberit Duofix	Only for use with Geberit Duofix	Only for use with Geberit Duofix	Only for use with Geberit Duofix	Only for use with Geberit Duofix
	116.421.00.1 Geberit cover plate, surface-even, for concealed function box		✓	✓	✓	✓	✓	✓	✓	✓	✓







Brenta			Geberit ONE round design		Geberit ONE round design		Geberit ONE square design		Geberit ONE square design	
										
Length 22 cm			Length 16 cm		Length 20 cm		Length 18 cm		Length 22 cm	
glossy chrome	black matt	stainless steel finish	glossy chrome	black matt	glossy chrome	black matt	glossy chrome	black matt	glossy chrome	black matt
116.293.21.1	116.293.14.1	116.293.SN.1								
116.294.21.1	116.294.14.1	116.294.SN.1								
116.298.21.1	116.298.14.1	116.298.SN.1								
116.291.21.1	116.291.14.1	116.291.SN.1								
116.292.21.1	116.292.14.1	116.292.SN.1								
116.297.21.1	116.297.14.1	116.297.SN.1								
116.295.21.1	116.295.14.1	116.295.SN.1								
116.296.21.1	116.296.14.1	116.296.SN.1								
					116.464.21.1	116.464.14.1			116.465.21.1	116.465.14.1
✓	✓	✓								
✓	✓	✓								
✓	✓	✓								
			✓	✓	✓	✓	✓	✓	✓	✓
✓	✓	✓								
✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Only for use with Geberit Duofix	Only for use with Geberit Duofix	Only for use with Geberit Duofix								
✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓



Geberit International Sales, version: October 2025

Design	Piave			Piave			Brenta		
									
	Length 17 cm			Length 22 cm			Length 17 cm		
	glossy chrome	black matt	stainless steel finish	glossy chrome	black matt	stainless steel finish	glossy chrome	black matt	stainless steel finish






Accessories

Geberit tap aerator for Piave and Brenta washbasin taps	243.625.00.1	5.0 l/min		✓ ¹⁾	✓ ¹⁾	✓ ¹⁾	✓ ¹⁾	✓ ¹⁾	✓ ¹⁾	✓ ¹⁾	✓ ¹⁾	✓ ¹⁾
	243.635.00.1	5.0 l/min, swivelling		✓	✓	✓	✓	✓	✓	✓	✓	✓
	243.636.00.1	3.8 l/min, spray		✓	✓	✓	✓	✓	✓	✓	✓	✓
	243.637.00.1	1.9 l/min, spray		✓ ²⁾	✓ ²⁾	✓ ²⁾	✓ ²⁾	✓ ²⁾	✓ ²⁾	✓ ²⁾	✓ ²⁾	✓ ²⁾
	243.638.00.1	1.3 l/min, Spray		✓ ²⁾	✓ ²⁾	✓ ²⁾	✓ ²⁾	✓ ²⁾	✓ ²⁾	✓ ²⁾	✓ ²⁾	✓ ²⁾
Geberit sealing set for Piave and Brenta washbasin taps, wall-mounted, with concealed function box	116.422.00.1			✓	✓	✓	✓	✓	✓	✓	✓	✓

✓ Compatible

¹⁾ Already included in the scope of delivery

²⁾ Not suitable for generator

	Brenta			Geberit ONE round design		Geberit ONE round design		Geberit ONE square design		Geberit ONE square design	
											
	Length 22 cm			Length 16 cm		Length 20 cm		Length 18 cm		Length 22 cm	
	glossy chrome	black matt	stainless steel finish	glossy chrome	black matt	glossy chrome	black matt	glossy chrome	black matt	glossy chrome	black matt
	✓ ¹⁾	✓ ¹⁾	✓ ¹⁾								
	✓	✓	✓								
	✓	✓	✓								
	✓ ²⁾	✓ ²⁾	✓ ²⁾								
	✓ ²⁾	✓ ²⁾	✓ ²⁾								
	✓	✓	✓								




Taps

Washbasin taps
Deck-mounted, mains operation

Deck-mounted, mains operation

Geberit Piave washbasin tap, deck-mounted, mains operation, with exposed function box

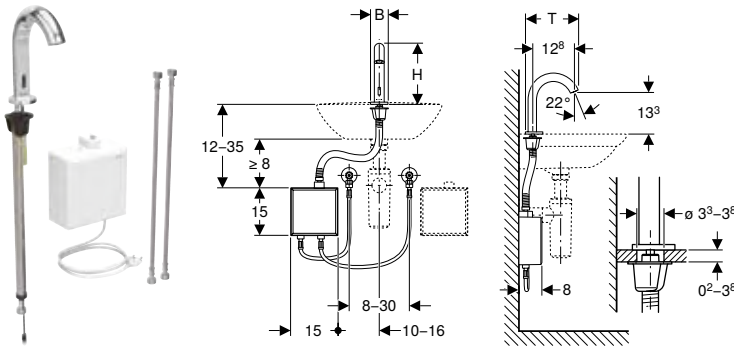

Application purposes

- For installation in washbasins or washtops
- For connecting cold and hot water (only for model with mixer or thermostatic mixer)
- For connecting cold or mixed water (only for model without mixer)
- Suitable for use with stainless steel sinks
- Model without mixer suitable for combination with continuous flow heater, see technical data sheet "Washbasin taps with continuous flow heaters"

Technical data

Degree of protection	IPX4
Nominal voltage	110–240 V AC
Mains frequency	50–60 Hz
Operating voltage	4.5 V DC
Cable length	1 m
Operating pressure	0.5–10 bar
Recommended operating pressure with thermostatic mixer	0.5–5 bar
Recommended operating pressure with thermostatic mixer	50–500 kPa
Differentiated pressure CW/WW max.	1.5 bar
Water test pressure max.	16 bar
Test pressure air / inert gas max.	3 bar
Ambient temperature	1–40 °C
Storage temperature	-20 – +70 °C
Water temperature, adjustment range with thermostatic mixer	20–42 °C
Water temperature short-term max.	90 °C
Flow rate at 300 kPa / 3 bar	5 l/min
Interval flush time, factory setting	5 s
Product material	Brass / plastic

Characteristics

- Tap group I in accordance with DIN 4109
- Infrared user detection
- Vandal-resistant
- Temperature presetting via mixer (only for models with mixer or thermostatic mixer)
- Not possible to set just hot water or just cold water (only for model with mixer or thermostatic mixer)
- Thermostat according to EN 1111 (only for model with thermostatic mixer)
- Scald protection by limiting the water temperature to 42 °C (only for models with thermostatic mixer)
- Thermal disinfection according to DVGW W 551 possible
- Functions can be set and queried with the Geberit Service Handy
- Device settings and operation with mobile device via integrated Bluetooth® interface
- Compatible with Geberit Control App
- Wired networkable with Geberit gateway via GEBUS converter
- Wirelessly connectable with Geberit Gateway via Bluetooth®
- Compatible with Geberit Connect
- With integrated check valve
- Functional unit with built-in basket filters

Scope of delivery


- Washbasin tap with IR sensor and connection hose
- Exposed function box with control electronics, functional unit and power supply unit
- Reinforced braided hoses 3/8"
- Tap aerator key
- Fastening material

Art. no.	Colour / surface	Mixer	B [cm]	H [cm]	T [cm]	Power consumption [W]	Plug type
116.161.14.1	black matt / easy-to-clean coated	without mixer	5.5	19.3	16.7	0.1	CEE 7/16
116.161.21.1	chrome / glossy	without mixer	5.5	19.3	16.7	0.1	CEE 7/16
116.161.SN.1	stainless steel look / brushed, easy-to-clean coated	without mixer	5.5	19.3	16.7	0.1	CEE 7/16
116.162.14.1	black matt / easy-to-clean coated	with mixer	5.5	19.3	16.7	0.1	CEE 7/16
116.162.21.1	chrome / glossy	with mixer	5.5	19.3	16.7	0.1	CEE 7/16
116.162.SN.1	stainless steel look / brushed, easy-to-clean coated	with mixer	5.5	19.3	16.7	0.1	CEE 7/16
116.167.14.1	black matt / easy-to-clean coated	with thermostatic mixer	5.5	19.3	16.7	0.1	CEE 7/16
116.167.21.1	chrome / glossy	with thermostatic mixer	5.5	19.3	16.7	0.1	CEE 7/16
116.167.SN.1	stainless steel look / brushed, easy-to-clean coated	with thermostatic mixer	5.5	19.3	16.7	0.1	CEE 7/16

Accessories

- Geberit tap aerator for Piave and Brenta washbasin taps → p. 353

Geberit Piave washbasin tap, deck-mounted, mains operation, for concealed function box

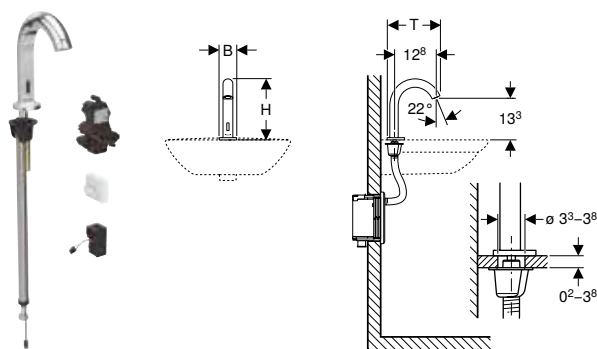

click & scan

Application purposes

- For installation in washbasins or washtops
- For installation in Geberit installation elements for washbasins, deck-mounted tap with concealed function box
- For installation in Geberit installation sets for electronic washbasin taps, deck-mounted, with concealed function box
- For connecting cold and hot water (only for model with mixer or thermostatic mixer)
- For connecting cold or mixed water (only for model without mixer)
- Suitable for use with stainless steel sinks
- Model without mixer suitable for combination with continuous flow heater, see technical data sheet "Washbasin taps with continuous flow heaters"

Technical data

Degree of protection	IPX4
Nominal voltage	110–240 V AC
Mains frequency	50–60 Hz
Operating voltage	4.5 V DC
Operating pressure	0.5–10 bar
Recommended operating pressure with thermostatic mixer	0.5–5 bar
Recommended operating pressure with thermostatic mixer	50–500 kPa
Differentiated pressure CW/WW max.	1.5 bar
Water test pressure max.	16 bar
Test pressure air / inert gas max.	3 bar
Ambient temperature	1–40 °C
Storage temperature	–20 – +70 °C
Water temperature, adjustment range with thermostatic mixer	20–42 °C
Water temperature short-term max.	90 °C
Flow rate at 300 kPa / 3 bar	5 l/min
Interval flush time, factory setting	5 s
Product material	Brass / plastic

Characteristics

- Tap group I in accordance with DIN 4109
- Infrared user detection
- Vandal-resistant
- Temperature presetting via mixer (only for models with mixer or thermostatic mixer)
- Not possible to set just hot water or just cold water (only for model with mixer or thermostatic mixer)
- Thermostat according to EN 1111 (only for model with thermostatic mixer)
- Scald protection by limiting the water temperature to 42 °C (only for models with thermostatic mixer)
- Thermal disinfection according to DVGW W 551 possible
- Functions can be set and queried with the Geberit Service Handy
- Device settings and operation with mobile device via integrated Bluetooth® interface
- Compatible with Geberit Control App
- Wired networkable with Geberit gateway via GEBUS converter
- Wirelessly connectable with Geberit Gateway via Bluetooth®
- Compatible with Geberit Connect
- With integrated check valve
- Functional unit with built-in basket filters
- Components in contact with drinking water lead-free

Scope of delivery

- Washbasin tap with IR sensor and connection hose
- Control electronics
- Functional unit
- Power supply unit
- Tap aerator key
- Fastening material

Art. no.	Colour / surface	Mixer	B	H	T	Power consumption [W]
			[cm]	[cm]	[cm]	
116.181.14.1	black matt / easy-to-clean coated	without mixer	5.5	19.3	16.7	0.1
116.181.21.1	chrome / glossy	without mixer	5.5	19.3	16.7	0.1
116.181.SN.1	stainless steel look / brushed, easy-to-clean coated	without mixer	5.5	19.3	16.7	0.1
116.182.14.1	black matt / easy-to-clean coated	with mixer	5.5	19.3	16.7	0.1
116.182.21.1	chrome / glossy	with mixer	5.5	19.3	16.7	0.1
116.182.SN.1	stainless steel look / brushed, easy-to-clean coated	with mixer	5.5	19.3	16.7	0.1
116.187.14.1	black matt / easy-to-clean coated	with thermostatic mixer	5.5	19.3	16.7	0.1
116.187.21.1	chrome / glossy	with thermostatic mixer	5.5	19.3	16.7	0.1
116.187.SN.1	stainless steel look / brushed, easy-to-clean coated	with thermostatic mixer	5.5	19.3	16.7	0.1

To order additionally

- Geberit element for washbasin or installation set for Geberit washbasin tap
- Cover plate for concealed function box

Can be combined with

- Geberit Duofix element for washbasin, 112 cm, electronic deck-mounted tap with concealed function box → p. 58
- Geberit Duofix element for washbasin, 112 cm, electronic deck-mounted tap with concealed function box, with concealed trap → p. 60
- Geberit GIS crossbar for electronic deck-mounted tap with concealed function box → p. 128
- Geberit installation set for Piave and Brenta washbasin taps, deck-mounted, with concealed function box → p. 355


Accessories

- Geberit tap aerator for Piave and Brenta washbasin taps → p. 353

Taps

Washbasin taps
Deck-mounted, mains operation

Geberit Brenta washbasin tap, deck-mounted, mains operation, with exposed function box

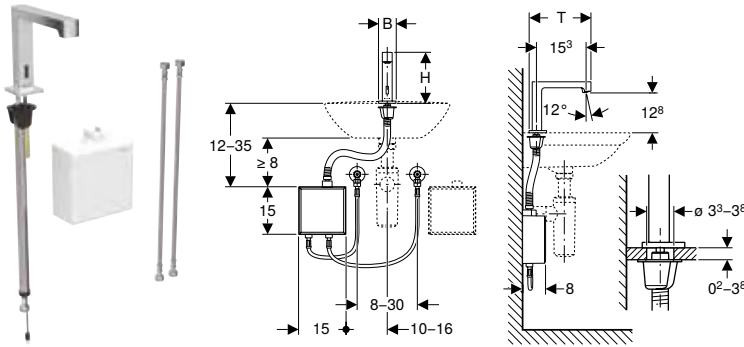

click & scan

Application purposes

- For installation in washbasins or washtops
- For connecting cold and hot water (only for model with mixer or thermostatic mixer)
- For connecting cold or mixed water (only for model without mixer)
- Suitable for use with stainless steel sinks
- Model without mixer suitable for combination with continuous flow heater, see technical data sheet "Washbasin taps with continuous flow heaters"

Technical data

Degree of protection	IPX4
Nominal voltage	110–240 V AC
Mains frequency	50–60 Hz
Operating voltage	4.5 V DC
Cable length	1 m
Operating pressure	0.5–10 bar
Recommended operating pressure with thermostatic mixer	0.5–5 bar
Recommended operating pressure with thermostatic mixer	50–500 kPa
Differentiated pressure CW/WW max.	1.5 bar
Water test pressure max.	16 bar
Test pressure air / inert gas max.	3 bar
Ambient temperature	1–40 °C
Storage temperature	-20 – +70 °C
Water temperature, adjustment range with thermostatic mixer	20–42 °C
Water temperature short-term max.	90 °C
Flow rate at 300 kPa / 3 bar	5 l/min
Interval flush time, factory setting	5 s
Product material	Brass / plastic

Characteristics

- Tap group I in accordance with DIN 4109
- Infrared user detection
- Vandal-resistant
- Temperature presetting via mixer (only for models with mixer or thermostatic mixer)
- Not possible to set just hot water or just cold water (only for model with mixer or thermostatic mixer)
- Thermostat according to EN 1111 (only for model with thermostatic mixer)
- Scald protection by limiting the water temperature to 42 °C (only for models with thermostatic mixer)
- Thermal disinfection according to DVGW W 551 possible
- Functions can be set and queried with the Geberit Service Handy
- Device settings and operation with mobile device via integrated Bluetooth® interface
- Compatible with Geberit Control App
- Wired networkable with Geberit gateway via GEBUS converter
- Wirelessly connectable with Geberit Gateway via Bluetooth®
- Compatible with Geberit Connect
- With integrated check valve
- Functional unit with built-in basket filters

Scope of delivery


- Washbasin tap with IR sensor and connection hose
- Exposed function box with control electronics, functional unit and power supply unit
- Reinforced braided hoses 3/8"
- Tap aerator key
- Fastening material

Art. no.	Colour / surface	Mixer	B	H	T	Power consumption [W]	Plug type
			[cm]	[cm]	[cm]		
116.171.14.1	black matt / easy-to-clean coated	without mixer	5.5	16.1	19.5	0.1	CEE 7/16
116.171.21.1	chrome / glossy	without mixer	5.5	16.1	19.5	0.1	CEE 7/16
116.171.SN.1	stainless steel look / brushed, easy-to-clean coated	without mixer	5.5	16.1	19.5	0.1	CEE 7/16
116.172.14.1	black matt / easy-to-clean coated	with mixer	5.5	16.1	19.5	0.1	CEE 7/16
116.172.21.1	chrome / glossy	with mixer	5.5	16.1	19.5	0.1	CEE 7/16
116.172.SN.1	stainless steel look / brushed, easy-to-clean coated	with mixer	5.5	16.1	19.5	0.1	CEE 7/16
116.177.14.1	black matt / easy-to-clean coated	with thermostatic mixer	5.5	16.1	19.5	0.1	CEE 7/16
116.177.21.1	chrome / glossy	with thermostatic mixer	5.5	16.1	19.5	0.1	CEE 7/16
116.177.SN.1	stainless steel look / brushed, easy-to-clean coated	with thermostatic mixer	5.5	16.1	19.5	0.1	CEE 7/16

Accessories

- Geberit tap aerator for Piave and Brenta washbasin taps → p. 353

Geberit Brenta washbasin tap, deck-mounted, mains operation, for concealed function box

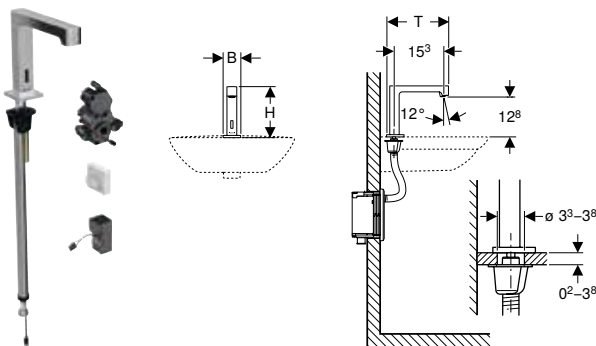

Application purposes

- For installation in washbasins or washtops
- For installation in Geberit installation elements for washbasins, deck-mounted tap with concealed function box
- For installation in Geberit installation sets for electronic washbasin taps, deck-mounted, with concealed function box
- For connecting cold and hot water (only for model with mixer or thermostatic mixer)
- For connecting cold or mixed water (only for model without mixer)
- Suitable for use with stainless steel sinks
- Model without mixer suitable for combination with continuous flow heater, see technical data sheet "Washbasin taps with continuous flow heaters"

Technical data

Degree of protection	IPX4
Nominal voltage	110–240 V AC
Mains frequency	50–60 Hz
Operating voltage	4.5 V DC
Operating pressure	0.5–10 bar
Recommended operating pressure with thermostatic mixer	0.5–5 bar
Recommended operating pressure with thermostatic mixer	50–500 kPa
Differentiated pressure CW/WW max.	1.5 bar
Water test pressure max.	16 bar
Test pressure air / inert gas max.	3 bar
Ambient temperature	1–40 °C
Storage temperature	–20 – +70 °C
Water temperature, adjustment range with thermostatic mixer	20–42 °C
Water temperature short-term max.	90 °C
Flow rate at 300 kPa / 3 bar	5 l/min
Interval flush time, factory setting	5 s
Product material	Brass / plastic

Characteristics

- Tap group I in accordance with DIN 4109
- Infrared user detection
- Vandal-resistant
- Temperature presetting via mixer (only for models with mixer or thermostatic mixer)
- Not possible to set just hot water or just cold water (only for model with mixer or thermostatic mixer)
- Thermostat according to EN 1111 (only for model with thermostatic mixer)
- Scald protection by limiting the water temperature to 42 °C (only for models with thermostatic mixer)
- Thermal disinfection according to DVGW W 551 possible
- Functions can be set and queried with the Geberit Service Handy
- Device settings and operation with mobile device via integrated Bluetooth® interface
- Compatible with Geberit Control App
- Wired networkable with Geberit gateway via GEBUS converter
- Wirelessly connectable with Geberit Gateway via Bluetooth®
- Compatible with Geberit Connect
- With integrated check valve
- Functional unit with built-in basket filters
- Components in contact with drinking water lead-free

Scope of delivery

- Washbasin tap with IR sensor and connection hose
- Control electronics
- Functional unit
- Power supply unit
- Tap aerator key
- Fastening material

Art. no.	Colour / surface	Mixer	B	H	T	Power consumption [W]
			[cm]	[cm]	[cm]	
116.191.14.1	black matt / easy-to-clean coated	without mixer	5.5	16.1	19.5	0.1
116.191.21.1	chrome / glossy	without mixer	5.5	16.1	19.5	0.1
116.191.SN.1	stainless steel look / brushed, easy-to-clean coated	without mixer	5.5	16.1	19.5	0.1
116.192.14.1	black matt / easy-to-clean coated	with mixer	5.5	16.1	19.5	0.1
116.192.21.1	chrome / glossy	with mixer	5.5	16.1	19.5	0.1
116.192.SN.1	stainless steel look / brushed, easy-to-clean coated	with mixer	5.5	16.1	19.5	0.1
116.197.14.1	black matt / easy-to-clean coated	with thermostatic mixer	5.5	16.1	19.5	0.1
116.197.21.1	chrome / glossy	with thermostatic mixer	5.5	16.1	19.5	0.1
116.197.SN.1	stainless steel look / brushed, easy-to-clean coated	with thermostatic mixer	5.5	16.1	19.5	0.1

To order additionally

- Geberit element for washbasin or installation set for Geberit washbasin tap
- Cover plate for concealed function box


Can be combined with

- Geberit Duofix element for washbasin, 112 cm, electronic deck-mounted tap with concealed function box → p. 58
- Geberit Duofix element for washbasin, 112 cm, electronic deck-mounted tap with concealed function box, with concealed trap → p. 60
- Geberit GIS crossbar for electronic deck-mounted tap with concealed function box → p. 128
- Geberit installation set for Piave and Brenta washbasin taps, deck-mounted, with concealed function box → p. 355

Accessories

- Geberit tap aerator for Piave and Brenta washbasin taps → p. 353

Geberit Type 186 washbasin tap, mains operation

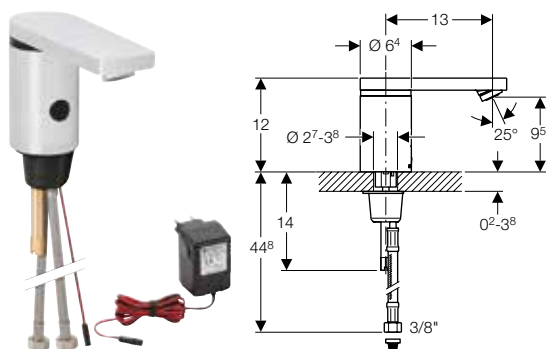

click & scan

Application purposes

- For installation in washbasins or washtops
- For connecting cold and hot water (only for model with mixer)
- For connecting cold or mixed water (only for model without mixer)
- Suitable for use with stainless steel sinks
- Model without mixer suitable for combination with continuous flow heater, see technical data sheet "Washbasin taps with continuous flow heaters"

Technical data

Degree of protection	IP44
Nominal voltage	230 V AC
Mains frequency	50–60 Hz
Operating voltage	12 V AC
Cable length	1.9 m
Operating pressure	0.5–8 bar
Differentiated pressure CW/WW max.	1.5 bar
Water test pressure max.	16 bar
Test pressure air / inert gas max.	3 bar
Ambient temperature	1–40 °C
Water temperature short-term max.	90 °C
Flow rate at 300 kPa / 3 bar	6 l/min
Interval flush time, factory setting	3 s
Product material	Brass chrome-plated

Characteristics

- Tap group I in accordance with DIN 4109
- Infrared user detection
- Vandal-resistant
- Temperature presetting via mixer (only for model with mixer)
- Not possible to set just hot water or just cold water (only for model with mixer)
- Functions can be set and queried with the Geberit Service Handy
- Device settings and operation with mobile device via integrated Bluetooth® interface
- Compatible with Geberit Control App
- Wirelessly connectable with Geberit Gateway via Bluetooth®
- Compatible with Geberit Connect
- With integrated check valve

Scope of delivery

- Basket filter
- Power supply unit plug
- Tap aerator key
- Fastening material

Art. no.	Colour / surface	Mixer	H [cm]	Power consumption [W]	Plug type
116.136.21.1	chrome / glossy	without mixer	12	0.1	SEV T11
116.146.21.1	chrome / glossy	with mixer	12	0.1	SEV T11
116.156.21.1	chrome / glossy	with mixer and handle	12	0.1	SEV T11

Accessories


- Geberit tap aerator for Types 6x, 8x and 18x washbasin taps → p. 353



Taps

Washbasin taps
Deck-mounted, mains operation

Geberit Type 80 washbasin tap, mains operation

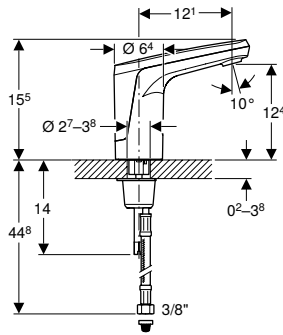

click & scan

Application purposes

- For installation in washbasins or washtops
- For connecting cold and hot water (only for model with mixer)
- For connecting cold or mixed water (only for model without mixer)
- Suitable for use with stainless steel sinks
- Model with mixer not suitable for continuous flow heater

Technical data

Degree of protection	IP44
Nominal voltage	230 V AC
Mains frequency	50–60 Hz
Operating voltage	12 V AC
Cable length	1.9 m
Operating pressure	0.5–8 bar
Differentiated pressure CW/WW max.	1.5 bar
Water test pressure max.	16 bar
Test pressure air / inert gas max.	3 bar
Ambient temperature	1–40 °C
Water temperature short-term max.	90 °C
Flow rate at 300 kPa / 3 bar	5.7 l/min
Interval flush time, factory setting	3 s
Product material	Die-cast zinc, chrome-plated

Characteristics

- Tap group I in accordance with DIN 4109
- Infrared user detection
- Vandal-resistant
- Temperature presetting via mixer (only for model with mixer)
- Not possible to set just hot water or just cold water (only for model with mixer)
- Functions can be set and queried with the Geberit Service Handy
- With integrated check valve

Scope of delivery


- Basket filter
- Power supply unit plug
- Tap aerator key
- Fastening material

Art. no.	Colour / surface	Mixer	H [cm]	Power consumption [W]	Plug type
116.133.21.1	chrome / glossy	without mixer	15.5	0.1	SEV T11
116.134.21.1	chrome / glossy	with mixer	15.5	0.1	SEV T11

Taps

Washbasin taps
Deck-mounted, battery operation

Geberit Piave washbasin tap, deck-mounted, battery operation, for concealed function box

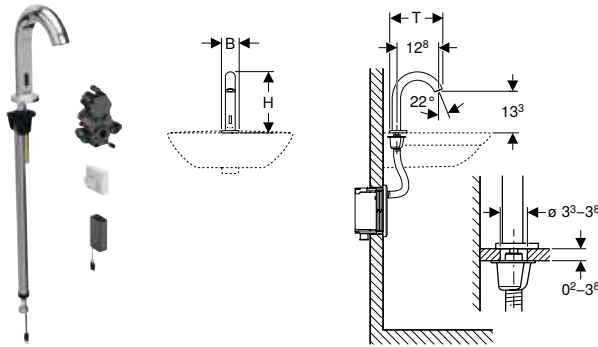

click & scan

Application purposes

- For installation in washbasins or washtops
- For installation in Geberit installation elements for washbasins, deck-mounted tap with concealed function box
- For installation in Geberit installation sets for electronic washbasin taps, deck-mounted, with concealed function box
- For connecting cold and hot water (only for model with mixer or thermostatic mixer)
- For connecting cold or mixed water (only for model without mixer)
- Suitable for use with stainless steel sinks
- Model without mixer suitable for combination with continuous flow heater, see technical data sheet "Washbasin taps with continuous flow heaters"

Technical data

Battery type	Alkaline (1.5 V AA)
Degree of protection	IPX4
Operating voltage	3 V DC
Operating pressure	0.5–10 bar
Recommended operating pressure with thermostatic mixer	0.5–5 bar
Recommended operating pressure with thermostatic mixer	50–500 kPa
Differentiated pressure CW/WW max.	1.5 bar
Water test pressure max.	16 bar
Test pressure air / inert gas max.	3 bar
Ambient temperature	1–40 °C
Storage temperature	-20 – +70 °C
Water temperature, adjustment range with thermostatic mixer	20–42 °C
Water temperature short-term max.	90 °C
Flow rate at 300 kPa / 3 bar	5 l/min
Interval flush time, factory setting	5 s
Product material	Brass / plastic

Characteristics

- Tap group I in accordance with DIN 4109
- Infrared user detection
- Vandal-resistant
- Temperature presetting via mixer (only for models with mixer or thermostatic mixer)
- Not possible to set just hot water or just cold water (only for model with mixer or thermostatic mixer)
- Thermostat according to EN 1111 (only for model with thermostatic mixer)
- Scald protection by limiting the water temperature to 42 °C (only for models with thermostatic mixer)
- Thermal disinfection according to DVGW W 551 possible
- Warning when the battery is low
- Functions can be set and queried with the Geberit Service Handy
- Device settings and operation with mobile device via integrated Bluetooth® interface
- Compatible with Geberit Control App
- Wired networkable with Geberit gateway via GEBUS converter
- Wirelessly connectable with Geberit Gateway via Bluetooth®
- Compatible with Geberit Connect
- With integrated check valve
- Functional unit with built-in basket filters
- Components in contact with drinking water lead-free

Scope of delivery

- Washbasin tap with IR sensor and connection hose
- Control electronics
- Functional unit
- Battery compartment
- 2 alkaline manganese batteries type AA 1.5 V
- Tap aerator key
- Fastening material

Art. no.	Colour / surface	Mixer	B	H	T
			[cm]	[cm]	[cm]
116.183.14.1	black matt / easy-to-clean coated	without mixer	5.5	19.3	16.7
116.183.21.1	chrome / glossy	without mixer	5.5	19.3	16.7
116.183.SN.1	stainless steel look / brushed, easy-to-clean coated	without mixer	5.5	19.3	16.7
116.184.14.1	black matt / easy-to-clean coated	with mixer	5.5	19.3	16.7
116.184.21.1	chrome / glossy	with mixer	5.5	19.3	16.7
116.184.SN.1	stainless steel look / brushed, easy-to-clean coated	with mixer	5.5	19.3	16.7
116.188.14.1	black matt / easy-to-clean coated	with thermostatic mixer	5.5	19.3	16.7
116.188.21.1	chrome / glossy	with thermostatic mixer	5.5	19.3	16.7
116.188.SN.1	stainless steel look / brushed, easy-to-clean coated	with thermostatic mixer	5.5	19.3	16.7

To order additionally

- Geberit element for washbasin or installation set for Geberit washbasin tap
- Cover plate for concealed function box


Can be combined with

- Geberit Duofix element for washbasin, 112 cm, electronic deck-mounted tap with concealed function box → p. 58
- Geberit Duofix element for washbasin, 112 cm, electronic deck-mounted tap with concealed function box, with concealed trap → p. 60
- Geberit GIS crossbar for electronic deck-mounted tap with concealed function box → p. 128
- Geberit installation set for Piave and Brenta washbasin taps, deck-mounted, with concealed function box → p. 355

Accessories

- Geberit tap aerator for Piave and Brenta washbasin taps → p. 353

Geberit Brenta washbasin tap, deck-mounted, battery operation, with exposed function box

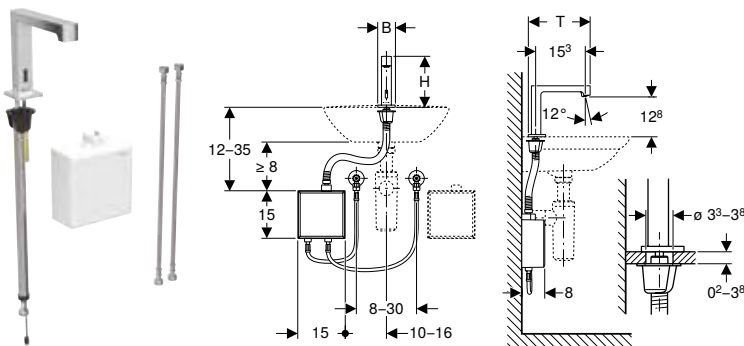

Application purposes

- For installation in washbasins or washtops
- For connecting cold and hot water (only for model with mixer or thermostatic mixer)
- For connecting cold or mixed water (only for model without mixer)
- Suitable for use with stainless steel sinks
- Model without mixer suitable for combination with continuous flow heater, see technical data sheet "Washbasin taps with continuous flow heaters"

Technical data

Battery type	Alkaline (1.5 V AA)
Degree of protection	IPX4
Operating voltage	3 V DC
Operating pressure	0.5–10 bar
Recommended operating pressure with thermostatic mixer	0.5–5 bar
Recommended operating pressure with thermostatic mixer	50–500 kPa
Differentiated pressure CW/WW max.	1.5 bar
Water test pressure max.	16 bar
Test pressure air / inert gas max.	3 bar
Ambient temperature	1–40 °C
Storage temperature	-20 – +70 °C
Water temperature, adjustment range with thermostatic mixer	20–42 °C
Water temperature short-term max.	90 °C
Flow rate at 300 kPa / 3 bar	5 l/min
Interval flush time, factory setting	5 s
Product material	Brass / plastic

Characteristics

- Tap group I in accordance with DIN 4109
- Infrared user detection
- Vandal-resistant
- Temperature presetting via mixer (only for models with mixer or thermostatic mixer)
- Not possible to set just hot water or just cold water (only for model with mixer or thermostatic mixer)
- Thermostat according to EN 1111 (only for model with thermostatic mixer)
- Scald protection by limiting the water temperature to 42 °C (only for models with thermostatic mixer)
- Thermal disinfection according to DVGW W 551 possible
- Warning when the battery is low
- Functions can be set and queried with the Geberit Service Handy
- Device settings and operation with mobile device via integrated Bluetooth® interface
- Compatible with Geberit Control App
- Wired networkable with Geberit gateway via GEBUS converter
- Wirelessly connectable with Geberit Gateway via Bluetooth®
- Compatible with Geberit Connect
- With integrated check valve
- Functional unit with built-in basket filters

Scope of delivery

- Washbasin tap with IR sensor and connection hose
- Exposed function box with control electronics, functional unit and battery compartment
- Reinforced braided hoses 3/8"
- Tap aerator key
- Fastening material

Art. no.	Colour / surface	Mixer	B	H	T
			[cm]	[cm]	[cm]
116.173.14.1	black matt / easy-to-clean coated	without mixer	5.5	16.1	19.5
116.173.21.1	chrome / glossy	without mixer	5.5	16.1	19.5
116.173.SN.1	stainless steel look / brushed, easy-to-clean coated	without mixer	5.5	16.1	19.5
116.174.14.1	black matt / easy-to-clean coated	with mixer	5.5	16.1	19.5
116.174.21.1	chrome / glossy	with mixer	5.5	16.1	19.5
116.174.SN.1	stainless steel look / brushed, easy-to-clean coated	with mixer	5.5	16.1	19.5
116.178.14.1	black matt / easy-to-clean coated	with thermostatic mixer	5.5	16.1	19.5
116.178.21.1	chrome / glossy	with thermostatic mixer	5.5	16.1	19.5
116.178.SN.1	stainless steel look / brushed, easy-to-clean coated	with thermostatic mixer	5.5	16.1	19.5

Accessories


- Geberit tap aerator for Piave and Brenta washbasin taps → p. 353



Taps

Washbasin taps
Deck-mounted, battery operation

Geberit Brenta washbasin tap, deck-mounted, battery operation, for concealed function box

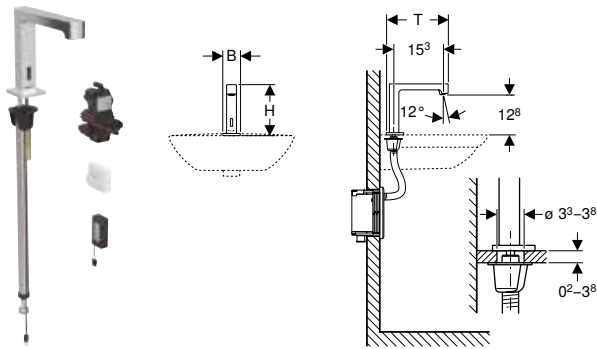

click & scan

Application purposes

- For installation in washbasins or washtops
- For installation in Geberit installation elements for washbasins, deck-mounted tap with concealed function box
- For installation in Geberit installation sets for electronic washbasin taps, deck-mounted, with concealed function box
- For connecting cold and hot water (only for model with mixer or thermostatic mixer)
- For connecting cold or mixed water (only for model without mixer)
- Suitable for use with stainless steel sinks
- Model without mixer suitable for combination with continuous flow heater, see technical data sheet "Washbasin taps with continuous flow heaters"

Technical data

Battery type	Alkaline (1.5 V AA)
Degree of protection	IPX4
Operating voltage	3 V DC
Operating pressure	0.5–10 bar
Recommended operating pressure with thermostatic mixer	0.5–5 bar
Recommended operating pressure with thermostatic mixer	50–500 kPa
Differentiated pressure CW/WW max.	1.5 bar
Water test pressure max.	16 bar
Test pressure air / inert gas max.	3 bar
Ambient temperature	1–40 °C
Storage temperature	-20 – +70 °C
Water temperature, adjustment range with thermostatic mixer	20–42 °C
Water temperature short-term max.	90 °C
Flow rate at 300 kPa / 3 bar	5 l/min
Interval flush time, factory setting	5 s
Product material	Brass / plastic

Characteristics

- Tap group I in accordance with DIN 4109
- Infrared user detection
- Vandal-resistant
- Temperature presetting via mixer (only for models with mixer or thermostatic mixer)
- Not possible to set just hot water or just cold water (only for model with mixer or thermostatic mixer)
- Thermostat according to EN 1111 (only for model with thermostatic mixer)
- Scald protection by limiting the water temperature to 42 °C (only for models with thermostatic mixer)
- Thermal disinfection according to DVGW W 551 possible
- Warning when the battery is low
- Functions can be set and queried with the Geberit Service Handy
- Device settings and operation with mobile device via integrated Bluetooth® interface
- Compatible with Geberit Control App
- Wired networkable with Geberit gateway via GEBUS converter
- Wirelessly connectable with Geberit Gateway via Bluetooth®
- Compatible with Geberit Connect
- With integrated check valve
- Functional unit with built-in basket filters
- Components in contact with drinking water lead-free

Scope of delivery

- Washbasin tap with IR sensor and connection hose
- Control electronics
- Functional unit
- Battery compartment
- 2 alkaline manganese batteries type AA 1.5 V
- Tap aerator key
- Fastening material

Art. no.	Colour / surface	Mixer	B	H	T
			[cm]	[cm]	[cm]
116.193.14.1	black matt / easy-to-clean coated	without mixer	5.5	16.1	19.5
116.193.21.1	chrome / glossy	without mixer	5.5	16.1	19.5
116.193.SN.1	stainless steel look / brushed, easy-to-clean coated	without mixer	5.5	16.1	19.5
116.194.14.1	black matt / easy-to-clean coated	with mixer	5.5	16.1	19.5
116.194.21.1	chrome / glossy	with mixer	5.5	16.1	19.5
116.194.SN.1	stainless steel look / brushed, easy-to-clean coated	with mixer	5.5	16.1	19.5
116.198.14.1	black matt / easy-to-clean coated	with thermostatic mixer	5.5	16.1	19.5
116.198.21.1	chrome / glossy	with thermostatic mixer	5.5	16.1	19.5
116.198.SN.1	stainless steel look / brushed, easy-to-clean coated	with thermostatic mixer	5.5	16.1	19.5

To order additionally

- Geberit element for washbasin or installation set for Geberit washbasin tap
- Cover plate for concealed function box


Can be combined with

- Geberit Duofix element for washbasin, 112 cm, electronic deck-mounted tap with concealed function box → p. 58
- Geberit Duofix element for washbasin, 112 cm, electronic deck-mounted tap with concealed function box, with concealed trap → p. 60
- Geberit GIS crossbar for electronic deck-mounted tap with concealed function box → p. 128
- Geberit installation set for Piave and Brenta washbasin taps, deck-mounted, with concealed function box → p. 355

Accessories

- Geberit tap aerator for Piave and Brenta washbasin taps → p. 353

Geberit Type 185 washbasin tap, battery operation

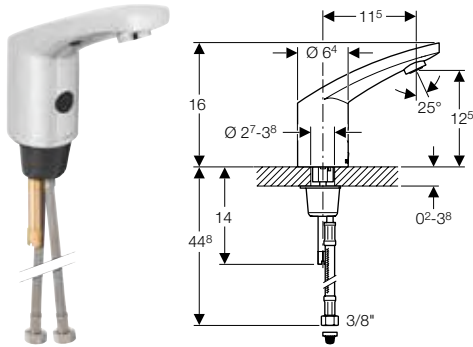

click & scan

Application purposes

- For installation in washbasins or washtops
- For connecting cold and hot water (only for model with mixer)
- For connecting cold or mixed water (only for model without mixer)
- Suitable for use with stainless steel sinks
- Model without mixer suitable for combination with continuous flow heater, see technical data sheet "Washbasin taps with continuous flow heaters"

Technical data

Battery type	CR-P2 (6 V)
Degree of protection	IP44
Operating voltage	6 V DC
Operating pressure	0.5–8 bar
Differentiated pressure CW/WW max.	1.5 bar
Water test pressure max.	16 bar
Test pressure air / inert gas max.	3 bar
Ambient temperature	1–40 °C
Water temperature short-term max.	90 °C
Flow rate at 300 kPa / 3 bar	6 l/min
Interval flush time, factory setting	3 s
Product material	Brass chrome-plated

Art. no.	Colour / surface	Mixer	H [cm]
116.235.21.1	chrome / glossy	without mixer	16
116.245.21.1	chrome / glossy	with mixer	16
116.255.21.1	chrome / glossy	with mixer and handle	16

Accessories

- Geberit tap aerator for Types 6x, 8x and 18x washbasin taps → p. 353

Characteristics

- Tap group I in accordance with DIN 4109
- Infrared user detection
- Vandal-resistant
- Temperature presetting via mixer (only for model with mixer)
- Not possible to set just hot water or just cold water (only for model with mixer)
- Warning when the battery is low
- Functions can be set and queried with the Geberit Service Handy
- Device settings and operation with mobile device via integrated Bluetooth® interface
- Compatible with Geberit Control App
- Wirelessly connectable with Geberit Gateway via Bluetooth®
- Compatible with Geberit Connect
- With integrated check valve

Scope of delivery


- Basket filter
- Lithium battery, type CR-P2, 6 V
- Tap aerator key
- Fastening material



Taps

Washbasin taps
Deck-mounted, battery operation

Geberit Type 186 washbasin tap, battery operation

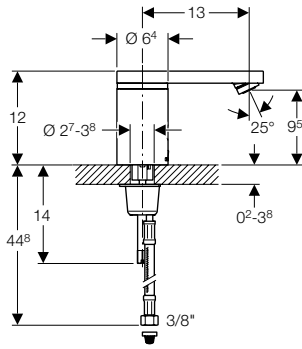

click & scan

Application purposes

- For installation in washbasins or washtops
- For connecting cold and hot water (only for model with mixer)
- For connecting cold or mixed water (only for model without mixer)
- Suitable for use with stainless steel sinks
- Model without mixer suitable for combination with continuous flow heater, see technical data sheet "Washbasin taps with continuous flow heaters"

Technical data

Battery type	CR-P2 (6 V)
Degree of protection	IP44
Operating voltage	6 V DC
Operating pressure	0.5–8 bar
Differentiated pressure CW/WW max.	1.5 bar
Water test pressure max.	16 bar
Test pressure air / inert gas max.	3 bar
Ambient temperature	1–40 °C
Water temperature short-term max.	90 °C
Flow rate at 300 kPa / 3 bar	6 l/min
Interval flush time, factory setting	3 s
Product material	Brass chrome-plated

Characteristics

- Tap group I in accordance with DIN 4109
- Infrared user detection
- Vandal-resistant
- Temperature presetting via mixer (only for model with mixer)
- Not possible to set just hot water or just cold water (only for model with mixer)
- Warning when the battery is low
- Functions can be set and queried with the Geberit Service Handy
- Device settings and operation with mobile device via integrated Bluetooth® interface
- Compatible with Geberit Control App
- Wirelessly connectable with Geberit Gateway via Bluetooth®
- Compatible with Geberit Connect
- With integrated check valve

Scope of delivery


- Basket filter
- Lithium battery, type CR-P2, 6 V
- Tap aerator key
- Fastening material

Art. no.	Colour / surface	Mixer	H [cm]
116.236.21.1	chrome / glossy	without mixer	12
116.246.21.1	chrome / glossy	with mixer	12
116.256.21.1	chrome / glossy	with mixer and handle	12

Accessories

- Geberit tap aerator for Types 6x, 8x and 18x washbasin taps → p. 353

Geberit Type 80 washbasin tap, battery operation

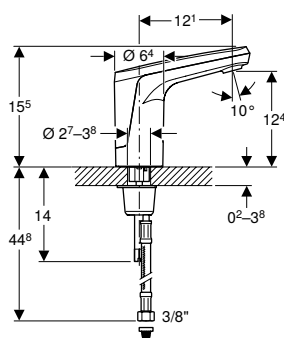

click & scan

Application purposes

- For installation in washbasins or washtops
- For connecting cold and hot water (only for model with mixer)
- For connecting cold or mixed water (only for model without mixer)
- Suitable for use with stainless steel sinks
- Model with mixer not suitable for continuous flow heater

Technical data

Battery type	CR-P2 (6 V)
Degree of protection	IP44
Operating voltage	6 V DC
Operating pressure	0.5–8 bar
Differentiated pressure CW/WW max.	1.5 bar
Water test pressure max.	16 bar
Test pressure air / inert gas max.	3 bar
Ambient temperature	1–40 °C
Water temperature short-term max.	90 °C
Flow rate at 300 kPa / 3 bar	5.7 l/min
Interval flush time, factory setting	3 s
Product material	Die-cast zinc, chrome-plated

Characteristics

- Tap group I in accordance with DIN 4109
- Infrared user detection
- Vandal-resistant
- Temperature presetting via mixer (only for model with mixer)
- Not possible to set just hot water or just cold water (only for model with mixer)
- Warning when the battery is low
- Functions can be set and queried with the Geberit Service Handy
- With integrated check valve

Scope of delivery

- Basket filter
- Lithium battery, type CR-P2, 6 V
- Tap aerator key
- Fastening material

Art. no.	Colour / surface	Mixer	H [cm]
116.131.21.1	chrome / glossy	without mixer	15.5
116.132.21.1	chrome / glossy	with mixer	15.5




Taps

Washbasin taps
Deck-mounted, generator operation

Deck-mounted, generator operation

Geberit Piave washbasin tap, deck-mounted, generator operation, with exposed function box

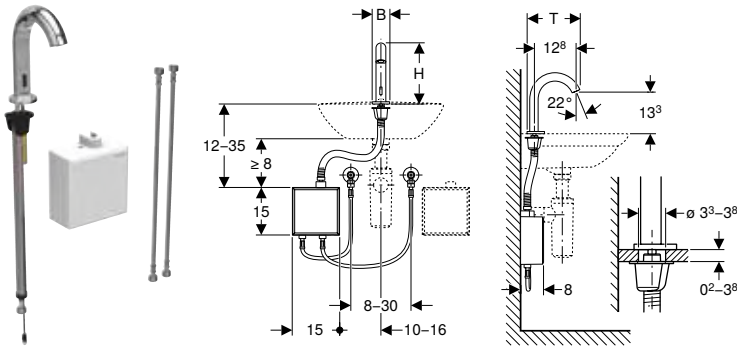

click & scan

Application purposes

- For installation in washbasins or washtops
- For connecting cold and hot water (only for model with mixer or thermostatic mixer)
- For connecting cold or mixed water (only for model without mixer)
- Suitable for use with stainless steel sinks
- For a flow rate of > 3 l/min
- Model without mixer suitable for combination with continuous flow heater, see technical data sheet "Washbasin taps with continuous flow heaters"

Technical data

Degree of protection	IPX4
Operating voltage	3.2 V DC
Operating pressure	2-10 bar
Differentiated pressure CW/WW max.	1.5 bar
Water test pressure max.	16 bar
Test pressure air / inert gas max.	3 bar
Ambient temperature	1-40 °C
Storage temperature	-20 - +70 °C
Water temperature short-term max.	90 °C
Flow rate at 300 kPa / 3 bar	5 l/min
Interval flush time, factory setting	5 s
Product material	Brass / plastic

Characteristics

- Tap group I in accordance with DIN 4109
- Infrared user detection
- Vandal-resistant
- Temperature presetting via mixer (only for models with mixer or thermostatic mixer)
- Not possible to set just hot water or just cold water (only for model with mixer or thermostatic mixer)
- Functions can be set and queried with the Geberit Service Handy
- Device settings and operation with mobile device via integrated Bluetooth® interface
- Compatible with Geberit Control App
- Wirelessly connectable with Geberit Gateway via Bluetooth®
- Compatible with Geberit Connect
- With integrated check valve
- When used at least 50 times per day on average for a duration of 4 s each, the washbasin tap works in a self-sustaining manner
- Functional unit with built-in basket filters

Scope of delivery


- Washbasin tap with IR sensor and connection hose
- Exposed function box with control electronics, functional unit and rechargeable battery for generator operation
- Reinforced braided hoses 3/8"
- Tap aerator key
- Fastening material

Art. no.	Colour / surface	Mixer	B	H	T
			[cm]	[cm]	[cm]
116.165.14.1	black matt / easy-to-clean coated	without mixer	5.5	19.3	16.7
116.165.21.1	chrome / glossy	without mixer	5.5	19.3	16.7
116.165.SN.1	stainless steel look / brushed, easy-to-clean coated	without mixer	5.5	19.3	16.7
116.166.14.1	black matt / easy-to-clean coated	with mixer	5.5	19.3	16.7
116.166.21.1	chrome / glossy	with mixer	5.5	19.3	16.7
116.166.SN.1	stainless steel look / brushed, easy-to-clean coated	with mixer	5.5	19.3	16.7

Accessories

- Geberit tap aerator for Piave and Brenta washbasin taps → p. 353

Geberit Piave washbasin tap, deck-mounted, generator operation, for concealed function box

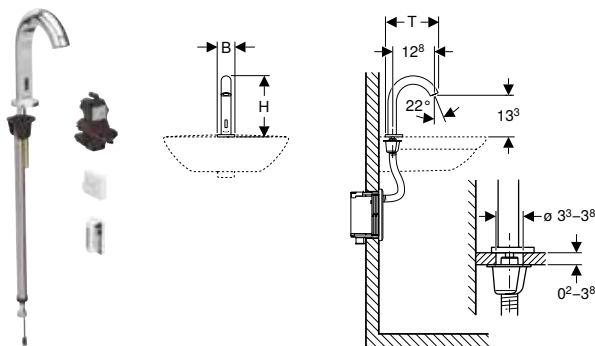

Application purposes

- For installation in washbasins or washtops
- For installation in Geberit installation elements for washbasins, deck-mounted tap with concealed function box
- For installation in Geberit installation sets for electronic washbasin taps, deck-mounted, with concealed function box
- For connecting cold and hot water (only for model with mixer or thermostatic mixer)
- For connecting cold or mixed water (only for model without mixer)
- Suitable for use with stainless steel sinks
- For a flow rate of > 3 l/min
- Model without mixer suitable for combination with continuous flow heater, see technical data sheet "Washbasin taps with continuous flow heaters"

Technical data

Degree of protection	IPX4
Operating voltage	3.2 V DC
Operating pressure	2–10 bar
Differentiated pressure CW/WW max.	1.5 bar
Water test pressure max.	16 bar
Test pressure air / inert gas max.	3 bar
Ambient temperature	1–40 °C
Storage temperature	-20 – +70 °C
Water temperature short-term max.	90 °C
Flow rate at 300 kPa / 3 bar	5 l/min
Interval flush time, factory setting	5 s
Product material	Brass / plastic

Characteristics

- Tap group I in accordance with DIN 4109
- Infrared user detection
- Vandal-resistant
- Temperature presetting via mixer (only for models with mixer or thermostatic mixer)
- Not possible to set just hot water or just cold water (only for model with mixer or thermostatic mixer)
- Functions can be set and queried with the Geberit Service Handy
- Device settings and operation with mobile device via integrated Bluetooth® interface
- Compatible with Geberit Control App
- Wirelessly connectable with Geberit Gateway via Bluetooth®
- Compatible with Geberit Connect
- With integrated check valve
- When used at least 50 times per day on average for a duration of 4 s each, the washbasin tap works in a self-sustaining manner
- Functional unit with built-in basket filters
- Components in contact with drinking water lead-free

Scope of delivery

- Washbasin tap with IR sensor and connection hose
- Control electronics
- Functional unit
- Rechargeable battery for generator operation
- Tap aerator key
- Fastening material

Art. no.	Colour / surface	Mixer	B	H	T
			[cm]	[cm]	[cm]
116.185.14.1	black matt / easy-to-clean coated	without mixer	5.5	19.3	16.7
116.185.21.1	chrome / glossy	without mixer	5.5	19.3	16.7
116.185.SN.1	stainless steel look / brushed, easy-to-clean coated	without mixer	5.5	19.3	16.7
116.186.14.1	black matt / easy-to-clean coated	with mixer	5.5	19.3	16.7
116.186.21.1	chrome / glossy	with mixer	5.5	19.3	16.7
116.186.SN.1	stainless steel look / brushed, easy-to-clean coated	with mixer	5.5	19.3	16.7

To order additionally

- Geberit element for washbasin or installation set for Geberit washbasin tap
- Cover plate for concealed function box

Can be combined with

- Geberit Duofix element for washbasin, 112 cm, electronic deck-mounted tap with concealed function box → p. 58
- Geberit Duofix element for washbasin, 112 cm, electronic deck-mounted tap with concealed function box, with concealed trap → p. 60
- Geberit GIS crossbar for electronic deck-mounted tap with concealed function box → p. 128
- Geberit installation set for Piave and Brenta washbasin taps, deck-mounted, with concealed function box → p. 355

Accessories


- Geberit tap aerator for Piave and Brenta washbasin taps → p. 353



Taps

Washbasin taps
Deck-mounted, generator operation

Geberit Brenta washbasin tap, deck-mounted, generator operation, with exposed function box

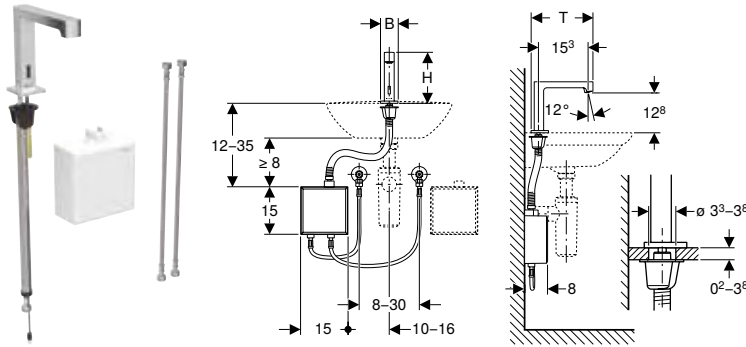

click & scan

Application purposes

- For installation in washbasins or washtops
- For connecting cold and hot water (only for model with mixer or thermostatic mixer)
- For connecting cold or mixed water (only for model without mixer)
- Suitable for use with stainless steel sinks
- For a flow rate of > 3 l/min
- Model without mixer suitable for combination with continuous flow heater, see technical data sheet "Washbasin taps with continuous flow heaters"

Technical data

Degree of protection	IPX4
Operating voltage	3.2 V DC
Operating pressure	2–10 bar
Differentiated pressure CW/WW max.	1.5 bar
Water test pressure max.	16 bar
Test pressure air / inert gas max.	3 bar
Ambient temperature	1–40 °C
Storage temperature	-20 – +70 °C
Water temperature short-term max.	90 °C
Flow rate at 300 kPa / 3 bar	5 l/min
Interval flush time, factory setting	5 s
Product material	Brass / plastic

Characteristics

- Tap group I in accordance with DIN 4109
- Infrared user detection
- Vandal-resistant
- Temperature presetting via mixer (only for models with mixer or thermostatic mixer)
- Not possible to set just hot water or just cold water (only for model with mixer or thermostatic mixer)
- Functions can be set and queried with the Geberit Service Handy
- Device settings and operation with mobile device via integrated Bluetooth® interface
- Compatible with Geberit Control App
- Wirelessly connectable with Geberit Gateway via Bluetooth®
- Compatible with Geberit Connect
- With integrated check valve
- When used at least 50 times per day on average for a duration of 4 s each, the washbasin tap works in a self-sustaining manner
- Functional unit with built-in basket filters


Scope of delivery

- Washbasin tap with IR sensor and connection hose
- Exposed function box with control electronics, functional unit and rechargeable battery for generator operation
- Reinforced braided hoses 3/8"
- Tap aerator key
- Fastening material

Art. no.	Colour / surface	Mixer	B	H	T
			[cm]	[cm]	[cm]
116.175.14.1	black matt / easy-to-clean coated	without mixer	5.5	16.1	19.5
116.175.21.1	chrome / glossy	without mixer	5.5	16.1	19.5
116.175.SN.1	stainless steel look / brushed, easy-to-clean coated	without mixer	5.5	16.1	19.5
116.176.14.1	black matt / easy-to-clean coated	with mixer	5.5	16.1	19.5
116.176.21.1	chrome / glossy	with mixer	5.5	16.1	19.5
116.176.SN.1	stainless steel look / brushed, easy-to-clean coated	with mixer	5.5	16.1	19.5

Accessories

- Geberit tap aerator for Piave and Brenta washbasin taps → p. 353

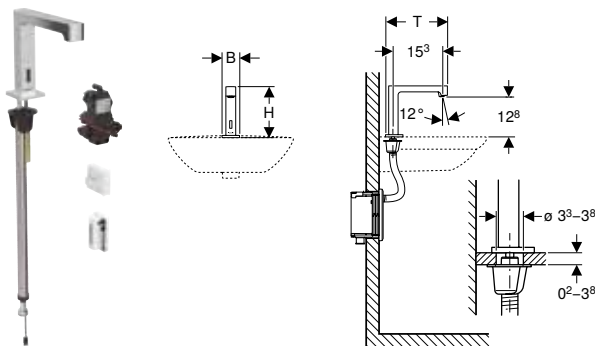Geberit Brenta washbasin tap, deck-mounted, generator operation, for concealed function box

click & scan

Application purposes

- For installation in washbasins or washtops
- For installation in Geberit installation elements for washbasins, deck-mounted tap with concealed function box
- For installation in Geberit installation sets for electronic washbasin taps, deck-mounted, with concealed function box
- For connecting cold and hot water (only for model with mixer or thermostatic mixer)
- For connecting cold or mixed water (only for model without mixer)
- Suitable for use with stainless steel sinks
- For a flow rate of > 3 l/min
- Model without mixer suitable for combination with continuous flow heater, see technical data sheet "Washbasin taps with continuous flow heaters"

Technical data

Degree of protection	IPX4
Operating voltage	3.2 V DC
Operating pressure	2–10 bar
Differentiated pressure CW/WW max.	1.5 bar
Water test pressure max.	16 bar
Test pressure air / inert gas max.	3 bar
Ambient temperature	1–40 °C
Storage temperature	-20 – +70 °C
Water temperature short-term max.	90 °C
Flow rate at 300 kPa / 3 bar	5 l/min
Interval flush time, factory setting	5 s
Product material	Brass / plastic

Characteristics

- Tap group I in accordance with DIN 4109
- Infrared user detection
- Vandal-resistant
- Temperature presetting via mixer (only for models with mixer or thermostatic mixer)
- Not possible to set just hot water or just cold water (only for model with mixer or thermostatic mixer)
- Functions can be set and queried with the Geberit Service Handy
- Device settings and operation with mobile device via integrated Bluetooth® interface
- Compatible with Geberit Control App
- Wirelessly connectable with Geberit Gateway via Bluetooth®
- Compatible with Geberit Connect
- With integrated check valve
- When used at least 50 times per day on average for a duration of 4 s each, the washbasin tap works in a self-sustaining manner
- Functional unit with built-in basket filters
- Components in contact with drinking water lead-free

Scope of delivery

- Washbasin tap with IR sensor and connection hose
- Control electronics
- Functional unit
- Rechargeable battery for generator operation
- Tap aerator key
- Fastening material

Art. no.	Colour / surface	Mixer	B	H	T
			[cm]	[cm]	[cm]
116.195.14.1	black matt / easy-to-clean coated	without mixer	5.5	16.1	19.5
116.195.21.1	chrome / glossy	without mixer	5.5	16.1	19.5
116.195.SN.1	stainless steel look / brushed, easy-to-clean coated	without mixer	5.5	16.1	19.5
116.196.14.1	black matt / easy-to-clean coated	with mixer	5.5	16.1	19.5
116.196.21.1	chrome / glossy	with mixer	5.5	16.1	19.5
116.196.SN.1	stainless steel look / brushed, easy-to-clean coated	with mixer	5.5	16.1	19.5

To order additionally

- Geberit element for washbasin or installation set for Geberit washbasin tap
- Cover plate for concealed function box

Can be combined with

- Geberit Duofix element for washbasin, 112 cm, electronic deck-mounted tap with concealed function box → p. 58
- Geberit Duofix element for washbasin, 112 cm, electronic deck-mounted tap with concealed function box, with concealed trap → p. 60
- Geberit GIS crossbar for electronic deck-mounted tap with concealed function box → p. 128
- Geberit installation set for Piave and Brenta washbasin taps, deck-mounted, with concealed function box → p. 355

Accessories


- Geberit tap aerator for Piave and Brenta washbasin taps → p. 353



Taps

Washbasin taps
Deck-mounted, generator operation

Geberit Type 185 washbasin tap, generator operation

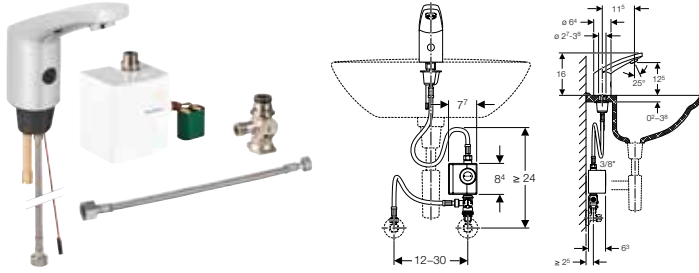

click & scan

Application purposes

- For installation in washbasins or washtops
- For connecting cold and hot water (only for model with mixer)
- For connecting cold or mixed water (only for model without mixer)
- Suitable for use with stainless steel sinks
- For a flow rate of > 3 l/min
- Model without mixer suitable for combination with continuous flow heater, see technical data sheet "Washbasin taps with continuous flow heaters"

Technical data

Battery type	Li-Ion (6.6 V)
Degree of protection	IP44
Operating voltage	6.6 V DC
Operating pressure	2–8 bar
Differentiated pressure CW/WW max.	1.5 bar
Water test pressure max.	16 bar
Test pressure air / inert gas max.	3 bar
Ambient temperature	1–40 °C
Water temperature short-term max.	90 °C
Flow rate at 300 kPa / 3 bar	6 l/min
Interval flush time, factory setting	3 s
Product material	Brass chrome-plated

Characteristics

- Tap group I in accordance with DIN 4109
- Infrared user detection
- Vandal-resistant
- Temperature presetting via below-desk mixer (only for models with mixer)
- Not possible to set just hot water or just cold water (only for model with mixer)
- Functions can be set and queried with the Geberit Service Handy
- Device settings and operation with mobile device via integrated Bluetooth® interface
- Compatible with Geberit Control App
- Wirelessly connectable with Geberit Gateway via Bluetooth®
- Compatible with Geberit Connect
- With integrated check valve
- When used at least 50 times per day on average for a duration of 4 s each, the washbasin tap works in a self-sustaining manner

Scope of delivery



- Generator unit
- Reinforced braided hose 3/8"
- Basket filter
- Adapter to angle stop valve G 3/8"
- Below-desk mixer (only for model with mixer)
- Tap aerator key
- Fastening material

Art. no.	Colour / surface	Mixer		H [cm]
		without mixer	with below-desk mixer	
116.335.21.1	chrome / glossy	without mixer		16
116.365.21.1	chrome / glossy	with below-desk mixer		16

Accessories

- Geberit tap aerator for Types 6x, 8x and 18x washbasin taps → p. 353

Geberit Type 186 washbasin tap, generator operation

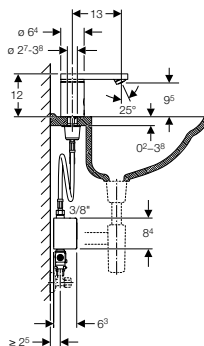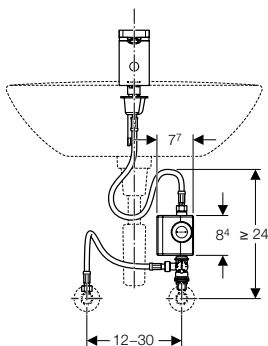

click & scan

Application purposes

- For installation in washbasins or washtops
- For connecting cold and hot water (only for model with mixer)
- For connecting cold or mixed water (only for model without mixer)
- Suitable for use with stainless steel sinks
- For a flow rate of > 3 l/min
- Model without mixer suitable for combination with continuous flow heater, see technical data sheet "Washbasin taps with continuous flow heaters"

Technical data

Battery type	Li-Ion (6.6 V)
Degree of protection	IP44
Operating voltage	6.6 V DC
Operating pressure	2–8 bar
Differentiated pressure CW/WW max.	1.5 bar
Water test pressure max.	16 bar
Test pressure air / inert gas max.	3 bar
Ambient temperature	1–40 °C
Water temperature short-term max.	90 °C
Flow rate at 300 kPa / 3 bar	6 l/min
Interval flush time, factory setting	3 s
Product material	Brass chrome-plated

Characteristics

- Tap group I in accordance with DIN 4109
- Infrared user detection
- Vandal-resistant
- Temperature presetting via below-desk mixer (only for models with mixer)
- Not possible to set just hot water or just cold water (only for model with mixer)
- Functions can be set and queried with the Geberit Service Handy
- Device settings and operation with mobile device via integrated Bluetooth® interface
- Compatible with Geberit Control App
- Wirelessly connectable with Geberit Gateway via Bluetooth®
- Compatible with Geberit Connect
- With integrated check valve
- When used at least 50 times per day on average for a duration of 4 s each, the washbasin tap works in a self-sustaining manner

Scope of delivery

- Generator unit
- Reinforced braided hose 3/8"
- Basket filter
- Adapter to angle stop valve G 3/8"
- Below-desk mixer (only for model with mixer)
- Tap aerator key
- Fastening material

Art. no.	Colour / surface	Mixer	H [cm]
116.336.21.1	chrome / glossy	without mixer	12
116.366.21.1	chrome / glossy	with below-desk mixer	12

Accessories

- Geberit tap aerator for Types 6x, 8x and 18x washbasin taps → p. 353




Taps

Washbasin taps
Wall-mounted, mains operation

Wall-mounted, mains operation

Geberit Piave washbasin tap, wall-mounted, mains operation, for concealed function box

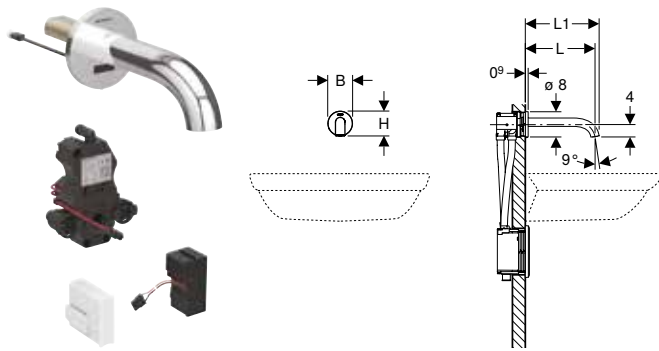

click & scan

Application purposes

- For installation in Geberit elements for washbasins, wall-mounted tap with concealed function box
- For connecting cold and hot water (only for model with mixer or thermostatic mixer)
- For connecting cold or mixed water (only for model without mixer)
- Suitable for use with stainless steel sinks
- Model without mixer suitable for combination with continuous flow heater, see technical data sheet "Washbasin taps with continuous flow heaters"
- For panelling thickness 10–50 mm

Technical data

Degree of protection	IPX4
Nominal voltage	110–240 V AC
Mains frequency	50–60 Hz
Operating voltage	4.5 V DC
Operating pressure	0.5–10 bar
Recommended operating pressure with thermostatic mixer	0.5–5 bar
Recommended operating pressure with thermostatic mixer	50–500 kPa
Differentiated pressure CW/WW max.	1.5 bar
Water test pressure max.	16 bar
Test pressure air / inert gas max.	3 bar
Ambient temperature	1–40 °C
Storage temperature	-20 – +70 °C
Water temperature, adjustment range with thermostatic mixer	20–42 °C
Water temperature short-term max.	90 °C
Flow rate at 300 kPa / 3 bar	5 l/min
Interval flush time, factory setting	5 s
Product material	Brass / plastic

Characteristics

- Tap group I in accordance with DIN 4109
- Infrared user detection
- Vandal-resistant
- Temperature presetting via mixer (only for models with mixer or thermostatic mixer)
- Not possible to set just hot water or just cold water (only for model with mixer or thermostatic mixer)
- Thermostat according to EN 1111 (only for model with thermostatic mixer)
- Scald protection by limiting the water temperature to 42 °C (only for models with thermostatic mixer)
- Thermal disinfection according to DVGW W 551 possible
- Functions can be set and queried with the Geberit Service Handy
- Device settings and operation with mobile device via integrated Bluetooth® interface
- Compatible with Geberit Control App
- Wired networkable with Geberit gateway via GEBUS converter
- Wirelessly connectable with Geberit Gateway via Bluetooth®
- Compatible with Geberit Connect
- With integrated check valve
- Functional unit with built-in basket filters
- Components in contact with drinking water lead-free

Scope of delivery

- Washbasin tap
- IR sensor with connection cable
- Control electronics
- Functional unit
- Power supply unit
- Tap aerator key
- Fastening material

Art. no.	Colour / surface	Mixer	L	L1	B	H	Power consumption [W]
			[cm]	[cm]	[cm]	[cm]	
116.261.14.1	black matt / easy-to-clean coated	without mixer	17	18.3	8	8	0.1
116.261.21.1	chrome / glossy	without mixer	17	18.3	8	8	0.1
116.261.SN.1	stainless steel look / brushed, easy-to-clean coated	without mixer	17	18.3	8	8	0.1
116.262.14.1	black matt / easy-to-clean coated	with mixer	17	18.3	8	8	0.1
116.262.21.1	chrome / glossy	with mixer	17	18.3	8	8	0.1
116.262.SN.1	stainless steel look / brushed, easy-to-clean coated	with mixer	17	18.3	8	8	0.1
116.267.14.1	black matt / easy-to-clean coated	with thermostatic mixer	17	18.3	8	8	0.1
116.267.21.1	chrome / glossy	with thermostatic mixer	17	18.3	8	8	0.1
116.267.SN.1	stainless steel look / brushed, easy-to-clean coated	with thermostatic mixer	17	18.3	8	8	0.1
116.281.14.1	black matt / easy-to-clean coated	without mixer	22	23.3	8	8	0.1
116.281.21.1	chrome / glossy	without mixer	22	23.3	8	8	0.1
116.281.SN.1	stainless steel look / brushed, easy-to-clean coated	without mixer	22	23.3	8	8	0.1
116.282.14.1	black matt / easy-to-clean coated	with mixer	22	23.3	8	8	0.1
116.282.21.1	chrome / glossy	with mixer	22	23.3	8	8	0.1
116.282.SN.1	stainless steel look / brushed, easy-to-clean coated	with mixer	22	23.3	8	8	0.1
116.287.14.1	black matt / easy-to-clean coated	with thermostatic mixer	22	23.3	8	8	0.1
116.287.21.1	chrome / glossy	with thermostatic mixer	22	23.3	8	8	0.1
116.287.SN.1	stainless steel look / brushed, easy-to-clean coated	with thermostatic mixer	22	23.3	8	8	0.1

To order additionally

- Geberit element for washbasin
- Cover plate for concealed function box

Can be combined with

- Geberit Duofix element for washbasin, 130 cm, electronic wall-mounted tap with concealed function box → p. 65
- Geberit Duofix element for washbasin, 130 cm, electronic wall-mounted tap with concealed function box, with concealed trap → p. 66
- Geberit GIS crossbar for electronic wall-mounted tap with concealed function box → p. 129
- Geberit Duofix element, 130 cm, for electronic wall-mounted tap with concealed function box, for ablution → p. 83

Accessories


- Geberit tap aerator for Piave and Brenta washbasin taps → p. 353
- Geberit extension set for Piave and Brenta washbasin taps, wall-mounted, with concealed function box → p. 355
- Geberit sealing set for Piave and Brenta washbasin taps, wall-mounted, with concealed function box → p. 356



Taps

Washbasin taps
Wall-mounted, mains operation

Geberit Brenta washbasin tap, wall-mounted, mains operation, for concealed function box

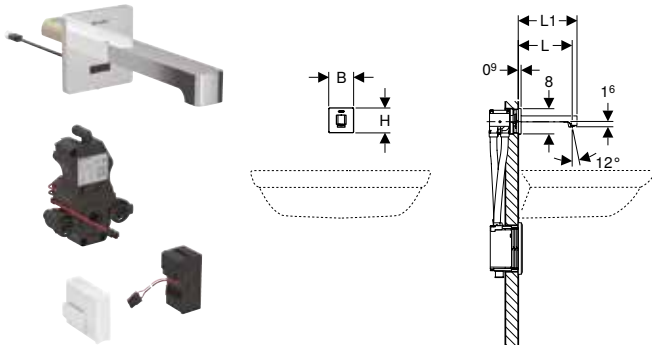

click & scan

Application purposes

- For installation in Geberit elements for washbasins, wall-mounted tap with concealed function box
- For connecting cold and hot water (only for model with mixer or thermostatic mixer)
- For connecting cold or mixed water (only for model without mixer)
- Suitable for use with stainless steel sinks
- Model without mixer suitable for combination with continuous flow heater, see technical data sheet "Washbasin taps with continuous flow heaters"
- For panelling thickness 10–50 mm

Technical data

Degree of protection	IPX4
Nominal voltage	110–240 V AC
Mains frequency	50–60 Hz
Operating voltage	4.5 V DC
Operating pressure	0.5–10 bar
Recommended operating pressure with thermostatic mixer	0.5–5 bar
Recommended operating pressure with thermostatic mixer	50–500 kPa
Differentiated pressure CW/WW max.	1.5 bar
Water test pressure max.	16 bar
Test pressure air / inert gas max.	3 bar
Ambient temperature	1–40 °C
Storage temperature	-20 – +70 °C
Water temperature, adjustment range with thermostatic mixer	20–42 °C
Water temperature short-term max.	90 °C
Flow rate at 300 kPa / 3 bar	5 l/min
Interval flush time, factory setting	5 s
Product material	Brass / plastic

Characteristics

- Tap group I in accordance with DIN 4109
- Infrared user detection
- Vandal-resistant
- Temperature presetting via mixer (only for models with mixer or thermostatic mixer)
- Not possible to set just hot water or just cold water (only for model with mixer or thermostatic mixer)
- Thermostat according to EN 1111 (only for model with thermostatic mixer)
- Scald protection by limiting the water temperature to 42 °C (only for models with thermostatic mixer)
- Thermal disinfection according to DVGW W 551 possible
- Functions can be set and queried with the Geberit Service Handy
- Device settings and operation with mobile device via integrated Bluetooth® interface
- Compatible with Geberit Control App
- Wired networkable with Geberit gateway via GEBUS converter
- Wirelessly connectable with Geberit Gateway via Bluetooth®
- Compatible with Geberit Connect
- With integrated check valve
- Functional unit with built-in basket filters
- Components in contact with drinking water lead-free

Scope of delivery

- Washbasin tap
- IR sensor with connection cable
- Control electronics
- Functional unit
- Power supply unit
- Tap aerator key
- Fastening material

Art. no.	Colour / surface	Mixer	L	L1	B	H	Power consumption [W]
			[cm]	[cm]	[cm]	[cm]	
116.271.14.1	black matt / easy-to-clean coated	without mixer	17	18.6	8	8	0.1
116.271.21.1	chrome / glossy	without mixer	17	18.6	8	8	0.1
116.271.SN.1	stainless steel look / brushed, easy-to-clean coated	without mixer	17	18.6	8	8	0.1
116.272.14.1	black matt / easy-to-clean coated	with mixer	17	18.6	8	8	0.1
116.272.21.1	chrome / glossy	with mixer	17	18.6	8	8	0.1
116.272.SN.1	stainless steel look / brushed, easy-to-clean coated	with mixer	17	18.6	8	8	0.1
116.277.14.1	black matt / easy-to-clean coated	with thermostatic mixer	17	18.6	8	8	0.1
116.277.21.1	chrome / glossy	with thermostatic mixer	17	18.6	8	8	0.1
116.277.SN.1	stainless steel look / brushed, easy-to-clean coated	with thermostatic mixer	17	18.6	8	8	0.1
116.291.14.1	black matt / easy-to-clean coated	without mixer	22	23.6	8	8	0.1
116.291.21.1	chrome / glossy	without mixer	22	23.6	8	8	0.1
116.291.SN.1	stainless steel look / brushed, easy-to-clean coated	without mixer	22	23.6	8	8	0.1
116.292.14.1	black matt / easy-to-clean coated	with mixer	22	23.6	8	8	0.1
116.292.21.1	chrome / glossy	with mixer	22	23.6	8	8	0.1
116.292.SN.1	stainless steel look / brushed, easy-to-clean coated	with mixer	22	23.6	8	8	0.1
116.297.14.1	black matt / easy-to-clean coated	with thermostatic mixer	22	23.6	8	8	0.1
116.297.21.1	chrome / glossy	with thermostatic mixer	22	23.6	8	8	0.1
116.297.SN.1	stainless steel look / brushed, easy-to-clean coated	with thermostatic mixer	22	23.6	8	8	0.1

To order additionally

- Geberit element for washbasin
- Cover plate for concealed function box

Can be combined with

- Geberit Duofix element for washbasin, 130 cm, electronic wall-mounted tap with concealed function box → p. 65
- Geberit Duofix element for washbasin, 130 cm, electronic wall-mounted tap with concealed function box, with concealed trap → p. 66
- Geberit GIS crossbar for electronic wall-mounted tap with concealed function box → p. 129
- Geberit Duofix element, 130 cm, for electronic wall-mounted tap with concealed function box, for ablution → p. 83

Accessories

- Geberit tap aerator for Piave and Brenta washbasin taps → p. 353
- Geberit extension set for Piave and Brenta washbasin taps, wall-mounted, with concealed function box → p. 355
- Geberit sealing set for Piave and Brenta washbasin taps, wall-mounted, with concealed function box → p. 356




Taps

Washbasin taps
Wall-mounted, battery operation

Wall-mounted, battery operation

Geberit Piave washbasin tap, wall-mounted, battery operation, for concealed function box

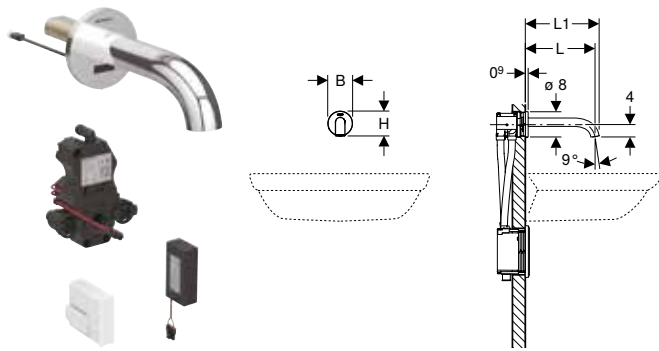

click & scan

Application purposes

- For installation in Geberit elements for washbasins, wall-mounted tap with concealed function box
- For connecting cold and hot water (only for model with mixer or thermostatic mixer)
- For connecting cold or mixed water (only for model without mixer)
- Suitable for use with stainless steel sinks
- Model without mixer suitable for combination with continuous flow heater, see technical data sheet "Washbasin taps with continuous flow heaters"
- For panelling thickness 10–50 mm

Technical data

Battery type	Alkaline (1.5 V AA)
Degree of protection	IPX4
Operating voltage	3 V DC
Operating pressure	0.5–10 bar
Recommended operating pressure with thermostatic mixer	0.5–5 bar
Recommended operating pressure with thermostatic mixer	50–500 kPa
Differentiated pressure CW/WW max.	1.5 bar
Water test pressure max.	16 bar
Test pressure air / inert gas max.	3 bar
Ambient temperature	1–40 °C
Storage temperature	-20 – +70 °C
Water temperature, adjustment range with thermostatic mixer	20–42 °C
Water temperature short-term max.	90 °C
Flow rate at 300 kPa / 3 bar	5 l/min
Interval flush time, factory setting	5 s
Product material	Brass / plastic

Characteristics

- Tap group I in accordance with DIN 4109
- Infrared user detection
- Vandal-resistant
- Temperature presetting via mixer (only for models with mixer or thermostatic mixer)
- Not possible to set just hot water or just cold water (only for model with mixer or thermostatic mixer)
- Thermostat according to EN 1111 (only for model with thermostatic mixer)
- Scald protection by limiting the water temperature to 42 °C (only for models with thermostatic mixer)
- Thermal disinfection according to DVGW W 551 possible
- Warning when the battery is low
- Functions can be set and queried with the Geberit Service Handy
- Device settings and operation with mobile device via integrated Bluetooth® interface
- Compatible with Geberit Control App
- Wired networkable with Geberit gateway via GEBUS converter
- Wirelessly connectable with Geberit Gateway via Bluetooth®
- Compatible with Geberit Connect
- With integrated check valve
- Functional unit with built-in basket filters
- Components in contact with drinking water lead-free

Scope of delivery

- Washbasin tap
- IR sensor with connection cable
- Control electronics
- Functional unit
- Battery compartment
- 2 alkaline manganese batteries type AA 1.5 V
- Tap aerator key
- Fastening material

Art. no.	Colour / surface	Mixer	L	L1	B	H
			[cm]	[cm]	[cm]	[cm]
116.263.14.1	black matt / easy-to-clean coated	without mixer	17	18.3	8	8
116.263.21.1	chrome / glossy	without mixer	17	18.3	8	8
116.263.SN.1	stainless steel look / brushed, easy-to-clean coated	without mixer	17	18.3	8	8
116.264.14.1	black matt / easy-to-clean coated	with mixer	17	18.3	8	8
116.264.21.1	chrome / glossy	with mixer	17	18.3	8	8
116.264.SN.1	stainless steel look / brushed, easy-to-clean coated	with mixer	17	18.3	8	8
116.268.14.1	black matt / easy-to-clean coated	with thermostatic mixer	17	18.3	8	8
116.268.21.1	chrome / glossy	with thermostatic mixer	17	18.3	8	8
116.268.SN.1	stainless steel look / brushed, easy-to-clean coated	with thermostatic mixer	17	18.3	8	8
116.283.14.1	black matt / easy-to-clean coated	without mixer	22	23.3	8	8
116.283.21.1	chrome / glossy	without mixer	22	23.3	8	8
116.283.SN.1	stainless steel look / brushed, easy-to-clean coated	without mixer	22	23.3	8	8
116.284.14.1	black matt / easy-to-clean coated	with mixer	22	23.3	8	8
116.284.21.1	chrome / glossy	with mixer	22	23.3	8	8
116.284.SN.1	stainless steel look / brushed, easy-to-clean coated	with mixer	22	23.3	8	8
116.288.14.1	black matt / easy-to-clean coated	with thermostatic mixer	22	23.3	8	8
116.288.21.1	chrome / glossy	with thermostatic mixer	22	23.3	8	8
116.288.SN.1	stainless steel look / brushed, easy-to-clean coated	with thermostatic mixer	22	23.3	8	8

To order additionally

- Geberit element for washbasin
- Cover plate for concealed function box

Can be combined with

- Geberit Duofix element for washbasin, 130 cm, electronic wall-mounted tap with concealed function box → p. 65
- Geberit Duofix element for washbasin, 130 cm, electronic wall-mounted tap with concealed function box, with concealed trap → p. 66
- Geberit GIS crossbar for electronic wall-mounted tap with concealed function box → p. 129
- Geberit Duofix element, 130 cm, for electronic wall-mounted tap with concealed function box, for ablution → p. 83

Accessories


- Geberit tap aerator for Piave and Brenta washbasin taps → p. 353
- Geberit extension set for Piave and Brenta washbasin taps, wall-mounted, with concealed function box → p. 355
- Geberit sealing set for Piave and Brenta washbasin taps, wall-mounted, with concealed function box → p. 356



Taps

Washbasin taps
Wall-mounted, battery operation

Geberit Brenta washbasin tap, wall-mounted, battery operation, for concealed function box

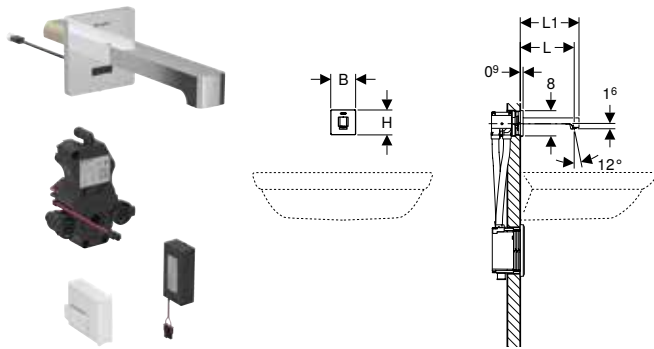

click & scan

Application purposes

- For installation in Geberit elements for washbasins, wall-mounted tap with concealed function box
- For connecting cold and hot water (only for model with mixer or thermostatic mixer)
- For connecting cold or mixed water (only for model without mixer)
- Suitable for use with stainless steel sinks
- Model without mixer suitable for combination with continuous flow heater, see technical data sheet "Washbasin taps with continuous flow heaters"
- For panelling thickness 10–50 mm

Technical data

Battery type	Alkaline (1.5 V AA)
Degree of protection	IPX4
Operating voltage	3 V DC
Operating pressure	0.5–10 bar
Recommended operating pressure with thermostatic mixer	0.5–5 bar
Recommended operating pressure with thermostatic mixer	50–500 kPa
Differentiated pressure CW/WW max.	1.5 bar
Water test pressure max.	16 bar
Test pressure air / inert gas max.	3 bar
Ambient temperature	1–40 °C
Storage temperature	–20 – +70 °C
Water temperature, adjustment range with thermostatic mixer	20–42 °C
Water temperature short-term max.	90 °C
Flow rate at 300 kPa / 3 bar	5 l/min
Interval flush time, factory setting	5 s
Product material	Brass / plastic

Characteristics

- Tap group I in accordance with DIN 4109
- Infrared user detection
- Vandal-resistant
- Temperature presetting via mixer (only for models with mixer or thermostatic mixer)
- Not possible to set just hot water or just cold water (only for model with mixer or thermostatic mixer)
- Thermostat according to EN 1111 (only for model with thermostatic mixer)
- Scald protection by limiting the water temperature to 42 °C (only for models with thermostatic mixer)
- Thermal disinfection according to DVGW W 551 possible
- Warning when the battery is low
- Functions can be set and queried with the Geberit Service Handy
- Device settings and operation with mobile device via integrated Bluetooth® interface
- Compatible with Geberit Control App
- Wired networkable with Geberit gateway via GEBUS converter
- Wirelessly connectable with Geberit Gateway via Bluetooth®
- Compatible with Geberit Connect
- With integrated check valve
- Functional unit with built-in basket filters
- Components in contact with drinking water lead-free

Scope of delivery

- Washbasin tap
- IR sensor with connection cable
- Control electronics
- Functional unit
- Battery compartment
- 2 alkaline manganese batteries type AA 1.5 V
- Tap aerator key
- Fastening material

Art. no.	Colour / surface	Mixer	L	L1	B	H
			[cm]	[cm]	[cm]	[cm]
116.273.14.1	black matt / easy-to-clean coated	without mixer	17	18.6	8	8
116.273.21.1	chrome / glossy	without mixer	17	18.6	8	8
116.273.SN.1	stainless steel look / brushed, easy-to-clean coated	without mixer	17	18.6	8	8
116.274.14.1	black matt / easy-to-clean coated	with mixer	17	18.6	8	8
116.274.21.1	chrome / glossy	with mixer	17	18.6	8	8
116.274.SN.1	stainless steel look / brushed, easy-to-clean coated	with mixer	17	18.6	8	8
116.278.14.1	black matt / easy-to-clean coated	with thermostatic mixer	17	18.6	8	8
116.278.21.1	chrome / glossy	with thermostatic mixer	17	18.6	8	8
116.278.SN.1	stainless steel look / brushed, easy-to-clean coated	with thermostatic mixer	17	18.6	8	8
116.293.14.1	black matt / easy-to-clean coated	without mixer	22	23.6	8	8
116.293.21.1	chrome / glossy	without mixer	22	23.6	8	8
116.293.SN.1	stainless steel look / brushed, easy-to-clean coated	without mixer	22	23.6	8	8
116.294.14.1	black matt / easy-to-clean coated	with mixer	22	23.6	8	8
116.294.21.1	chrome / glossy	with mixer	22	23.6	8	8
116.294.SN.1	stainless steel look / brushed, easy-to-clean coated	with mixer	22	23.6	8	8
116.298.14.1	black matt / easy-to-clean coated	with thermostatic mixer	22	23.6	8	8
116.298.21.1	chrome / glossy	with thermostatic mixer	22	23.6	8	8
116.298.SN.1	stainless steel look / brushed, easy-to-clean coated	with thermostatic mixer	22	23.6	8	8

To order additionally

- Geberit element for washbasin
- Cover plate for concealed function box

Can be combined with

- Geberit Duofix element for washbasin, 130 cm, electronic wall-mounted tap with concealed function box → p. 65
- Geberit Duofix element for washbasin, 130 cm, electronic wall-mounted tap with concealed function box, with concealed trap → p. 66
- Geberit GIS crossbar for electronic wall-mounted tap with concealed function box → p. 129
- Geberit Duofix element, 130 cm, for electronic wall-mounted tap with concealed function box, for ablution → p. 83

Accessories

- Geberit tap aerator for Piave and Brenta washbasin taps → p. 353
- Geberit extension set for Piave and Brenta washbasin taps, wall-mounted, with concealed function box → p. 355
- Geberit sealing set for Piave and Brenta washbasin taps, wall-mounted, with concealed function box → p. 356




Taps

Washbasin taps
Wall-mounted, generator operation

Wall-mounted, generator operation

Geberit Piave washbasin tap, wall-mounted, generator operation, for concealed function box

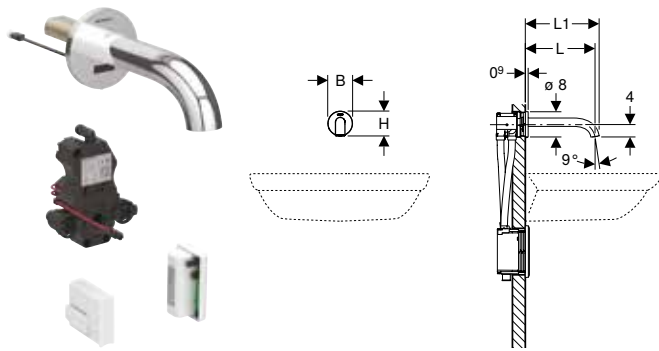

click & scan

Application purposes

- For installation in Geberit elements for washbasins, wall-mounted tap with concealed function box
- For connecting cold and hot water (only for model with mixer or thermostatic mixer)
- For connecting cold or mixed water (only for model without mixer)
- Suitable for use with stainless steel sinks
- For a flow rate of > 3 l/min
- Model without mixer suitable for combination with continuous flow heater, see technical data sheet "Washbasin taps with continuous flow heaters"
- For panelling thickness 10–50 mm

Technical data

Degree of protection	IPX4
Operating voltage	3.2 V DC
Operating pressure	2–10 bar
Differentiated pressure CW/WW max.	1.5 bar
Water test pressure max.	16 bar
Test pressure air / inert gas max.	3 bar
Ambient temperature	1–40 °C
Storage temperature	-20 – +70 °C
Water temperature short-term max.	90 °C
Flow rate at 300 kPa / 3 bar	5 l/min
Interval flush time, factory setting	5 s
Product material	Brass / plastic

Characteristics

- Tap group I in accordance with DIN 4109
- Infrared user detection
- Vandal-resistant
- Temperature presetting via mixer (only for models with mixer or thermostatic mixer)
- Not possible to set just hot water or just cold water (only for model with mixer or thermostatic mixer)
- Functions can be set and queried with the Geberit Service Handy
- Device settings and operation with mobile device via integrated Bluetooth® interface
- Compatible with Geberit Control App
- Wirelessly connectable with Geberit Gateway via Bluetooth®
- Compatible with Geberit Connect
- With integrated check valve
- When used at least 50 times per day on average for a duration of 4 s each, the washbasin tap works in a self-sustaining manner
- Functional unit with built-in basket filters
- Components in contact with drinking water lead-free

Scope of delivery

- Washbasin tap
- IR sensor with connection cable
- Control electronics
- Functional unit
- Rechargeable battery for generator operation
- Tap aerator key
- Fastening material

Art. no.	Colour / surface	Mixer	L	L1	B	H
			[cm]	[cm]	[cm]	[cm]
116.265.14.1	black matt / easy-to-clean coated	without mixer	17	18.3	8	8
116.265.21.1	chrome / glossy	without mixer	17	18.3	8	8
116.265.SN.1	stainless steel look / brushed, easy-to-clean coated	without mixer	17	18.3	8	8
116.266.14.1	black matt / easy-to-clean coated	with mixer	17	18.3	8	8
116.266.21.1	chrome / glossy	with mixer	17	18.3	8	8
116.266.SN.1	stainless steel look / brushed, easy-to-clean coated	with mixer	17	18.3	8	8
116.285.14.1	black matt / easy-to-clean coated	without mixer	22	23.3	8	8
116.285.21.1	chrome / glossy	without mixer	22	23.3	8	8
116.285.SN.1	stainless steel look / brushed, easy-to-clean coated	without mixer	22	23.3	8	8
116.286.14.1	black matt / easy-to-clean coated	with mixer	22	23.3	8	8
116.286.21.1	chrome / glossy	with mixer	22	23.3	8	8
116.286.SN.1	stainless steel look / brushed, easy-to-clean coated	with mixer	22	23.3	8	8

To order additionally

- Geberit element for washbasin
- Cover plate for concealed function box


Can be combined with

- Geberit Duofix element for washbasin, 130 cm, electronic wall-mounted tap with concealed function box → p. 65
- Geberit Duofix element for washbasin, 130 cm, electronic wall-mounted tap with concealed function box, with concealed trap → p. 66
- Geberit GIS crossbar for electronic wall-mounted tap with concealed function box → p. 129
- Geberit Duofix element, 130 cm, for electronic wall-mounted tap with concealed function box, for ablution → p. 83

Accessories

- Geberit tap aerator for Piave and Brenta washbasin taps → p. 353
- Geberit extension set for Piave and Brenta washbasin taps, wall-mounted, with concealed function box → p. 355
- Geberit sealing set for Piave and Brenta washbasin taps, wall-mounted, with concealed function box → p. 356

Geberit Brenta washbasin tap, wall-mounted, generator operation, for concealed function box

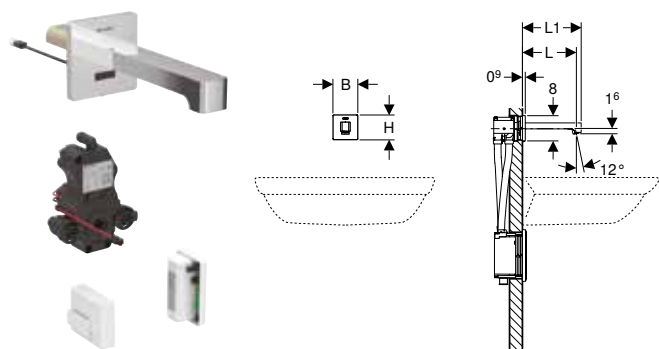

click & scan

Application purposes

- For installation in Geberit elements for washbasins, wall-mounted tap with concealed function box
- For connecting cold and hot water (only for model with mixer or thermostatic mixer)
- For connecting cold or mixed water (only for model without mixer)
- Suitable for use with stainless steel sinks
- For a flow rate of > 3 l/min
- Model without mixer suitable for combination with continuous flow heater, see technical data sheet "Washbasin taps with continuous flow heaters"
- For panelling thickness 10–50 mm

Technical data

Degree of protection	IPX4
Operating voltage	3.2 V DC
Operating pressure	2–10 bar
Differentiated pressure CW/WW max.	1.5 bar
Water test pressure max.	16 bar
Test pressure air / inert gas max.	3 bar
Ambient temperature	1–40 °C
Storage temperature	-20 – +70 °C
Water temperature short-term max.	90 °C
Flow rate at 300 kPa / 3 bar	5 l/min
Interval flush time, factory setting	5 s
Product material	Brass / plastic

Characteristics

- Tap group I in accordance with DIN 4109
- Infrared user detection
- Vandal-resistant
- Temperature presetting via mixer (only for models with mixer or thermostatic mixer)
- Not possible to set just hot water or just cold water (only for model with mixer or thermostatic mixer)
- Functions can be set and queried with the Geberit Service Handy
- Device settings and operation with mobile device via integrated Bluetooth® interface
- Compatible with Geberit Control App
- Wirelessly connectable with Geberit Gateway via Bluetooth®
- Compatible with Geberit Connect
- With integrated check valve
- When used at least 50 times per day on average for a duration of 4 s each, the washbasin tap works in a self-sustaining manner
- Functional unit with built-in basket filters
- Components in contact with drinking water lead-free

Scope of delivery

- Washbasin tap
- IR sensor with connection cable
- Control electronics
- Functional unit
- Rechargeable battery for generator operation
- Tap aerator key
- Fastening material

Art. no.	Colour / surface	Mixer	L	L1	B	H
			[cm]	[cm]	[cm]	[cm]
116.275.14.1	black matt / easy-to-clean coated	without mixer	17	18.6	8	8
116.275.21.1	chrome / glossy	without mixer	17	18.6	8	8
116.275.SN.1	stainless steel look / brushed, easy-to-clean coated	without mixer	17	18.6	8	8
116.276.14.1	black matt / easy-to-clean coated	with mixer	17	18.6	8	8
116.276.21.1	chrome / glossy	with mixer	17	18.6	8	8
116.276.SN.1	stainless steel look / brushed, easy-to-clean coated	with mixer	17	18.6	8	8
116.295.14.1	black matt / easy-to-clean coated	without mixer	22	23.6	8	8
116.295.21.1	chrome / glossy	without mixer	22	23.6	8	8
116.295.SN.1	stainless steel look / brushed, easy-to-clean coated	without mixer	22	23.6	8	8
116.296.14.1	black matt / easy-to-clean coated	with mixer	22	23.6	8	8
116.296.21.1	chrome / glossy	with mixer	22	23.6	8	8
116.296.SN.1	stainless steel look / brushed, easy-to-clean coated	with mixer	22	23.6	8	8

To order additionally

- Geberit element for washbasin
- Cover plate for concealed function box

Can be combined with

- Geberit Duofix element for washbasin, 130 cm, electronic wall-mounted tap with concealed function box → p. 65
- Geberit Duofix element for washbasin, 130 cm, electronic wall-mounted tap with concealed function box, with concealed trap → p. 66
- Geberit GIS crossbar for electronic wall-mounted tap with concealed function box → p. 129
- Geberit Duofix element, 130 cm, for electronic wall-mounted tap with concealed function box, for ablution → p. 83

Accessories


- Geberit tap aerator for Piave and Brenta washbasin taps → p. 353
- Geberit extension set for Piave and Brenta washbasin taps, wall-mounted, with concealed function box → p. 355
- Geberit sealing set for Piave and Brenta washbasin taps, wall-mounted, with concealed function box → p. 356

Taps

Washbasin taps
Wall-mounted, two-handle mixer

Wall-mounted, two-handle mixer

Geberit ONE washbasin tap, round design, wall-mounted, two-handle mixer, for concealed function box

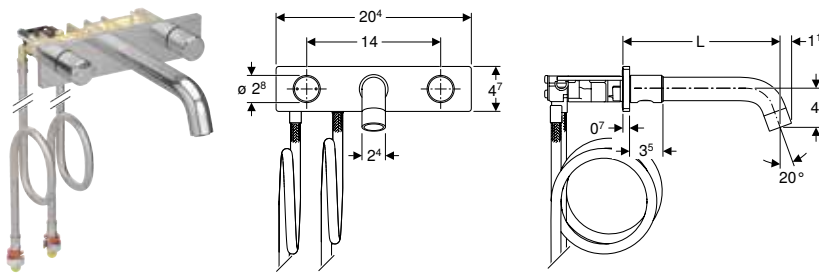

click & scan

Application purposes

- For installation in Geberit elements for Geberit ONE wall-mounted taps with concealed function box
- For connecting cold and hot water
- For panelling thickness 10–60 mm

Technical data

Operating pressure	0.5–10 bar
Differentiated pressure CW/WW max.	1.5 bar
Water test pressure max.	16 bar
Test pressure air / inert gas max.	3 bar
Ambient temperature	1–40 °C
Storage temperature	-20 – +70 °C
Water temperature short-term max.	90 °C
Flow rate at 300 kPa / 3 bar	5 l/min
Product material	Brass / die-cast zinc

Characteristics

- Tap group I in accordance with DIN 4109
- Two-handle mixer
- Left turn handle for temperature setting, right turn handle for volumetric flow rate regulation
- With integrated check valve
- With connection hoses, length 105.5 cm

Scope of delivery


- Washbasin tap
- Valve block with connection hoses
- Fastening material

Art. no.	Colour / surface	Mixer	L [cm]	B [cm]	H [cm]
116.464.14.1	black matt / easy-to-clean coated	with mixer	20.5	20.4	4.7
116.464.21.1	chrome / glossy	with mixer	20.5	20.4	4.7

Can be combined with

- Geberit Duofix element for washbasin, 112–130 cm, Geberit ONE wall-mounted tap with concealed function box → p. 67

Geberit ONE washbasin tap, square design, wall-mounted, two-handle mixer, for concealed function box

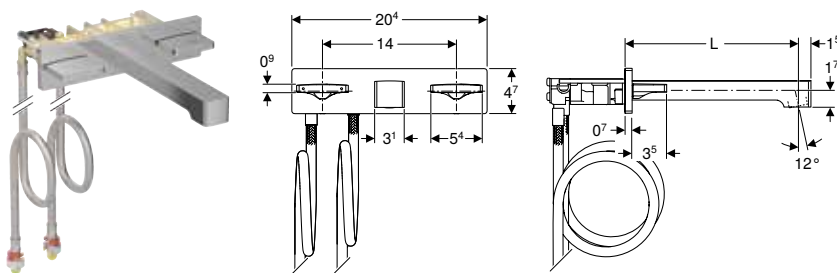

click & scan

Application purposes

- For installation in Geberit elements for Geberit ONE wall-mounted taps with concealed function box
- For connecting cold and hot water
- For panelling thickness 10–60 mm

Technical data

Operating pressure	0.5–10 bar
Differentiated pressure CW/WW max.	1.5 bar
Water test pressure max.	16 bar
Test pressure air / inert gas max.	3 bar
Ambient temperature	1–40 °C
Storage temperature	-20 – +70 °C
Water temperature short-term max.	90 °C
Flow rate at 300 kPa / 3 bar	5 l/min
Product material	Brass / die-cast zinc

Characteristics

- Tap group I in accordance with DIN 4109
- Two-handle mixer
- Left turn handle for temperature setting, right turn handle for volumetric flow rate regulation
- With integrated check valve
- With connection hoses, length 105.5 cm

Scope of delivery

- Washbasin tap
- Valve block with connection hoses
- Fastening material

Art. no.	Colour / surface	Mixer	L [cm]	B [cm]	H [cm]
116.465.14.1	black matt / easy-to-clean coated	with mixer	22	20.4	4.7
116.465.21.1	chrome / glossy	with mixer	22	20.4	4.7

Can be combined with

- Geberit Duofix element for washbasin, 112–130 cm, Geberit ONE wall-mounted tap with concealed function box → p. 67

Accessories

For washbasin taps

Geberit extension cable for power supply unit, for Types 8x and 18x washbasin taps



click & scan

Application purposes

- For use with installation sets

Technical data

Nominal voltage	12 V AC
Mains frequency	50–60 Hz
Cable length	2.8 m
Product material	PVC

Art. no.	d1, Ø [mm]	Plug type
242.349.00.1	3	SK-2

Geberit tap aerator for Types 6x, 8x and 18x washbasin taps



click & scan

Scope of delivery

- Installation wrench

Art. no.	Flow rate [l/min]	Model
243.626.21.1	1.3	rigid
242.645.21.1	1.9	rigid
242.834.21.1	3.8	rigid
242.307.21.1	6	swivelling

Geberit tap aerator for Piave and Brenta washbasin taps




click & scan

Scope of delivery

- Installation wrench

Art. no.	Flow rate [l/min]	Model
243.638.00.1	1.3	rigid
243.637.00.1	1.9	rigid
243.636.00.1	3.8	rigid
243.625.00.1	5	rigid
243.635.00.1	5	swivelling

Geberit cover plate for concealed function box

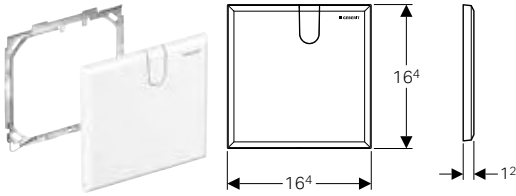

click & scan

Application purposes

- For covering the service opening of Geberit washbasin taps with concealed function box
- For covering the service opening of Geberit installation boxes for Gateway

Scope of delivery


- Cover plate
- Mounting frame
- Fastening material

Technical data

Product material	Plastic
------------------	---------

Art. no.	Colour / surface	L [cm]	B [cm]	T [cm]
116.425.11.1	white alpine	16.4	16.4	1.2

Geberit cover plate for concealed function box and concealed trap

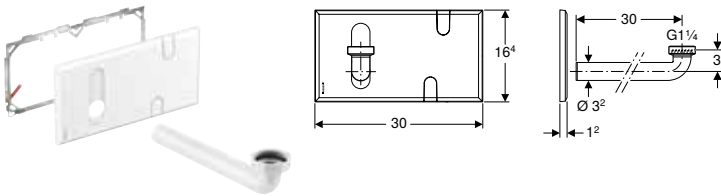

click & scan

Application purposes

- For covering the service opening of Geberit washbasin taps with concealed function box and concealed trap
- Exclusively suitable for use with Geberit Duofix

Scope of delivery


- Cover plate
- Mounting frame
- Connection bend, \varnothing 32 mm
- Flat gasket
- Fastening material

Technical data

Product material	Plastic
------------------	---------

Art. no.	Colour / surface	L [cm]	B [cm]	T [cm]
116.426.11.1	white alpine	30	16.4	1.2

Geberit cover plate, surface-even, for concealed function box

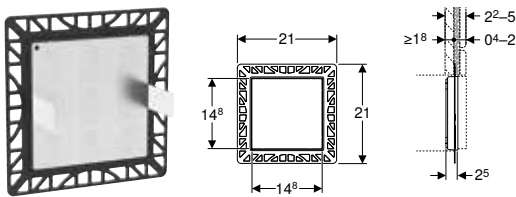

click & scan

Application purposes

- For covering the service opening of Geberit washbasin taps with concealed function box
- For covering the service opening of Geberit installation boxes for Gateway
- For individual bathroom design
- For extensive surface coverings
- For covering thicknesses \geq 18 mm
- Suitable for tile structures of 4–20 mm

Characteristics

- Surface is provided and completed by customer
- Surface-even installation
- Cover plate not suitable for applying plaster
- Not compatible with concealed trap, in Geberit Duofix installation elements

Scope of delivery


- Mounting frame
- Support plate
- Fastening material

Technical data

Product material	Steel / plastic
------------------	-----------------

Art. no.	L [cm]	B [cm]	T [cm]
116.421.00.1	14.8	14.8	2.5

Geberit installation set for Piave and Brenta washbasin taps, deck-mounted, with concealed function box

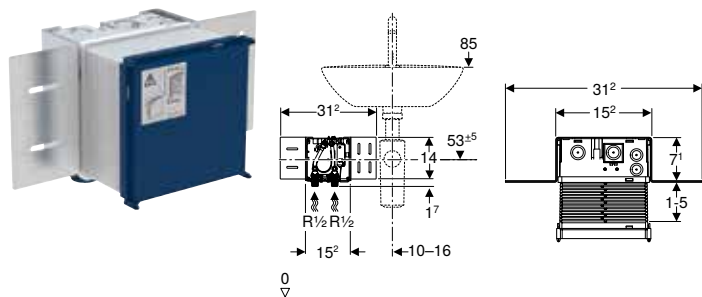

click & scan

Application purposes

- For Piave and Brenta washbasin taps, deck-mounted, with concealed function box

Scope of delivery

- Protection box with cover, for concealed housing

Characteristics

- Water supply connection compatible with MasterFix and MeplaFix
- Water supply connection on the bottom of concealed housing
- Shut-off unit integrated in the concealed housing
- Components in contact with drinking water lead-free

Art. no.

116.130.00.1


Can be combined with

- Geberit Piave washbasin tap, deck-mounted, mains operation, for concealed function box → p. 323
- Geberit Brenta washbasin tap, deck-mounted, mains operation, for concealed function box → p. 325
- Geberit Piave washbasin tap, deck-mounted, battery operation, for concealed function box → p. 330
- Geberit Brenta washbasin tap, deck-mounted, battery operation, for concealed function box → p. 332
- Geberit Piave washbasin tap, deck-mounted, generator operation, for concealed function box → p. 337
- Geberit Brenta washbasin tap, deck-mounted, generator operation, for concealed function box → p. 339

Accessories

- Geberit cover plate for concealed function box → p. 354
- Geberit cover plate, surface-even, for concealed function box → p. 354

Geberit extension set for Piave and Brenta washbasin taps, wall-mounted, with concealed function box

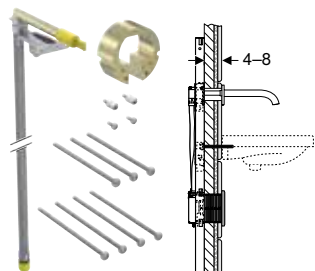

click & scan

Application purposes

- For Piave and Brenta washbasin taps, wall-mounted, with concealed function box
- For use with panelling thickness of 4–8 cm (extension by 3 cm)

Scope of delivery

- Connection hose
- Extension piece
- Fastening material

Art. no.

244.622.00.1

Geberit sealing set for Piave and Brenta washbasin taps, wall-mounted, with concealed function box



click & scan

Application purposes

- For sealing the wall fixing of Piave and Brenta washbasin taps, wall mounting, with concealed function box
- For sealing against splash water

Characteristics

- Protection degree IPx5 possible


Scope of delivery

- Seal
- Fastening material

Art. no.

116.422.00.1

Geberit installation set with concealed power supply unit, for Types 8x and 18x washbasin taps

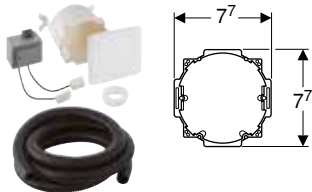

click & scan

Application purposes

- For concealed installation
- For power supply of washbasin taps Types 85–88, 185 and 186

Technical data

Degree of protection	IP20
Nominal voltage	230 V AC
Mains frequency	50–60 Hz
Output voltage	12 V AC

Characteristics

- Power supply for max. eight taps

Scope of delivery

- Cover for flush-mounting box
- Flush-mounting box for drilling hole \varnothing 76 mm
- Hardwired transformer
- Conduit pipe, length 2.5 m

Art. no.

241.631.00.1

Accessories

- Geberit extension cable for power supply unit, for Types 8x and 18x washbasin taps → p. 353

Geberit conversion set for electrical generator, for washbasin taps



click & scan

Application purposes

- For a flow rate of > 3 l/min
- For converting Types 185 and 186 washbasin taps to power supply from generator
- For connecting to Types 185 and 186 washbasin taps with cold or mixed water operation

Scope of delivery

- Generator unit
- Power adapter, resource-saving
- Adapter to angle stop valve G 3/8"
- Reinforced braided hose 3/8"
- Basket filter

Characteristics

- When used at least 50 times per day on average for a duration of 4 s each, the washbasin tap works in a self-sustaining manner

Art. no.

116.450.00.1





Waste fittings and traps for washplaces and kitchen sinks


Drain assemblies for washbasins	360
P-traps	360
P-traps, space-saving models	361
Dip tube traps for washbasins	361
Bottle traps with dip tube, for washbasins, space-saving model	365
Concealed traps	369
Washbasin connectors	370
Covers	371
Connections	372
Seals	374
Extensions	374
Drain assemblies for kitchen sinks.....	375
P-traps	375
Accessories	379
Drain assemblies for devices	379
P-traps	379
Concealed traps	380
Surface-mounted traps	381
Connections	381
Drain assemblies for sinks.....	383
Traps	383
Straight connector	384
Waste outlets	385
Accessories	386



Drain assemblies for washbasins

P-traps

Geberit P-trap for washbasin, horizontal outlet

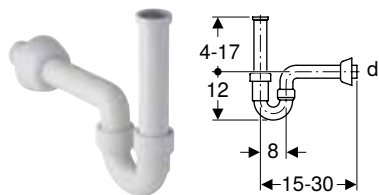

click & scan

Application purposes

- For washbasins
- For bidets

Technical data

Depth of water seal (mm)	70 mm
Product material	PP

Characteristics


- Quality-monitored in accordance with EN 274-3
- Horizontal outlet

Scope of delivery

- Straight connector with female thread
- Connection bend
- Wall collar

Art. no.	Colour / surface	d, ø [mm]	G ["]	h [cm]
151.100.11.1	white alpine	40	1 1/4	4-17

Geberit P-trap for washbasin, lockable, with backflow prevention, horizontal outlet

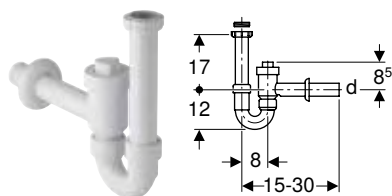

click & scan

Application purposes

- For washbasins
- Not suitable for use as backpressure seal in accordance with EN 13564

Technical data

Depth of water seal (mm)	70 mm
Product material	PP

Characteristics


- Quality-monitored in accordance with EN 274-3
- Connection with built-in check valve
- Lockable
- Resistant to negative pressure up to -870 Pa
- Resistant to overpressure up to 1500 Pa
- Horizontal outlet

Scope of delivery

- Reduction ring made of PP, G 1 1/2" x G 1 1/4"
- Inlet connection piece with union nut
- Wall collar
- Stop valve

Art. no.	Colour / surface	d, ø [mm]	G ["]	G1 ["]	h [cm]
152.860.11.1	white alpine	40	1 1/2	1 1/4	17
152.861.11.1	white alpine	50	1 1/2	1 1/4	17

Geberit P-trap for washbasin, with sleeve, horizontal outlet

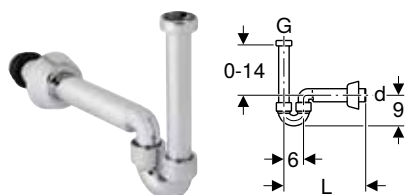

click & scan

Application purposes

- For washbasins
- For connecting to bidets

Characteristics

- Quality-monitored in accordance with EN 274-3
- Chrome-plated
- Horizontal outlet

Technical data

Product material	ABS
------------------	-----


Scope of delivery

- Seals
- Connection bend
- Connection bend with union nut
- Wall collar

Art. no.	Colour / surface	d, Ø [mm]	G ["]	h [cm]
151.105.21.1	chrome / Glossy	40	1 1/4	0-14

P-traps, space-saving models

Geberit P-trap for washbasin, space-saving model, horizontal outlet

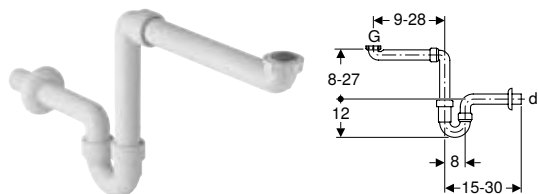

Application purposes

- For space-saving connection of washbasins in bathroom furniture

Technical data

Depth of water seal (mm)	70 mm
Product material	PP

Characteristics

- Quality-monitored in accordance with EN 274-3
- Space-saving model
- Horizontal outlet


Scope of delivery

- Seal
- Connection bend
- Connection bend with union nut
- Wall collar

Art. no.	Colour / surface	d, Ø [mm]	G ["]	G1 ["]	h [cm]
151.107.11.1	white alpine	40	1 1/2	1 1/4	8-27

Dip tube traps for washbasins

Washbasin drain with siphon, valve cover and sleeve, horizontal outlet, for Geberit ONE washbasin, vertical outlet

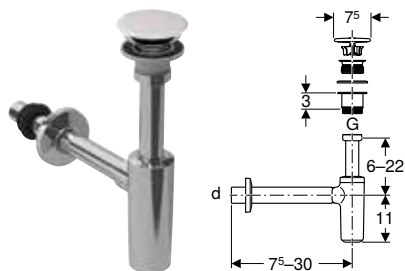

Application purposes

- For washbasins
- For connecting washbasins with drilling hole Ø 46 mm
- For washbasins with material thickness 15-20 mm near the waste outlet

Technical data

Depth of water seal (mm)	75 mm
--------------------------	-------

Characteristics

- Quality-monitored in accordance with EN 274-3
- Corrosion-resistant
- Horizontal outlet

Scope of delivery

- Waste outlet
- Seal
- Sleeve made of EPDM
- Valve cover made of sanitary ceramic
- Wall collar

Art. no.	Colour / surface	d, Ø [mm]	AB [mm]	L [cm]	h [cm]
151.019.01.1	white / Bright chrome-plated	32	15-20	7.5-30	6-22




- For washbasins with material thickness of 8-15 mm in the waste outlet area, the flat gasket art. no. 245.413.00.1 must also be used

Waste fittings and traps for washplaces and kitchen sinks

Drain assemblies for washbasins

Dip tube traps for washbasins

Geberit washbasin drain with trap, external waste plug with push actuation, horizontal outlet

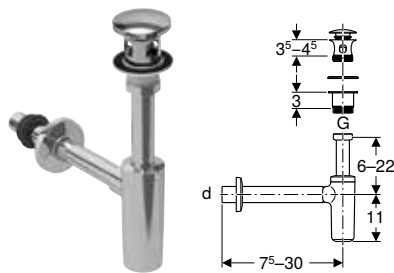

click & scan

Application purposes

- For washbasins with material thickness 40–45 mm near the waste outlet
- For connecting washbasins with drilling hole \varnothing 46 mm

Technical data

Depth of water seal (mm)	75 mm
--------------------------	-------

Characteristics


- Actuation using external waste plug with push actuation
- Quality-monitored in accordance with EN 274-3
- Corrosion-resistant
- Horizontal outlet

Scope of delivery

- Waste outlet
- Seal
- Sleeve made of EPDM
- External waste plug
- Wall collar

Art. no.	Colour / surface	d, \varnothing [mm]	AB [mm]	L [cm]	h [cm]
151.021.21.1	chrome / Glossy	32	35–45	7.5–30	6–22

Geberit washbasin drain with trap, valve cover and sleeve, horizontal outlet

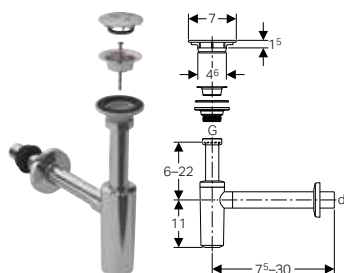

click & scan

Application purposes

- For washbasins
- For connecting washbasins with drilling hole \varnothing 46 mm

Technical data

Depth of water seal (mm)	75 mm
--------------------------	-------

Characteristics


- Quality-monitored in accordance with EN 274-3
- Corrosion-resistant
- Horizontal outlet

Scope of delivery

- Sleeve made of EPDM
- Wall collar
- Valve cover
- Waste outlet
- Seal
- Bolt

Art. no.	Colour / surface	d, \varnothing [mm]	L [cm]	h [cm]
151.020.21.1	chrome / Glossy	32	7.5–30	6–22

Geberit dip tube trap for washbasin, horizontal outlet

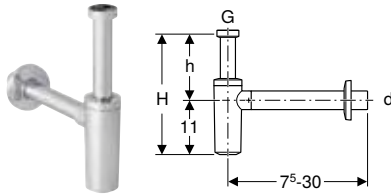

click & scan

Application purposes

- For washbasins

Technical data

Depth of water seal (mm)	75 mm
Product material	ABS

Characteristics

- Quality-monitored in accordance with EN 274-3
- Corrosion-resistant
- Horizontal outlet

Scope of delivery


- Wall collar

Art. no.	Colour / surface	d, ø [mm]	G ["]	H [cm]	h [cm]
151.034.14.1	black matt	32	1 1/4	17-33	6-22
151.034.21.1	chrome / Glossy	32	1 1/4	17-33	6-22
151.035.14.1	black matt	40	1 1/4	17-33	6-22
151.035.21.1	chrome / Glossy	40	1 1/4	17-33	6-22

Accessories

- Geberit extension for dip tube trap → p. 374

Geberit dip tube trap for washbasin, horizontal outlet, push-on seal, wall collar

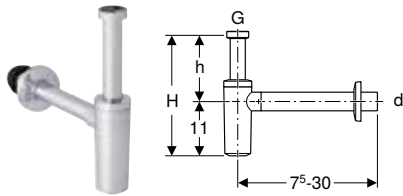

click & scan

Application purposes

- For washbasins

Technical data

Depth of water seal (mm)	75 mm
Product material	ABS

Characteristics

- Quality-monitored in accordance with EN 274-3
- Corrosion-resistant
- Horizontal outlet

Scope of delivery

- Wall collar
- Sleeve made of EPDM

Art. no.	Colour / surface	d, ø [mm]	G ["]	H [cm]	h [cm]
151.024.14.1	black matt	32	1 1/4	17-33	6-22
151.025.14.1	black matt	40	1 1/4	17-33	6-22

Accessories

- Geberit extension for dip tube trap → p. 374




Waste fittings and traps for washplaces and kitchen sinks

Drain assemblies for washbasins

Dip tube traps for washbasins

Geberit dip tube trap for washbasin, connector BSP, horizontal outlet

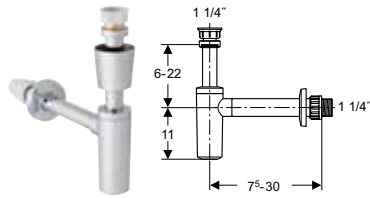

click & scan

Application purposes

- For washbasins

Technical data

Depth of water seal (mm)	75 mm
Product material	ABS

Characteristics


- Quality-monitored in accordance with EN 274-3
- Corrosion-resistant
- Horizontal outlet

Scope of delivery

- Valve collar
- Wall collar
- Threaded connector

Art. no.	Colour / surface	d, ø [mm]	G ["]	h [cm]
151.039.21.1	chrome / Glossy	32	1 1/4	6-22

Geberit dip tube trap for washbasin, with valve collar, horizontal outlet

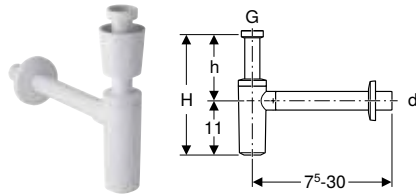

click & scan

Application purposes

- For washbasins

Technical data

Depth of water seal (mm)	75 mm
Product material	PP

Characteristics

- Quality-monitored in accordance with EN 274-3
- Corrosion-resistant
- Horizontal outlet


Scope of delivery

- Valve collar
- Wall collar

Art. no.	Colour / surface	d, ø [mm]	G ["]	H [cm]	h [cm]
151.034.11.1	white alpine	32	1 1/4	17-33	6-22
151.035.11.1	white alpine	40	1 1/4	17-33	6-22

Bottle traps with dip tube, for washbasins, space-saving model

Geberit dip tube trap for washbasin, space-saving model, horizontal outlet

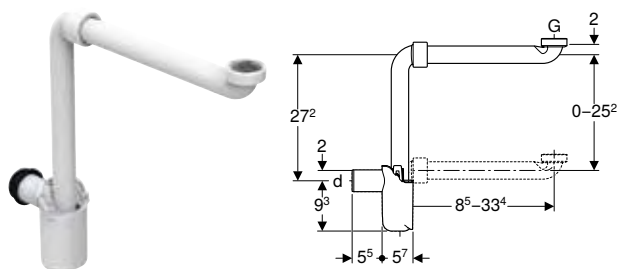

click & scan

Application purposes

- For space-saving connection of washbasins in bathroom furniture

Technical data

Depth of water seal (mm)	50 mm
Product material	PP

Characteristics


- Quality-monitored in accordance with EN 274-3
- Space-saving model
- For cleaning accessible
- Horizontal outlet

Scope of delivery

- Connection bend with union nut
- Seals

Art. no.	Colour / surface	d, ø [mm]	Discharge rate [l/s]	G ["]	h [cm]
151.116.11.1	white alpine	32	0.68	1 1/4	8.5-33.4
151.117.11.1	white alpine	40	0.68	1 1/4	8.5-33.4

Geberit washbasin drain, space-saving model, slim design, with free outlet and valve cover

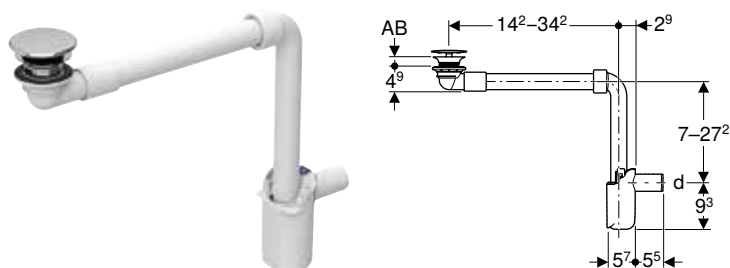

click & scan

Application purposes

- For washbasins without overflow
- For washbasins with material thickness 15-20 mm near the waste outlet
- For space-saving installation on washbasins with cabinet without trap cutout
- For space-saving installation on washbasins

Technical data

Depth of water seal (mm)	50 mm
--------------------------	-------

Characteristics

- Quality-monitored in accordance with EN 274-3
- Hygienic with optimum flow behaviour
- Length can be adapted on washbasin
- With integrated hair trap
- Horizontal outlet

Scope of delivery

- Waste outlet
- Connection bend 90° made of PP
- Sleeve made of EPDM
- Dip tube trap
- Valve cover
- Washbasin connector

Art. no.	Colour / surface	d, ø [mm]	AB [mm]	L [cm]	h [cm]
152.084.21.1	chrome / Glossy	32	15-20	11.2	7-27.2
152.093.21.1	chrome / Glossy	40	15-20	11.2	7-27.2



- For washbasins with material thickness of 8-15 mm in the waste outlet area, the flat gasket art. no. 245.413.00.1 must also be used




Waste fittings and traps for washplaces and kitchen sinks

Drain assemblies for washbasins

Bottle traps with dip tube, for washbasins, space-saving model

Geberit washbasin drain, space-saving model, slim design, with free outlet and valve cover

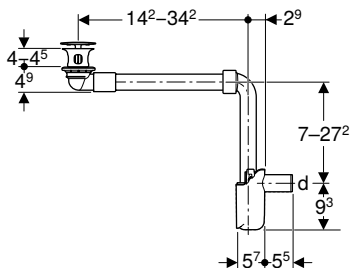

click & scan

Application purposes

- For washbasins without overflow
- For washbasins with material thickness 40–45 mm near the waste outlet
- For space-saving installation on washbasins with cabinet without trap cutout
- For space-saving installation on washbasins

Characteristics

- Quality-monitored in accordance with EN 274-3
- Hygienic with optimum flow behaviour
- Length can be adapted on washbasin
- With integrated hair trap
- Horizontal outlet

Technical data


Depth of water seal (mm)	50 mm
--------------------------	-------

Scope of delivery

- Waste outlet
- Connection bend 90° made of PP
- Sleeve made of EPDM
- Dip tube trap
- Valve cover
- Washbasin connector

Art. no.	Colour / surface	d, ø [mm]	AB [mm]	L [cm]	h [cm]
152.091.21.1	chrome / Glossy	32	40–45	11.2	7–27.2
152.092.21.1	chrome / Glossy	40	40–45	11.2	7–27.2

Washbasin drain, space-saving model, slim design, with free outlet and valve cover, horizontal outlet, for Geberit ONE washbasin, vertical outlet

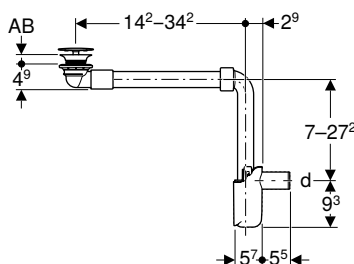

click & scan

Application purposes

- For washbasins without overflow
- For washbasins with material thickness 15–20 mm near the waste outlet
- For space-saving installation on washbasins with cabinet without trap cutout
- For space-saving installation on washbasins

Characteristics

- Quality-monitored in accordance with EN 274-3
- Hygienic with optimum flow behaviour
- Length can be adapted on washbasin
- With integrated hair trap
- Horizontal outlet

Technical data

Depth of water seal (mm)	50 mm
--------------------------	-------

Scope of delivery


- Waste outlet
- Connection bend 90° made of PP
- Sleeve made of EPDM
- Dip tube trap
- Valve cover made of sanitary ceramic
- Washbasin connector

Art. no.	Colour / surface	d, ø [mm]	AB [mm]	L [cm]	h [cm]
152.089.01.1	white	32	15–20	11.2	7–27.2
152.099.01.1	white	40	15–20	11.2	7–27.2



- For washbasins with material thickness of 8–15 mm in the waste outlet area, the flat gasket art. no. 245.413.00.1 must also be used

Geberit washbasin drain, space-saving model, slim design, with external waste plug and lever actuation

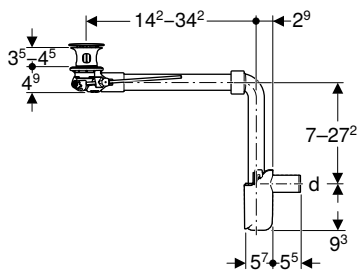

click & scan

Application purposes

- For washbasins with overflow
- For washbasins with material thickness 40–45 mm near the waste outlet
- For space-saving installation on washbasins with cabinet without trap cutout
- For space-saving installation on washbasins

Technical data

Depth of water seal (mm)	50 mm
--------------------------	-------

Characteristics


- Quality-monitored in accordance with EN 274-3
- Hygienic with optimum flow behaviour
- Waste outlet can be closed
- Actuation using rod
- Length can be adapted on washbasin
- With integrated hair trap
- Horizontal outlet

Scope of delivery

- Waste outlet
- Connection bend 90° made of PP
- External waste plug
- Actuator lever
- Sleeve made of EPDM
- Dip tube trap
- Washbasin connector

Art. no.	Colour / surface	d, ø [mm]	AB [mm]	L [cm]	h [cm]
152.072.21.1	chrome / Glossy	32	40–45	11.2	7–27.2
152.074.21.1	chrome / Glossy	40	40–45	11.2	7–27.2

Geberit washbasin drain, space-saving model, slim design, with external waste plug with push actuation

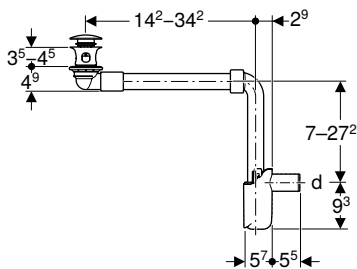

click & scan

Application purposes

- For washbasins with overflow
- For washbasins with material thickness 40–45 mm near the waste outlet
- For space-saving installation on washbasins with cabinet without trap cutout
- For space-saving installation on washbasins

Technical data

Depth of water seal (mm)	50 mm
--------------------------	-------

Characteristics

- Quality-monitored in accordance with EN 274-3
- Hygienic with optimum flow behaviour
- Waste outlet can be closed
- Actuation using external waste plug with push actuation
- Length can be adapted on washbasin
- With integrated hair trap
- Horizontal outlet

Scope of delivery

- Waste outlet
- Connection bend 90° made of PP
- External waste plug
- Sleeve made of EPDM
- Dip tube trap
- Washbasin connector

Art. no.	Colour / surface	d, ø [mm]	AB [mm]	L [cm]	h [cm]
152.073.21.1	chrome / Glossy	32	40–45	11.2	7–27.2
152.075.21.1	chrome / Glossy	40	40–45	11.2	7–27.2




Waste fittings and traps for washplaces and kitchen sinks

Drain assemblies for washbasins

Bottle traps with dip tube, for washbasins, space-saving model

Geberit Clou washbasin drain, space-saving model, slim design, with lever actuation and valve cover

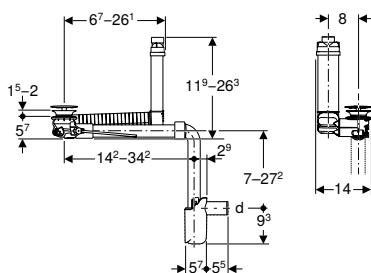

click & scan

Application purposes

- For washbasins without visible overflow
- For washbasins with material thickness 15–20 mm near the waste outlet
- For space-saving installation on washbasins with cabinet without trap cutout
- For space-saving installation on washbasins

Technical data

Depth of water seal (mm)	50 mm
--------------------------	-------

Characteristics

- Quality-monitored in accordance with EN 274-3
- Hygienic with optimum flow behaviour
- Waste outlet can be closed
- Actuation using rod
- Hidden overflow function
- Length and height can be adapted to washbasin
- With integrated hair trap
- Horizontal outlet

Scope of delivery


- Waste outlet
- Connection bend 90° made of PP
- Actuator lever
- Sleeve made of EPDM
- Plug
- Dip tube trap
- Valve cover
- Washbasin connector

Art. no.	Colour / surface	d, ø [mm]	AB [mm]	L [cm]	h [cm]
152.049.21.1	chrome / Glossy	32	15–20	11.2	7–27.2
152.059.21.1	chrome / Glossy	40	15–20	11.2	7–27.2



- For washbasins with material thickness of 8–15 mm in the waste outlet area, the flat gasket art. no. 245.413.00.1 must also be used

Washbasin drain, space-saving model, slim design, with lever actuation and valve cover, horizontal outlet, for Geberit ONE washbasin, vertical outlet

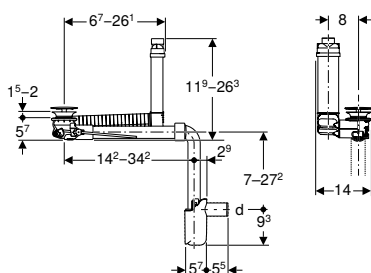

click & scan

Application purposes

- For washbasins without visible overflow
- For washbasins with material thickness 15–20 mm near the waste outlet
- For space-saving installation on washbasins with cabinet without trap cutout
- For space-saving installation on washbasins


Characteristics

- Quality-monitored in accordance with EN 274-3
- Hygienic with optimum flow behaviour
- Waste outlet can be closed
- Actuation using rod
- Hidden overflow function
- Length and height can be adapted to washbasin
- With integrated hair trap
- Horizontal outlet

Waste fittings and traps for washplaces and kitchen sinks

Drain assemblies for washbasins
Washbasin connectors

Geberit concealed trap for washbasin, with in-wall cabinet, ready-to-fit set, screen valve and overflow pipe, horizontal outlet

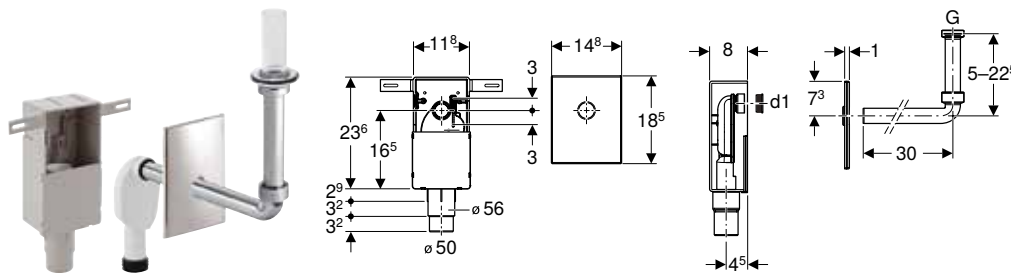

click & scan

Application purposes

- For healthcare facilities
- For covered installation
- For solid construction
- Suitable for barrier-free construction
- For concealed installation

Technical data

Depth of water seal (mm)	50 mm
Product material	Plastic

Characteristics

- Quality-monitored in accordance with EN 274-3
- Concealed trap can be height-adjusted ± 3 cm during final installation


Scope of delivery

- Connection bend, $\varnothing 32$ mm
- Cover plate
- In-wall cabinet
- Concealed trap
- Protection box
- Valve screen
- Overflow pipe for Renova Comfort washbasin
- Overflow pipe for Vitalis washbasin
- Fastening material
- Seals

Art. no.	Colour / surface	d, \varnothing [mm]	G ["]	d1, \varnothing [mm]
151.122.21.1	chrome / Glossy	50-56	1 1/4	40

Washbasin connectors

Geberit waste outlet with free outlet and valve cover



click & scan

Application purposes

- For washbasins without overflow
- For washbasins without visible overflow

Technical data

Product material	Brass chrome-plated
------------------	---------------------

Characteristics


- Valve cover made of plastic, chrome-plated
- With built-in screen

Scope of delivery

- Screen
- Seals

Art. no.	Colour / surface	G ["]	L [cm]
152.050.14.1	black matt	1 1/4	5
152.050.21.1	chrome / Glossy	1 1/4	5
152.080.14.1	black matt	1 1/4	8
152.080.21.1	chrome / Glossy	1 1/4	8

Geberit waste outlet with overflow pipe, for washbasin



click & scan

Application purposes

- For Paracelsus washbasins, without overflow

Technical data


Product material	Stainless steel / plastic
------------------	---------------------------

Scope of delivery

- Overflow pipe
- Waste outlet
- Seal
- Bolt

Art. no.	Colour / surface	G ["]
240.648.00.1	transparent	1 1/4

Geberit Clou washbasin connector with lever actuation

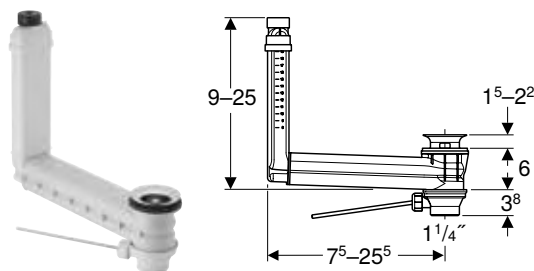

click & scan

Application purposes

- For washbasins without visible overflow
- For washbasins without visible overflow

Technical data

Product material	Plastic
------------------	---------

Characteristics

- Quality-monitored in accordance with EN 274-3
- Hygienic with optimum flow behaviour
- Waste outlet can be closed
- Actuation using rod
- Hidden overflow function
- Length and height can be adapted to washbasin

Scope of delivery

- Waste outlet
- Actuator lever
- Plug
- Washbasin connector

Art. no.	Colour / surface	d, ø [mm]	G ["]	AB [mm]
152.018.00.1	white alpine / Stainless steel polished	32	1 1/4	15-22

To order additionally

- Geberit valve cover for waste outlet with free outlet → p. 372
- Geberit valve cover for waste outlet with free outlet → p. 371

Covers

Geberit valve cover for waste outlet with free outlet



click & scan

Application purposes

- For washbasin connections with free outlet
- For Clou washbasin connectors


Art. no.	Colour / surface	d, ø [mm]	Product material
241.993.11.1	white alpine	6.4	Plastic

Waste fittings and traps for washplaces and kitchen sinks

Drain assemblies for washbasins

Connections


Geberit wall collar, large



click & scan

Art. no.	Colour / surface	d, ø [mm]	Product material	D [cm]	H [cm]
241.507.11.1	white alpine	32	Plastic	8.5	3.7
241.507.21.1	chrome / Glossy	32	Plastic	8.5	3.7
241.508.11.1	white alpine	40	Plastic	8.5	3.7
241.508.21.1	chrome / Glossy	40	Plastic	8.5	3.7
854.909.11.1	white alpine	50	PP	8.5	3.5
894.094.11.1	white alpine	50	PP	9	7

Geberit wall collar, flat



click & scan

Art. no.	Colour / surface	d, ø [mm]	Product material	D [cm]	H [cm]
854.187.11.1	white alpine	40	PP	8.5	1.5
854.188.11.1	white alpine	50	PP	8.5	1.5

Geberit valve cover for waste outlet with free outlet



click & scan

Application purposes

- For washbasin connections with free outlet
- For Clou washbasin connectors

Scope of delivery

- Hair trap


Art. no.	Colour / surface	d, ø [mm]	Product material
241.993.01.1	white	64	Sanitary ceramic
241.993.14.1	black matt	64	Plastic
241.993.21.1	chrome / Glossy	64	Plastic

Accessories

- Geberit ONE wall-hung bidet, shrouded

Connections

Geberit waste outlet with free outlet, screen

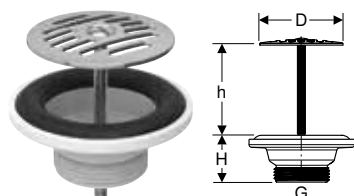

click & scan

Application purposes

- Not for dammable washbasins

Scope of delivery


- Screen
- Seal

Technical data

Product material	Stainless steel / plastic
------------------	---------------------------

Art. no.	Colour / surface	G ["]	D [cm]	H [cm]	h [cm]
152.005.00.1	Grating: Stainless steel polished	1 1/4	6.3	3.5	0-5

Geberit waste outlet with push actuation

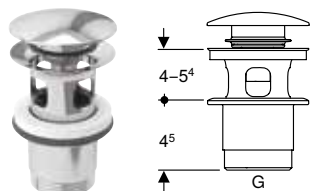

click & scan

Application purposes

- For washbasins with material thickness 40–45 mm near the waste outlet
- For washbasins with overflow

Characteristics

- Waste outlet can be closed
- Actuation using external waste plug with push actuation

Scope of delivery


- Waste outlet
- External waste plug

Technical data

Product material	Brass chrome-plated
------------------	---------------------

Art. no.	Colour / surface	G ["]	AB [mm]
152.076.21.1	chrome / Glossy	1 1/4	40–45

Geberit Clou washbasin connector, space-saving model, slim design, with lever actuation and valve cover

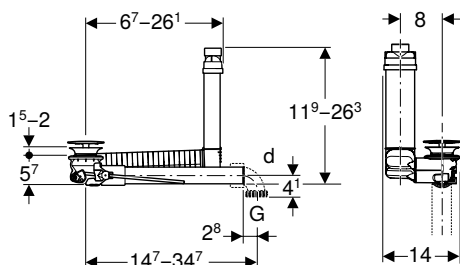

click & scan

Application purposes

- For washbasins without visible overflow
- For washbasins with material thickness 15–20 mm near the waste outlet
- For space-saving installation on washbasins
- For space-saving installation on washbasins with cabinet without trap cutout

Characteristics

- Quality-monitored in accordance with EN 274-3
- Hygienic with optimum flow behaviour
- Waste outlet can be closed
- Actuation using rod
- Hidden overflow function
- Length and height can be adapted to washbasin
- With integrated hair trap

Scope of delivery

- Waste outlet
- Connection bend 90° made of PP, G 1 1/4"
- Actuator lever
- Plug
- Valve cover
- Washbasin connector

Technical data

Product material	Brass chrome-plated / plastic
------------------	-------------------------------

Art. no.	Colour / surface	d, ø [mm]	Discharge rate [l/s]	G ["]	AB [mm]
152.013.21.1	chrome / Glossy	32	0.25	1 1/4	15–20



- For washbasins with material thickness of 8–15 mm in the waste outlet area, the flat gasket art. no. 245.413.00.1 must also be used



Seals

Geberit sleeve



click & scan

Application purposes


- For bidets and washbasins

Technical data

Product material	EPDM
------------------	------

Art. no.	d, \varnothing [mm]	d1, \varnothing [mm]	L [cm]
152.796.00.1	40	44	2.3
152.495.00.1	32	46	2.3
152.496.00.1	40	46	2.3
153.564.16.1	32	58	2.3
153.565.16.1	40	58	2.3
153.566.16.1	50	58	2.3

Geberit sleeve



click & scan

Application purposes

- For bidets and washbasins


Technical data

Product material	EPDM
------------------	------

Art. no.	DN	d, \varnothing [mm]	di, \varnothing [mm]
152.682.00.1	50	32	44
152.689.00.1	56	32	50
152.690.00.1	56	40	50
152.691.00.1	60	32	57
152.692.00.1	60	40	57
152.693.00.1	60	50	57

Extensions

Geberit extension for dip tube trap



click & scan

Application purposes

- For Geberit washbasin trap with division wall

Technical data


Product material	Plastic
------------------	---------

Art. no.	Colour / surface	d, \varnothing [mm]
241.502.11.1	white alpine	40
241.502.21.1	chrome / Glossy	40
242.126.11.1	white alpine	32
242.126.21.1	chrome / Glossy	32

Drain assemblies for kitchen sinks

P-traps

Geberit P-trap for kitchen sink, horizontal outlet

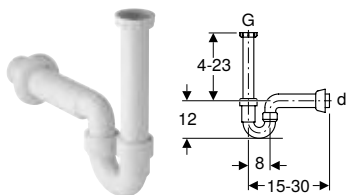

click & scan

Application purposes

- For connecting kitchen sinks with one bowl

Technical data

Product material	PP
------------------	----

Characteristics


- Quality-monitored in accordance with EN 274-3
- P-trap
- Horizontal outlet

Scope of delivery

- Inlet connection piece with union nut made of PP, G 1 1/2"
- Wall collar

Art. no.	Colour / surface	d, \emptyset [mm]	G ["]	h [cm]
152.741.11.1	white alpine	50	1 1/2	4-23
152.742.11.1	white alpine	40	1 1/2	4-23

Geberit P-trap for kitchen sink, with angled hose connector, horizontal outlet

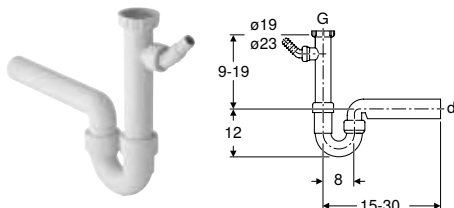

click & scan

Application purposes

- For connecting kitchen sinks with one bowl

Technical data

Product material	PP
------------------	----

Characteristics

- Quality-monitored in accordance with EN 274-3
- With connection for washing machine or dishwasher
- Horizontal outlet


Scope of delivery

- Inlet connection piece with union nut made of PP, G 1", with supplementary connection
- Angled hose connector made of PP, \emptyset 19 / 23 mm
- Blind cap for waste coupling G 1"

Art. no.	Colour / surface	d, \emptyset [mm]	G ["]	h [cm]
152.711.11.1	white alpine	50	1 1/2	9-19
152.713.11.1	white alpine	40	1 1/2	9-19



Geberit P-trap for kitchen sink, with angled hose connector, vertical outlet

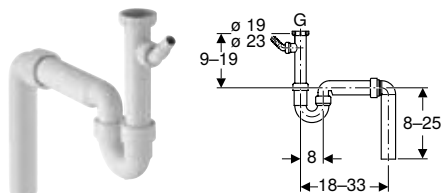

click & scan

Application purposes

- For connecting kitchen sinks with one bowl

Technical data

Product material	PP
------------------	----

Characteristics


- Quality-monitored in accordance with EN 274-3
- With connection for washing machine or dishwasher
- Vertical outlet

Scope of delivery

- Inlet connection piece with union nut made of PP, G 1 1/2", with supplementary connection
- Angled hose connector made of PP, \varnothing 19 / 23 mm
- Connection bend 90° made of PP
- Blind cap for waste coupling G 1"

Art. no.	Colour / surface	d, \varnothing [mm]	G ["]	h [cm]
152.550.11.1	white alpine	50	1 1/2	9-19
152.556.11.1	white alpine	40	1 1/2	9-19

Geberit P-trap for kitchen sink, space-saving model, with angled hose connector, horizontal outlet

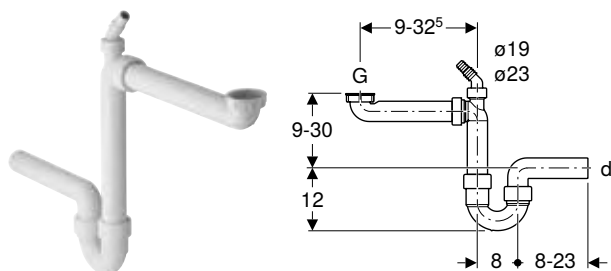

click & scan

Application purposes

- For connecting kitchen sinks with one bowl

Technical data

Product material	PP
------------------	----

Characteristics


- Quality-monitored in accordance with EN 274-3
- Space-saving model
- With connection for washing machine or dishwasher
- Horizontal outlet

Scope of delivery

- Connection bend with union nut made of PP, G 1 1/2"
- Angled hose connector made of PP, \varnothing 19 / 23 mm
- Reduction ring made of PP, G 1 1/2" x G 1 1/4"
- Connection bend with union nut made of PP, G 1", with supplementary connection
- Blind cap for waste coupling G 1"

Art. no.	Colour / surface	d, \varnothing [mm]	G ["]	h [cm]
152.819.11.1	white alpine	50	1 1/2	9-30
152.885.11.1	white alpine	40	1 1/2	9-30

Geberit P-trap for two kitchen sinks, with angled hose connector, horizontal outlet

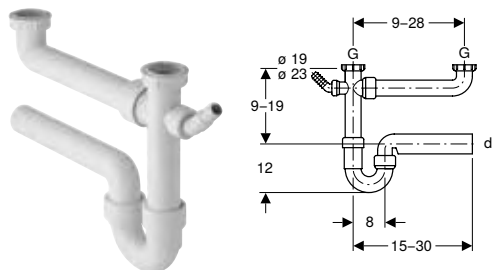

click & scan

Application purposes

- For connecting kitchen sinks with two bowls

Technical data

Product material	PP
------------------	----

Characteristics


- Quality-monitored in accordance with EN 274-3
- With connection for washing machine or dishwasher
- Horizontal outlet

Scope of delivery

- Inlet connection piece with union nut made of PP, with supplementary connection
- Angled hose connector made of PP, \varnothing 19 / 23 mm
- Connection bend with union nut
- Blind cap for waste coupling G 1"

Art. no.	Colour / surface	d, \varnothing [mm]	G ["]	h [cm]
152.715.11.1	white alpine	50	1 1/2	9-19

Geberit P-trap for two offset kitchen sinks, with angled hose connector, horizontal outlet

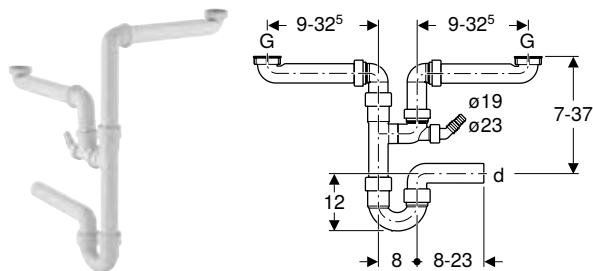

click & scan

Application purposes

- For connecting kitchen sinks with two bowls

Technical data

Product material	PP
------------------	----

Characteristics

- Quality-monitored in accordance with EN 274-3
- Space-saving model
- With connection for washing machine or dishwasher
- Horizontal outlet

Scope of delivery

- 2 connection bends with union nut made of PP, G 1 1/2"
- Angled hose connector made of PP, \varnothing 19 / 23 mm
- Connection bend 90° made of PP
- Branch fitting 88.5° made of PP, \varnothing 40 mm
- Blind cap for waste coupling G 1"


Art. no.	Colour / surface	d, \varnothing [mm]	G ["]	h [cm]
152.818.11.1	white alpine	50	1 1/2	7-37
152.886.11.1	white alpine	40	1 1/2	7-37



Waste fittings and traps for washplaces and kitchen sinks

Drain assemblies for kitchen sinks
P-traps

Geberit P-trap for two kitchen sinks, with angled hose connector, extralong, horizontal outlet

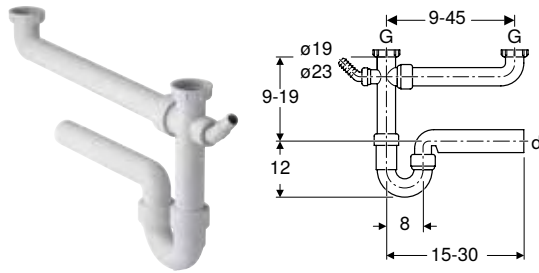

click & scan

Application purposes

- For connecting kitchen sinks with two bowls

Technical data

Product material	PP
------------------	----

Characteristics


- Quality-monitored in accordance with EN 274-3
- With connection for washing machine or dishwasher
- Horizontal outlet

Scope of delivery

- Blind cap for waste coupling G 1"
- Angled hose connector, \varnothing 19 / 23 mm
- Connection bend
- Connection bend with union nut

Art. no.	Colour / surface	d, \varnothing [mm]	G ["]	h [cm]
152.597.11.1	white alpine	40	1 1/2	9-19

Geberit P-trap for three kitchen sinks, with angled hose connector, horizontal outlet

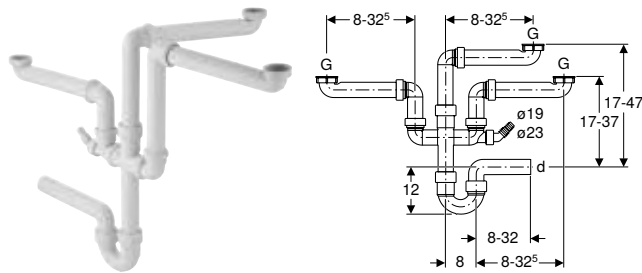

click & scan

Application purposes

- For connecting kitchen sinks with three bowls

Technical data

Product material	PP
------------------	----

Characteristics

- Quality-monitored in accordance with EN 274-3
- Horizontal outlet


Scope of delivery

- Blind cap for waste coupling G 1"
- Angled hose connector, \varnothing 19 / 23 mm
- Connection bend
- Connection bend with union nut

Art. no.	Colour / surface	d, \varnothing [mm]	G ["]	h [cm]
152.821.11.1	white alpine	40	1 1/2	17-47

Accessories

Geberit double-angled hose connector

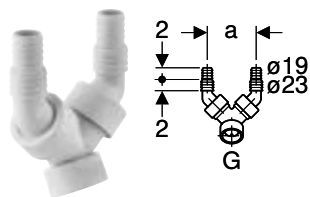

click & scan

Application purposes

- For connecting washing machines or dishwashers

Technical data

Product material	Plastic
------------------	---------

Scope of delivery


- 2 non-return valves
- Blind cap for waste coupling G 1"

Art. no.	Colour / surface	G ["]	a [cm]
152.767.11.1	white alpine	1	8.3

Drain assemblies for devices

P-traps

Geberit P-traps for devices, with oval inlet funnel

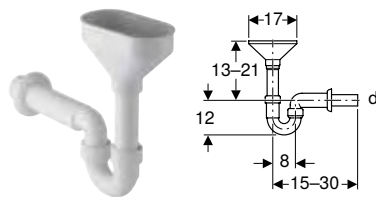

click & scan

Application purposes

- For residual water connections

Technical data

Depth of water seal (mm)	50 mm
Product material	PP

Characteristics


- Quality-monitored in accordance with EN 274-3
- Horizontal outlet

Scope of delivery

- Inlet funnel
- Wall collar
- Screen

Art. no.	Colour / surface	d, \varnothing [mm]	h [cm]
152.392.11.1	white alpine	40	13-21
152.393.11.1	white alpine	50	13-21

Geberit P-trap for devices

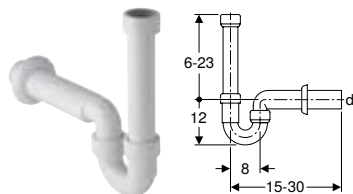

click & scan

Application purposes

- For connecting washing machines or dishwashers

Technical data

Depth of water seal (mm)	50 mm
Product material	PP

Characteristics

- Quality-monitored in accordance with EN 274-3
- Horizontal outlet


Scope of delivery

- Inlet connection piece made of PP, G 1 1/2"
- Wall collar

Art. no.	Colour / surface	d, \varnothing [mm]	G ["]	h [cm]
152.702.11.1	white alpine	50	1 1/2	6-23
152.704.11.1	white alpine	40	1 1/2	6-23

Concealed traps

Geberit concealed trap for devices, with one connection

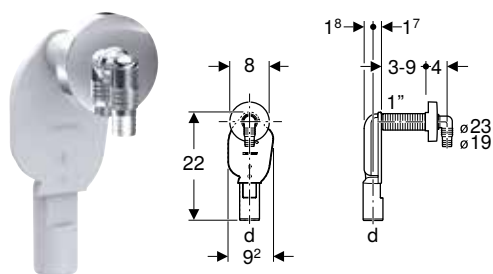

click & scan

Application purposes

- For covered installation
- For connecting washing machines or dishwashers

Technical data


Depth of water seal (mm)	50 mm
Product material	Plastic

Scope of delivery

- Trap made of PP
- Wall collar
- Angled hose connector, \varnothing 19 / 23 mm
- Thread protection

Art. no.	Colour / surface	d, \varnothing [mm]	Discharge rate [l/s]
152.234.21.1	chrome / Glossy	40	0.6

Geberit concealed trap for devices, with one connection

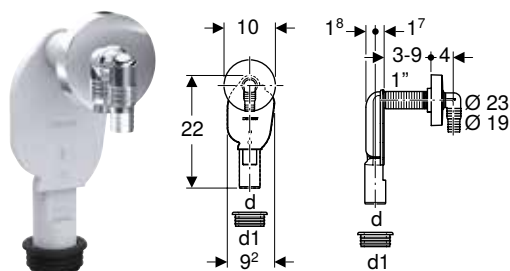

click & scan

Application purposes

- For covered installation
- For connecting washing machines or dishwashers

Technical data

Product material	Plastic
------------------	---------

Characteristics


- Quality-monitored in accordance with EN 274-3

Scope of delivery

- Angled hose connector made of PP, \varnothing 19 / 23 mm
- Wall collar
- Protection box
- Sleeve made of EPDM

Art. no.	Colour / surface	d, \varnothing [mm]	Discharge rate [l/s]	d1, \varnothing [mm]
152.235.11.1	white alpine	40	0.6	56
152.235.21.1	chrome / Glossy	40	0.6	56

Geberit set of concealed trap for devices, with one connection, in-wall cabinet and cover plate

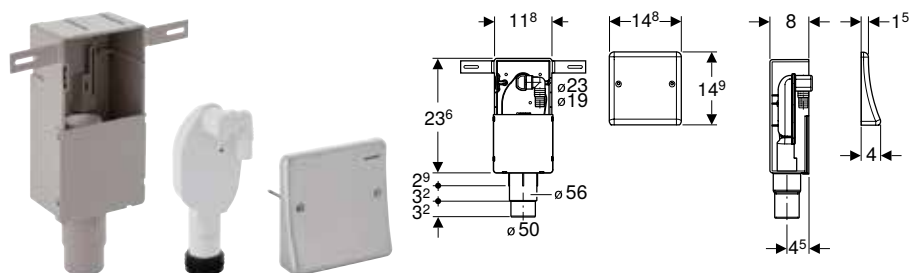

click & scan

Application purposes

- For covered installation
- For connecting washing machines or dishwashers
- For concealed installation

Characteristics

- Quality-monitored in accordance with EN 274-3
- Cover plate made of stainless steel
- Concealed trap can be removed for cleaning

Technical data

Depth of water seal (mm)	70 mm
Product material	Plastic


Scope of delivery

- Cover plate
- Angled hose connector made of PP, \varnothing 19 / 23 mm
- In-wall cabinet
- Sleeve made of EPDM
- Protection box
- Fastening material

Art. no.	d, \varnothing [mm]	Discharge rate [l/s]
152.232.00.1	50–56	0.6

Surface-mounted traps

Geberit surface-mounted trap for devices, with cover

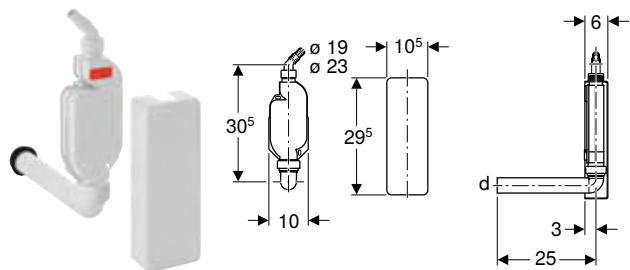

click & scan

Application purposes

- For connecting washing machines or dishwashers
- For exposed installation

Characteristics

- Quality-monitored in accordance with EN 274-3
- Horizontal outlet

Technical data

Depth of water seal (mm)	70 mm
Product material	PP


Scope of delivery

- Cover
- Connection bend 90° made of PP, \varnothing 40 mm
- Angled hose connector made of PP, \varnothing 19 / 23 mm
- Sleeve made of EPDM
- Fastening material
- Blind cap for waste coupling G 1"

Art. no.	Colour / surface	d, \varnothing [mm]	G ["]	h [cm]
152.768.11.1	white alpine	40	1	30.5

Connections

Geberit funnel, oval

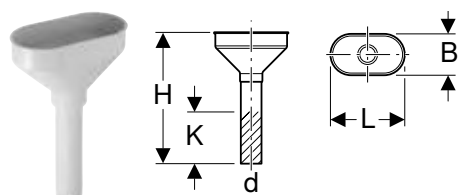

click & scan

Technical data

Product material	Plastic
------------------	---------

Scope of delivery


- Valve screen

Art. no.	Colour / surface	DN	d, \varnothing [mm]	L [cm]	B [cm]	H [cm]	K [cm]
152.378.11.1	white alpine	40	40	17.5	9.5	27	10

Waste fittings and traps for washplaces and kitchen sinks

Drain assemblies for devices
Connections

Geberit funnel, oval

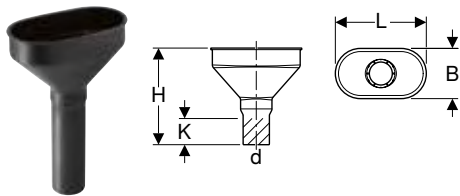

click & scan

Technical data


Product material	PE-HD
------------------	-------

Scope of delivery

- Valve screen

Art. no.	DN	d, \varnothing [mm]	L [cm]	B [cm]	H [cm]	K [cm]
352.377.16.1	40	40	17.5	9.5	18.5	5
352.379.16.1	50	50	17.5	9.5	18.5	5

Geberit funnel, square

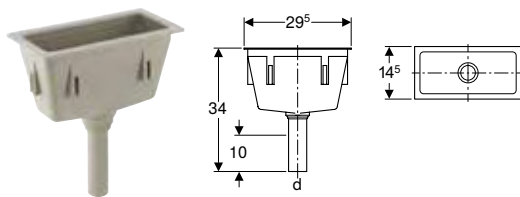

click & scan

Technical data


Product material	Plastic
------------------	---------

Scope of delivery

- Valve screen

Art. no.	Colour / surface	DN	d, \varnothing [mm]	B [cm]	H [cm]	T [cm]
352.389.08.1	pebble grey	40	50	29.5	34.3	14.5

Geberit adapter for hose connection for devices

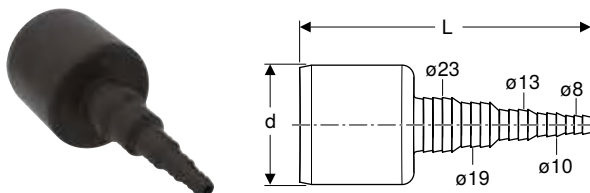

click & scan

Application purposes

- For connecting drain hoses with PE-HD outlet pipes

Technical data


Product material	PE-HD
------------------	-------

Art. no.	Colour / surface	DN	d, \varnothing [mm]	L [cm]
152.910.16.1	black	50	50	12.3

Drain assemblies for sinks

Traps

Geberit P-trap for sink, with compression joint, vertical inlet and horizontal outlet

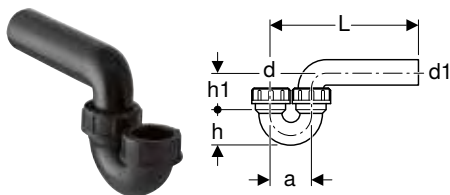


click & scan

Technical data

Depth of water seal (mm)	75 mm
Product material	PE-HD

Art. no.	DN	d, \varnothing [mm]	Discharge rate [l/s]	d1, \varnothing [mm]	a [cm]	h [cm]	h1 [cm]
152.039.16.1	50 / 50	50	0.84	50	8	6.5	8
152.043.16.1	50 / 56	50	0.84	56	8	6.5	8
152.044.16.1	56 / 56	56	0.84	56	9	7	9

Geberit P-trap for sink, with compression joint, horizontal inlet and horizontal outlet

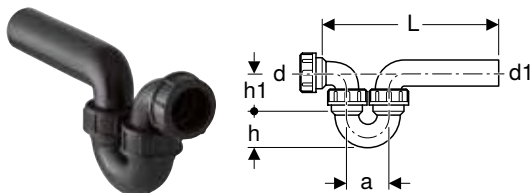

click & scan

Technical data


Depth of water seal (mm)	75 mm
Product material	PE-HD

Scope of delivery

- Connection bend with union nut

Art. no.	DN	d, \varnothing [mm]	Discharge rate [l/s]	d1, \varnothing [mm]	a [cm]	h [cm]	h1 [cm]
152.040.16.1	50 / 50	50	0.84	50	8	6.5	8
152.045.16.1	50 / 56	50	0.84	56	8	6.5	8
152.046.16.1	56 / 56	56	0.84	56	9	7	9

Geberit P-trap for sink, with compression joint, vertical inlet and vertical outlet

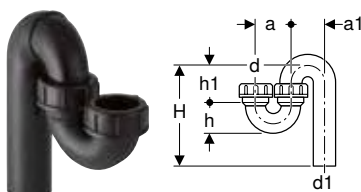

click & scan

Technical data


Depth of water seal (mm)	75 mm
Product material	PE-HD

Art. no.	DN	d, \varnothing [mm]	Discharge rate [l/s]	d1, \varnothing [mm]	a [cm]	a1 [cm]	H [cm]	h [cm]	h1 [cm]
152.038.16.1	50 / 50	50	0.84	50	8	8	8-18	6.5	8
152.041.16.1	50 / 56	50	0.84	56	8	7.6	8-21	5.6	8.7
152.042.16.1	56 / 56	56	0.84	56	9	9	8-21	7	9



Straight connector

Geberit straight connector with union nut



click & scan

Technical data

Product material	PE-HD
------------------	-------

Scope of delivery

- Seal

Art. no.	DN	d, ø [mm]	G ["]	H [cm]	K [cm]
152.107.16.1	50	40	1 1/4	21	11
152.108.16.1	40	40	1 1/2	20	11
152.113.16.1	50	50	1 1/2	20	13
152.114.16.1	50	50	2	20	13
152.115.16.1	50	50	1 1/4	20	13

Geberit straight connector with union nut



click & scan

Technical data


Product material	PE-HD
------------------	-------

Scope of delivery

- Seal

Art. no.	DN	d, ø [mm]	G ["]	H [cm]
152.175.16.1	40	40	1 1/4	4.5
152.176.16.1	40	40	1 1/2	3.5
152.179.16.1	50	50	1 1/4	3.3
152.180.16.1	50	50	1 1/2	3.3
152.181.16.1	50	50	2	3
152.184.16.1	30	32	1 1/4	2

Geberit straight adapter with male thread and screw connection



click & scan

Technical data


Product material	PE-HD
------------------	-------

Scope of delivery

- Nipple made of brass
- Seal

Art. no.	DN	d, ø [mm]	G ["]	H [cm]	h [cm]
152.973.00.1	40	40	1/2	9	6
152.974.00.1	40	40	3/4	9	6
152.978.00.1	50	50	1	9	6
152.979.00.1	50	50	1/2	9	6
152.981.00.1	50	50	3/4	9	6

Geberit adapter for hose connection for devices

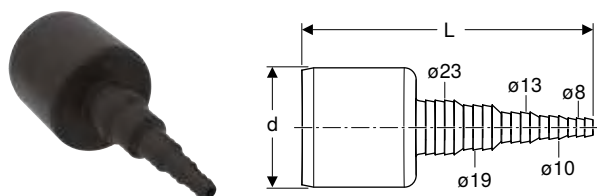

click & scan

Application purposes

- For connecting drain hoses with PE-HD outlet pipes


Technical data

Product material	PE-HD
------------------	-------

Art. no.	Colour / surface	DN	d, \varnothing [mm]	L [cm]
152.910.16.1	black	50	50	12.3

Waste outlets

Geberit waste outlet with round thread



click & scan

Application purposes

- For stainless steel sinks

Characteristics

- Conical rim

Technical data

Product material	Plastic
------------------	---------

Scope of delivery


- Counternut Rg 60 x 1/8"
- Flange gasket made of EPDM

Art. no.	Colour / surface	Rd	D [cm]	H [cm]
352.328.08.1	pebble grey	60x1/8	7	8

Accessories

- Geberit waste plug without chain → p. 387
- Geberit valve screen → p. 386

Geberit waste outlet with round thread

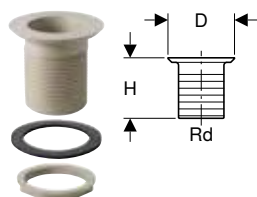

click & scan

Application purposes

- For washbasins made of stoneware

Characteristics

- Flat rim

Technical data

Product material	Plastic
------------------	---------

Scope of delivery

- Counternut Rg 60 x 1/8"
- Flange gasket made of EPDM

Art. no.	Colour / surface	Rd	D [cm]	H [cm]
352.329.08.1	pebble grey	60x1/8	8.8	8

Accessories


- Geberit waste plug without chain → p. 387
- Geberit valve screen → p. 386



Waste fittings and traps for washplaces and kitchen sinks

Drain assemblies for sinks
Accessories

Geberit waste outlet with overflow pipe, for cleaner sink



click & scan

Application purposes

- For washbasins without overflow
- For cleaner sinks without overflow

Technical data

Product material	Stainless steel / plastic
------------------	---------------------------

Scope of delivery

- Overflow pipe
- Waste outlet
- Seal
- Bolt

Art. no.	Colour / surface	G ["]
152.121.00.1	Stainless steel smooth	1 1/4
152.122.00.1	Stainless steel smooth	1 1/2

Accessories

Geberit fastening material for square funnel



click & scan

Scope of delivery

- Set of 6 pieces


Art. no.

352.368.00.1

To order additionally

- Geberit funnel, square → p. 382

Geberit valve screen



click & scan

Application purposes

- For Geberit oval funnel
- For Geberit waste outlets Rg 60 x 1/8"


Characteristics

- With five holes ø 12 mm

Technical data

Product material	Plastic
------------------	---------


Art. no.	Colour / surface	d, ø [mm]
352.332.08.1	pebble grey	45

Geberit overflow pipe cone with O-ring
[click & scan](#)
Application purposes

- For Geberit waste outlets Rg 60 x 1/8'

Technical data

Art. no.	Colour / surface	Technical data		
		d, \emptyset [mm]	d1, \emptyset [mm]	H [cm]
352.333.08.1	pebble grey	50	46	4.5

Geberit waste plug without chain
[click & scan](#)
Application purposes

- For Geberit waste outlets Rg 60 x 1/8'

Technical data

Art. no.	Colour / surface	Technical data
		d, \emptyset [mm]
352.331.08.1	pebble grey	52





Showers














Floor drainage systems for showers.....	388
Assortment overview – Geberit floor-even showers	388
Shower channels.....	390
Assortment overview – Geberit shower channels.....	390
Accessories for shower channels	398
Shower floor drains	400
Accessory overview – Geberit shower floor drains.....	400
Accessories for shower floor drains	403
Wall drains	404
Assortment overview – Geberit wall drains	404
Accessories for wall drains	411









Floor drainage systems for showers

Assortment overview – Geberit floor-even showers

Geberit International Sales, version: October 2025

Assortment overview – Geberit floor-even showers		Geberit shower channel CleanLine and Geberit shower floor drain	Geberit wall drain
			
Installation sets for Geberit floor-even shower solutions			
For installation height 9–22 cm (dimension for floor constructions excl. tiles and slope), depth of water seal 50 mm			
154.150.00.1 Geberit installation set for CleanLine shower channel, for screed height at inlet 90–220 mm		✓	
154.050.00.1 Geberit shower floor drain for screed height at inlet 90–220 mm		✓	
For installation height 18–31 cm (dimension for floor constructions excl. tiles and slope), depth of water seal 50 mm with inlet			
154.159.00.1 Geberit installation set with inlet, for shower channels of the CleanLine series		✓	
For installation height 6.5–9 cm (dimension for floor constructions excl. tiles and slope), depth of water seal 30 mm			
154.152.00.1 Geberit installation set for CleanLine shower channel, for screed height at inlet 65–90 mm		✓	
154.052.00.1 Geberit shower floor drain for screed height at inlet 65–90 mm		✓	
For installation height 2–25 cm (dimension for floor constructions excl. tiles and slope), without trap			
154.153.00.1 Geberit installation set for CleanLine shower channels, floor-penetrating installation		✓	
154.053.00.1 Geberit shower floor drain, cross-floor		✓	
Installation elements for showers			
For installation height 9–20 cm (dimension for floor constructions excl. tiles and slope), depth of water seal 50 mm			
111.591.00.2 Geberit Duofix element for shower, 50 cm, with CleanWall wall drain, for screed height at inlet 90–250 mm			✓
111.580.00.2 Geberit Duofix element for shower, 130 cm, with CleanWall wall drain, wall-mounted tap, concealed, for screed height at inlet 90–250 mm			✓
461.734.00.1 Geberit GIS element for shower, with CleanWall wall drain, for screed height at inlet 90–200 mm			✓
457.534.00.1 Geberit Kombifix element for shower, with wall drain, for screed height at inlet 90–200 mm			✓

Geberit International Sales, version: October 2025



















Assortment overview – Geberit floor-even showers		Geberit shower channel CleanLine and Geberit shower floor drain	Geberit wall drain
			
For installation height 6.5–9 cm (dimension for floor constructions excl. tiles and slope), depth of water seal 30 mm			
111.593.00.2 Geberit Duofix element for shower, 50 cm, with CleanWall wall drain, for screed height at inlet 65–90 mm			✓
111.581.00.2 Geberit Duofix element for shower, 130 cm, with CleanWall wall drain, wall-mounted tap, concealed, for screed height at inlet 65–90 mm			✓
461.736.00.1 Geberit GIS element for shower, with CleanWall wall drain, for screed height at inlet 65–90 mm			✓
457.536.00.1 Geberit Kombifix element for shower, with wall drain, for screed height at inlet 65–90 mm			✓
✓ Compatible			










Shower channels

Assortment overview – Geberit shower channels

Geberit International Sales, version: October 2025


		Geberit installation set for CleanLine shower channel, for screed height at inlet 90–220 mm	Geberit installation set with inlet, for shower channels of the Clean-Line series	Geberit installation set for CleanLine shower channel, for screed height at inlet 65–90 mm	Geberit installation set for CleanLine shower channels, floor-penetrating installation
		154.150.00.1	154.159.00.1	154.152.00.1	154.153.00.1
					
To order additionally					
Length 30–90 cm					
Geberit CleanLine20 shower channel	154.450.KS.1 	✓	✓	✓	✓
Geberit CleanLine30 shower channel	154.501.KS.1 	✓	✓	✓	✓
	154.501.TE.1	✓	✓	✓	✓
Geberit CleanLine50 shower channel	154.446.KS.2 	✓	✓	✓	✓
	154.446.QC.2	✓	✓	✓	✓
Geberit CleanLine60 shower channel for thin floorings	154.458.00.1 	✓	✓	✓	✓
Geberit CleanLine80 shower channel	154.440.KS.1 	✓	✓	✓	✓
	154.440.QC.1	✓	✓	✓	✓
	154.440.39.1	✓	✓	✓	✓
Länge 30–110 cm					
Geberit CleanLine20 shower channel	154.461.KS.1 	✓	✓	✓	✓
Geberit CleanLine30 shower channel	154.502.KS.1 	✓	✓	✓	✓
	154.502.TE.1	✓	✓	✓	✓
Geberit CleanLine50 shower channel	154.448.KS.2 	✓	✓	✓	✓
	154.448.QC.2	✓	✓	✓	✓
Geberit CleanLine80 shower channel	154.442.KS.1 	✓	✓	✓	✓
	154.442.QC.1	✓	✓	✓	✓
	154.442.39.1	✓	✓	✓	✓
Length 30–130 cm					
Geberit CleanLine20 shower channel	154.451.KS.1 	✓	✓	✓	✓
Geberit CleanLine30 shower channel	154.503.KS.1 	✓	✓	✓	✓
	154.503.TE.1	✓	✓	✓	✓
Geberit CleanLine50 shower channel	154.447.KS.2 	✓	✓	✓	✓
	154.447.QC.2	✓	✓	✓	✓
Geberit CleanLine60 shower channel for thin floorings	154.459.00.1 	✓	✓	✓	✓
Geberit CleanLine80 shower channel	154.441.KS.1 	✓	✓	✓	✓
	154.441.QC.1	✓	✓	✓	✓
	154.441.39.1	✓	✓	✓	✓

Geberit International Sales, version: October 2025

		Geberit installation set for CleanLine shower channel, for screed height at inlet 90–220 mm	Geberit installation set with inlet, for shower channels of the Clean-Line series	Geberit installation set for CleanLine shower channel, for screed height at inlet 65–90 mm	Geberit installation set for CleanLine shower channels, floor-penetrating installation
		154.150.00.1	154.159.00.1	154.152.00.1	154.153.00.1
					
To order additionally					
Length 30–160 cm					
Geberit CleanLine20 shower channel	154.453.KS.1 	✓	✓	✓	✓
Geberit CleanLine30 shower channel	154.504.KS.1 	✓	✓	✓	✓
	154.504.TE.1	✓	✓	✓	✓
Tile-bearing					
Geberit CleanLine shower channel, tile-bearing	154.455.00.1 	✓	✓	✓	✓

✓ Compatible

Geberit installation set for CleanLine shower channel, for screed height at inlet 90–220 mm

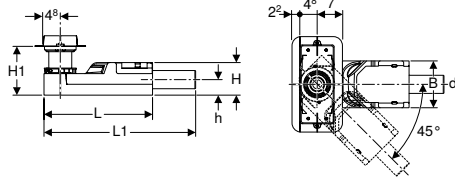

click & scan

Application purposes

- For drainage of Geberit shower channels of the CleanLine series
- For composite seals
- For screed height ≥ 90 mm at inlet
- For use as floor drain with horizontal outlet

Technical data

Depth of water seal (mm)	50 mm
--------------------------	-------

Characteristics

- Quality-monitored in accordance with EN 1253-3
- Premounted sealing fleece
- Sealing fleece, 10 cm circumferential, for connecting sealing systems
- Base unit made of EPS, for sound decoupling and receiving the trap

Scope of delivery

- Protection box cover with reference line
- Thin bed bonding flange
- Trap made of PE-HD
- Fastening material
- Distance plate, thickness 2 cm

Art. no.	DN	d, \varnothing [mm]	Discharge rate [l/s]	L [cm]	L1 [cm]	B [cm]	H [cm]	H1 [cm]	h [cm]
154.150.00.1	50	50	0.8	30	35.8	13	9	9–22	4.2

To order additionally

- Shower channel of the CleanLine series

Accessories

- Geberit CleanLine20 shower channel → p. 396
- Geberit CleanLine30 shower channel → p. 397
- Geberit CleanLine50 shower channel → p. 398
- Geberit CleanLine60 shower channel for thin floorings → p. 398
- Geberit CleanLine80 shower channel → p. 399
- Geberit CleanLine shower channel, tile-bearing → p. 396




- Consider screed height of the base unit with tile sizes < 5 cm. Have product material and thickness of the screed defined by tiler.

Showers

Floor drainage systems for showers
Shower channels

Geberit installation set for CleanLine shower channel, for screed height at inlet 65–90 mm

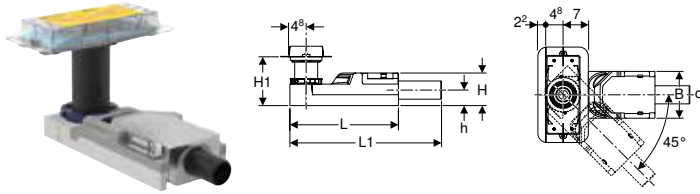

click & scan

Application purposes

- For drainage of Geberit shower channels of the CleanLine series
- For composite seals
- For screed height ≥ 65 mm at inlet
- For use as floor drain with horizontal outlet

Characteristics

- Premounted sealing fleece
- Sealing fleece, 10 cm circumferential, for connecting sealing systems
- Base unit made of EPS, for sound decoupling and receiving the trap

Technical data

Depth of water seal (mm)	30 mm
--------------------------	-------

Scope of delivery

- Protection box cover with reference line
- Thin bed bonding flange
- Trap made of PE-HD
- Fastening material

Art. no.	DN	d, \varnothing [mm]	Discharge rate [l/s]	L [cm]	L1 [cm]	B [cm]	H [cm]	H1 [cm]	h [cm]
154.152.00.1	40	40	0.4	30	35.8	13	6.5	6.5–17.5	3.2

To order additionally

- Shower channel of the CleanLine series


Accessories

- Geberit CleanLine20 shower channel → p. 396
- Geberit CleanLine30 shower channel → p. 397
- Geberit CleanLine50 shower channel → p. 398
- Geberit CleanLine60 shower channel for thin floorings → p. 398
- Geberit CleanLine80 shower channel → p. 399
- Geberit CleanLine shower channel, tile-bearing → p. 396



- Consider screed height of the base unit with tile sizes < 5 cm. Have product material and thickness of the screed defined by tiler.

Geberit installation set for CleanLine shower channels, floor-penetrating installation

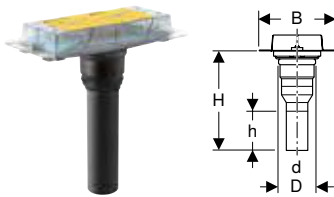

click & scan

Application purposes

- For drainage of Geberit shower channels of the CleanLine series
- For composite seals
- For floor constructions 2–25 cm
- For screed height ≥ 20 mm at inlet
- For use as floor drain with vertical outlet

Scope of delivery

- Protection box cover with reference line
- Thin bed bonding flange
- Straight connector made of PE-HD, $\varnothing 50$ mm

Characteristics

- Premounted sealing fleece
- Sealing fleece, 10 cm circumferential, for connecting sealing systems

Art. no.	DN	d, \varnothing [mm]	D [cm]	B [cm]	H [cm]	h [cm]
154.153.00.1	50	50	7.8	14	34	15.6


To order additionally

- Shower channel of the CleanLine series
- Trap

Accessories

- Geberit CleanLine20 shower channel → p. 396
- Geberit CleanLine30 shower channel → p. 397
- Geberit CleanLine50 shower channel → p. 398
- Geberit CleanLine60 shower channel for thin floorings → p. 398
- Geberit CleanLine80 shower channel → p. 399
- Geberit CleanLine shower channel, tile-bearing → p. 396
- Geberit P-trap for sink, with compression joint, vertical inlet and horizontal outlet → p. 383

Geberit installation set with inlet, for shower channels of the CleanLine series

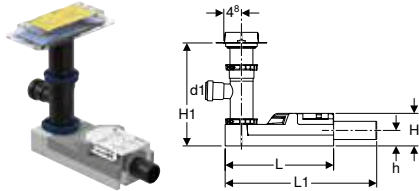

click & scan

Application purposes

- For drainage of Geberit shower channels of the CleanLine series
- For composite seals
- For screed heights ≥ 190 mm at inlet
- For use as floor drain with horizontal outlet

Technical data

Depth of water seal (mm)	50 mm
--------------------------	-------

Characteristics

- Quality-monitored in accordance with EN 1253-3
- Premounted sealing fleece
- Sealing fleece, 10 cm circumferential, for connecting sealing systems
- Base unit made of EPS, for sound decoupling and receiving the trap

Scope of delivery

- Protection box cover with reference line
- Thin bed bonding flange
- Trap made of PE-HD
- Branch fitting 88.5° made of PE, $\varnothing 63 / 40$ mm
- Fastening material
- Distance plate, thickness 2 cm

Art. no.	DN	d, \varnothing [mm]	Discharge rate [l/s]	d1, \varnothing [mm]	L [cm]	L1 [cm]	B [cm]	H [cm]	H1 [cm]	h [cm]
154.159.00.1	50	50	0.8	40	30	35.8	13	9	19–36.5	4.2

To order additionally

- Shower channel of the CleanLine series

Accessories


- Geberit CleanLine20 shower channel → p. 396
- Geberit CleanLine30 shower channel → p. 397
- Geberit CleanLine50 shower channel → p. 398
- Geberit CleanLine60 shower channel for thin floorings → p. 398
- Geberit CleanLine80 shower channel → p. 399
- Geberit CleanLine shower channel, tile-bearing → p. 396



Showers

Floor drainage systems for showers
Shower channels

Geberit CleanLine20 shower channel

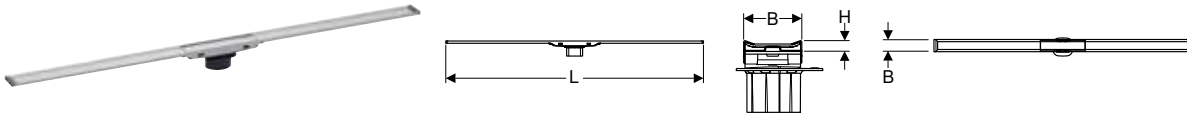

click & scan

Application purposes

- For drainage of floor-even showers
- For installation in the room or on the wall
- For installation in thin bed mortar
- For composite seals
- Suitable for barrier-free construction

Technical data

Product material	CrNiMo steel 1.4404 (EN 10088)
------------------	--------------------------------

Characteristics

- Quality-monitored in accordance with EN 1253-3
- Shower channel can be cut to length
- Suitable for tile structures on floor 8–35 mm
- Shower channel can be aligned in height, inclination and offset
- Easy cleaning
- Water drainage above the composite seal
- Load-bearing capacity, class K 3 (3 kN)

Scope of delivery

- Comb insert
- Inlet connection piece with compensation ring
- 2 end pieces, pluggable
- Suction cup

Art. no.	Colour / surface	L [cm]	B [cm]	H [cm]
154.450.KS.1	PO Frame: polished stainless steel Surface: brushed stainless steel	30–90	4.3	0.8
154.461.KS.1	PO Frame: polished stainless steel Surface: brushed stainless steel	30–110	4.3	0.8
154.451.KS.1	PO Frame: polished stainless steel Surface: brushed stainless steel	30–130	4.3	0.8
154.453.KS.1	Frame: polished stainless steel Surface: brushed stainless steel	30–160	4.3	0.8

PO: Phase out as of April 2026

To order additionally

- Geberit installation set for CleanLine shower channel, for screed height at inlet 90–220 mm → p. 393
- Geberit installation set for CleanLine shower channel, for screed height at inlet 65–90 mm → p. 394
- Geberit installation set for CleanLine shower channels, floor-penetrating installation → p. 394
- Geberit installation set with inlet, for shower channels of the CleanLine series → p. 395


Can be combined with

- Geberit connecting piece cleanLine20 → p. 400



- Natural stone tiles in the shower area may discolour

Geberit CleanLine shower channel, tile-bearing

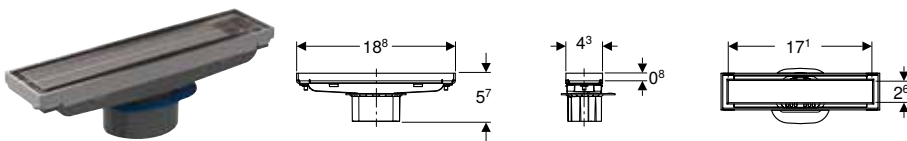

click & scan

Application purposes

- For drainage of floor-even showers
- For installation in the room or on the wall
- For installation in thin bed mortar
- For composite seals
- Suitable for barrier-free construction

Technical data

Product material	Stainless steel
------------------	-----------------

Characteristics

- Suitable for tile structures on floor 13–35 mm
- Tile insert high with tile adhesive 0.8 cm
- Shower channel can be aligned in height, inclination and offset
- Water drainage above the composite seal
- Easy cleaning

Scope of delivery

- Comb insert
- Inlet connection piece with compensation ring
- Demounting tool

Art. no.	Colour / surface	L [cm]	B [cm]	H [cm]
154.455.00.1	customised / Stainless steel brushed	18.8	2.6	5.7

To order additionally



- Geberit installation set for CleanLine shower channel, for screed height at inlet 90–220 mm → p. 393
- Geberit installation set for CleanLine shower channels, floor-penetrating installation → p. 394
- Geberit installation set for CleanLine shower channel, for screed height at inlet 65–90 mm → p. 394
- Geberit installation set with inlet, for shower channels of the CleanLine series → p. 395



- Natural stone tiles in the shower area may discolour
- Tile insert including tile adhesive 17.1 x 2.6 x 0.8 cm

New

Geberit CleanLine30 shower channel



Application purposes

- For drainage of floor-even showers
- For installation in the room or on the wall
- Suitable for barrier-free construction

Characteristics

- Quality-monitored in accordance with EN 1253-3
- Shower channel can be cut to length
- Suitable for tile structures on floor 8–35 mm
- Shower channel can be aligned in height, inclination and offset
- Easy cleaning
- Load-bearing capacity, class K 3 (3 kN)
- Access to comb insert without tools
- With anti-fingerprint coating (only for models in black)

Technical data

Product material	CrNiMo steel 1.4404 (EN 10088)
------------------	--------------------------------

Scope of delivery

- Comb insert
- Inlet connection piece with compensation ring
- Sleeve

Art. no.	Colour / surface	L [cm]	B [cm]	H [cm]
154.501.KS.1	brushed stainless steel	30–90	4.3	0.8
154.501.TE.1	black	30–90	4.3	0.8
154.502.KS.1	brushed stainless steel	30–110	4.3	0.8
154.502.TE.1	black	30–110	4.3	0.8
154.503.KS.1	brushed stainless steel	30–130	4.3	0.8
154.503.TE.1	black	30–130	4.3	0.8
154.504.KS.1	brushed stainless steel	30–160	4.3	0.8
154.504.TE.1	black	30–160	4.3	0.8

Available as of April 2026

To order additionally

- Geberit installation set for CleanLine shower channel, for screed height at inlet 90–220 mm → p. 393
- Geberit installation set for CleanLine shower channel, for screed height at inlet 65–90 mm → p. 394
- Geberit installation set for CleanLine shower channels, floor-penetrating installation → p. 394
- Geberit installation set with inlet, for shower channels of the CleanLine series → p. 395

Can be combined with

- Geberit CleanLine30 connecting piece → p. 400






- Natural stone tiles in the shower area may discolour



Showers

Floor drainage systems for showers
Shower channels

Geberit CleanLine50 shower channel



click & scan

Application purposes

- For drainage of floor-even showers
- For installation in the room or on the wall
- For installation in thin bed mortar
- For composite seals
- Suitable for barrier-free construction

Technical data

Product material	CrNiMo steel 1.4404 (EN 10088)
------------------	--------------------------------

Scope of delivery

- Comb insert
- Inlet connection piece with compensation ring
- Suction cup
- Sleeve

Characteristics

- Quality-monitored in accordance with EN 1253-3
- With integrated slope
- Shower channel can be cut to length
- Suitable for tile structures on floor from 10–35 mm
- Shower channel can be aligned in height, inclination and offset
- Easy cleaning
- Water drainage above the composite seal
- Water drainage above the finished floor when using the sleeve
- With anti-fingerprint coating (only for models in black chrome)
- Discharge rate 0.56 l/s when using the installation set with 30 mm water seal depth and 65 mm screed height at inlet
- Discharge rate 0.74 l/s when using the installation set with 50 mm water seal depth and 90 mm screed height at inlet
- Discharge rate 0.8 l/s when using the installation set with 50 mm water seal depth and 100 mm screed height at inlet

Art. no.	Colour / surface	L [cm]	B [cm]	H [cm]
154.446.KS.2	Stainless steel brushed	30–90	3	1
154.446.QC.2	black chrome / Brushed	30–90	3	1
154.448.KS.2	Stainless steel brushed	30–110	3	1
154.448.QC.2	black chrome / Brushed	30–110	3	1
154.447.KS.2	Stainless steel brushed	30–130	3	1
154.447.QC.2	black chrome / Brushed	30–130	3	1

To order additionally

- Geberit installation set for CleanLine shower channel, for screed height at inlet 90–220 mm → p. 393
- Geberit installation set for CleanLine shower channel, for screed height at inlet 65–90 mm → p. 394
- Geberit installation set for CleanLine shower channels, floor-penetrating installation → p. 394
- Geberit installation set with inlet, for shower channels of the CleanLine series → p. 395



Can be combined with

- Geberit CleanLine50 connecting piece → p. 400



- Natural stone tiles in the shower area may discolour

Geberit CleanLine60 shower channel for thin floorings



click & scan

Application purposes

- For drainage of floor-even showers
- For installation in the room or on the wall
- For installation in thin bed mortar
- For composite seals
- For integration in finished surfaces based on epoxy resin
- For integration in finished surfaces based on PUR
- Suitable for barrier-free construction

Technical data

Product material	CrNiMo steel 1.4404 (EN 10088)
------------------	--------------------------------

Characteristics

- Quality-monitored in accordance with EN 1253-3
- Shower channel can be cut to length
- Suitable for tile structures on floor 4–30 mm
- Shower channel can be aligned in height, inclination and offset
- Easy cleaning
- Water drainage above the composite seal
- Water drainage above the finished floor when using the sleeve
- Load-bearing capacity, class K 3 (3 kN)

Scope of delivery

- Comb insert
- Inlet connection piece with compensation ring
- Suction cup
- Sleeve

Art. no.	Colour / surface	L [cm]	B [cm]	H [cm]
154.458.00.1	Stainless steel brushed	30–90	4.7	0.4
154.459.00.1	Stainless steel brushed	30–130	4.7	0.4


To order additionally

- Geberit installation set for CleanLine shower channel, for screed height at inlet 90–220 mm → p. 393
- Geberit installation set for CleanLine shower channel, for screed height at inlet 65–90 mm → p. 394
- Geberit installation set for CleanLine shower channels, floor-penetrating installation → p. 394
- Geberit installation set with inlet, for shower channels of the CleanLine series → p. 395



- Natural stone tiles in the shower area may discolour

Geberit CleanLine80 shower channel



click & scan

Application purposes

- For drainage of floor-even showers
- For installation in the room or on the wall
- For installation in thin bed mortar
- For composite seals
- Suitable for barrier-free construction

Technical data

Product material	CrNiMo steel 1.4404 (EN 10088)
------------------	--------------------------------

Characteristics

- Quality-monitored in accordance with EN 1253-3
- With integrated slope
- Shower channel can be cut to length
- Suitable for tile structures on floor from 10–35 mm
- Shower channel can be aligned in height, inclination and offset
- Easy cleaning
- Water drainage above the composite seal
- Water drainage above the finished floor when using the sleeve
- Load-bearing capacity, class K 3 (3 kN)
- With antifingerprint coating

Scope of delivery

- Comb insert
- Inlet connection piece with compensation ring
- Suction cup
- Sleeve

Art. no.	Colour / surface	L	B	H
		[cm]	[cm]	[cm]
154.440.KS.1	Frame: Stainless steel polished Surface: Stainless steel brushed	30–90	4.4	1
154.440.QC.1	Frame, Surface: black chrome / Brushed	30–90	4.4	1
154.440.39.1	Frame: champagne / Polished Surface: champagne / Stainless steel brushed	30–90	4.4	1
154.442.KS.1	Frame: Stainless steel polished Surface: Stainless steel brushed	30–110	4.4	1
154.442.QC.1	Frame, Surface: black chrome / Brushed	30–110	4.4	1
154.442.39.1	Frame: champagne / Polished Surface: champagne / Brushed	30–110	4.4	1
154.441.KS.1	Frame: Polished Surface: Stainless steel brushed	30–130	4.4	1
154.441.QC.1	Frame, Surface: black chrome / Brushed	30–130	4.4	1
154.441.39.1	Frame: champagne / Polished Surface: champagne / Stainless steel brushed	30–130	4.4	1

To order additionally

- Geberit installation set for CleanLine shower channel, for screed height at inlet 90–220 mm → p. 393
- Geberit installation set for CleanLine shower channels, floor-penetrating installation → p. 394
- Geberit installation set for CleanLine shower channel, for screed height at inlet 65–90 mm → p. 394
- Geberit installation set with inlet, for shower channels of the CleanLine series → p. 395

Can be combined with

- Geberit connecting piece CleanLine80 → p. 400



- Natural stone tiles in the shower area may discolour



Showers

Floor drainage systems for showers
Accessories for shower channels

Accessories for shower channels

Geberit connecting piece cleanLine20



click & scan

Application purposes

- For connecting two CleanLine20 shower channels

Scope of delivery

- Set of 2 pieces

Art. no.

154.307.00.1

Can be combined with

- Geberit CleanLine20 shower channel → p. 396

New

Geberit CleanLine30 connecting piece



click & scan

Art. no.

154.322.00.1

L
[cm]

12

B
[cm]


4.1

Available as of April 2026

Can be combined with

- Geberit CleanLine30 shower channel → p. 397

Geberit CleanLine50 connecting piece

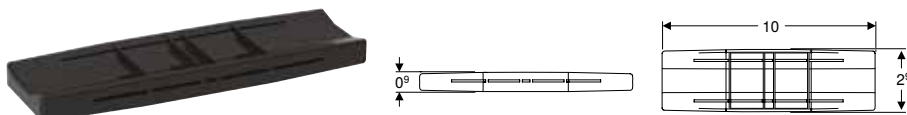

click & scan

Application purposes

- For connecting two CleanLine50 shower channels

Art. no.

154.320.00.1

L
[cm]

10

B
[cm]

2.9

H
[cm]

0.9

Can be combined with

- Geberit CleanLine50 shower channel → p. 398

Geberit connecting piece CleanLine80



click & scan

Application purposes

- For connecting two CleanLine80 shower channels

Art. no.

154.309.00.1

Can be combined with

- Geberit CleanLine80 shower channel → p. 399

Geberit fastening material for installation set for CleanLine shower channels



click & scan


Scope of delivery

- 2 slotted flat irons
- Fastening material

Art. no.

154.314.00.1

Geberit cleaning accessories for CleanLine shower channels

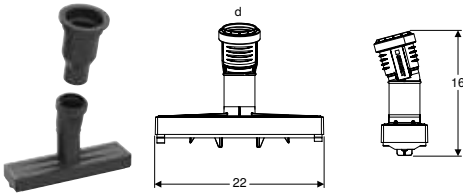

click & scan

Application purposes

- For Geberit CleanLine20 / CleanLine50 / CleanLine60 / CleanLine80 shower channels
- For use with Ropump® Super Plus pipe cleaning device

Characteristics

- Ropump® Super Plus pipe \varnothing 81 mm

Technical data

Product material	PE-HD
------------------	-------

Art. no.	d, \varnothing [mm]	B [cm]	H [cm]
154.343.00.1	63	20.8	18.3

Geberit suction and pressure pump for trap cleaning



click & scan

Art. no.

154.345.00.1







Showers

Floor drainage systems for showers
Shower floor drains



Shower floor drains

Accessory overview – Geberit shower floor drains

Geberit International Sales, version: October 2025

	Geberit shower floor drain for screed height at inlet 90–220 mm		Geberit shower floor drain for screed height at inlet 65–90 mm		Geberit shower floor drain, cross-floor	
	154.050.00.1		154.052.00.1		154.053.00.1	
						
Accessories						
Geberit Circle design grating, 8 x 8 cm	154.311.00.1		✓	✓	✓	✓
Geberit CleanPoint design grating, 8 x 8 cm	154.312.00.1		✓	✓	✓	✓
Geberit grating, screwable, 8 x 8 cm with grating frame	154.310.00.1		✓	✓	✓	✓
✓ Compatible						

Geberit CleanPoint shower floor drain for screed height at inlet 90–220 mm

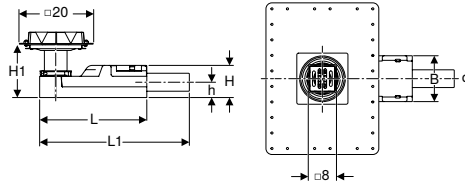

click & scan

Application purposes

- For drainage of floor-even showers
- Suitable for barrier-free construction
- For composite seals
- For screed height ≥ 90 mm at inlet
- For use as floor drain with horizontal outlet

Technical data

Depth of water seal (mm)	50 mm
--------------------------	-------

Characteristics

- Quality-monitored in accordance with EN 1253-3
- Suitable for tile structures on floor 2–40 mm
- Premounted sealing fleece
- Sealing fleece, 10 cm circumferential, for connecting sealing systems
- Grating made of stainless steel
- Grating can be aligned in height, inclination and offset
- Base unit made of EPS, for sound decoupling and receiving the trap
- Load-bearing capacity, class K 3 (3 kN)
- Water drainage above the composite seal

Scope of delivery

- Protection box cover with reference line
- Thin bed bonding flange
- Comb insert
- Grating frame unpunched with compensation ring
- Grating
- Trap made of PE-HD
- Fastening material
- Distance plate, thickness 2 cm

Art. no.	DN	d, \varnothing	Discharge rate	L	L1	B	H	H1	h
	[mm]	[mm]	[l/s]	[cm]	[cm]	[cm]	[cm]	[cm]	[cm]
154.050.00.1	50	50	0.8	30	35.8	13	9	9–22	4.2



Accessories

- Geberit CleanPoint grating, screwable, 8 x 8 cm with grating frame → p. 405
- Geberit CleanPoint design grating, round, 8 x 8 cm → p. 405
- Geberit CleanPoint design grating, 8 x 8 cm → p. 405



- Consider screed height of the base unit with tile sizes < 5 cm. Have product material and thickness of the screed defined by tiler.
- Natural stone tiles in the shower area may discolour
- Screwable grating with grating frame (art. no. 154.310.00.1) must be ordered separately

Geberit CleanPoint shower floor drain for screed height at inlet 65–90 mm

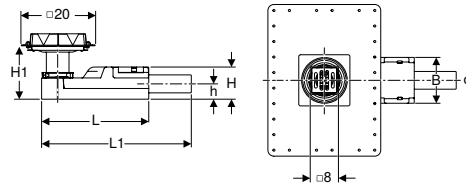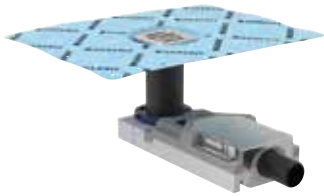

click & scan

Application purposes

- For drainage of floor-even showers
- Suitable for barrier-free construction
- For composite seals
- For screed height ≥ 65 mm at inlet
- For use as floor drain with horizontal outlet

Technical data

Depth of water seal (mm)	30 mm
--------------------------	-------

Characteristics

- Suitable for tile structures on floor 2–30 mm
- Premounted sealing fleece
- Sealing fleece, 10 cm circumferential, for connecting sealing systems
- Grating made of stainless steel
- Grating can be aligned in height, inclination and offset
- Base unit made of EPS, for sound decoupling and receiving the trap
- Load-bearing capacity, class K 3 (3 kN)
- Water drainage above the composite seal

Scope of delivery

- Protection box cover with reference line
- Thin bed bonding flange
- Comb insert
- Grating frame unpunched with compensation ring
- Grating
- Trap made of PE-HD
- Fastening material

Art. no.	DN	d, \emptyset [mm]	Discharge rate [l/s]	L [cm]	L1 [cm]	B [cm]	H [cm]	H1 [cm]	h [cm]
154.052.00.1	40	40	0.4	30	35.8	13	6.5	6.5–17.5	3.2

Accessories

- Geberit CleanPoint grating, screwable, 8 x 8 cm with grating frame → p. 405
- Geberit CleanPoint design grating, round, 8 x 8 cm → p. 405
- Geberit CleanPoint design grating, 8 x 8 cm → p. 405


- Consider screed height of the base unit with tile sizes < 5 cm. Have product material and thickness of the screed defined by tiler.
- Natural stone tiles in the shower area may discolour
- Screwable grating with grating frame (art. no. 154.310.00.1) must be ordered separately



Showers

Floor drainage systems for showers
Shower floor drains

Geberit CleanPoint cross-floor shower floor drain

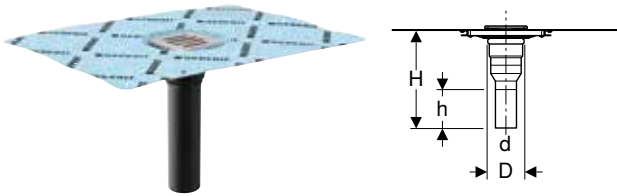

click & scan

Application purposes

- For drainage of floor-even showers
- For composite seals
- For floor constructions 2–25 cm
- For screed height ≥ 20 mm at inlet
- Not suitable for installation with fire protection requirements
- Suitable for barrier-free construction
- For use as floor drain with vertical outlet

Scope of delivery

- Protection box cover with reference line
- Thin bed bonding flange
- Straight connector made of PE-HD, $\varnothing 50$ mm
- Comb insert
- Grating frame unpunched with compensation ring
- Grating

Characteristics

- Premounted sealing fleece
- Sealing fleece, 10 cm circumferential, for connecting sealing systems
- Suitable for tile structures on floor 2–40 mm
- Grating can be aligned in height, inclination and offset
- Grating made of stainless steel
- Load-bearing capacity, class K 3 (3 kN)
- Water drainage above the composite seal

Art. no.	DN	d, \varnothing [mm]	D [cm]	H [cm]	h [cm]
154.053.00.1	50	50	7.8	34	15.6

To order additionally

- Trap

Accessories


- Geberit CleanPoint design grating, round, 8 x 8 cm \rightarrow p. 405
- Geberit CleanPoint design grating, 8 x 8 cm \rightarrow p. 405
- Geberit CleanPoint grating, screwable, 8 x 8 cm with grating frame \rightarrow p. 405
- Geberit P-trap for sink, with compression joint, vertical inlet and horizontal outlet \rightarrow p. 383



- Natural stone tiles in the shower area may discolour
- Screwable grating with grating frame (art. no. 154.310.00.1) must be ordered separately

Accessories for shower floor drains

Geberit CleanPoint grating, screwable, 8 x 8 cm with grating frame

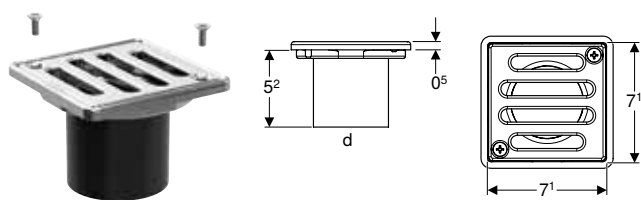

click & scan

Application purposes

- For Geberit floor drains for shower, 8 x 8 cm

Technical data


Product material	Stainless steel
------------------	-----------------

Characteristics

- Screwable
- Grating and screws made of stainless steel
- Load-bearing capacity, class K 3 (3 kN)

Art. no.	d, ø [mm]	Nominal width [cm]	L [cm]	B [cm]
154.310.00.1	50	8	8	8

Geberit CleanPoint design grating, round, 8 x 8 cm

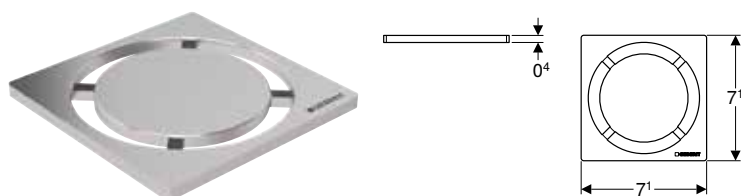

click & scan

Application purposes

- For shower floor drain with grating frame 8 x 8 cm

Technical data


Product material	Stainless steel
------------------	-----------------

Characteristics

- Brushed
- Load-bearing capacity, class K 3 (3 kN)

Art. no.	Nominal width [cm]	L [cm]	B [cm]	H [cm]
154.311.00.1	8	7.1	7.1	0.4

Geberit CleanPoint design grating, 8 x 8 cm

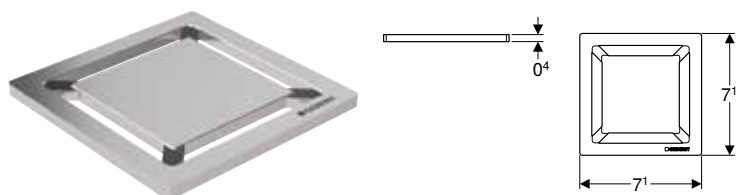

click & scan

Application purposes

- For shower floor drain with grating frame 8 x 8 cm

Technical data

Product material	Stainless steel
------------------	-----------------

Characteristics









- Brushed
- Load-bearing capacity, class K 3 (3 kN)

Art. no.	Nominal width [cm]	L [cm]	B [cm]	H [cm]
154.312.00.1	8	7.1	7.1	0.4

Wall drains

Assortment overview – Geberit wall drains

Geberit International Sales, version: October 2025


	Geberit Duo-fix element for shower, 130 cm, with CleanWall wall drain, wall-mounted tap, concealed, for screed height at inlet 90–250 mm	Geberit Duo-fix element for shower, 130 cm, with CleanWall wall drain, wall-mounted tap, concealed, for screed height at inlet 65–90 mm	Geberit Duo-fix element for shower, 50 cm, with CleanWall wall drain, for screed height at inlet 90–250 mm	Geberit Duo-fix element for shower, 50 cm, with CleanWall wall drain, for screed height at inlet 65–90 mm	Geberit Kombifix element for shower, with wall drain, for screed height at inlet 90–200 mm	Geberit Kombifix element for shower, with wall drain, for screed height at inlet 65–90 mm	Geberit GIS element for shower, with CleanWall wall drain, for screed height at inlet 90–200 mm	Geberit GIS element for shower, with CleanWall wall drain, for screed height at inlet 65–90 mm
	111.580.00.2	111.581.00.2	111.591.00.2	111.593.00.2	457.534.00.1	457.536.00.1	461.734.00.1	461.736.00.1
								

To order additionally

Geberit ready-to-fit set for CleanWall wall drain, cover made of plastic	154.335.11.1	✓	✓	✓	✓	✓	✓	✓
	154.335.14.1	✓	✓	✓	✓	✓	✓	✓
	154.335.21.1	✓	✓	✓	✓	✓	✓	✓
Geberit ready-to-fit set for CleanWall wall drain, cover made of brushed stainless steel	154.336.FW.1	✓	✓	✓	✓	✓	✓	✓
	154.337.FW.1	✓	✓	✓	✓	✓	✓	✓
Geberit ready-to-fit set for CleanWall wall drain, tile-bearing, frameless	154.338.00.1	✓	✓	✓	✓	✓	✓	✓
Geberit ready-to-fit set for CleanWall wall drain, tile-bearing, multi-piece	154.339.00.1	✓	✓	✓	✓	✓	✓	✓
Accessories								
Geberit CleanWall collector profile for wall drain for shower	154.340.FW.1	✓	✓	✓	✓	✓	✓	✓
	154.341.FW.1	✓	✓	✓	✓	✓	✓	✓

✓ Compatible

Geberit GIS element for shower, with CleanWall wall drain, for screed height at inlet 65–90 mm

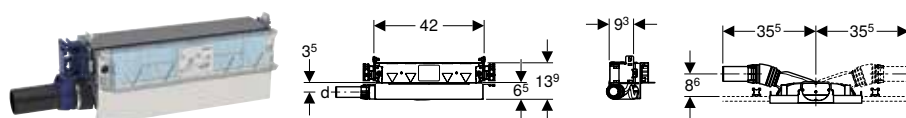

click & scan

Application purposes

- For installation in Geberit GIS support systems for prewalls, partition walls or freestanding walls
- For drainage of floor-even showers
- For composite seals
- For screed height ≥ 65 mm at inlet

Technical data

Depth of water seal (mm)	30 mm
--------------------------	-------

Characteristics

- Infinitely variable height adjustment in Geberit GIS structure
- Adjustable inlet height of trap
- Panelling thickness 10–40 mm
- Suitable for tile structures on floor 2–26 mm
- Suitable for tile structures on wall 2–35 mm
- Adjustable sealing level for tension-free sealing connection
- Lateral drainage connection
- Premounted sealing fleece
- Sealing fleece, 10 cm circumferential, for connecting sealing systems

Scope of delivery

- Straight connector made of PE-HD, \varnothing 40 mm
- Protection box cover with integrated outlet sheet
- Fastening material

Art. no.	DN	d, \varnothing [mm]	Discharge rate [l/s]	B [cm]	H [cm]	T [cm]
461.736.00.1	40	40	0.4	42	13.9	9.3

To order additionally

- Ready-to-fit set


Accessories

- Geberit ready-to-fit set for CleanWall wall drain, cover made of plastic → p. 413
- Geberit ready-to-fit set for CleanWall wall drain, cover made of brushed stainless steel → p. 413
- Geberit ready-to-fit set for CleanWall wall drain, cover made of stainless steel, screwable → p. 413
- Geberit ready-to-fit set for CleanWall wall drain, tile-bearing, frameless → p. 414
- Geberit ready-to-fit set for CleanWall wall drain, tile-bearing, multi-piece → p. 414
- Geberit CleanWall collector profile for wall drain for shower → p. 414



- Natural stone tiles in the shower area may discolour

Geberit GIS element for shower, with CleanWall wall drain, for screed height at inlet 90–200 mm

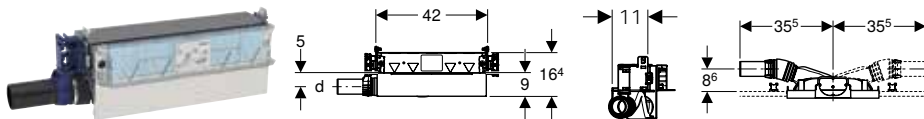

Application purposes

- For installation in Geberit GIS support systems for prewalls, partition walls or freestanding walls
- For drainage of floor-even showers
- For composite seals
- For screed height ≥ 90 mm at inlet

Technical data

Depth of water seal (mm)	50 mm
--------------------------	-------

Characteristics

- Quality-monitored in accordance with EN 1253-3
- Infinitely variable height adjustment in Geberit GIS structure
- Adjustable inlet height of trap
- Panelling thickness 10–40 mm
- Suitable for tile structures on floor 2–26 mm
- Adjustable sealing level for tension-free sealing connection
- Suitable for tile structures on wall 2–35 mm
- Lateral drainage connection
- Premounted sealing fleece
- Sealing fleece, 10 cm circumferential, for connecting sealing systems

Scope of delivery

- Straight connector made of PE-HD, \varnothing 50 mm
- Protection box cover with integrated outlet sheet
- Fastening material

Art. no.	DN	d, \varnothing [mm]	Discharge rate [l/s]	B [cm]	H [cm]	T [cm]
461.734.00.1	50	50	0.8	42	16.4	11

To order additionally

- Ready-to-fit set

Accessories


- Geberit ready-to-fit set for CleanWall wall drain, cover made of brushed stainless steel → p. 413
- Geberit ready-to-fit set for CleanWall wall drain, cover made of stainless steel, screwable → p. 413
- Geberit ready-to-fit set for CleanWall wall drain, cover made of plastic → p. 413
- Geberit ready-to-fit set for CleanWall wall drain, tile-bearing, frameless → p. 414
- Geberit ready-to-fit set for CleanWall wall drain, tile-bearing, multi-piece → p. 414
- Geberit CleanWall collector profile for wall drain for shower → p. 414



- Natural stone tiles in the shower area may discolour



Geberit Kombifix element for shower, with CleanWall wall drain, for screed height at inlet 65–90 mm

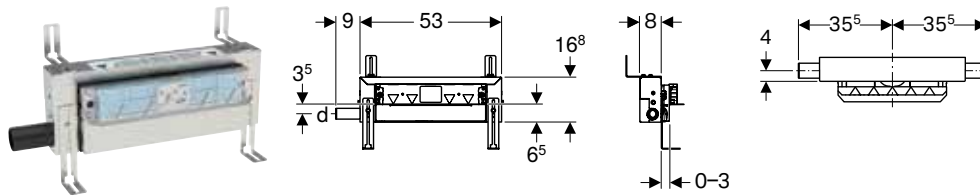

Application purposes

- For drainage of floor-even showers
- For solid walls, drywalls, or prewalls in solid and drywall construction
- For composite seals
- For screed height ≥ 65 mm at inlet

Characteristics

- Plaster thickness 5–30 mm
- Suitable for tile structures on floor 2–26 mm
- Suitable for tile structures on wall 2–35 mm
- Height-adjustable element
- Adjustable sealing level for tension-free sealing connection
- Lateral drainage connection
- Premounted sealing fleece
- Sealing fleece, 10 cm circumferential, for connecting sealing systems
- Adjustable inlet height of trap

Technical data

Depth of water seal (mm)	30 mm
--------------------------	-------

Scope of delivery

- Straight connector made of PE-HD, \varnothing 40 mm
- Protection box cover with integrated outlet sheet
- Fastening material

Art. no.	DN	d, \varnothing [mm]	Discharge rate [l/s]	B [cm]	H [cm]	T [cm]
457.536.00.1	40	40	0.4	53	16.8	8

To order additionally

- Ready-to-fit set


Accessories

- Geberit ready-to-fit set for CleanWall wall drain, cover made of plastic \rightarrow p. 413
- Geberit ready-to-fit set for CleanWall wall drain, cover made of stainless steel, screwable \rightarrow p. 413
- Geberit ready-to-fit set for CleanWall wall drain, tile-bearing, frameless \rightarrow p. 414
- Geberit ready-to-fit set for CleanWall wall drain, tile-bearing, multi-piece \rightarrow p. 414



- Natural stone tiles in the shower area may discolour

Geberit Kombifix element for shower, with CleanWall wall drain, for screed height at inlet 90–200 mm

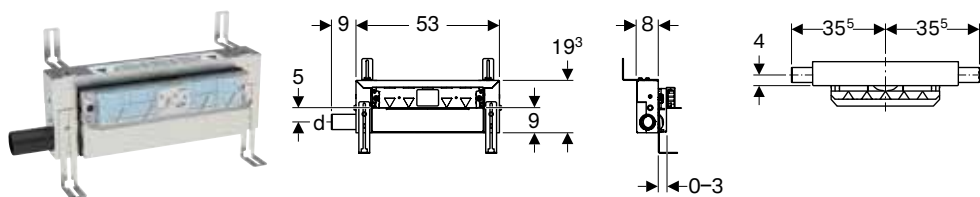

Application purposes

- For drainage of floor-even showers
- For solid walls, drywalls, or prewalls in solid and drywall construction
- For composite seals
- For screed height ≥ 90 mm at inlet

Characteristics

- Quality-monitored in accordance with EN 1253-3
- Plaster thickness 5–30 mm
- Suitable for tile structures on floor 2–26 mm
- Suitable for tile structures on wall 2–35 mm
- Height-adjustable element
- Adjustable sealing level for tension-free sealing connection
- Lateral drainage connection
- Premounted sealing fleece
- Sealing fleece, 10 cm circumferential, for connecting sealing systems
- Adjustable inlet height of trap

Technical data

Depth of water seal (mm)	50 mm
--------------------------	-------

Scope of delivery

- Straight connector made of PE-HD, \varnothing 50 mm
- Protection box cover with integrated outlet sheet
- Fastening material

Art. no.	DN	d, \varnothing [mm]	Discharge rate [l/s]	B [cm]	H [cm]	T [cm]
457.534.00.1	50	50	0.8	53	19.3	8

To order additionally

- Ready-to-fit set


Accessories

- Geberit ready-to-fit set for CleanWall wall drain, cover made of stainless steel, screwable → p. 413
- Geberit ready-to-fit set for CleanWall wall drain, cover made of plastic → p. 413
- Geberit ready-to-fit set for CleanWall wall drain, tile-bearing, frameless → p. 414
- Geberit ready-to-fit set for CleanWall wall drain, tile-bearing, multi-piece → p. 414



- Natural stone tiles in the shower area may discolour

Geberit Duofix element for shower, 130 cm, with CleanWall wall drain, wall-mounted tap, concealed, for screed height at inlet 90–250 mm

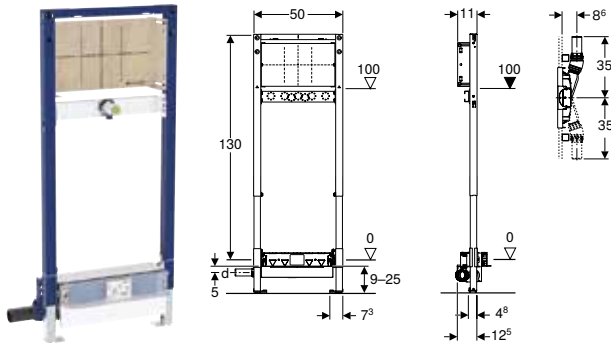

Application purposes

- For metal and wood frame walls
- For Geberit Duofix system walls
- For installation in part- or room-height prewalls
- For installation in room-height partition walls
- For composite seals
- For drainage of floor-even showers
- For screed height ≥ 90 mm at inlet
- For concealed or surface-mounted taps

Technical data

Depth of water seal (mm)	50 mm
--------------------------	-------

Scope of delivery

- Straight connector made of PE-HD, \varnothing 50 mm
- Elbow tap connector Rp 1/2" / R 1/2", compatible with MF
- Sealing washer
- Sound insulation base
- Insulating sleeve
- Protection box cover with integrated outlet sheet
- Fastening and protection material

Characteristics

- 2025 range
- Statically self-supporting frame, protected against corrosion with powder coating
- With pull-out plate for lateral fastening above the element on metal or wood profiles or on Geberit Duofix system studs
- Alternative fastening point for wall anchors
- Rotating foot plates, suitable for installation in U profiles UW 50 and UW 75
- Foot plates that can be mounted in Geberit Duofix system rail without tools, without additional components
- Galvanised non-slip leg supports protected against corrosion
- Quality-monitored in accordance with EN 1253-3
- Adjustable sealing level for tension-free sealing connection
- Premounted sealing fleece
- Sealing fleece, 10 cm circumferential, for connecting sealing systems
- Mounting plate adjustable in height and depth
- Mounting plate made of veneered wood, waterproof bonded
- Building material class B2 in accordance with DIN 4102-1, resp. class D-s2, d0 in accordance with EN 13501-3
- Formaldehyde release class A in accordance with EN 1084, resp. Class E 1 according to EN 13936
- Adjustable inlet height of trap
- Panelling thickness 10–40 mm
- Suitable for tile structures on floor 2–26 mm
- Suitable for tile structures on wall 2–35 mm
- Lateral drainage connection

Art. no.	DN	d, \varnothing [mm]	Discharge rate [l/s]	B [cm]	H [cm]	T [cm]
111.580.00.2	50	50	0.8	50	130	11

To order additionally

- Ready-to-fit set


Accessories

- Accessory overview – Geberit Duofix elements for showers and bathtubs → p. 81



- Natural stone tiles in the shower area may discolour

Geberit Duofix element for shower, 130 cm, with CleanWall wall drain, wall-mounted tap, concealed, for screed height at inlet 65–90 mm

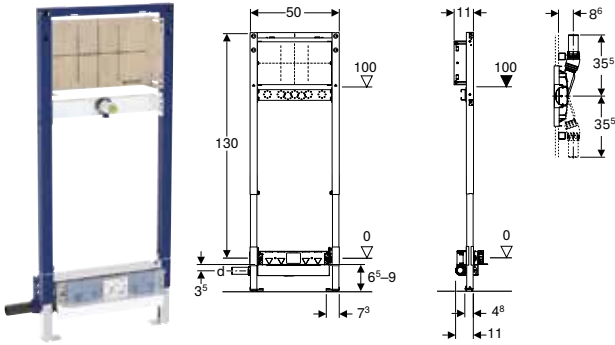

Application purposes

- For metal and wood frame walls
- For Geberit Duofix system walls
- For installation in part- or room-height prewalls
- For installation in room-height partition walls
- For drainage of floor-even showers
- For screed height ≥ 65 mm at inlet
- For concealed or surface-mounted taps
- For composite seals

Technical data

Depth of water seal (mm)	30 mm
--------------------------	-------

Scope of delivery

- Straight connector made of PE-HD, \varnothing 40 mm
- Elbow tap connector Rp 1/2" / R 1/2", compatible with MF
- Sealing washer
- Sound insulation base
- Insulating sleeve
- Protection box cover with integrated outlet sheet
- Fastening and protection material

Characteristics

- 2025 range
- Statically self-supporting frame, protected against corrosion with powder coating
- With pull-out plate for lateral fastening above the element on metal or wood profiles or on Geberit Duofix system studs
- Alternative fastening point for wall anchors
- Rotating foot plates, suitable for installation in U profiles UW 50 and UW 75
- Foot plates that can be mounted in Geberit Duofix system rail without tools, without additional components
- Galvanised non-slip leg supports protected against corrosion
- Adjustable sealing level for tension-free sealing connection
- Premounted sealing fleece
- Sealing fleece, 10 cm circumferential, for connecting sealing systems
- Mounting plate adjustable in height and depth
- Mounting plate made of veneered wood, waterproof bonded
- Building material class B2 in accordance with DIN 4102-1, resp. class D-s2, d0 in accordance with EN 13501-3
- Formaldehyde release class A in accordance with EN 1084, resp. Class E 1 according to EN 13936
- Deviating from the requirements from EN 1253, the depth of water seal is just 30 mm
- Adjustable inlet height of trap
- Panelling thickness 10–40 mm
- Suitable for tile structures on floor 2–26 mm
- Suitable for tile structures on wall 2–35 mm
- Lateral drainage connection

Art. no.	DN	d, \varnothing [mm]	Discharge rate [l/s]	B [cm]	H [cm]	T [cm]
111.581.00.2	40	40	0.4	50	130	11

To order additionally

- Ready-to-fit set


Accessories

- Accessory overview – Geberit Duofix elements for showers and bathtubs → p. 81



- Natural stone tiles in the shower area may discolour

Geberit Duofix element for shower, 50 cm, with CleanWall wall drain, for screed height at inlet 90–250 mm

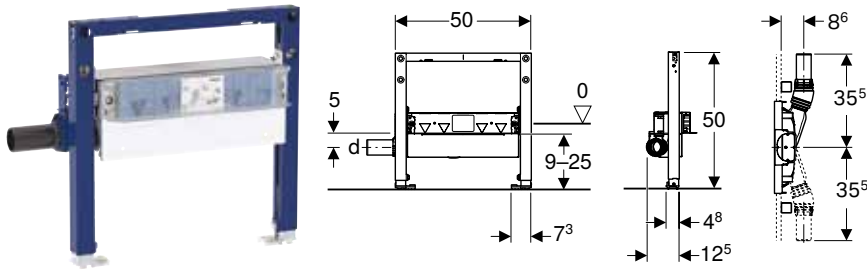

Application purposes

- For metal and wood frame walls
- For Geberit Duofix system walls
- For installation in room-height pre-walls
- For installation in room-height partition walls
- For composite seals
- For drainage of floor-even showers
- For screed height ≥ 90 mm at inlet

Technical data

Depth of water seal (mm)	50 mm
--------------------------	-------

Scope of delivery

- Straight connector made of PE-HD, $\varnothing 50$ mm
- Protection box cover with integrated outlet sheet
- Fastening material

Characteristics

- 2025 range
- Statically self-supporting frame, protected against corrosion with powder coating
- With pull-out plate for lateral fastening above the element on metal or wood profiles or on Geberit Duofix system studs
- Alternative fastening point for wall anchors
- Rotating foot plates, suitable for installation in U profiles UW 50 and UW 75
- Foot plates that can be mounted in Geberit Duofix system rail without tools, without additional components
- Galvanised non-slip leg supports protected against corrosion
- Quality-monitored in accordance with EN 1253-3
- Adjustable sealing level for tension-free sealing connection
- Premounted sealing fleece
- Sealing fleece, 10 cm circumferential, for connecting sealing systems
- Adjustable inlet height of trap
- Panelling thickness 10–40 mm
- Suitable for tile structures on floor 2–26 mm
- Suitable for tile structures on wall 2–35 mm
- Lateral drainage connection

Art. no.	DN	d, \varnothing [mm]	Discharge rate [l/s]	B [cm]	H [cm]	T [cm]
111.591.00.2	50	50	0.8	50	50	12.5

To order additionally

- Ready-to-fit set


Accessories

- Accessory overview – Geberit Duofix elements for showers and bathtubs → p. 81



- Natural stone tiles in the shower area may discolour

Geberit Duofix element for shower, 50 cm, with CleanWall wall drain, for screed height at inlet 65–90 mm

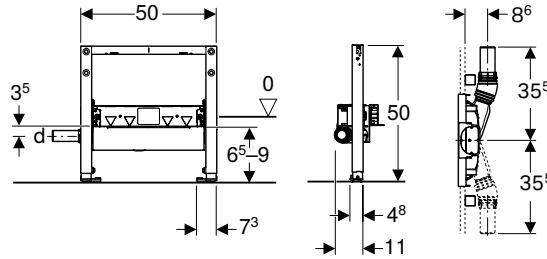

Application purposes

- For metal and wood frame walls
- For Geberit Duofix system walls
- For installation in room-height pre-walls
- For installation in room-height partition walls
- For drainage of floor-even showers
- For screed height ≥ 65 mm at inlet
- For composite seals

Technical data

Depth of water seal (mm)	30 mm
--------------------------	-------

Scope of delivery

- Straight connector made of PE-HD, $\varnothing 40$ mm
- Protection box cover with integrated outlet sheet
- Fastening material

Characteristics

- 2025 range
- Statically self-supporting frame, protected against corrosion with powder coating
- With pull-out plate for lateral fastening above the element on metal or wood profiles or on Geberit Duofix system studs
- Alternative fastening point for wall anchors
- Rotating foot plates, suitable for installation in U profiles UW 50 and UW 75
- Foot plates that can be mounted in Geberit Duofix system rail without tools, without additional components
- Galvanised non-slip leg supports protected against corrosion
- Adjustable sealing level for tension-free sealing connection
- Premounted sealing fleece
- Sealing fleece, 10 cm circumferential, for connecting sealing systems
- Deviating from the requirements from EN 1253, the depth of water seal is just 30 mm
- Adjustable inlet height of trap
- Panelling thickness 10–40 mm
- Suitable for tile structures on floor 2–26 mm
- Suitable for tile structures on wall 2–35 mm
- Lateral drainage connection

Art. no.	DN	d, \varnothing [mm]	Discharge rate [l/s]	B [cm]	H [cm]	T [cm]
111.593.00.2	40	40	0.4	50	50	11

To order additionally

- Ready-to-fit set

Accessories

- Accessory overview – Geberit Duofix elements for showers and bathtubs → p. 81



- Natural stone tiles in the shower area may discolour

Accessories for wall drains

Geberit ready-to-fit set for CleanWall wall drain, cover made of brushed stainless steel



click & scan

Application purposes

- For Geberit wall drains

Technical data

Product material	Stainless steel
------------------	-----------------

Characteristics

- Can be removed for cleaning

Scope of delivery

- Cover
- Comb insert
- Hexagon key

Art. no.	Colour / surface	L [cm]	H [cm]
154.336.FW.1	Stainless steel brushed	32	5

Geberit ready-to-fit set for CleanWall wall drain, cover made of stainless steel, screwable



click & scan

Application purposes

- For Geberit wall drains

Technical data

Product material	Stainless steel
------------------	-----------------

Characteristics

- Can be removed for cleaning
- Screwable

Scope of delivery

- Cover
- Comb insert
- Hexagon key
- Fastening material

Art. no.	Colour / surface	L [cm]	H [cm]
154.337.FW.1	Stainless steel brushed	32	5

Geberit ready-to-fit set for CleanWall wall drain, cover made of plastic



click & scan

Application purposes

- For Geberit wall drains

Technical data

Product material	Plastic
------------------	---------

Characteristics

- Can be removed for cleaning

Scope of delivery

- Cover
- Comb insert
- Hexagon key

Art. no.	Colour / surface	L [cm]	H [cm]
154.335.11.1	white alpine	32	5
154.335.14.1	black matt	32	5
154.335.21.1	chrome / Glossy	32	5

Showers

Floor drainage systems for showers
Accessories for wall drains

Geberit CleanWall collector profile for wall drain for shower



click & scan

Application purposes

- For draining off shower water into the Geberit wall drain for showers
- For installation in thin bed mortar

Characteristics

- Can be shortened as required

Scope of delivery


- 2 caps, pluggable

Technical data

Product material	Stainless steel
------------------	-----------------

Art. no.	Colour / surface	L [cm]	H [cm]
154.340.FW.1	Stainless steel brushed	115	0.8
154.341.FW.1	Stainless steel brushed	150	0.8

Geberit ready-to-fit set for CleanWall wall drain, tile-bearing, frameless

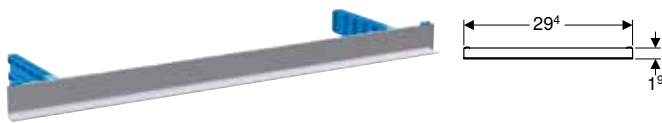

click & scan

Application purposes

- For Geberit wall drains
- For overlaying with one tile without joints

Scope of delivery

- Tile-bearing plate
- Comb insert
- Hexagon key

Characteristics

- Can be removed for cleaning
- Suitable for tile structures on wall 2–35 mm

Art. no.	L [cm]	H [cm]
154.338.00.1	29.4	1.9

Geberit ready-to-fit set for CleanWall wall drain, tile-bearing, multi-piece



click & scan

Application purposes

- For Geberit wall drains
- For overlaying with multiple tiles

Characteristics

- Can be removed for cleaning
- Suitable for tile structures on wall 2–35 mm

Technical data


Product material	Stainless steel
------------------	-----------------

Scope of delivery

- Tile-bearing plate
- Sight frame
- Comb insert
- Hexagon key

Art. no.	L [cm]	H [cm]
154.339.00.1	31.6	6.4

Geberit cleaning accessories for CleanWall wall drain

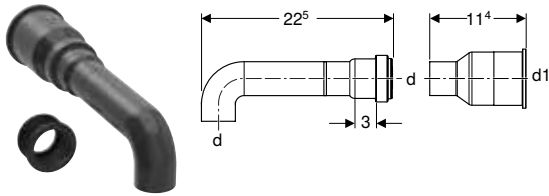

Application purposes

- For use with Ropump® Super Plus pipe cleaning device

Technical data

Product material	PE-HD
------------------	-------

Characteristics

- Ropump® Super Plus pipe \varnothing 81 mm
- Suitable for tile structures on floor 4–16 mm

Art. no.	d, \varnothing [mm]	d1, \varnothing [mm]
154.344.00.1	40	60





Waste fittings and traps for showers and bathtubs

Drain assemblies for shower trays, d52.....	418
Assortment overview – Geberit shower drains.....	418
Without drain covers.....	418
Drain covers.....	419
Drain assemblies for shower trays, d62.....	419
Without drain covers.....	419
Drain covers.....	419
Drain assemblies for shower trays, d90.....	420
With drain covers.....	420
Without drain covers.....	421
Drain covers.....	422
Drain assemblies for bathtubs, d52.....	423
Assortment overview – Geberit bathtub drains.....	423
With turn handle actuation.....	424
Ready-to-fit-sets for turn handle actuation.....	426
With turn handle actuation and inlet.....	426
Ready-to-fit-sets for turn handle actuation and inlet.....	429
With push actuation PushControl.....	430
With waste plugs.....	431
Accessories for drain assemblies, for bathtubs.....	432
Water supply connections.....	432



Drain assemblies for shower trays, d52


Assortment overview – Geberit shower drains

Geberit International Sales, version: October 2025

	With ready-to-fit set	Without ready-to-fit set			
	d90	d52	d62	d90	
					
Shower drain	150.551.21.1				
	150.552.21.1				
	150.583.21.1				
	150.592.21.1				
			150.680.00.1		
				150.685.00.1	
					150.550.00.1
				150.581.00.1	
				150.552.00.1	
Accessories					
Outlet cover		150.280.xx.1			
			150.285.xx.1		
				150.265.xx.1	
				150.266.xx.1	

Without drain covers

Geberit shower drain d52

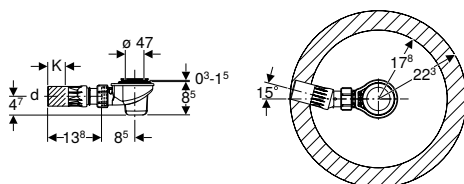

click & scan

Application purposes

- For shower trays with valve hole \varnothing 52 mm
- For shower trays without overflow
- For use as floor drain with horizontal outlet

Technical data

Depth of water seal (mm)	50 mm
--------------------------	-------

Characteristics

- Quality-monitored in accordance with EN 274-3
- Dip tube can be dismantled

Scope of delivery

- Trap
- Straight connector made of PE-HD, \varnothing 50 mm, with ball joint
- Fastening material

Art. no.	DN	d, \varnothing [mm]	H [cm]	K [cm]
150.680.00.1	50	50	9	4.7

To order additionally

- Drain cover

Accessories

- Geberit drain cover d52, for shower drain → p. 419

Drain covers

Geberit drain cover d52, for shower drain


[click & scan](#)

Application purposes

- For Geberit shower drains with removable dip tube
- For valve holes \varnothing 52 mm

Technical data



Product material	Plastic
------------------	---------

Art. no.	Colour / surface	d, \varnothing [mm]
150.280.11.1	white alpine	80
150.280.14.1	black matt	80
150.280.21.1	chrome / Glossy	80
150.280.46.1	chrome / Matt	80

Drain assemblies for shower trays, d62

Without drain covers

Geberit shower drain d62, straight connector with ball joint


[click & scan](#)

Application purposes

- For installation in shower trays with valve hole \varnothing 62 mm
- For shower trays without overflow
- For installation in the shell of a building
- For use as floor drain with horizontal outlet

Scope of delivery

- Fastening material
- Screw connection, \varnothing 40 mm
- Straight connector made of PE-HD, \varnothing 50 mm, with ball joint
- Trap

Characteristics

- Quality-monitored in accordance with EN 274-3
- Dip tube can be dismantled

Art. no.	DN	d, \varnothing [mm]	H [cm]	K [cm]
150.685.00.1	50	50	9	4.7

To order additionally

- Drain cover

Accessories

- Geberit drain cover d62, for shower drain → p. 419

Drain covers

Geberit drain cover d62, for shower drain


[click & scan](#)

Application purposes

- For Geberit shower drains with removable dip tube
- For valve holes \varnothing 60 mm

Technical data


Product material	Plastic
------------------	---------

Art. no.	Colour / surface
150.285.21.1	chrome / Glossy

Drain assemblies for shower trays, d90

With drain covers

Geberit shower drain d90, with drain cover, depth of water seal 50 mm, outlet made of PE

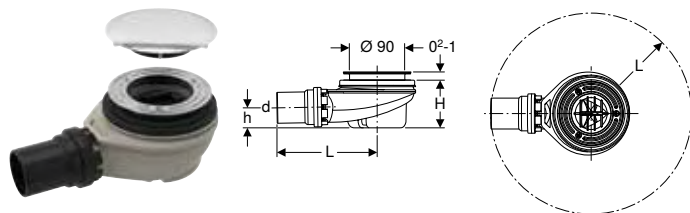

click & scan

Application purposes

- For shower trays with valve hole \varnothing 90 mm
- For shower trays without overflow
- For use as floor drain with horizontal outlet

Technical data

Depth of water seal (mm)	50 mm
--------------------------	-------

Characteristics


- Quality-monitored in accordance with EN 274-3
- Dip tube can be dismantled
- Removable trap cup

Scope of delivery

- Drain cover
- Trap
- Comb insert
- Fastening material

Art. no.	Colour / surface	DN	Straight connector	d, \varnothing [mm]	L [cm]	H [cm]	h [cm]
150.551.21.1	chrome / Glossy	50	PE-HD	50	16.3	7.8	3.3
150.552.21.1	chrome / Glossy	40	PE-HD	40	16.3	7.8	3.3

Geberit shower drain d90, with drain cover, depth of water seal 30 mm, outlet made of PE

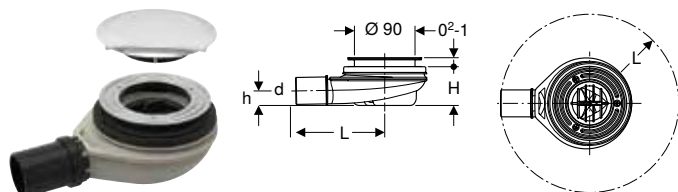

click & scan

Application purposes

- For shower trays with valve hole \varnothing 90 mm
- For shower trays without overflow
- For use as floor drain with horizontal outlet

Technical data

Depth of water seal (mm)	30 mm
--------------------------	-------

Characteristics


- Deviating from the requirements from EN 274, the depth of water seal is just 30 mm
- Dip tube can be dismantled
- Removable trap cup

Scope of delivery

- Drain cover
- Trap
- Comb insert
- Fastening material

Art. no.	Colour / surface	DN	Straight connector	d, \varnothing [mm]	L [cm]	H [cm]	h [cm]
150.583.21.1	chrome / Glossy	40	PE-HD	40	16.3	5.8	2.2

Geberit shower drain d90, for cross-floor installation, without trap, with drain cover

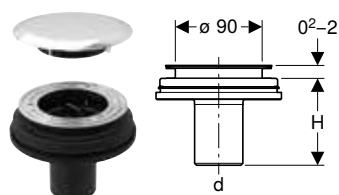

click & scan

Application purposes

- For shower trays with valve hole \varnothing 90 mm
- For shower trays without overflow
- For use as floor drain with vertical outlet

Scope of delivery

- Drain cover
- Comb insert
- Outlet pipe made of PE-HD, \varnothing 50 mm
- Fastening material


Art. no.	Colour / surface	DN	d, ø [mm]	H [cm]
150.592.21.1	chrome / Glossy	50	50	8.5

To order additionally

- Trap

Without drain covers

Geberit shower drain d90, depth of water seal 50 mm, outlet made of PE

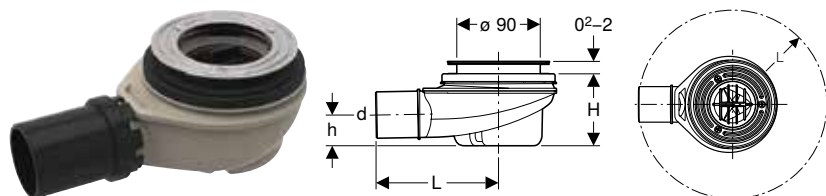

click & scan

Application purposes

- For shower trays with valve hole ø 90 mm
- For shower trays without overflow
- For use as floor drain with horizontal outlet

Characteristics

- Quality-monitored in accordance with EN 274-3
- Dip tube can be dismantled
- Removable trap cup

Technical data

Depth of water seal (mm)	50 mm
--------------------------	-------

Scope of delivery

- Trap
- Fastening material

Art. no.	DN	Straight connector	d, ø [mm]	L [cm]	H [cm]	h [cm]
150.550.00.1	50	PE-HD	50	16.3	7.8	3.3
150.552.00.1	40	PE-HD	40	16.3	7.8	3.3


To order additionally

- Ablaufdeckel ø 90 mm

Can be combined with

- Geberit Split drain cover, d90, for shower drain, 30/50 mm water seal depth → p. 423
- Geberit drain cover d90, for shower drain, depth of water seal 30 / 50 mm → p. 422

Geberit shower drain d90, depth of water seal 30 mm, outlet made of PE

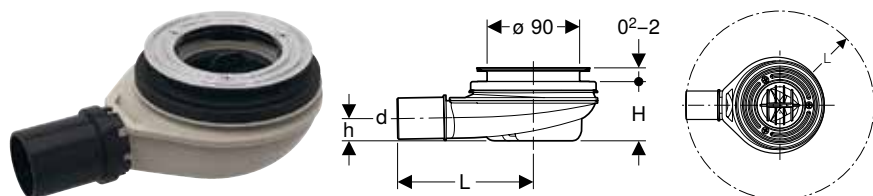

click & scan

Application purposes

- For shower trays with valve hole ø 90 mm
- For shower trays without overflow
- For use as floor drain with horizontal outlet

Characteristics

- Deviating from the requirements from EN 274, the depth of water seal is just 30 mm
- Dip tube can be dismantled
- Removable trap cup

Technical data

Depth of water seal (mm)	30 mm
--------------------------	-------

Scope of delivery

- Trap
- Fastening material

Art. no.	DN	Straight connector	d, ø [mm]	L [cm]	H [cm]	h [cm]
150.581.00.1	40	PE-HD	40	16.3	5.8	2.2

To order additionally

- Ablaufdeckel ø 90 mm

Can be combined with

- Geberit Split drain cover, d90, for shower drain, 30/50 mm water seal depth → p. 423
- Geberit drain cover d90, for shower drain, depth of water seal 30 / 50 mm → p. 422




Waste fittings and traps for showers and bathtubs

Drain assemblies for shower trays, d90

Drain covers

Geberit shower drain d90, for cross-floor installation, without trap

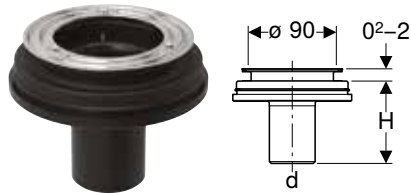

click & scan

Application purposes

- For shower trays with valve hole \varnothing 90 mm
- For shower trays without overflow
- For use as floor drain with vertical outlet

Scope of delivery

- Outlet pipe made of PE-HD, \varnothing 50 mm
- Fastening material

Art. no.	DN	d, \varnothing [mm]	H [cm]
150.592.00.1	50	50	8.5

To order additionally

- Trap
- Ablaufdeckel \varnothing 90 mm

Can be combined with

- Geberit Split drain cover, d90, for shower drain, 30/50 mm water seal depth \rightarrow p. 423
- Geberit drain cover d90, for shower drain, depth of water seal 30 / 50 mm \rightarrow p. 422

Drain covers

Geberit drain cover d90, for shower drain, depth of water seal 30 / 50 mm



click & scan

Application purposes

- For Geberit shower drains
- For valve holes \varnothing 90 mm

Scope of delivery

- Comb insert

Art. no.	Colour / surface	d, \varnothing [mm]	Product material
150.265.11.1	white alpine	115	Plastic
150.265.21.1	chrome / Glossy	115	Plastic
150.265.46.1	chrome / Matt	115	Plastic

Can be combined with

- Geberit shower drain d90, depth of water seal 30 mm, outlet made of PE \rightarrow p. 421
- Geberit shower drain d90, for cross-floor installation, without trap \rightarrow p. 422
- Geberit shower drain d90, depth of water seal 50 mm, outlet made of PE \rightarrow p. 421

Geberit Split drain cover, d90, for shower drain, 30/50 mm water seal depth



click & scan

Application purposes

- For Geberit shower drains
- For valve holes ø 90 mm

Scope of delivery

- Comb insert

Technical data

Product material	Plastic
------------------	---------

Art. no.	Colour / surface	d, ø [mm]
150.266.11.1	Cover plate: white alpine / Matt Design ring/-s: chrome / Matt	120.7
150.266.16.1	Cover plate: black matt Design ring/-s: black / Glossy	120.7
150.266.21.1	Cover plate: chrome / Glossy Design ring/-s: chrome / Matt	120.7
150.266.KJ.1	Cover plate: white / Matt Design ring/-s: chrome / Matt	120.7

Can be combined with

- Geberit shower drain d90, depth of water seal 30 mm, outlet made of PE → p. 421
- Geberit shower drain d90, for cross-floor installation, without trap → p. 422
- Geberit shower drain d90, depth of water seal 50 mm, outlet made of PE → p. 421

Drain assemblies for bathtubs, d52

Assortment overview – Geberit bathtub drains


Geberit International Sales, version: October 2025

		Bathtub drain with pushbutton actuation PushControl	Bathtub drain with turn handle actuation	Bathtub drain with turn handle actuation and inlet	Bathtub drain with waste plug
With ready-to-fit set	d52	150.755.21.6	150.520.21.6	150.710.21.6	150.017.00.6
	d52, long	150.756.21.6			
	d52, high	150.757.21.6			
	d52, XL		150.525.21.6	150.711.21.6	
Without ready-to-fit set	d52		150.501.00.6	150.702.00.6	
				150.700.00.6	
	d52, XL		150.505.00.6	150.701.00.6	



With turn handle actuation

Geberit bathtub drain with turn handle, d52, length 26 cm

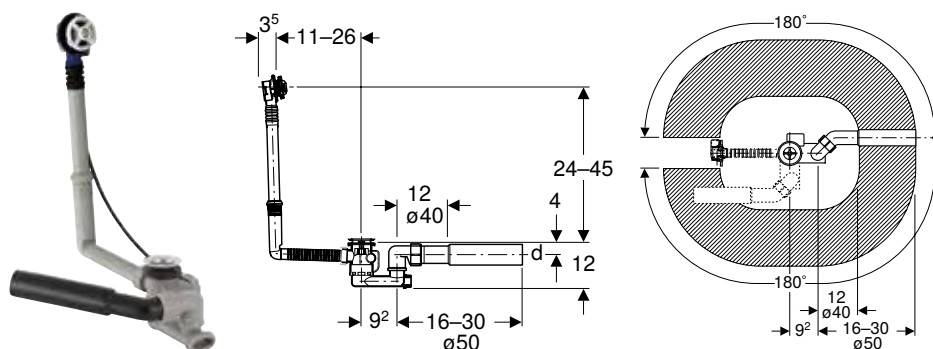

click & scan

Application purposes

- For bathtubs with valve hole \varnothing 52 mm
- For bathtubs made of steel, plastic or cast iron
- For standard-size bathtubs

Technical data

Overflow discharge rate	0.6 l/s
Depth of water seal (mm)	50 mm

Characteristics

- Quality-monitored in accordance with EN 274-3
- With overflow
- Double-sided seals on drain and overflow
- Overflow head with extendible mount can be fastened

Scope of delivery

- Waste outlet
- Trap
- Connection bend made of PE-HD, \varnothing 40 / 50 mm
- Protection box
- Fastening material

Art. no.	DN	d, \varnothing [mm]	Discharge rate [l/s]
150.501.00.6	40	40 / 50	0.8


To order additionally

- Ready-to-fit set

Accessories

- Geberit Split ready-to-fit set, d52, for bathtub drain with turn handle → p. 426
- Geberit ready-to-fit set d52, for bathtub drain with turn handle → p. 426

Geberit bathtub drain with turn handle, d52, length 26 cm, with ready-to-fit-set

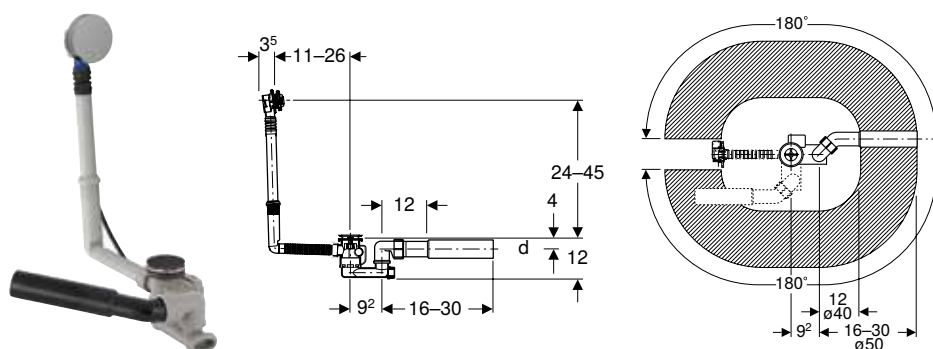

click & scan

Application purposes

- For bathtubs with valve hole \varnothing 52 mm
- For bathtubs made of steel, plastic or cast iron
- For standard-size bathtubs

Technical data

Overflow discharge rate	0.6 l/s
Depth of water seal (mm)	50 mm

Characteristics


- Quality-monitored in accordance with EN 274-3
- With overflow
- Double-sided seals on drain and overflow
- Overflow head with extendible mount can be fastened

Scope of delivery

- Ready-to-fit set
- Waste outlet
- Trap
- Connection bend made of PE-HD, \varnothing 40 / 50 mm
- Protection box
- Fastening material

Art. no.	Colour / surface	DN	d, \varnothing [mm]	Discharge rate [l/s]
150.520.21.6	chrome / Glossy	40	40 / 50	0.8

Geberit bathtub drain with turn handle, d52, length 73 cm

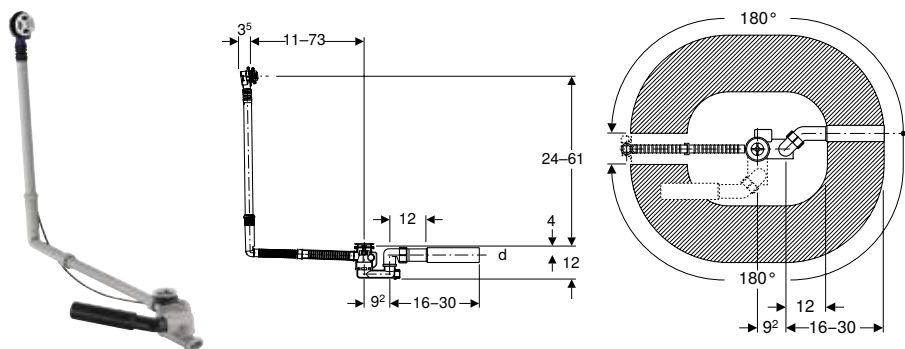

click & scan

Application purposes

- For bathtubs with valve hole \varnothing 52 mm
- For bathtubs made of steel, plastic or cast iron
- For custom-size bathtubs

Technical data

Overflow discharge rate	0.6 l/s
Depth of water seal (mm)	50 mm

Characteristics

- Quality-monitored in accordance with EN 274-3
- With overflow
- Double-sided seals on drain and overflow
- Overflow head with extendible mount can be fastened

Scope of delivery

- Waste outlet
- Trap
- Connection bend made of PE-HD, \varnothing 40 / 50 mm
- Protection box
- Fastening material

Art. no.	DN	d, \varnothing [mm]	Discharge rate [l/s]
150.505.00.6	40 / 50	40 / 50	0.8


To order additionally

- Ready-to-fit set

Accessories

- Geberit Split ready-to-fit set, d52, for bathtub drain with turn handle → p. 426
- Geberit ready-to-fit set d52, for bathtub drain with turn handle → p. 426

Geberit bathtub drain with turn handle, d52, length 73 cm, with ready-to-fit-set

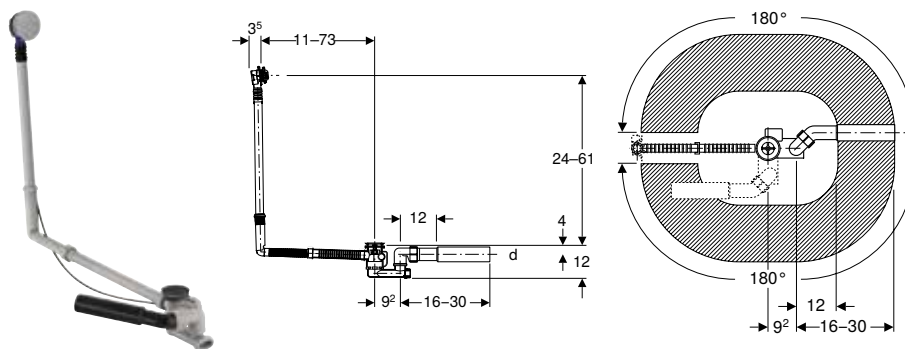

click & scan

Application purposes

- For bathtubs with valve hole \varnothing 52 mm
- For bathtubs made of steel, plastic or cast iron
- For custom-size bathtubs

Technical data

Overflow discharge rate	0.6 l/s
Depth of water seal (mm)	50 mm

Characteristics

- Quality-monitored in accordance with EN 274-3
- With overflow
- Double-sided seals on drain and overflow
- Overflow head with extendible mount can be fastened

Scope of delivery

- Ready-to-fit set
- Waste outlet
- Trap
- Connection bend made of PE-HD, \varnothing 40 / 50 mm
- Protection box
- Fastening material

Art. no.	Colour / surface	DN	d, \varnothing [mm]	Discharge rate [l/s]
150.525.21.6	chrome / Glossy	40	40 / 50	0.8



Waste fittings and traps for showers and bathtubs

Drain assemblies for bathtubs, d52
With turn handle actuation and inlet

Ready-to-fit-sets for turn handle actuation

Geberit ready-to-fit set d52, for bathtub drain with turn handle



click & scan

Scope of delivery

- Actuator rosette
- Waste plug
- Fastening material

Art. no.	Colour / surface
150.281.11.1	white alpine
150.281.21.1	chrome / Glossy

Geberit Split ready-to-fit set, d52, for bathtub drain with turn handle



click & scan



Scope of delivery

- Actuator rosette
- Waste plug
- Fastening material

Art. no.	Colour / surface
150.300.14.1	black matt
150.300.21.1	chrome / Glossy
150.300.KJ.1	Cover plate: white alpine / Glossy Design ring/-s: chrome / Glossy

With turn handle actuation and inlet

Geberit bathtub drain with turn handle and inlet, d52, length 26 cm

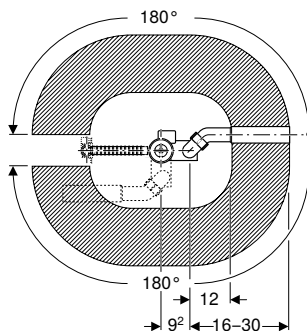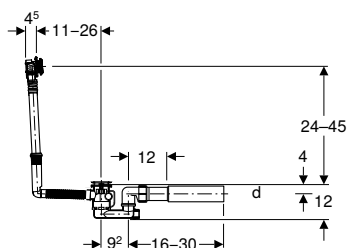

click & scan

Application purposes

- For bathtubs with valve hole \varnothing 52 mm
- For bathtubs made of steel, plastic or cast iron
- For standard-size bathtubs

Characteristics

- With overflow and inlet
- Quality-monitored in accordance with EN 274-3
- Inlet jet can be aligned
- Double-sided seals on drain and overflow
- Overflow head with extendible mount can be fastened

Technical data

Sound class	1
Inlet capacity at 300 kPa / 3 bar	0.35 l/s
Overflow discharge rate	0.6 l/s
Depth of water seal (mm)	50 mm

Scope of delivery

- Overflow head with inlet
- Waste outlet
- Trap
- Elbow tap connector 90° with MasterFix, 1/2", radial-sealing
- Connection bend made of PE-HD, ø 40 / 50 mm
- Protection box
- Fastening material

Art. no.	DN	d, ø [mm]	Discharge rate [l/s]
150.700.00.6	40	40 / 50	0.85



To order additionally

- Ready-to-fit set

Accessories

- Geberit Split ready-to-fit set, d52, for bathtub drain with turn handle and inlet → p. 429

Geberit bathtub drain with turn handle and inlet, d52, length 26cm, with ready-to-fit-set

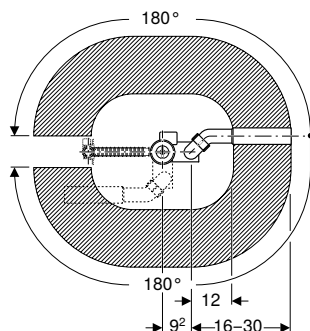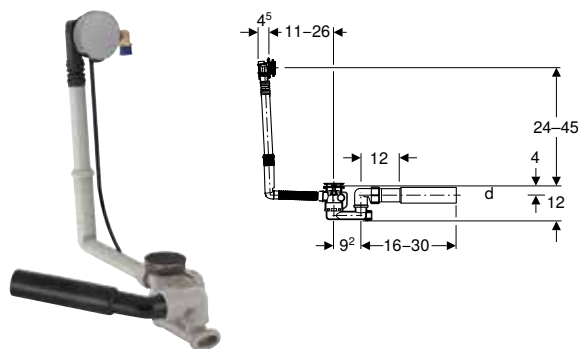

Application purposes

- For bathtubs with valve hole ø 52 mm
- For bathtubs made of steel, plastic or cast iron
- For standard-size bathtubs

Technical data

Sound class	1
Inlet capacity at 300 kPa / 3 bar	0.35 l/s
Overflow discharge rate	0.6 l/s
Depth of water seal (mm)	50 mm

Characteristics

- With overflow and inlet
- Quality-monitored in accordance with EN 274-3
- Inlet jet can be aligned
- Double-sided seals on drain and overflow
- Overflow head with extendible mount can be fastened

Scope of delivery

- Ready-to-fit set
- Overflow head with inlet
- Waste outlet
- Trap
- Elbow tap connector 90° with MasterFix, 1/2", radial-sealing
- Connection bend made of PE-HD, ø 40 / 50 mm
- Protection box
- Fastening material


Art. no.	Colour / surface	DN	d, ø [mm]	Discharge rate [l/s]
150.710.21.6	chrome / Glossy	40	40 / 50	0.85



Waste fittings and traps for showers and bathtubs

Drain assemblies for bathtubs, d52
With turn handle actuation and inlet

Geberit bathtub drain with turn handle and inlet, d52, length 32 cm, with connection bend, counterflow principle

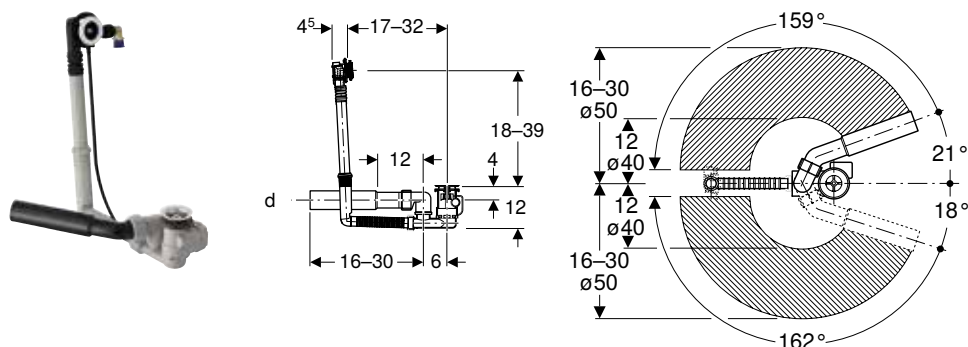

click & scan

Application purposes

- For bathtubs made of steel, plastic or cast iron
- For standard-size bathtubs
- For bathtubs with valve hole \varnothing 52 mm

Technical data

Sound class	1
Inlet capacity at 300 kPa / 3 bar	0.35 l/s
Overflow discharge rate	0.6 l/s
Depth of water seal (mm)	50 mm

Characteristics

- Fulfils requirements in accordance with DIN 274
- With overflow and inlet
- Inlet jet can be aligned
- Double-sided seals on drain and overflow
- Overflow head with extendible mount can be fastened

Scope of delivery

- Waste outlet
- Trap
- Overflow head with inlet
- Elbow tap connector 90° with MasterFix, 1/2", radial-sealing
- Connection bend 45° made of PE-HD, \varnothing 40 / 50 mm
- Protection box
- Fastening material

Art. no.	DN	d, \varnothing [mm]	Discharge rate [l/s]
150.702.00.6	40	40 / 50	0.85


To order additionally

- Ready-to-fit set

Accessories

- Geberit Split ready-to-fit set, d52, for bathtub drain with turn handle and inlet → p. 429

Geberit bathtub drain with turn handle and inlet, d52, length 73cm, with ready-to-fit-set

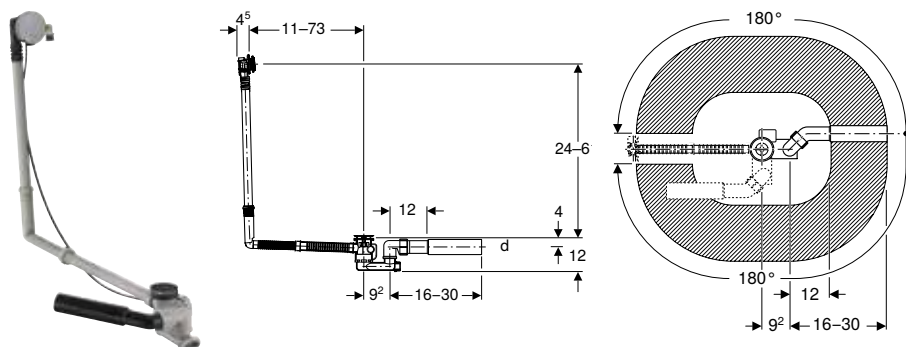

click & scan

Application purposes

- For bathtubs with valve hole \varnothing 52 mm
- For bathtubs made of steel, plastic or cast iron
- For custom-size bathtubs

Technical data

Sound class	1
Inlet capacity at 300 kPa / 3 bar	0.35 l/s
Overflow discharge rate	0.6 l/s
Depth of water seal (mm)	50 mm

Characteristics


- With overflow and inlet
- Quality-monitored in accordance with EN 274-3
- Inlet jet can be aligned
- Double-sided seals on drain and overflow
- Overflow head with extendible mount can be fastened

Scope of delivery

- Ready-to-fit set
- Elbow tap connector 90° with MasterFix, 1/2", radial-sealing
- Connection bend made of PE-HD, \varnothing 40 / 50 mm
- Waste outlet
- Trap
- Protection box
- Fastening material

Art. no.	Colour / surface	DN	d, ø [mm]	Discharge rate [l/s]
150.711.21.6	chrome / Glossy	40	40 / 50	0.85

Geberit bathtub drain with turn handle and inlet, d52, length 73 cm

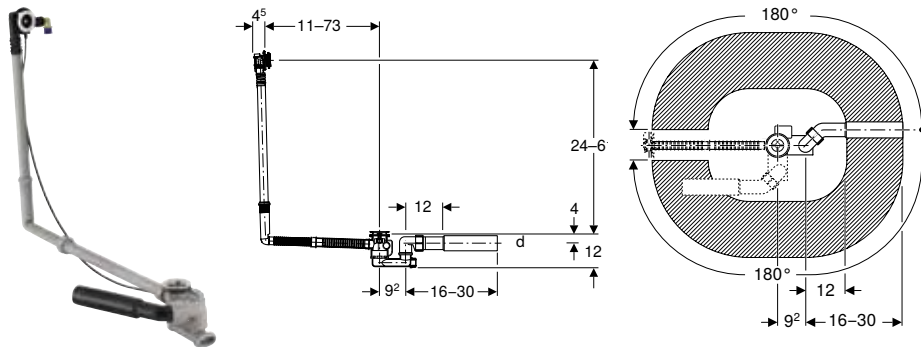

Application purposes

- For bathtubs with valve hole ø 52 mm
- For bathtubs made of steel, plastic or cast iron
- For custom-size bathtubs

Technical data

Sound class	1
Inlet capacity at 300 kPa / 3 bar	0.35 l/s
Overflow discharge rate	0.6 l/s
Depth of water seal (mm)	50 mm

Characteristics

- With overflow and inlet
- Quality-monitored in accordance with EN 274-3
- Inlet jet can be aligned
- Double-sided seals on drain and overflow
- Overflow head with extendible mount can be fastened

Scope of delivery

- Overflow head with inlet
- Waste outlet
- Trap
- Elbow tap connector 90° with MasterFix, 1/2", radial-sealing
- Connection bend made of PE-HD, ø 40 / 50 mm
- Protection box
- Fastening material

Art. no.	DN	d, ø [mm]	Discharge rate [l/s]
150.701.00.6	40	40 / 50	0.85

To order additionally

- Ready-to-fit set

Accessories

- Geberit Split ready-to-fit set, d52, for bathtub drain with turn handle and inlet → p. 429

Ready-to-fit-sets for turn handle actuation and inlet

Geberit Split ready-to-fit set, d52, for bathtub drain with turn handle and inlet





Scope of delivery

- Actuator rosette
- Tap aerator
- Waste plug
- Fastening material

Art. no.	Colour / surface
150.481.11.1	white alpine
150.481.14.1	black matt
150.481.21.1	chrome / Glossy
150.481.KJ.1	Cover plate: white alpine / Glossy Design ring/-s: chrome / Glossy

With push actuation PushControl

Geberit bathtub drain with push actuation PushControl, d52, length 26 cm, with ready-to-fit-set and connection bend

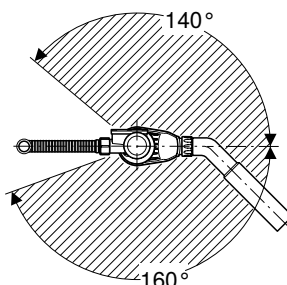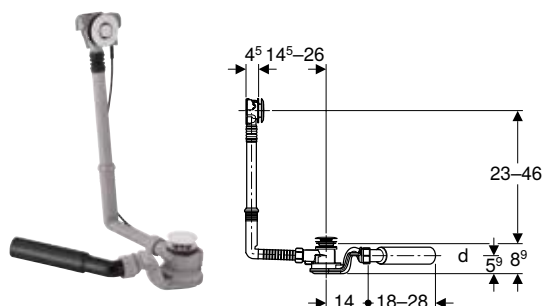

click & scan

Application purposes

- For bathtubs made of steel, plastic or cast iron
- For standard-size bathtubs
- For bathtubs with valve hole \varnothing 52 mm

Technical data

Overflow discharge rate	0.65 l/s
Depth of water seal (mm)	50 mm

Characteristics



- Quality-monitored in accordance with EN 274-3
- Push actuation aligned with bathtub surface
- With overflow
- Double-sided seals on drain and overflow
- Overflow head with extendible mount can be fastened

Scope of delivery

- Waste outlet
- Trap
- Connection bend 45° made of PE-HD, \varnothing 40 / 50 mm
- Ready-to-fit set
- Protection box
- Fastening material

Art. no.	Colour / surface	DN	d, \varnothing [mm]	Discharge rate [l/s]
150.755.21.6	chrome / Glossy	40	40 / 50	1

Geberit bathtub drain with push actuation PushControl, d52, height 60 cm, with ready-to-fit-set and connection bend

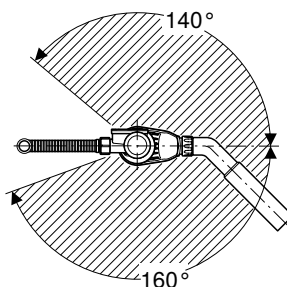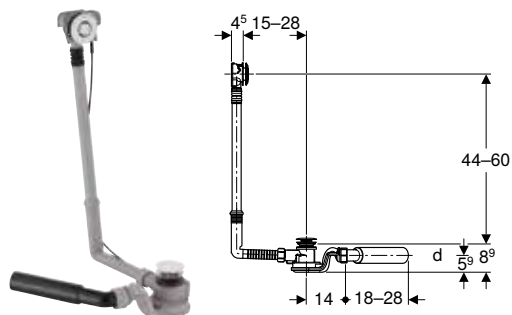

click & scan

Application purposes

- For bathtubs made of steel, plastic or cast iron
- For custom-size bathtubs
- For bathtubs with valve hole \varnothing 52 mm

Technical data

Overflow discharge rate	0.65 l/s
Depth of water seal (mm)	50 mm

Characteristics



- Quality-monitored in accordance with EN 274-3
- Push actuation aligned with bathtub surface
- With overflow
- Double-sided seals on drain and overflow
- Overflow head with extendible mount can be fastened

Scope of delivery

- Waste outlet
- Trap
- Connection bend 45° made of PE-HD, \varnothing 40 / 50 mm
- Ready-to-fit set
- Protection box
- Fastening material

Art. no.	Colour / surface	DN	d, \varnothing [mm]	Discharge rate [l/s]
150.757.21.6	chrome / Glossy	40	40 / 50	1

Geberit bathtub drain with push actuation PushControl, d52, length 50 cm, with ready-to-fit-set and connection bend

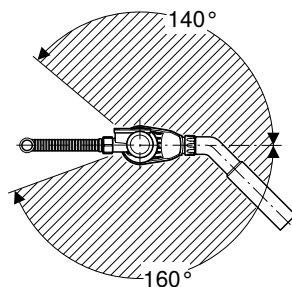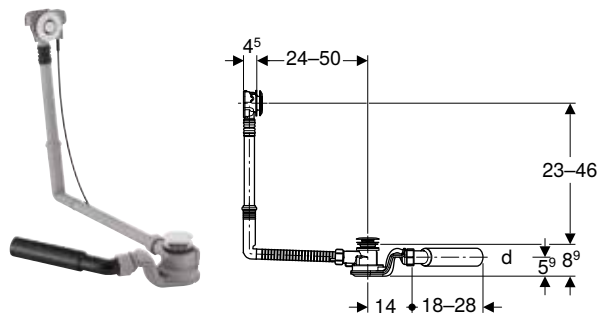

click & scan

Application purposes

- For bathtubs made of steel, plastic or cast iron
- For custom-size bathtubs
- For bathtubs with valve hole \varnothing 52 mm

Technical data

Overflow discharge rate	0.65 l/s
Depth of water seal (mm)	50 mm

Characteristics

- Quality-monitored in accordance with EN 274-3
- Push actuation aligned with bathtub surface
- With overflow
- Double-sided seals on drain and overflow
- Overflow head with extendible mount can be fastened



Scope of delivery

- Waste outlet
- Trap
- Connection bend 45° made of PE-HD, \varnothing 40 / 50 mm
- Ready-to-fit set
- Protection box
- Fastening material

Art. no.	Colour / surface	DN	d, \varnothing [mm]	Discharge rate [l/s]
150.756.21.6	chrome / Glossy	40	40 / 50	1

With waste plugs

Geberit bathtub drain with waste plug, d52, with ready-to-fit-set

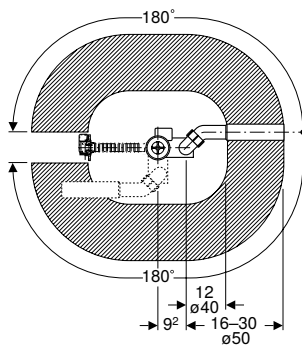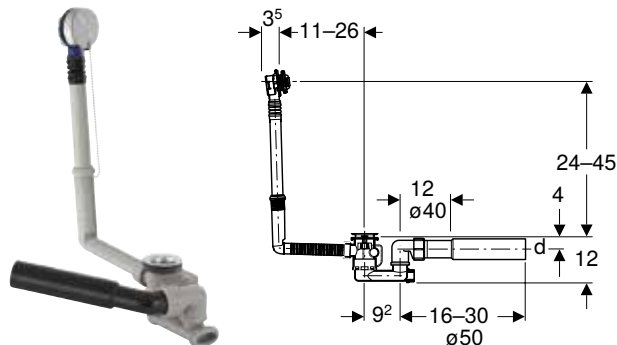

click & scan

Application purposes

- For bathtubs with valve hole \varnothing 52 mm
- For bathtubs made of steel, plastic or cast iron
- For standard-size bathtubs

Technical data

Overflow discharge rate	0.6 l/s
Depth of water seal (mm)	50 mm

Characteristics

- Quality-monitored in accordance with EN 274-3
- With overflow
- Double-sided seals on drain and overflow
- Overflow head with extendible mount can be fastened

Scope of delivery

- Ready-to-fit set
- Ball chain
- Waste outlet
- Trap
- Connection bend made of PE-HD, \varnothing 40 / 50 mm
- Fastening material

Art. no.	Colour / surface	DN	d, \varnothing [mm]	Discharge rate [l/s]
150.017.00.6	Cover plate: chrome / Glossy	40 / 50	40 / 50	0.8



Accessories for drain assemblies, for bathtubs

Water supply connections

Geberit reinforced braided hose, white, 3/4"



[click & scan](#)

Characteristics

- Length 80 cm

Scope of delivery

- 2 flat gaskets made of FA-AM
- 2 screw connections made of brass, R 3/4"

Art. no.

G

["]

150.991.00.1

3/4





Floor Drainage Systems


Surface drainage systems for indoor and outdoor	436
Floor drains 10 x 10 cm	436
Floor drains for balconies and terraces, 10 x 10 cm	439
Floor drains 12 x 12 cm	440
Floor drains 13 x 13 cm	441
Floor drains for balconies and terraces, 13 x 13 cm	443
Accessories	444



Surface drainage systems for indoor and outdoor

Floor drains 10 x 10 cm

Geberit Aquorea floor drain with top piece made of PP, d50, slotted grating 10 x 10 cm

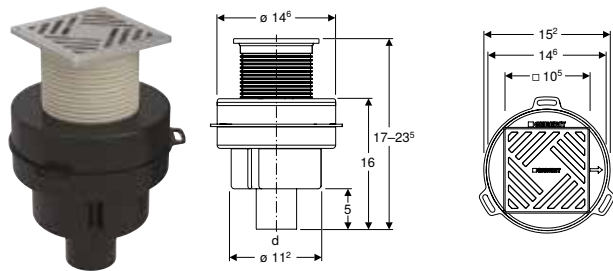

click & scan

Application purposes

- For use inside buildings
- For use as floor drain with vertical outlet

Technical data

Depth of water seal (mm)	50 mm
Product material	PE-HD

Characteristics


- Straight connector made of PE-HD, \varnothing 50 mm
- Diaphragm trap made of silicone
- Integrated protection against dehydration
- Integrated protection against germ formation
- Load-bearing capacity, class H 1.5 (1.5 kN)

Scope of delivery

- Protection box
- Grating

Art. no.	DN	d, \varnothing [mm]	Discharge rate [l/s]	H [cm]
388.015.00.2	50	50	1	17-23.5

Geberit Aquorea floor drain with top piece made of PP, d50, tile-bearing grating 10 x 10 cm

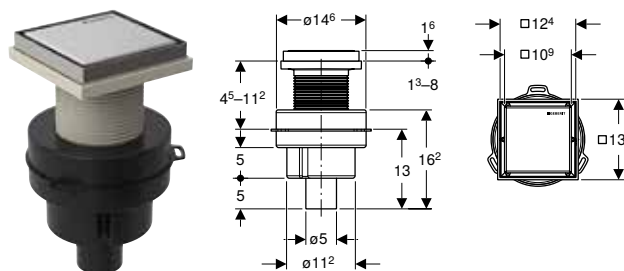

click & scan

Application purposes

- For use inside buildings
- For use as floor drain with vertical outlet

Technical data

Depth of water seal (mm)	50 mm
Product material	PE-HD

Characteristics



- Straight connector made of PE-HD, \varnothing 50 mm
- Diaphragm trap made of silicone
- Integrated protection against dehydration
- Integrated protection against germ formation
- Load-bearing capacity, class H 1.5 (1.5 kN)
- Cover can be tiled or used as a stainless steel surface

Scope of delivery

- Protection box

Art. no.	DN	d, \varnothing [mm]	Discharge rate [l/s]	H [cm]
388.120.00.1	50	50	1	19.1-25.8

Geberit Aquorea floor drain, tile-bearing grating 12 x 12 cm, rear inlet

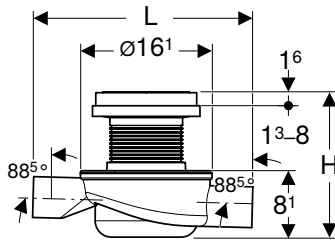

click & scan

Application purposes

- For use inside buildings
- For use as floor drain with horizontal outlet
- For connecting a sanitary appliance

Technical data

Depth of water seal (mm)	50 mm
Product material	PE-HD

Characteristics



- Straight connector made of PE-HD, Ø 50 mm
- Inlet made of PE-HD, Ø 50 mm
- Diaphragm trap made of silicone
- Integrated protection against dehydration
- Integrated protection against germ formation
- Load-bearing capacity, class H 1.5 (1.5 kN)
- Cover can be tiled or used as a stainless steel surface

Scope of delivery

- Protection box
- Extraction tool

Art. no.	DN	d, Ø [mm]	Discharge rate [l/s]	d1, Ø [mm]	L [cm]	H [cm]
388.123.00.2	50	50	0.8	50	26.8	11-17.7

Geberit Aquorea floor drain, tile-bearing grating 12 x 12 cm

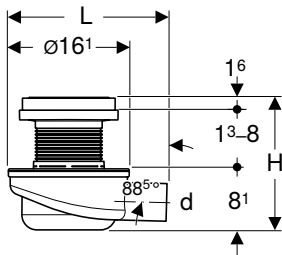

click & scan

Application purposes

- For use inside buildings
- For use as floor drain with horizontal outlet

Technical data

Depth of water seal (mm)	50 mm
Product material	PE-HD

Characteristics

- Straight connector made of PE-HD, Ø 50 mm
- Diaphragm trap made of silicone
- Integrated protection against dehydration
- Integrated protection against germ formation
- Load-bearing capacity, class H 1.5 (1.5 kN)
- Cover can be tiled or used as a stainless steel surface

Scope of delivery

- Protection box


Art. no.	DN	d, Ø [mm]	Discharge rate [l/s]	L [cm]	H [cm]
388.121.00.2	50	50	0.8	21.1	11-17.7



Floor Drainage Systems

Surface drainage systems for indoor and outdoor
Floor drains 10 x 10 cm

Geberit Aquorea floor drain, slotted grating 10 x 10 cm, rear inlet

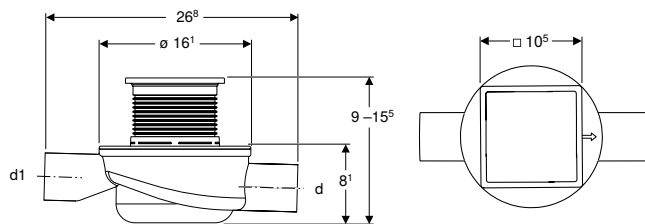

click & scan

Application purposes

- For use inside buildings
- For use as floor drain with horizontal outlet
- For connecting a sanitary appliance

Technical data

Depth of water seal (mm)	50 mm
Product material	PE-HD

Characteristics

- Straight connector made of PE-HD, \varnothing 50 mm
- Inlet made of PE-HD, \varnothing 50 mm
- Diaphragm trap made of silicone
- Integrated protection against dehydration
- Integrated protection against germ formation
- Load-bearing capacity, class H 1.5 (1.5 kN)

Scope of delivery

- Protection box

Art. no.	DN	d, \varnothing [mm]	Discharge rate [l/s]	d1, \varnothing [mm]	Nominal width [cm]	L [cm]	H [cm]
388.011.00.3	50	50	0.8	50	10	26.8	9-15.5


To order additionally

- Geberit Fractal design grating 10 x 10 cm → p. 448

Accessories

- Geberit Bubbles design grating 10 x 10 cm → p. 447
- Geberit NeoChinese design grating 10 x 10 cm → p. 447
- Geberit Ocean design grating 10 x 10 cm → p. 447
- Geberit Piano design grating 10 x 10 cm → p. 447
- Geberit Sequential design grating 10 x 10 cm → p. 448
- Geberit Squares design grating, 10 x 10 cm → p. 447
- Geberit Triangles design grating 10 x 10 cm → p. 448

Geberit Aquorea floor drain without slotted grating, 10 x 10 cm

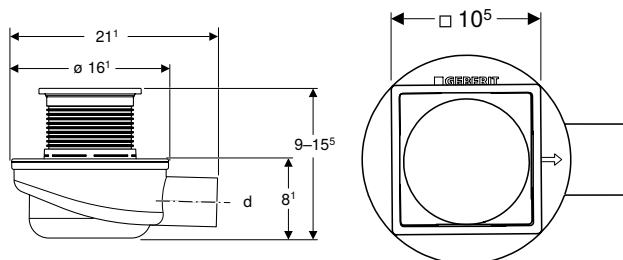

click & scan

Application purposes

- For use as floor drain with horizontal outlet

Technical data

Depth of water seal (mm)	50 mm
Product material	PE-HD

Characteristics

- Load-bearing capacity, class H 1.5 (1.5 kN)

Art. no.	DN	d, \varnothing [mm]	Discharge rate [l/s]	Nominal width [cm]	H [cm]
388.012.00.3	50	50	0.8	10	9-15.5



To order additionally

- Geberit Fractal design grating 10 x 10 cm → p. 448

Accessories

- Geberit Bubbles design grating 10 x 10 cm → p. 447
- Geberit NeoChinese design grating 10 x 10 cm → p. 447
- Geberit Ocean design grating 10 x 10 cm → p. 447
- Geberit Piano design grating 10 x 10 cm → p. 447
- Geberit Sequential design grating 10 x 10 cm → p. 448
- Geberit Squares design grating, 10 x 10 cm → p. 447
- Geberit Triangles design grating 10 x 10 cm → p. 448

Geberit Aquorea floor drain, 10 x 10 cm hole grating



click & scan

Application purposes

- For use inside buildings
- For use as floor drain with horizontal outlet

Technical data

Depth of water seal (mm)	50 mm
Product material	PE-HD

Characteristics

- Straight connector made of PE-HD, \varnothing 50 mm
- Integrated protection against dehydration
- Integrated protection against germ formation
- Load-bearing capacity, class H 1.5 (1.5 kN)



Scope of delivery

- Protection box
- Grating

Art. no.	DN	d, \varnothing [mm]	Discharge rate [l/s]	Nominal width [cm]	L [cm]	H [cm]
388.013.00.2	50	50	0.55	10	21.1	9-15.5

Floor drains for balconies and terraces, 10 x 10 cm

Geberit ready-to-fit set for collector drain

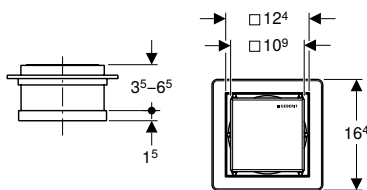

click & scan

Application purposes

- For use inside buildings
- For Geberit collector drain made of PE-HD

Technical data

Product material	PE-HD
------------------	-------

Characteristics

- Frame and design cover made of stainless steel
- Design cover can be tiled on the back side
- Load-bearing capacity, class H 1.5 (1.5 kN)

Scope of delivery


- Design cover
- Top piece with grating frame
- Sleeve made of EPDM
- Hair trap
- Protection box

Art. no.	Colour / surface	D [cm]
388.005.00.1	Stainless steel	11



Floor drains 12 x 12 cm

Geberit collector drain

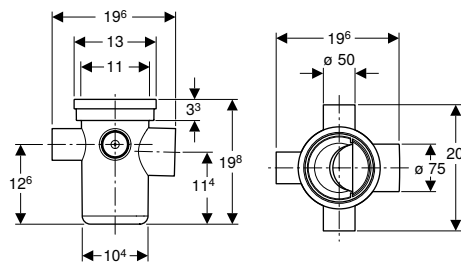

click & scan

Application purposes

- For use inside buildings
- For connecting sanitary appliances
- For use as floor drain with horizontal outlet

Technical data

Inlet capacity	0.8 l/s
Depth of water seal (mm)	75 mm
Product material	PE-HD

Characteristics

- Straight connector permanently mounted, \varnothing 75 mm, made of PE-HD
- Three connection options, made of PE-HD, \varnothing 50 mm
- Trap insert can be removed without tools

Scope of delivery


- Trap

Art. no.	d, \varnothing [mm]	Discharge rate [l/s]	d1, \varnothing [mm]	H [cm]
388.001.00.1	75	1.15	50	19.8

Accessories

- Geberit ready-to-fit set for collector drain → p. 439

Geberit collector drain

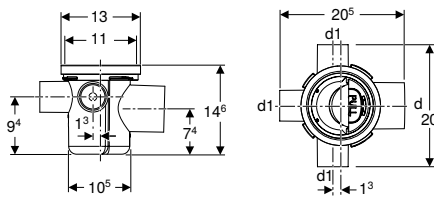

click & scan

Application purposes

- For use inside buildings
- For connecting sanitary appliances
- For use as floor drain with horizontal outlet
- For cross-floor installations

Technical data

Inlet capacity	0.5 l/s
Depth of water seal (mm)	50 mm
Product material	PE-HD

Characteristics

- Straight connector permanently mounted, \varnothing 75 mm, made of PE-HD
- Three connection options, made of PE-HD, \varnothing 50 mm
- Trap insert can be removed without tools

Scope of delivery

- Trap

Art. no.	DN	DN1	d, \varnothing [mm]	Discharge rate [l/s]	d1, \varnothing [mm]	L [cm]	H [cm]
388.007.00.1	70	50	75	0.8	50	20	15
388.008.00.1			75	0.8	50		15


Accessories

- Geberit ready-to-fit set for collector drain → p. 439



- Geberit collector drain Art. No. 388.008.00.1 fits together with Geberit ready-to-fit set for collector drain Art. No. 388.005.00.1

Geberit ready-to-fit set for collector drain, slotted grating 10 x 10 cm

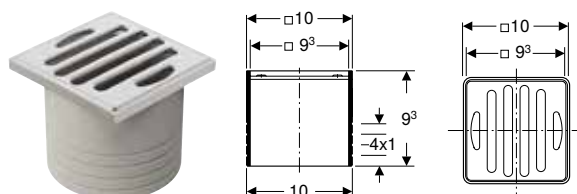

click & scan

Application purposes

- For use inside buildings
- For Geberit collector drain made of PE-HD

Characteristics

- Load-bearing capacity, class H 1.5 (1.5 kN)

Art. no.

Nominal width
[cm]

388.009.00.1


10

Scope of delivery

- Slotted grating 10 x 10 cm

Floor drains 13 x 13 cm

Geberit Varino floor drain, horizontal, d50

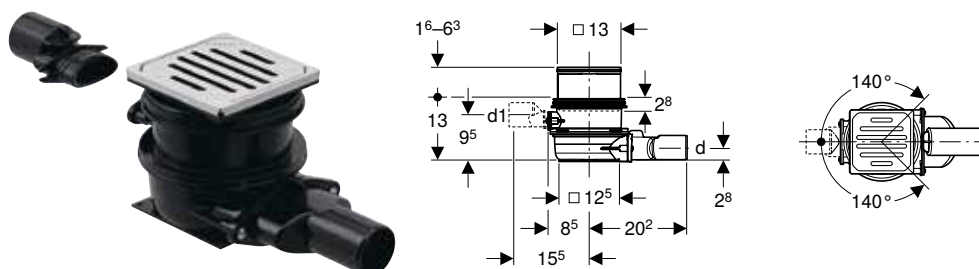

click & scan

Application purposes

- For connecting sanitary appliances
- For use inside buildings
- For use as floor drain with horizontal outlet

Technical data

Inlet capacity	0.6 l/s
Discharge rate at 20 mm head of water	1 l/s
Discharge rate at 10 mm head of water	0.7 l/s
Depth of water seal (mm)	50 mm
Product material	PE

Characteristics

- Quality-monitored in accordance with EN 1253-3
- Inlet rotatable by 280°
- Inlet closed
- Inlet for connecting one sanitary appliance
- Height-adjustable with extension piece
- Trap insert can be removed without tools
- Shockproof
- Resistant to chemicals
- Load-bearing capacity, class K 3 (3 kN)

Scope of delivery

- Inlet connection piece made of PE-HD, \varnothing 50 mm
- Outlet made of PE-HD, \varnothing 50 mm
- Stainless steel grating
- Trap insert
- Protection box

Art. no.

d, \varnothing
[mm]

Discharge rate
[l/s]

d1, \varnothing
[mm]

L
[cm]

H
[cm]

388.023.00.1

50

0.7

50

28.7


14.6–19.3

Accessories

- Geberit lockable grating for floor drains 13 x 13 cm → p. 446
- Geberit extension piece for floor drains 13 x 13 cm → p. 445
- Geberit flange for floor drains 13 x 13 cm → p. 445
- Geberit pressing flange attachment for floor drains 13 x 13 cm → p. 445
- Geberit hair trap for Varino floor drain 13 x 13 cm and Varino floor drain 13 x 13 cm → p. 444
- Geberit insert with odour trap, for floor drain 13 x 13 cm → p. 446
- Geberit pressure test plug for Varino floor drain 13 x 13 cm → p. 446
- Geberit installation frame for floor drains → p. 444
- Geberit slotted grating for Varino floor drain 13 x 13 cm, drivable → p. 446



Geberit Varino floor drain, horizontal, d110

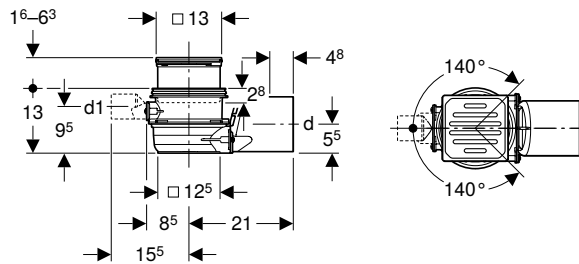

click & scan

Application purposes

- For connecting sanitary appliances
- For use inside buildings
- For use as floor drain with horizontal outlet

Technical data

Inlet capacity	0.8 l/s
Discharge rate at 20 mm head of water	1.4 l/s
Discharge rate at 10 mm head of water	0.8 l/s
Depth of water seal (mm)	50 mm
Product material	PE

Characteristics

- Quality-monitored in accordance with EN 1253-3
- Inlet rotatable by 280°
- Inlet closed
- Inlet for connecting one sanitary appliance
- Height-adjustable with extension piece
- Trap insert can be removed without tools
- Shockproof
- Resistant to chemicals
- Load-bearing capacity, class K 3 (3 kN)

Scope of delivery


- Inlet connection piece made of PE-HD, ø 50 mm
- Outlet made of PE-HD, ø 110 mm
- Stainless steel grating
- Trap insert
- Protection box

Art. no.	d, ø [mm]	Discharge rate [l/s]	d1, ø [mm]	L [cm]	H [cm]
388.021.00.1	110	0.8	50	29.5	14.6-19.3

Accessories

- Geberit lockable grating for floor drains 13 x 13 cm → p. 446
- Geberit extension piece for floor drains 13 x 13 cm → p. 445
- Geberit flange for floor drains 13 x 13 cm → p. 445
- Geberit pressing flange attachment for floor drains 13 x 13 cm → p. 445
- Geberit hair trap for Varino floor drain 13 x 13 cm and Varino floor drain 13 x 13 cm → p. 444
- Geberit insert with odour trap, for floor drain 13 x 13 cm → p. 446
- Geberit pressure test plug for Varino floor drain 13 x 13 cm → p. 446
- Geberit installation frame for floor drains → p. 444
- Geberit slotted grating for Varino floor drain 13 x 13 cm, drivable → p. 446

Geberit Varino floor drain, vertical, d110

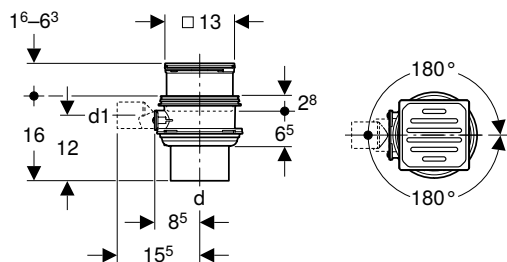

click & scan

Application purposes

- For connecting sanitary appliances
- For use inside buildings
- For use as floor drain with vertical outlet

Characteristics

- Quality-monitored in accordance with EN 1253-3
- Inlet rotatable by 360°
- Inlet closed
- Inlet for connecting one sanitary appliance
- Height-adjustable with extension piece
- Trap insert can be removed without tools
- Shockproof
- Resistant to chemicals
- Load-bearing capacity, class K 3 (3 kN)

Technical data

Inlet capacity	0.8 l/s
Discharge rate at 20 mm head of water	1.6 l/s
Discharge rate at 10 mm head of water	0.7 l/s
Depth of water seal (mm)	50 mm
Product material	PE

Scope of delivery

- Inlet connection piece made of PE-HD, ø 50 mm
- Outlet made of PE-HD, ø 110 mm
- Stainless steel grating
- Trap insert
- Protection box


Art. no.	d, ø [mm]	Discharge rate [l/s]	d1, ø [mm]	H [cm]
388.022.00.1	110	0.7	50	14.6–19.3

Accessories

- Geberit lockable grating for floor drains 13 x 13 cm → p. 446
- Geberit extension piece for floor drains 13 x 13 cm → p. 445
- Geberit flange for floor drains 13 x 13 cm → p. 445
- Geberit pressing flange attachment for floor drains 13 x 13 cm → p. 445
- Geberit hair trap for Varino floor drain 13 x 13 cm and Varino floor drain 13 x 13 cm → p. 444
- Geberit insert with odour trap, for floor drain 13 x 13 cm → p. 446
- Geberit pressure test plug for Varino floor drain 13 x 13 cm → p. 446
- Geberit slotted grating for Varino floor drain 13 x 13 cm, drivable → p. 446

Floor drains for balconies and terraces, 13 x 13 cm

Geberit Varino floor drain, horizontal, d50



Application purposes

- For balconies and patios
- For the outdoor area
- For use as floor drain with horizontal outlet

Technical data

Discharge rate with trap insert	0.6 l/s
Product material	PE

Characteristics

- Height-adjustable with extension piece
- Not trapped
- Shockproof
- Resistant to chemicals
- Load-bearing capacity, class K 3 (3 kN)

Scope of delivery

- Outlet made of PE-HD, ø 50 mm
- Stainless steel grating
- Protection box

Art. no.	DN	d, ø [mm]	Discharge rate [l/s]	L [cm]	H [cm]
388.032.00.1	50	50	0.9	19.6	8.6–13.6

Accessories


- Geberit lockable grating for floor drains 13 x 13 cm → p. 446
- Geberit extension piece for floor drains 13 x 13 cm → p. 445
- Geberit flange for floor drains 13 x 13 cm → p. 445
- Geberit pressing flange attachment for floor drains 13 x 13 cm → p. 445
- Geberit insert with odour trap, for floor drain 13 x 13 cm → p. 446
- Geberit hair trap for Varino floor drain 13 x 13 cm and Varino floor drain 13 x 13 cm → p. 444
- Geberit trap insert with depth of water seal 27 mm, for Varino floor drain 13 x 13 cm → p. 445
- Geberit slotted grating for Varino floor drain 13 x 13 cm, drivable → p. 446



Floor Drainage Systems

Surface drainage systems for indoor and outdoor
Accessories

Geberit Varino floor drain, vertical, d50



click & scan

Application purposes

- For balconies and patios
- For the outdoor area
- For use as floor drain with vertical outlet

Technical data

Discharge rate with trap insert	0.65 l/s
Product material	PE-HD

Characteristics

- Height-adjustable with extension piece
- Not trapped
- Shockproof
- Resistant to chemicals
- Load-bearing capacity, class K 3 (3 kN)

Scope of delivery

- Outlet made of PE-HD, \varnothing 50 mm
- Stainless steel grating
- Protection box


Art. no.	DN	d, \varnothing [mm]	Discharge rate [l/s]	H [cm]
388.033.00.1	50	50	2	14.6–19.6

Accessories

- Geberit lockable grating for floor drains 13 x 13 cm → p. 446
- Geberit extension piece for floor drains 13 x 13 cm → p. 445
- Geberit flange for floor drains 13 x 13 cm → p. 445
- Geberit pressing flange attachment for floor drains 13 x 13 cm → p. 445
- Geberit hair trap for Varino floor drain 13 x 13 cm and Varino floor drain 13 x 13 cm → p. 444
- Geberit insert with odour trap, for floor drain 13 x 13 cm → p. 446
- Geberit trap insert with depth of water seal 27 mm, for Varino floor drain 13 x 13 cm → p. 445
- Geberit slotted grating for Varino floor drain 13 x 13 cm, drivable → p. 446

Accessories

Geberit installation frame for floor drains



click & scan

Application purposes

- For Geberit floor drains with inlet funnel
- For Geberit floor drains 13 x 13 cm
- For Geberit floor drains, slotted grating 15 x 15 cm

Characteristics

- Zinc-plated



Technical data

Product material	Steel
------------------	-------

Art. no.

388.132.00.1

Geberit hair trap for Varino floor drain 13 x 13 cm and Varino floor drain 13 x 13 cm




click & scan

Art. no.

388.105.00.1

Geberit flange for floor drains 13 x 13 cm

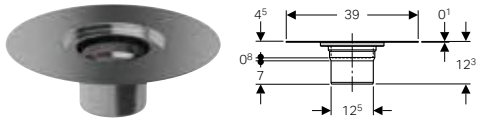

Application purposes

- For connecting moisture sealings with liquid plastic
- For connecting moisture sealings with sealing slurry
- For connecting moisture sealings with bitumen


Technical data

Product material	Stainless steel
------------------	-----------------

Art. no.

388.101.00.1

Geberit pressing flange attachment for floor drains 13 x 13 cm

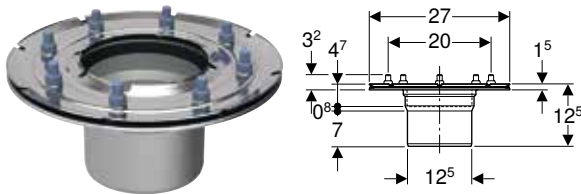

Application purposes

- For connecting moisture sealings with sealing foils


Technical data

Product material	Stainless steel
------------------	-----------------

Art. no.

388.102.00.1

Geberit trap insert with depth of water seal 27 mm, for Varino floor drain 13 x 13 cm



Technical data

Product material	PP
------------------	----


Art. no.

388.108.00.1



- Geberit trap insert fits to Art. No. 388.032.00.1 and Art. No. 388.033.00.1

Geberit extension piece for floor drains 13 x 13 cm



Technical data

Product material	PP
------------------	----

Art. no.


d, Ø
[mm]

388.100.00.1

125



Geberit lockable grating for floor drains 13 x 13 cm



click & scan

Technical data

Product material	Stainless steel
------------------	-----------------

Scope of delivery

- Wrench

Characteristics

- Load-bearing capacity, class K 3 (3 kN)

Art. no.	L [cm]	B [cm]
388.107.00.1	12.5	12.5

Geberit insert with odour trap, for floor drain 13 x 13 cm



click & scan

Application purposes

- For sealing Geberit floor drains 13 x 13 cm against odour nuisance
- For mounting in the grating frame

Technical data

Product material	PP
------------------	----

Art. no.

388.106.00.1

Geberit pressure test plug for Varino floor drain 13 x 13 cm



click & scan

Application purposes

- For sealing Geberit floor drains 13 x 13 cm for pressure tests up to 0.5 bar / 50 kPa

Art. no.	d, ø [mm]
388.109.00.1	63

Geberit slotted grating for Varino floor drain 13 x 13 cm, drivable



click & scan

Technical data


Product material	Stainless steel
------------------	-----------------

Characteristics

- Load-bearing capacity, class L 15 (15 kN)

Art. no.	L [cm]	B [cm]
388.104.00.1	12	12

Geberit NeoChinese design grating 10 x 10 cm

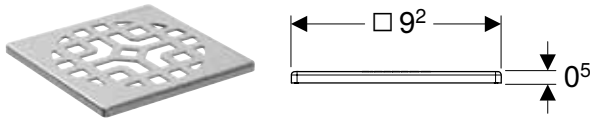

click & scan

Technical data


Product material	Stainless steel
------------------	-----------------

Characteristics

- Load-bearing capacity, class H 1.5 (1.5 kN)

Art. no.	Nominal width [cm]	L [cm]	B [cm]	H [cm]
388.115.00.1	10	9.2	9.2	0.5

Geberit Squares design grating, 10 x 10 cm

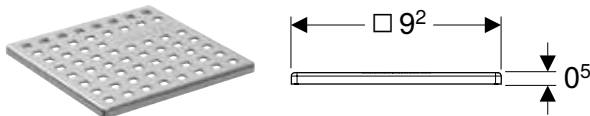

click & scan

Technical data


Product material	Stainless steel
------------------	-----------------

Characteristics

- Load-bearing capacity, class H 1.5 (1.5 kN)

Art. no.	Nominal width [cm]	L [cm]	B [cm]	H [cm]
388.110.00.1	10	9.2	9.2	0.5

Geberit Piano design grating 10 x 10 cm

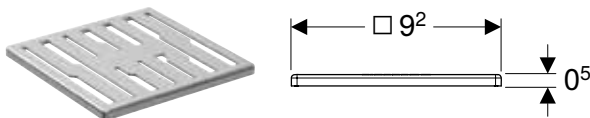

click & scan

Technical data


Product material	Stainless steel
------------------	-----------------

Characteristics

- Load-bearing capacity, class H 1.5 (1.5 kN)

Art. no.	Nominal width [cm]	L [cm]	B [cm]	H [cm]
388.117.00.1	10	9.2	9.2	0.5

Geberit Ocean design grating 10 x 10 cm

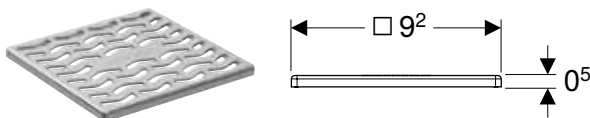

click & scan

Technical data


Product material	Stainless steel
------------------	-----------------

Characteristics

- Load-bearing capacity, class H 1.5 (1.5 kN)

Art. no.	Nominal width [cm]	L [cm]	B [cm]	H [cm]
388.111.00.1	10	9.2	9.2	0.5

Geberit Bubbles design grating 10 x 10 cm

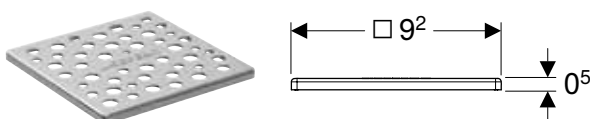

click & scan

Technical data

Product material	Stainless steel
------------------	-----------------

Characteristics

- Load-bearing capacity, class H 1.5 (1.5 kN)


Art. no.	Nominal width [cm]	L [cm]	B [cm]	H [cm]
388.113.00.1	10	9.2	9.2	0.5



Floor Drainage Systems

Surface drainage systems for indoor and outdoor
Accessories

Geberit Triangles design grating 10 x 10 cm

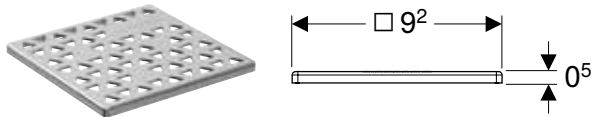

[click & scan](#)

Technical data


Product material	Stainless steel
------------------	-----------------

Characteristics

- Load-bearing capacity, class H 1.5 (1.5 kN)

Art. no.	Nominal width [cm]	L [cm]	B [cm]	H [cm]
388.112.00.1	10	9.2	9.2	0.5

Geberit Sequential design grating 10 x 10 cm

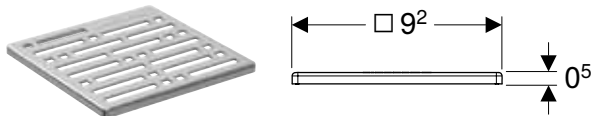

[click & scan](#)

Technical data


Product material	Stainless steel
------------------	-----------------

Characteristics

- Load-bearing capacity, class H 1.5 (1.5 kN)

Art. no.	Nominal width [cm]	L [cm]	B [cm]	H [cm]
388.114.00.1	10	9.2	9.2	0.5

Geberit Fractal design grating 10 x 10 cm

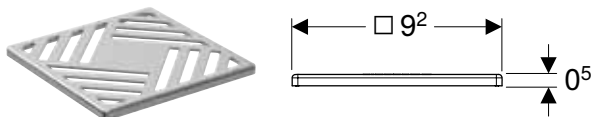

[click & scan](#)

Technical data

Product material	Stainless steel
------------------	-----------------

Characteristics

- Load-bearing capacity, class H 1.5 (1.5 kN)

Art. no.	Nominal width [cm]	L [cm]	B [cm]	H [cm]
388.125.00.1	10	9.2	9.2	0.5



Geberit ONE 453

Geberit Xeno² 521

Geberit Acanto 547

Geberit iCon 587

Geberit Aniara 651

Geberit Smyle 665

Geberit Selnova Square 697

Geberit Selnova 729

Geberit Selnova Compact 763

Geberit Selnova Comfort 767

Geberit Bastia 779



Geberit ONE

Washbasins.....	454
Assortment overview – Geberit ONE washbasins and bathroom furniture.....	455
Assortment overview – Washbasin connections, space-saving model, for Geberit ONE washbasins, vertical outlet.....	458
Assortment overview – Geberit Duofix element for washbasin for bathroom furniture.....	459
Handrinse basins.....	460
Washbasins.....	461
Vanity basins.....	465
Lay-on washbasins.....	470
Assortment overview – Geberit ONE lay-on washbasins and bathroom furniture..	471
Accessories.....	478
Bathroom furniture.....	480
Accessory overview – Geberit ONE bathroom furniture.....	481
Washbasin cabinets.....	484
Side cabinets.....	490
Washtops.....	498
Additional furniture.....	504
Accessories.....	505
Mirror cabinets.....	508
Concealed mirror cabinets.....	508
Exposed mirror cabinets.....	512
Accessories.....	516
WCs.....	517
Wall-hung WCs.....	517
Bidets.....	518
Wall-hung bidets.....	518





Washbasins

Assortment overview – Geberit ONE washbasins and bathroom furniture

Geberit International Sales, version: December 2025

				Washbasins					
				60 cm	75 cm	90 cm	105 cm	120 cm	
Horizontal outlet									
Without tap hole				505.033.00.1	505.035.00.1	505.037.00.1	505.045.00.1	505.047.00.1	
With tap hole				505.034.00.1	505.036.00.1	505.038.00.1	505.046.00.1	505.048.00.1	
With two tap holes								505.049.00.1	
Without tap hole, right shelf surface						505.042.00.1			
With tap hole, right shelf surface						505.039.00.1			
Without tap hole, left shelf surface						505.044.00.1			
With tap hole, left shelf surface						505.043.00.1			
Vertical outlet									
Without tap hole				505.021.01.1	505.021.01.2	505.021.01.3	505.021.01.4	505.021.01.5	
With tap hole				505.020.01.1	505.020.01.2	505.020.01.3	505.020.01.4	505.020.01.5	
With two tap holes								505.022.01.5	
With two drawers	With one drawer	From page		→ p. 464	→ p. 464	→ p. 464	→ p. 464	→ p. 464	
Width 60 cm									
505.261.00.1	505.071.00.1	white	→ p. 486	✓					
505.261.00.2	505.071.00.2	White matt	→ p. 486	✓					
505.261.00.3	505.071.00.3	lava	→ p. 486	✓					
505.261.00.4	505.071.00.4	sand grey	→ p. 486	✓					
505.261.00.5	505.071.00.5	oak	→ p. 486	✓					
505.261.00.6	505.071.00.6	hickory	→ p. 486	✓					
505.261.00.7	505.071.00.7	greige	→ p. 486	✓					
505.261.00.8	505.071.00.8	black matt	→ p. 486	✓					
Width 75 cm									
505.262.00.1	505.072.00.1	white	→ p. 486		✓				
505.262.00.2	505.072.00.2	White matt	→ p. 486		✓				
505.262.00.3	505.072.00.3	lava	→ p. 486		✓				
505.262.00.4	505.072.00.4	sand grey	→ p. 486		✓				
505.262.00.5	505.072.00.5	oak	→ p. 486		✓				
505.262.00.6	505.072.00.6	hickory	→ p. 486		✓				
505.262.00.7	505.072.00.7	greige	→ p. 486		✓				
505.262.00.8	505.072.00.8	black matt	→ p. 486		✓				
Width 90 cm									
505.263.00.1	505.073.00.1	white	→ p. 486			✓			
505.263.00.2	505.073.00.2	White matt	→ p. 486			✓			
505.263.00.3	505.073.00.3	lava	→ p. 486			✓			
505.263.00.4	505.073.00.4	sand grey	→ p. 486			✓			
505.263.00.5	505.073.00.5	oak	→ p. 486			✓			
505.263.00.6	505.073.00.6	hickory	→ p. 486			✓			
505.263.00.7	505.073.00.7	greige	→ p. 486			✓			
505.263.00.8	505.073.00.8	black matt	→ p. 486			✓			
Width 105 cm									
505.264.00.1	505.074.00.1	white	→ p. 486				✓		
505.264.00.2	505.074.00.2	White matt	→ p. 486				✓		
505.264.00.3	505.074.00.3	lava	→ p. 486				✓		
505.264.00.4	505.074.00.4	sand grey	→ p. 486				✓		
505.264.00.5	505.074.00.5	oak	→ p. 486				✓		
505.264.00.6	505.074.00.6	hickory	→ p. 486				✓		
505.264.00.7	505.074.00.7	greige	→ p. 486				✓		
505.264.00.8	505.074.00.8	black matt	→ p. 486				✓		

Geberit International Sales, version: December 2025

				Washbasins					
				60 cm	75 cm	90 cm	105 cm	120 cm	
Horizontal outlet									
Without tap hole				505.033.00.1	505.035.00.1	505.037.00.1	505.045.00.1	505.047.00.1	
With tap hole				505.034.00.1	505.036.00.1	505.038.00.1	505.046.00.1	505.048.00.1	
With two tap holes								505.049.00.1	
Without tap hole, right shelf surface						505.042.00.1			
With tap hole, right shelf surface						505.039.00.1			
Without tap hole, left shelf surface						505.044.00.1			
With tap hole, left shelf surface						505.043.00.1			
Vertical outlet									
Without tap hole				505.021.01.1	505.021.01.2	505.021.01.3	505.021.01.4	505.021.01.5	
With tap hole				505.020.01.1	505.020.01.2	505.020.01.3	505.020.01.4	505.020.01.5	
With two tap holes								505.022.01.5	
Width 120 cm									
505.265.00.1	505.075.00.1	white	→ p. 487					✓	
505.265.00.2	505.075.00.2	White matt	→ p. 487					✓	
505.265.00.3	505.075.00.3	lava	→ p. 487					✓	
505.265.00.4	505.075.00.4	sand grey	→ p. 487					✓	
505.265.00.5	505.075.00.5	oak	→ p. 487					✓	
505.265.00.6	505.075.00.6	hickory	→ p. 487					✓	
505.265.00.7	505.075.00.7	greige	→ p. 487					✓	
505.265.00.8	505.075.00.8	black matt	→ p. 487					✓	
Washbasin taps¹⁾									
116.464.21.1		Geberit ONE washbasin tap, round design, wall-mounted, two-handle mixer, for concealed function box	glossy chrome	✓ ²⁾	✓	✓	✓	✓ ³⁾	
116.464.14.1		Geberit ONE washbasin tap, square design, wall-mounted, two-handle mixer, for concealed function box	black matt	✓ ²⁾	✓	✓	✓	✓ ³⁾	
116.465.21.1		Geberit ONE washbasin tap, round design, wall-mounted, two-handle mixer, for concealed function box	glossy chrome	✓ ²⁾	✓	✓	✓	✓ ³⁾	
116.465.14.1		Geberit ONE washbasin tap, square design, wall-mounted, two-handle mixer, for concealed function box	black matt	✓ ²⁾	✓	✓	✓	✓ ³⁾	

✓ Compatible

¹⁾ For washbasins without tap hole; suitable Geberit Duofix element necessary










²⁾ Washbasin tap only compatible when used without bathroom furniture

³⁾ Only compatible when using 1 washbasin tap.

Vanity basins									
60 cm	75 cm	90 cm	105 cm	120 cm					
505.001.00.1	505.003.00.1	505.005.00.1	505.014.00.1	505.016.00.1					
505.002.00.1	505.004.00.1	505.006.00.1	505.015.00.1	505.017.00.1					
		505.007.00.1							
		505.008.00.1							
		505.009.00.1							
		505.013.00.1							
505.011.01.1	505.011.01.2	505.011.01.3	505.011.01.4	505.011.01.5					
505.010.01.1	505.010.01.2	505.010.01.3	505.010.01.4	505.010.01.5					
						Mirror cabinets, concealed installation	Installation box	Mirror cabinets, surface mounting	
				✓	120 cm	111.945.00.1	60–120 cm		
				✓	120 cm	111.945.00.1	60–120 cm		
				✓	120 cm	111.945.00.1	60–120 cm		
				✓	120 cm	111.945.00.1	60–120 cm		
				✓	120 cm	111.945.00.1	60–120 cm		
				✓	120 cm	111.945.00.1	60–120 cm		
				✓	120 cm	111.945.00.1	60–120 cm		
				✓	120 cm	111.945.00.1	60–120 cm		
		✓	✓	✓	✓				
		✓	✓	✓	✓				
		✓	✓	✓	✓				
		✓	✓	✓	✓				

Assortment overview – Washbasin connections, space-saving model, for Geberit ONE washbasins, vertical outlet

Geberit International Sales, October 2025

	Washbasins with cabinet		Washbasins	
	Without overflow hole			
	For deck-mounted taps	For wall-mounted taps	For deck-mounted taps	For wall-mounted taps
				
Washbasin connection, dammable				
<p>152.051.01.1 Washbasin drain, space-saving model, slim design, with lever actuation and valve cover, horizontal outlet, for Geberit ONE washbasin, vertical outlet</p> 	✓	✓ ¹⁾		
<p>152.061.01.1 Washbasin drain, space-saving model, slim design, with lever actuation and valve cover, horizontal outlet, for Geberit ONE washbasin, vertical outlet</p> 	✓	✓ ¹⁾		
Washbasin connection, not dammable				
<p>152.089.01.1 Washbasin drain, space-saving model, slim design, with free outlet and valve cover, horizontal outlet, for Geberit ONE washbasin, vertical outlet</p> 	✓	✓		
<p>152.099.01.1 Washbasin drain, space-saving model, slim design, with free outlet and valve cover, horizontal outlet, for Geberit ONE washbasin, vertical outlet</p> 	✓	✓		
<p>151.019.01.1 Washbasin drain with siphon, valve cover and sleeve, horizontal outlet, for Geberit ONE washbasin, vertical outlet</p> 			✓	✓

✓ Compatible

¹⁾ To be ordered additionally: 245.900.20.1

Assortment overview – Geberit Duofix element for washbasin for bathroom furniture

Geberit International Sales, October 2025

Mirror cabinet / washbasin / double washbasin / furniture cabinet	Nominal width in cm	60	75	90	105	120	135
Installation box for Geberit ONE mirror cabinet, height 90 cm	111.941.00.1	✓					
	111.942.00.1		✓				
	111.943.00.1			✓			
	111.944.00.1				✓		
	111.945.00.1					✓	
Geberit Duofix crossbar for element fastening, for stud clearance from 60 cm	111.041.00.1	✓					
	111.042.00.1		✓				
	111.043.00.1			✓			
	111.044.00.1				✓		
	111.045.00.1					✓	
111.046.00.1						✓	
Geberit Duofix element for washbasin, 112 cm, slim design, deck-mounted tap	111.266.00.2	✓				✓ ³⁾	✓ ³⁾
Geberit Duofix element for washbasin, 112–130 cm, slim design, wall-mounted tap, concealed	111.274.00.2	✓				✓ ³⁾	✓ ³⁾
Assortment with Geberit Duofix element for washbasin, standard model		✓ ¹⁾	✓	✓	✓	✓ ³⁾¹⁾	✓ ³⁾¹⁾
Geberit Duofix mounting plate for washbasin with washbasin cabinet and one washbasin tap, concentric	111.951.00.1	✓ ²⁾					
	111.952.00.1		✓				
	111.953.00.1			✓			
	111.954.00.1				✓		
	111.955.00.1					✓	
Geberit Duofix mounting plate for washbasin with washbasin cabinet and one washbasin tap eccentric	111.055.00.1			✓	✓		
Geberit Duofix mounting plate for washbasin with washbasin cabinet and two washbasin taps	111.056.00.1					✓	✓
Geberit Duofix fastening for central drain between two elements for washbasin	111.027.00.1					✓	✓

Compatible with series Geberit ONE and iCon – for other series and third-party products, the effective detail connection dimension of the products must be checked before the final selection


¹⁾ When using Geberit Duofix element for washbasin, standard model with width 50 cm, there are limited positioning options for furniture substructure mounting next to element, compared to element, slim design with 44 cm width

²⁾ Suitable for Geberit Duofix element for washbasin, slim design, with width 44 cm

³⁾ Use of two Duofix installation elements for two outlet taps

Handrinse basins

Geberit ONE handrinse basin CleanDrain

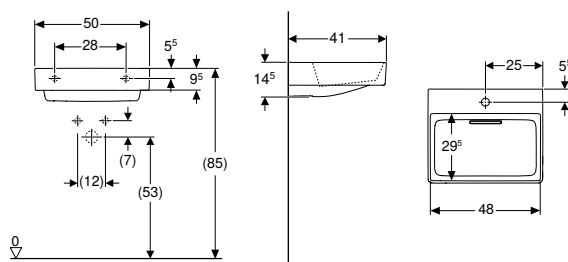

click & scan

Technical data

Product material	Fine fireclay
------------------	---------------

Scope of delivery

- Handrinse basin
- Drain cover with comb insert, magnetic fixing
- Geberit washbasin connector and trap, space-saving model

Characteristics


- Can be installed with a washbasin cabinet
- Horizontal outlet
- Hidden overflow function
- Actuation using tie rod
- With integrated hair trap
- Hygienic with optimum flow behaviour
- According to recommendation in line with SINTEF

Art. no.	Colour / surface	Tap hole	Overflow	Cabinet width [cm]	H [cm]	T [cm]	Fastening points
B / width: 50 cm							
505.018.00.1	Washbasin: white / KeraTect Cover: white / powder-coated	without	without	50	14.5	41	2
505.019.00.1	Washbasin: white / KeraTect Cover: white / powder-coated	centred	without	50	14.5	41	2

Accessories

- Geberit fastening material for washbasin → p. 1035
- Geberit ONE drain cover with comb insert, magnetic fixing → p. 478

Geberit ONE handrinse basin

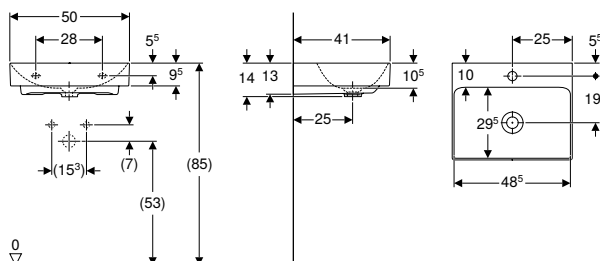

click & scan

Technical data

Product material	Fine fireclay
------------------	---------------

Scope of delivery

- Handrinse basin

Characteristics

- Can be installed with a washbasin cabinet
- Vertical outlet

Art. no.	Colour / surface	Tap hole	Overflow	H [cm]	T [cm]	Fastening points
B / width: 50 cm						
505.020.01.6	white / KeraTect	centred	without	14	41	2
505.021.01.6	white / KeraTect	without	without	14	41	2

To order additionally

- Geberit washbasin connector and trap, space-saving model


Accessories

- Geberit fastening material for washbasin → p. 1035
- Washbasin drain with siphon, valve cover and sleeve, horizontal outlet, for Geberit ONE washbasin, vertical outlet
- Washbasin drain, space-saving model, slim design, with free outlet and valve cover, horizontal outlet, for Geberit ONE washbasin, vertical outlet
- Washbasin drain, space-saving model, slim design, with lever actuation and valve cover, horizontal outlet, for Geberit ONE washbasin, vertical outlet

Washbasins

Mix & Match

Geberit ONE washbasin CleanDrain

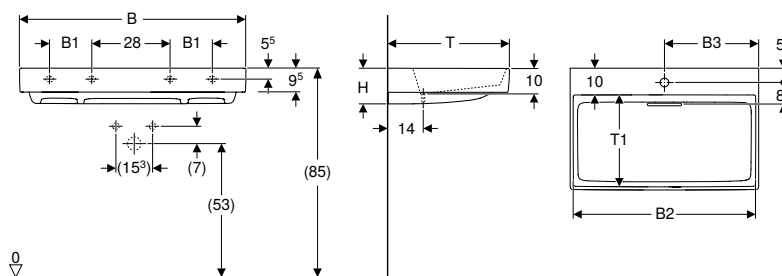

Technical data

Product material	Fine fireclay
------------------	---------------

Scope of delivery

- Washbasin
- Drain cover with comb insert, magnetic fixing
- Comb insert with white cover
- Geberit washbasin connector and trap, space-saving model

Characteristics

- Can be installed with a washbasin cabinet
- Horizontal outlet
- Hidden overflow function
- Actuation using tie rod
- With integrated hair trap
- Hygienic with optimum flow behaviour
- According to recommendation in line with SINTEF

Art. no.	Colour / surface	Mix & Match	Tap hole	Overflow	B1 [cm]	B2 [cm]	B3 [cm]	Cabinet width [cm]	H [cm]	T [cm]	T1 [cm]	Fastening points
B / width: 60 cm												
505.034.00.1	Washbasin: white / KeraTect Cover: white / glossy	Yes	centred	without	57.9	30.1		60	14	48	37	2
505.033.00.1	Washbasin: white / KeraTect Cover: white / glossy	Yes	without	without	57.9			60	14	48	37	2
B / width: 75 cm												
505.036.00.1	Washbasin: white / KeraTect Cover: white / glossy	Yes	centred	without	72.5	37.5		75	14	48	37	2
505.035.00.1	Washbasin: white / KeraTect Cover: white / glossy	Yes	without	without	72.5			75	14	48	37	2
B / width: 90 cm												
505.038.00.1	Washbasin: white / KeraTect Cover: white / glossy	Yes	centred	without	17.2	87.1	44.9	90	14	48	37	4
505.037.00.1	Washbasin: white / KeraTect Cover: white / glossy	Yes	without	without	17.2	87.1		90	14	48	37	4
B / width: 105 cm												
505.046.00.1	Washbasin: white / KeraTect Cover: white / glossy	No	centred	without	18	101.9	52.5	105	14	48	37	4
505.045.00.1	Washbasin: white / KeraTect Cover: white / glossy	No	without	without	18	101.9		105	14	48	37	4
B / width: 120 cm												
505.049.00.1	Washbasin: white / KeraTect Cover: white / glossy	Yes	left and right	without	28	116.5	30.6	120	14	48	37	4
505.048.00.1	Washbasin: white / KeraTect Cover: white / glossy	Yes	centred	without	28	116.5	60	120	14	48	37	4
505.047.00.1	Washbasin: white / KeraTect Cover: white / glossy	Yes	without	without	28	116.5		120	14	48	37	4

Can be combined with

- Geberit iCon cabinet for washbasin, with one drawer → p. 614
- Geberit iCon cabinet for washbasin, with two drawers → p. 616
- Geberit ONE cabinet for washbasin, with two drawers → p. 486
- Geberit ONE cabinet for washbasin, with one drawer → p. 484
- Geberit Acanto cabinet for washbasin, with one drawer and one internal drawer → p. 564

Accessories


- Geberit fastening material for washbasin → p. 1035
- Geberit ONE drain cover with comb insert, magnetic fixing → p. 478



- Mix & Match: Articles of the same width can be freely combined in the Geberit ONE, Acanto and iCon series

Mix & Match

Geberit ONE washbasin CleanDrain, right shelf surface

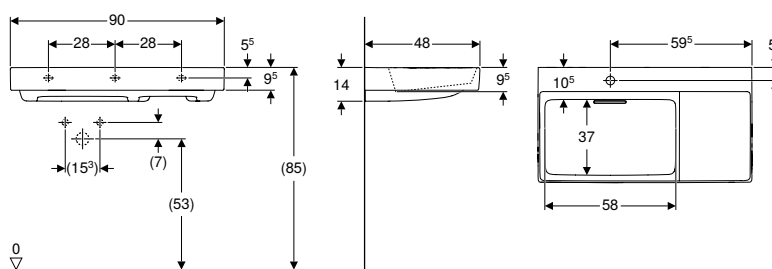

Technical data

Product material	Fine fireclay
------------------	---------------

Scope of delivery

- Washbasin
- Drain cover with comb insert, magnetic fixing
- Geberit washbasin connector and trap, space-saving model

Characteristics

- Can be installed with a washbasin cabinet
- Horizontal outlet
- Hidden overflow function
- Actuation using tie rod
- With integrated hair trap
- Hygienic with optimum flow behaviour

Art. no.	Colour / surface	Mix & Match	Tap hole	Overflow	Cabinet width [cm]	H [cm]	T [cm]	Fastening points	Shelf space
B / width: 90 cm									
505.039.00.1	Washbasin: white / KeraTect Cover: white / glossy	Yes	left	without	90	14	48	3	right
505.042.00.1	Washbasin: white / KeraTect Cover: white / glossy	Yes	without	without	90	14	48	3	right

Can be combined with

- Geberit iCon cabinet for washbasin, with one drawer → p. 614
- Geberit iCon cabinet for washbasin, with two drawers → p. 616
- Geberit ONE cabinet for washbasin, with two drawers → p. 486
- Geberit ONE cabinet for washbasin, with one drawer → p. 484
- Geberit Acanto cabinet for washbasin, with one drawer and one internal drawer → p. 564

Accessories


- Geberit fastening material for washbasin → p. 1035
- Geberit ONE drain cover with comb insert, magnetic fixing → p. 478



- Mix & Match: Articles of the same width can be freely combined in the Geberit ONE, Acanto and iCon series

Mix & Match

Geberit ONE washbasin CleanDrain, left shelf surface

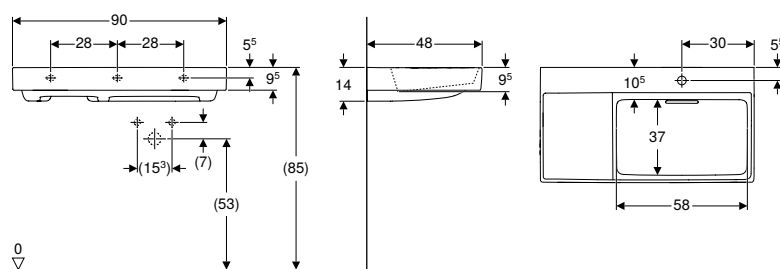

Technical data

Product material	Fine fireclay
------------------	---------------

Scope of delivery

- Washbasin
- Drain cover with comb insert, magnetic fixing
- Geberit washbasin connector and trap, space-saving model

Characteristics

- Can be installed with a washbasin cabinet
- Horizontal outlet
- Hidden overflow function
- Actuation using tie rod
- With integrated hair trap
- Hygienic with optimum flow behaviour

Art. no.	Colour / surface	Mix & Match	Tap hole	Overflow	Cabinet width [cm]	H [cm]	T [cm]	Fastening points	Shelf space
B / width: 90 cm									
505.043.00.1	Washbasin: white / KeraTect Cover: white / glossy	Yes	right	without	90	14	48	3	left
505.044.00.1	Washbasin: white / KeraTect Cover: white / glossy	Yes	without	without	90	14	48	3	left

Can be combined with

- Geberit iCon cabinet for washbasin, with one drawer → p. 614
- Geberit iCon cabinet for washbasin, with two drawers → p. 616
- Geberit ONE cabinet for washbasin, with two drawers → p. 486
- Geberit ONE cabinet for washbasin, with one drawer → p. 484
- Geberit Acanto cabinet for washbasin, with one drawer and one internal drawer → p. 564

Accessories


- Geberit fastening material for washbasin → p. 1035
- Geberit ONE drain cover with comb insert, magnetic fixing → p. 478



- Mix & Match: Articles of the same width can be freely combined in the Geberit ONE, Acanto and iCon series

Mix & Match

Geberit ONE washbasin

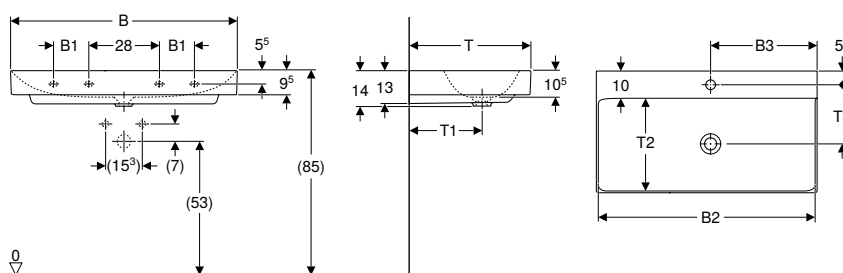

Technical data

Product material	Fine fireclay
------------------	---------------

Scope of delivery

- Washbasin

Characteristics

- Can be installed with a washbasin cabinet
- Vertical outlet

Art. no.	Colour / surface	Mix & Match	Tap hole	Overflow	B1 [cm]	B2 [cm]	B3 [cm]	Cabinet width [cm]	H [cm]	T [cm]	T1 [cm]	T2 [cm]	T3 [cm]	Fastening points
----------	------------------	-------------	----------	----------	---------	---------	---------	--------------------	--------	--------	---------	---------	---------	------------------

B / width: 60 cm

505.020.01.1	white / KeraTect	Yes	centred	without	58.5	30	60	14	48	29	37	23.5		2
505.021.01.1	white / KeraTect	Yes	without	without	58.5	30	60	14	48	29	37			2

B / width: 75 cm

505.020.01.2	white / KeraTect	Yes	centred	without	73.5	45	75	14	48	29	37	23.5		2
505.021.01.2	white / KeraTect	Yes	without	without	73.5	37.5	75	14	48	29	37			2

B / width: 90 cm

505.020.01.3	white / KeraTect	Yes	centred	without	14	88.5	45	90	14	48	29	37	23.5	4
505.021.01.3	white / KeraTect	Yes	without	without	14	88.5	45	90	14	48	29	37		4

B / width: 105 cm

505.020.01.4	white / KeraTect	No	centred	without	18	103.5	52.5	105	14	48	29	37	23.5	4
505.021.01.4	white / KeraTect	No	without	without	18	103.5	52.5	105	14	48	29	37		4

B / width: 120 cm

505.022.01.5	white / KeraTect	Yes	left and right	without	28	118.5	31.5	120	14	48	29	37	23.5	4
505.020.01.5	white / KeraTect	Yes	centred	without	28	118.5	60	120	14	48	29	37	23.5	4
505.021.01.5	white / KeraTect	Yes	without	without	28	118.5	60	102	14	48	29	37		4

To order additionally

- Geberit washbasin connector and trap, space-saving model

Can be combined with

- Geberit iCon cabinet for washbasin, with one drawer → p. 614
- Geberit iCon cabinet for washbasin, with two drawers → p. 616
- Geberit ONE cabinet for washbasin, with two drawers → p. 486
- Geberit ONE cabinet for washbasin, with one drawer → p. 484
- Geberit Acanto cabinet for washbasin, with one drawer and one internal drawer → p. 564

Accessories

- Geberit fastening material for washbasin → p. 1035
- Washbasin drain with siphon, valve cover and sleeve, horizontal outlet, for Geberit ONE washbasin, vertical outlet
- Washbasin drain, space-saving model, slim design, with free outlet and valve cover, horizontal outlet, for Geberit ONE washbasin, vertical outlet
- Washbasin drain, space-saving model, slim design, with lever actuation and valve cover, horizontal outlet, for Geberit ONE washbasin, vertical outlet






- A Geberit washbasin connector, space-saving model is required for the installation of the washbasin with base cabinet. See 'Assortment overview – Geberit ONE washbasin connectors space-saving model' or online catalogue, washbasin accessories
- Mix & Match: Articles of the same width can be freely combined in the Geberit ONE, Acanto and iCon series

Vanity basins

Mix & Match

Geberit ONE vanity basin CleanDrain

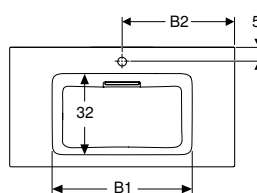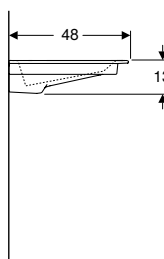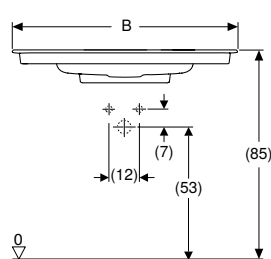

click & scan

Application purposes

- For mounting on washbasin cabinets

Technical data

Product material	Fine fireclay
------------------	---------------

Characteristics

- Horizontal outlet
- Slim rim
- Hidden overflow function
- Actuation using tie rod
- With integrated hair trap
- Hygienic with optimum flow behaviour

Scope of delivery

- Vanity basin
- Drain cover with comb insert, magnetic fixing
- Geberit washbasin connector and trap, space-saving model

Art. no.	Colour / surface	Mix & Tap hole Match	Overflow	B1 [cm]	B2 [cm]	Cabinet width [cm]	H [cm]	T [cm]	Shelf space
B / width: 60 cm									
505.002.00.1	Washbasin: white / KeraTect Cover: white / glossy	Yes centred	without	49	30	60	13	48	on both sides
505.001.00.1	Washbasin: white / KeraTect Cover: white / glossy	Yes without	without	49		60	13	48	on both sides
B / width: 75 cm									
505.004.00.1	Washbasin: white / KeraTect Cover: white / glossy	Yes centred	without	55.5	37	75	13	48	on both sides
505.003.00.1	Washbasin: white / KeraTect Cover: white / glossy	Yes without	without	55.5		75	13	48	on both sides
B / width: 90 cm									
505.006.00.1	Washbasin: white / KeraTect Cover: white / glossy	Yes centred	without	55.5	45	90	13	48	on both sides
505.005.00.1	Washbasin: white / KeraTect Cover: white / glossy	Yes without	without	55.5		90	13	48	on both sides
B / width: 105 cm									
505.015.00.1	Washbasin: white / KeraTect Cover: white / glossy	No centred	without	55.5	52	105	13	48	on both sides
505.014.00.1	Washbasin: white / KeraTect Cover: white / glossy	No without	without	55.5		105	13	48	on both sides
B / width: 119 cm									
505.017.00.1	Washbasin: white / KeraTect Cover: white / glossy	Yes centred	without	55.5	59.5	120	13	48	on both sides
505.016.00.1	Washbasin: white / KeraTect Cover: white / glossy	Yes without	without	55.5		120	13	48	on both sides

Can be combined with

- Geberit iCon cabinet for washbasin, with one drawer → p. 614
- Geberit iCon cabinet for washbasin, with two drawers → p. 616
- Geberit ONE cabinet for washbasin, with two drawers → p. 486
- Geberit ONE cabinet for washbasin, with one drawer → p. 484
- Geberit Acanto cabinet for washbasin, with one drawer and one internal drawer → p. 564

Accessories


- Geberit ONE drain cover with comb insert, magnetic fixing → p. 478



- Mix & Match: Articles of the same width can be freely combined in the Geberit ONE, Acanto and iCon series

Mix & Match

Geberit ONE vanity basin, CleanDrain, right shelf surface

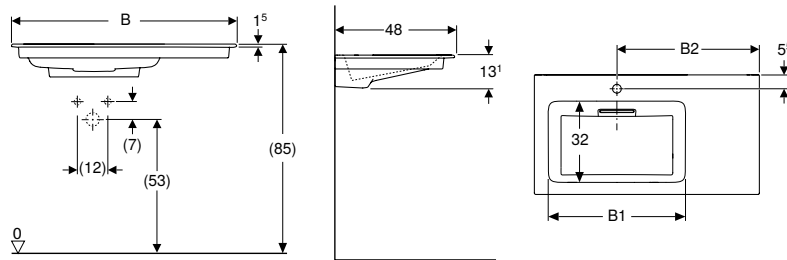

click & scan

Application purposes

- For mounting on washbasin cabinets

Technical data

Product material	Fine fireclay
------------------	---------------

Characteristics

- Horizontal outlet
- Slim rim
- Hidden overflow function
- Actuation using tie rod
- With integrated hair trap
- Hygienic with optimum flow behaviour

Scope of delivery

- Vanity basin
- Drain cover with comb insert, magnetic fixing
- Geberit washbasin connector and trap, space-saving model

Art. no.	Colour / surface	Mix & Tap hole Match	Overflow	Overflow	B1 [cm]	B2 [cm]	Cabinet width [cm]	H [cm]	T [cm]	Shelf space
B / width: 90 cm										
505.007.00.1	Washbasin: white / KeraTect Cover: white / glossy	Yes	left	without	54.5	57	90	13.1	48	right
505.008.00.1	Washbasin: white / KeraTect Cover: white / glossy	Yes	without	without	54.5		90	13.1	48	right

Can be combined with

- Geberit iCon cabinet for washbasin, with one drawer → p. 614
- Geberit iCon cabinet for washbasin, with two drawers → p. 616
- Geberit ONE cabinet for washbasin, with two drawers → p. 486
- Geberit ONE cabinet for washbasin, with one drawer → p. 484
- Geberit Acanto cabinet for washbasin, with one drawer and one internal drawer → p. 564

Accessories




- Geberit ONE drain cover with comb insert, magnetic fixing → p. 478



- Mix & Match: Articles of the same width can be freely combined in the Geberit ONE, Acanto and iCon series

Mix & Match

Geberit ONE vanity basin, CleanDrain, left shelf surface

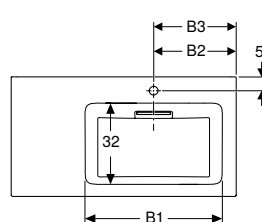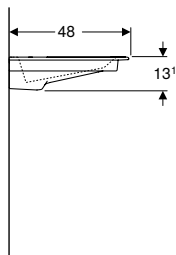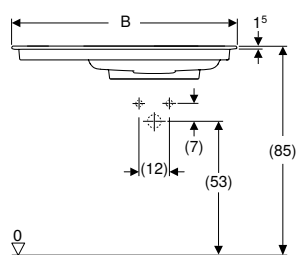

Application purposes

- For mounting on washbasin cabinets

Technical data

Product material	Fine fireclay
------------------	---------------

Characteristics

- Horizontal outlet
- Slim rim
- Hidden overflow function
- Actuation using tie rod
- With integrated hair trap
- Hygienic with optimum flow behaviour

Scope of delivery

- Vanity basin
- Drain cover with comb insert, magnetic fixing
- Geberit washbasin connector and trap, space-saving model

Art. no.	Colour / surface	Mix & Tap hole Match	Tap hole	Overflow	B1 [cm]	B2 [cm]	B3 [cm]	Cabinet width [cm]	H [cm]	T [cm]	Shelf space
B / width: 90 cm											
505.009.00.1	Washbasin: white / KeraTect Cover: white / glossy	Yes	right	without	54.5	33	33	90	13.1	48	left
505.013.00.1	Washbasin: white / KeraTect Cover: white / glossy	Yes	without	without	54.5		33	90	13.1	48	left

Can be combined with

- Geberit iCon cabinet for washbasin, with one drawer → p. 614
- Geberit iCon cabinet for washbasin, with two drawers → p. 616
- Geberit ONE cabinet for washbasin, with two drawers → p. 486
- Geberit ONE cabinet for washbasin, with one drawer → p. 484
- Geberit Acanto cabinet for washbasin, with one drawer and one internal drawer → p. 564

Accessories


- Geberit ONE drain cover with comb insert, magnetic fixing → p. 478



- Mix & Match: Articles of the same width can be freely combined in the Geberit ONE, Acanto and iCon series

Mix & Match

Geberit ONE vanity basin

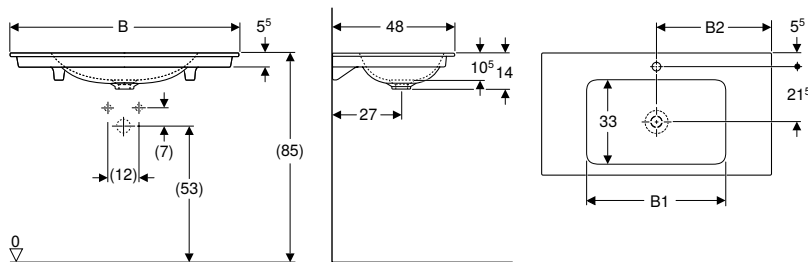

click & scan

Application purposes

- For mounting on washbasin cabinets

Technical data

Product material	Fine fireclay
------------------	---------------

Characteristics

- Vertical outlet
- Slim rim

Scope of delivery

- Vanity basin

Art. no.	Colour / surface	Mix & Match	Tap hole	Overflow	B1 [cm]	B2 [cm]	Cabinet width [cm]	H [cm]	T [cm]	Shelf space
B / width: 60 cm										
505.010.01.1	white / KeraTect	Yes	centred	without	50.5	30	60	14	48	on both sides
505.011.01.1	white / KeraTect	Yes	without	without	50.5	30	60	14	48	on both sides
B / width: 75 cm										
505.010.01.2	white / KeraTect	Yes	centred	without	55	37.5	75	14	48	on both sides
505.011.01.2	white / KeraTect	Yes	without	without	55	37.5	75	14	48	on both sides
B / width: 90 cm										
505.010.01.3	white / KeraTect	Yes	centred	without	55	45	90	14	48	on both sides
505.011.01.3	white / KeraTect	Yes	without	without	55	45	90	14	48	on both sides
B / width: 105 cm										
505.010.01.4	white / KeraTect	No	centred	without	55	52.5	105	14	48	on both sides
505.011.01.4	white / KeraTect	No	without	without	55	52.5	105	14	48	on both sides
B / width: 119 cm										
505.010.01.5	white / KeraTect	Yes	centred	without	60	59.5	120	14	48	on both sides
505.011.01.5	white / KeraTect	Yes	without	without	60	59.5	120	14	48	on both sides

To order additionally

- Geberit washbasin connector and trap, space-saving model

Can be combined with

- Geberit iCon cabinet for washbasin, with one drawer → p. 614
- Geberit iCon cabinet for washbasin, with two drawers → p. 616
- Geberit ONE cabinet for washbasin, with two drawers → p. 486
- Geberit ONE cabinet for washbasin, with one drawer → p. 484
- Geberit Acanto cabinet for washbasin, with one drawer and one internal drawer → p. 564

Accessories

- Washbasin drain, space-saving model, slim design, with free outlet and valve cover, horizontal outlet, for Geberit ONE washbasin, vertical outlet
- Washbasin drain, space-saving model, slim design, with lever actuation and valve cover, horizontal outlet, for Geberit ONE washbasin, vertical outlet







- A Geberit washbasin connector, space-saving model is required for the installation of the washbasin with base cabinet. See 'Assortment overview – Geberit ONE washbasin connectors space-saving model' or online catalogue, washbasin accessories
- Mix & Match: Articles of the same width can be freely combined in the Geberit ONE, Acanto and iCon series

Lay-on washbasins







Assortment overview – Geberit ONE lay-on washbasins and bathroom furniture

Geberit International Sales, version: December 2025

				Geberit ONE lay-on washbasin, bowl shape			
Horizontal outlet							
Without tap hole, white				505.050.00.1			
With tap hole, white				505.051.00.1			
Without tap hole, white matt				505.052.00.1			
With tap hole, white matt				505.053.00.1			
Vertical outlet							
Without tap hole, white				505.040.01.6			
With tap hole, white				505.041.01.6			
				Geberit ONE washtop with cutout, for lay-on washbasin, bowl shape			
				Central cut-out	Left cut-out	Right cut-out	Double cut-out
							
With two drawers	With one drawer	From page		→ p. 498	→ p. 498	→ p. 498	→ p. 498
Width 60 cm							
505.261.00.1	505.071.00.1	White, high-gloss	→ p. 486	505.271.00.1			
505.261.00.2	505.071.00.2	White matt	→ p. 486	505.271.00.2			
505.261.00.3	505.071.00.3	lava	→ p. 486	505.271.00.3			
505.261.00.4	505.071.00.4	sand grey	→ p. 486	505.271.00.4			
505.261.00.5	505.071.00.5	oak	→ p. 486	505.271.00.5			
505.261.00.6	505.071.00.6	hickory	→ p. 486	505.271.00.6			
505.261.00.7	505.071.00.7	greige	→ p. 486	505.271.00.7			
505.261.00.8	505.071.00.8	Black matt	→ p. 486				
Width 75 cm							
505.262.00.1	505.072.00.1	White, high-gloss	→ p. 486	505.272.00.1			
505.262.00.2	505.072.00.2	White matt	→ p. 486	505.272.00.2			
505.262.00.3	505.072.00.3	lava	→ p. 486	505.272.00.3			
505.262.00.4	505.072.00.4	sand grey	→ p. 486	505.272.00.4			
505.262.00.5	505.072.00.5	oak	→ p. 486	505.272.00.5			
505.262.00.6	505.072.00.6	hickory	→ p. 486	505.272.00.6			
505.262.00.7	505.072.00.7	greige	→ p. 486	505.272.00.7			
505.262.00.8	505.072.00.8	Black matt	→ p. 486				
Width 90 cm							
505.263.00.1	505.073.00.1	White, high-gloss	→ p. 486	505.273.00.1	505.293.00.1	505.313.00.1	
505.263.00.2	505.073.00.2	White matt	→ p. 486	505.273.00.2	505.293.00.2	505.313.00.2	
505.263.00.3	505.073.00.3	lava	→ p. 486	505.273.00.3	505.293.00.3	505.313.00.3	
505.263.00.4	505.073.00.4	sand grey	→ p. 486	505.273.00.4	505.293.00.4	505.313.00.4	
505.263.00.5	505.073.00.5	oak	→ p. 486	505.273.00.5	505.293.00.5	505.313.00.5	
505.263.00.6	505.073.00.6	hickory	→ p. 486	505.273.00.6	505.293.00.6	505.313.00.6	
505.263.00.7	505.073.00.7	greige	→ p. 486	505.273.00.7	505.293.00.7	505.313.00.7	
505.263.00.8	505.073.00.8	Black matt	→ p. 486				
Width 105 cm							
505.264.00.1	505.074.00.1	White, high-gloss	→ p. 486	505.274.00.1	505.294.00.1	505.314.00.1	
505.264.00.2	505.074.00.2	White matt	→ p. 486	505.274.00.2	505.294.00.2	505.314.00.2	
505.264.00.3	505.074.00.3	lava	→ p. 486	505.274.00.3	505.294.00.3	505.314.00.3	
505.264.00.4	505.074.00.4	sand grey	→ p. 486	505.274.00.4	505.294.00.4	505.314.00.4	
505.264.00.5	505.074.00.5	oak	→ p. 486	505.274.00.5	505.294.00.5	505.314.00.5	
505.264.00.6	505.074.00.6	hickory	→ p. 486	505.274.00.6	505.294.00.6	505.314.00.6	
505.264.00.7	505.074.00.7	greige	→ p. 486	505.274.00.7	505.294.00.7	505.314.00.7	
505.264.00.8	505.074.00.8	Black matt	→ p. 486				

Geberit ONE
Washbasins
Lay-on washbasins

Geberit International Sales, version: December 2025





				Geberit ONE lay-on washbasin, bowl shape			
Horizontal outlet							
Without tap hole, white				505.050.00.1			
With tap hole, white				505.051.00.1			
Without tap hole, white matt				505.052.00.1			
With tap hole, white matt				505.053.00.1			
Vertical outlet							
Without tap hole, white				505.040.01.6			
With tap hole, white				505.041.01.6			
Geberit ONE washtop with cutout, for lay-on washbasin, bowl shape							
		Central cut-out	Left cut-out	Right cut-out	Double cut-out		
							
Width 120 cm							
505.265.00.1	505.075.00.1	White, high-gloss	→ p. 487	505.275.00.1	505.295.00.1	505.315.00.1	505.335.00.1
505.265.00.2	505.075.00.2	White matt	→ p. 487	505.275.00.2	505.295.00.2	505.315.00.2	505.335.00.2
505.265.00.3	505.075.00.3	lava	→ p. 487	505.275.00.3	505.295.00.3	505.315.00.3	505.335.00.3
505.265.00.4	505.075.00.4	sand grey	→ p. 487	505.275.00.4	505.295.00.4	505.315.00.4	505.335.00.4
505.265.00.5	505.075.00.5	oak	→ p. 487	505.275.00.5	505.295.00.5	505.315.00.5	505.335.00.5
505.265.00.6	505.075.00.6	hickory	→ p. 487	505.275.00.6	505.295.00.6	505.315.00.6	505.335.00.6
505.265.00.7	505.075.00.7	greige	→ p. 487	505.275.00.7	505.295.00.7	505.315.00.7	505.335.00.7
505.265.00.8	505.075.00.8	Black matt	→ p. 487				
With four drawers		With two drawers					
Width 135 cm							
505.266.00.1	505.076.00.1	White, high-gloss	→ p. 489				505.276.00.1
505.266.00.2	505.076.00.2	White matt	→ p. 489				505.276.00.2
505.266.00.3	505.076.00.3	lava	→ p. 489				505.276.00.3
505.266.00.4	505.076.00.4	sand grey	→ p. 489				505.276.00.4
505.266.00.5	505.076.00.5	oak	→ p. 489				505.276.00.5
505.266.00.6	505.076.00.6	hickory	→ p. 489				505.276.00.6
505.266.00.7	505.076.00.7	greige	→ p. 489				505.276.00.7
505.266.00.8	505.076.00.8	Black matt	→ p. 489				
Washbasin taps¹⁾							
116.464.21.1		Geberit ONE washbasin tap, round design, wall-mounted, two-handle mixer, for concealed function box	gloss chrome	✓ ²⁾	✓	✓	✓ ³⁾
116.464.14.1			Black matt	✓ ²⁾	✓	✓	✓ ³⁾
116.465.21.1		Geberit ONE washbasin tap, square design, wall-mounted, two-handle mixer, for concealed function box	gloss chrome	✓ ²⁾	✓	✓	✓ ³⁾
116.465.14.1			Black matt	✓ ²⁾	✓	✓	✓ ³⁾

✓ Compatible

¹⁾ For washbasins without tap hole; suitable Geberit Duofix element necessary


²⁾ Washbasin tap not compatible with bathroom furniture, width 60 cm

³⁾ Washbasin tap not compatible with bathroom furniture, width 120 cm

Geberit ONE lay-on washbasin, rectangular							
505.023.00.1							
505.024.00.1							
505.025.00.1							
505.026.00.1							
505.031.01.6							
505.030.01.6							
Geberit ONE washtop with cutout, for lay-on washbasin, rectangular							
Central cut-out	Left cut-out	Right cut-out	Double cut-out				
				Mirror cabinets, concealed installation			
505.285.00.1	505.305.00.1	505.325.00.1	505.345.00.1	120 cm	111.945.00.1	60–120 cm	
505.285.00.2	505.305.00.2	505.325.00.2	505.345.00.2	120 cm	111.945.00.1	60–120 cm	
505.285.00.3	505.305.00.3	505.325.00.3	505.345.00.3	120 cm	111.945.00.1	60–120 cm	
505.285.00.4	505.305.00.4	505.325.00.4	505.345.00.4	120 cm	111.945.00.1	60–120 cm	
505.285.00.5	505.305.00.5	505.325.00.5	505.345.00.5	120 cm	111.945.00.1	60–120 cm	
505.285.00.6	505.305.00.6	505.325.00.6	505.345.00.6	120 cm	111.945.00.1	60–120 cm	
505.285.00.7	505.305.00.7	505.325.00.7	505.345.00.7	120 cm	111.945.00.1	60–120 cm	
				120 cm	111.945.00.1	60–120 cm	
			505.286.00.1	-		60–120 cm	
			505.286.00.2	-		60–120 cm	
			505.286.00.3	-		60–120 cm	
			505.286.00.4	-		60–120 cm	
			505.286.00.5	-		60–120 cm	
			505.286.00.6	-		60–120 cm	
			505.286.00.7	-		60–120 cm	
				-		60–120 cm	
✓ ²⁾	✓	✓	✓ ³⁾				
✓ ²⁾	✓	✓	✓ ³⁾				
✓ ²⁾	✓	✓	✓ ³⁾				
✓ ²⁾	✓	✓	✓ ³⁾				

Mix & Match

Geberit ONE lay-on washbasin, bowl shape, CleanDrain

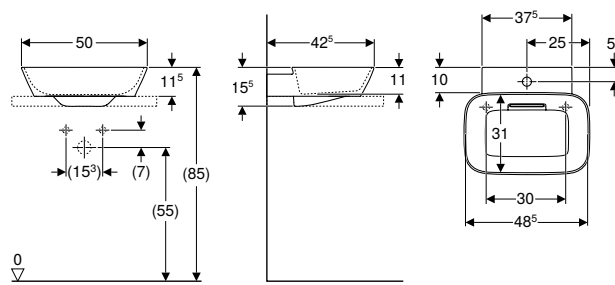

Application purposes

- For mounting on washtops

Technical data

Product material	Fine fireclay
------------------	---------------

Characteristics

- Horizontal outlet
- Hidden overflow function
- Actuation using tie rod
- With integrated hair trap
- Hygienic with optimum flow behaviour
- Ground bottom and rear sides

Scope of delivery

- Washbasin
- Drain cover with comb insert, magnetic fixing
- Geberit washbasin connector and trap, space-saving model
- Fastening material

Art. no.	Colour / surface	Mix & Match	Tap hole	Overflow	H [cm]	T [cm]
B / width: 50 cm						
505.051.00.1	Washbasin: white / KeraTect Cover: white / glossy	Yes	centred	without	15.5	42.5
505.053.00.1	Washbasin: white / matt Cover: white / glossy	Yes	centred	without	15.5	42.5
505.050.00.1	Washbasin: white / KeraTect Cover: white / glossy	Yes	without	without	15.5	42.5
505.052.00.1	Washbasin: white / matt Cover: white / glossy	Yes	without	without	15.5	42.5

To order additionally

- Geberit ONE washtop with cutout, for lay-on washbasin, bowl shape → p. 498
- Geberit ONE washtop with cutout, stoneware, for lay-on washbasin, bowl shape → p. 500

Can be combined with


- Geberit ONE cabinet for washbasin, with one drawer → p. 484
- Geberit ONE cabinet for washbasin, with two drawers → p. 486
- Geberit ONE cabinet for lay-on washbasin, with two drawers → p. 488
- Geberit ONE cabinet for lay-on washbasin, with four drawers → p. 489
- Geberit Acanto cabinet for washbasin, with one drawer and one internal drawer → p. 564
- Geberit iCon cabinet for washbasin, with one drawer → p. 614
- Geberit iCon cabinet for washbasin, with two drawers → p. 616

Accessories

- Geberit ONE drain cover with comb insert, magnetic fixing → p. 478

Mix & Match

Geberit ONE lay-on washbasin, bowl shape

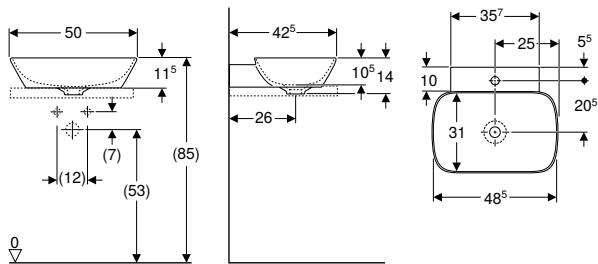

click & scan

Application purposes

- For mounting on washtops

Technical data

Product material	Fine fireclay
------------------	---------------

Characteristics

- Vertical outlet
- Ground bottom and rear sides

Scope of delivery

- Washbasin
- Fastening material

Art. no.	Colour / surface	Mix & Match	Tap hole	Overflow	H [cm]	T [cm]
B / width: 50 cm						
505.041.01.6	white / KeraTect	Yes	centred	without	14	42.5
505.040.01.6	white / KeraTect	Yes	without	without	14	42.5

To order additionally

- Geberit ONE washtop with cutout, for lay-on washbasin, bowl shape → p. 498
- Geberit ONE washtop with cutout, stoneware, for lay-on washbasin, bowl shape → p. 500
- Geberit washbasin connector and trap, space-saving model

Can be combined with

- Geberit ONE cabinet for washbasin, with one drawer → p. 484
- Geberit ONE cabinet for washbasin, with two drawers → p. 486
- Geberit ONE cabinet for lay-on washbasin, with two drawers → p. 488
- Geberit ONE cabinet for lay-on washbasin, with four drawers → p. 489
- Geberit Acanto cabinet for washbasin, with one drawer and one internal drawer → p. 564
- Geberit iCon cabinet for washbasin, with one drawer → p. 614
- Geberit iCon cabinet for washbasin, with two drawers → p. 616

Accessories


- Washbasin drain with siphon, valve cover and sleeve, horizontal outlet, for Geberit ONE washbasin, vertical outlet
- Washbasin drain, space-saving model, slim design, with free outlet and valve cover, horizontal outlet, for Geberit ONE washbasin, vertical outlet
- Washbasin drain, space-saving model, slim design, with lever actuation and valve cover, horizontal outlet, for Geberit ONE washbasin, vertical outlet



- A Geberit washbasin connector, space-saving model is required for the installation of the washbasin with base cabinet. See 'Assortment overview – Geberit ONE washbasin connectors space-saving model' or online catalogue, washbasin accessories

Mix & Match

Geberit ONE lay-on washbasin, rectangular, CleanDrain

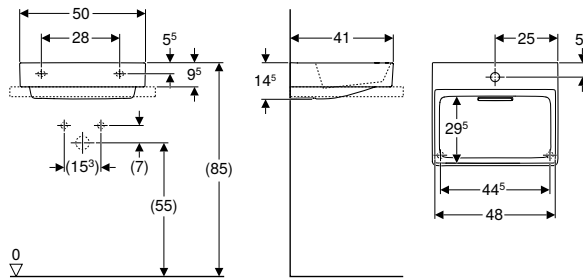

Application purposes

- For mounting on washtops

Technical data

Product material	Fine fireclay
------------------	---------------

Characteristics

- Horizontal outlet
- Hidden overflow function
- Actuation using tie rod
- With integrated hair trap
- Hygienic with optimum flow behaviour
- Ground bottom and rear sides

Scope of delivery

- Washbasin
- Drain cover with comb insert, magnetic fixing
- Geberit washbasin connector and trap, space-saving model
- Fastening material

Art. no.	Colour / surface	Mix & Match	Tap hole	Overflow	H [cm]	T [cm]	Fastening points
B / width: 50 cm							
505.024.00.1	Washbasin: white / KeraTect Cover: white / glossy	Yes	centred	without	14.5	41	2
505.026.00.1	Washbasin: white / matt Cover: white / glossy	Yes	centred	without	14.5	41	2
505.023.00.1	Washbasin: white / KeraTect Cover: white / glossy	Yes	without	without	14.5	41	2
505.025.00.1	Washbasin: white / matt Cover: white / glossy	Yes	without	without	14.5	41	2

To order additionally

- Geberit ONE washtop with cutout, for lay-on washbasin, rectangular → p. 502
- Geberit ONE washtop with cutout, stoneware, for lay-on washbasin, rectangular → p. 504

Can be combined with


- Geberit ONE cabinet for washbasin, with one drawer → p. 484
- Geberit ONE cabinet for washbasin, with two drawers → p. 486
- Geberit ONE cabinet for lay-on washbasin, with two drawers → p. 488
- Geberit ONE cabinet for lay-on washbasin, with four drawers → p. 489
- Geberit Acanto cabinet for washbasin, with one drawer and one internal drawer → p. 564
- Geberit iCon cabinet for washbasin, with one drawer → p. 614
- Geberit iCon cabinet for washbasin, with two drawers → p. 616

Accessories

- Geberit ONE drain cover with comb insert, magnetic fixing → p. 478

Mix & Match

Geberit ONE lay-on washbasin, rectangular

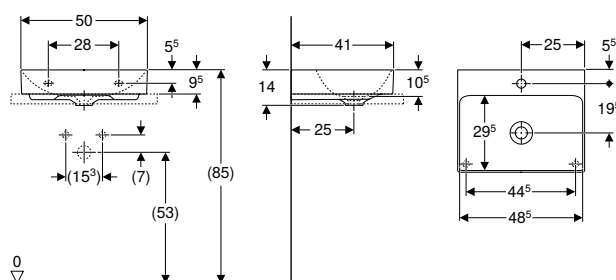

click & scan

Application purposes

- For mounting on washtops

Technical data

Product material	Fine fireclay
------------------	---------------

Characteristics

- Vertical outlet
- Ground bottom and rear sides

Scope of delivery

- Washbasin
- Fastening material

Art. no.	Colour / surface	Mix & Match	Tap hole	Overflow	H [cm]	T [cm]
B / width: 50 cm						
505.030.01.6	white / KeraTect	Yes	centred	without	14	41
505.031.01.6	white / KeraTect	Yes	without	without	14	41

To order additionally

- Geberit ONE washtop with cutout, for lay-on washbasin, rectangular → p. 502
- Geberit ONE washtop with cutout, stoneware, for lay-on washbasin, rectangular → p. 504
- Geberit washbasin connector and trap, space-saving model

Can be combined with

- Geberit iCon cabinet for washbasin, with one drawer → p. 614
- Geberit iCon cabinet for washbasin, with two drawers → p. 616
- Geberit ONE cabinet for washbasin, with two drawers → p. 486
- Geberit ONE cabinet for lay-on washbasin, with four drawers → p. 489
- Geberit ONE cabinet for washbasin, with one drawer → p. 484
- Geberit ONE cabinet for lay-on washbasin, with two drawers → p. 488
- Geberit Acanto cabinet for washbasin, with one drawer and one internal drawer → p. 564

Accessories

- Washbasin drain with siphon, valve cover and sleeve, horizontal outlet, for Geberit ONE washbasin, vertical outlet
- Washbasin drain, space-saving model, slim design, with free outlet and valve cover, horizontal outlet, for Geberit ONE washbasin, vertical outlet
- Washbasin drain, space-saving model, slim design, with lever actuation and valve cover, horizontal outlet, for Geberit ONE washbasin, vertical outlet



- A Geberit washbasin connector, space-saving model is required for the installation of the washbasin with base cabinet. See 'Assortment overview – Geberit ONE washbasin connectors space-saving model' or online catalogue, washbasin accessories
- Mix & Match: Articles of the same width can be freely combined in the Geberit ONE, Acanto and iCon series

Accessories

Geberit ONE drain cover with comb insert, magnetic fixing




click & scan

Characteristics

- With integrated hair trap

Art. no.	Colour / surface
245.451.11.1	white alpine
505.082.14.1	black matt / Easy-to-clean coated
505.082.21.1	chrome / Glossy
505.082.GH.1	Chrome brushed

Geberit ONE design cover for washbasin traps

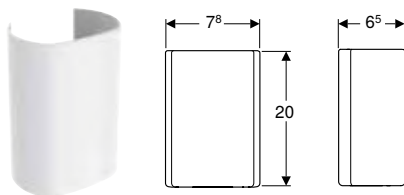

click & scan

Art. no.	Colour / surface	B	H	T
		[cm]	[cm]	[cm]
505.058.01.1	white / powder-coated stainless steel	7.8	20	6.5
505.058.21.1	brushed stainless steel	7.8	20	6.5





Can be combined with





- Geberit ONE cabinet for washbasin, with one drawer → p. 484
- Geberit ONE cabinet for lay-on washbasin, with two drawers → p. 488
- Geberit iCon cabinet for washbasin, with one drawer → p. 614

Bathroom furniture

Accessory overview – Geberit ONE bathroom furniture

Geberit International Sales, December 2025

			Towel rail	Geberit set of drawer inserts for top drawer			
			503.012.XX.1	502.349.00.1	502.350.00.1	502.351.00.1	
							
With two drawers	With one drawer	From page	→ p. 505	→ p. 505	→ p. 505	→ p. 505	
Width 60 cm							
505.261.00.1	505.071.00.1	white → p. 486	✓	✓			
505.261.00.2	505.071.00.2	White matt → p. 486	✓	✓			
505.261.00.3	505.071.00.3	lava → p. 486	✓	✓			
505.261.00.4	505.071.00.4	sand grey → p. 486	✓	✓			
505.261.00.5	505.071.00.5	oak → p. 486	✓	✓			
505.261.00.6	505.071.00.6	walnut → p. 486	✓	✓			
505.261.00.7	505.071.00.7	greige → p. 486	✓	✓			
505.261.00.8	505.071.00.8	Black matt → p. 486	✓	✓			
Width 75 cm							
505.262.00.1	505.072.00.1	white → p. 486	✓		✓		
505.262.00.2	505.072.00.2	White matt → p. 486	✓		✓		
505.262.00.3	505.072.00.3	lava → p. 486	✓		✓		
505.262.00.4	505.072.00.4	sand grey → p. 486	✓		✓		
505.262.00.5	505.072.00.5	oak → p. 486	✓		✓		
505.262.00.6	505.072.00.6	walnut → p. 486	✓		✓		
505.262.00.7	505.072.00.7	greige → p. 486	✓		✓		
505.262.00.8	505.072.00.8	Black matt → p. 486	✓		✓		
Width 90 cm							
505.263.00.1	505.073.00.1	white → p. 486	✓			✓	
505.263.00.2	505.073.00.2	White matt → p. 486	✓			✓	
505.263.00.3	505.073.00.3	lava → p. 486	✓			✓	
505.263.00.4	505.073.00.4	sand grey → p. 486	✓			✓	
505.263.00.5	505.073.00.5	oak → p. 486	✓			✓	
505.263.00.6	505.073.00.6	walnut → p. 486	✓			✓	
505.263.00.7	505.073.00.7	greige → p. 486	✓			✓	
505.263.00.8	505.073.00.8	Black matt → p. 486	✓			✓	
Width 105 cm							
505.264.00.1	505.074.00.1	white → p. 486	✓				
505.264.00.2	505.074.00.2	White matt → p. 486	✓				
505.264.00.3	505.074.00.3	lava → p. 486	✓				
505.264.00.4	505.074.00.4	sand grey → p. 486	✓				
505.264.00.5	505.074.00.5	oak → p. 486	✓				
505.264.00.6	505.074.00.6	walnut → p. 486	✓				
505.264.00.7	505.074.00.7	greige → p. 486	✓				
505.264.00.8	505.074.00.8	Black matt → p. 486	✓				
Width 120 cm							
505.265.00.1	505.075.00.1	white → p. 487	✓				
505.265.00.2	505.075.00.2	White matt → p. 487	✓				
505.265.00.3	505.075.00.3	lava → p. 487	✓				
505.265.00.4	505.075.00.4	sand grey → p. 487	✓				
505.265.00.5	505.075.00.5	oak → p. 487	✓				
505.265.00.6	505.075.00.6	walnut → p. 487	✓				
505.265.00.7	505.075.00.7	greige → p. 487	✓				
505.265.00.8	505.075.00.8	Black matt → p. 487	✓				

		Towel rail	Geberit set of drawer inserts for top drawer		
		503.012.XX.1	502.349.00.1	502.350.00.1	502.351.00.1
					

Width 135 cm

With four drawers	With two drawers						
505.266.00.1	505.076.00.1	white	→ p. 489	✓			
505.266.00.2	505.076.00.2	White matt	→ p. 489	✓			
505.266.00.3	505.076.00.3	lava	→ p. 489	✓			
505.266.00.4	505.076.00.4	sand grey	→ p. 489	✓			
505.266.00.5	505.076.00.5	oak	→ p. 489	✓			
505.266.00.6	505.076.00.6	walnut	→ p. 489	✓			
505.266.00.7	505.076.00.7	greige	→ p. 489	✓			
505.266.00.8	505.076.00.8	Black matt	→ p. 489	✓			

Side cabinets

With two drawers	With one drawer						
505.077.00.1	505.078.00.1	white	→ p. 491				
505.077.00.2	505.078.00.2	White matt	→ p. 491				
505.077.00.3	505.078.00.3	lava	→ p. 491				
505.077.00.4	505.078.00.4	sand grey	→ p. 491				
505.077.00.5	505.078.00.5	oak	→ p. 491				
505.077.00.6	505.078.00.6	walnut	→ p. 491				
505.077.00.7	505.078.00.7	greige	→ p. 491				
505.077.00.8	505.078.00.8	Black matt	→ p. 491				

Side element


505.079.00.1	white	→ p. 491					
505.079.00.2	White matt	→ p. 491					
505.079.00.3	lava	→ p. 491					
505.079.00.4	sand grey	→ p. 491					
505.079.00.5	oak	→ p. 491					
505.079.00.6	walnut	→ p. 491					
505.079.00.7	greige	→ p. 491					
505.079.00.8	Black matt	→ p. 491					

✓ Compatible

Washbasin cabinets

Mix & Match

Geberit ONE cabinet for washbasin, with one drawer

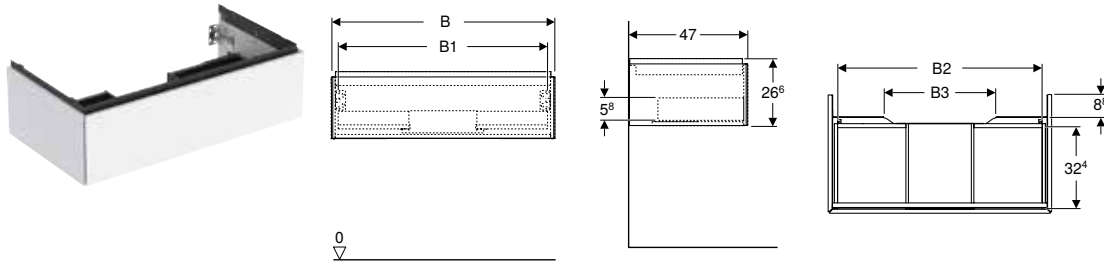

click & scan

Technical data

Product material	High-compressed three-layer chipboard
Drawer load max.	20 kg

Scope of delivery

- Cabinet for washbasin
- Fastening material

Characteristics

- FSC™ C134279 certified
- Wall-hung
- Fully usable storage space in upper drawer
- With one drawer
- Opening with push-to-open mechanism
- Drawer with soft closing
- Moisture-resistant
- Delivered preassembled

Art. no.	Colour / surface	Mix & Match	B [cm]	B1 [cm]	B2 [cm]	B3 [cm]	H [cm]	T [cm]
Washbasin width: 60 cm								
505.071.00.1	white / high-gloss coated	Yes	59.2	53.8	51.7	15.2	26.6	47
505.071.00.2 *	white / matt coated	Yes	59.2	53.8	51.7	15.2	26.6	47
505.071.00.3	lava / matt coated	Yes	59.2	53.8	51.7	15.2	26.6	47
505.071.00.4 *	sand grey / high-gloss coated	Yes	59.2	53.8	51.7	15.2	26.6	47
505.071.00.5	oak / wood-textured melamine	Yes	59.2	53.8	51.7	15.2	26.6	47
505.071.00.6 *	hickory / wood-textured melamine	Yes	59.2	53.8	51.7	15.2	26.6	47
505.071.00.7 *	greige / matt coated	Yes	59.2	53.8	51.7	15.2	26.6	47
505.071.00.8 *	black / matt coated	Yes	59.2	53.8	51.7	15.2	26.6	47
Washbasin width: 75 cm								
505.072.00.1	white / high-gloss coated	Yes	74	68.6	66.5	30	26.6	47
505.072.00.2 *	white / matt coated	Yes	74	68.6	66.5	30	26.6	47
505.072.00.3	lava / matt coated	Yes	74	68.6	66.5	30	26.6	47
505.072.00.4 *	sand grey / high-gloss coated	Yes	74	68.6	66.5	30	26.6	47
505.072.00.5	oak / wood-textured melamine	Yes	74	68.6	66.5	30	26.6	47
505.072.00.6 *	hickory / wood-textured melamine	Yes	74	68.6	66.5	30	26.6	47
505.072.00.7 *	greige / matt coated	Yes	74	68.6	66.5	30	26.6	47
505.072.00.8 *	black / matt coated	Yes	74	68.6	66.5	30	26.6	47
Washbasin width: 90 cm								
505.073.00.1	white / high-gloss coated	Yes	88.8	83.4	81.3	44.8	26.6	47
505.073.00.2 *	white / matt coated	Yes	88.8	83.4	81.3	44.8	26.6	47
505.073.00.3	lava / matt coated	Yes	88.8	83.4	81.3	44.8	26.6	47
505.073.00.4 *	sand grey / high-gloss coated	Yes	88.8	83.4	81.3	44.8	26.6	47
505.073.00.5	oak / wood-textured melamine	Yes	88.8	83.4	81.3	44.8	26.6	47
505.073.00.6 *	hickory / wood-textured melamine	Yes	88.8	83.4	81.3	44.8	26.6	47
505.073.00.7 *	greige / matt coated	Yes	88.8	83.4	81.3	44.8	26.6	47
505.073.00.8 *	black / matt coated	Yes	88.8	83.4	81.3	44.8	26.6	47
Washbasin width: 105 cm								
505.074.00.1	white / high-gloss coated	No	103.6	98.2	96.1	59.6	26.6	47
505.074.00.2 *	white / matt coated	No	103.6	98.2	96.1	59.6	26.6	47
505.074.00.3	lava / matt coated	No	103.6	98.2	96.1	59.6	26.6	47
505.074.00.4 *	sand grey / high-gloss coated	No	103.6	98.2	96.1	59.6	26.6	47
505.074.00.5	oak / wood-textured melamine	No	103.6	98.2	96.1	59.6	26.6	47
505.074.00.6 *	hickory / wood-textured melamine	No	103.6	98.2	96.1	59.6	26.6	47
505.074.00.7 *	greige / matt coated	No	103.6	98.2	96.1	59.6	26.6	47
505.074.00.8 *	black / matt coated	No	103.6	98.2	96.1	59.6	26.6	47

* Order-based production

Art. no.	Colour / surface	Mix & Match	B [cm]	B1 [cm]	B2 [cm]	B3 [cm]	H [cm]	T [cm]
Washbasin width: 120 cm								
505.075.00.1	white / high-gloss coated	Yes	118.4	113	110.9	74.4	26.6	47
505.075.00.2 *	white / matt coated	Yes	118.4	113	110.9	74.4	26.6	47
505.075.00.3	lava / matt coated	Yes	118.4	113	110.9	74.4	26.6	47
505.075.00.4 *	sand grey / high-gloss coated	Yes	118.4	113	110.9	74.4	26.6	47
505.075.00.5	oak / wood-textured melamine	Yes	118.4	113	110.9	74.4	26.6	47
505.075.00.6 *	hickory / wood-textured melamine	Yes	118.4	113	110.9	74.4	26.6	47
505.075.00.7 *	greige / matt coated	Yes	118.4	113	110.9	74.4	26.6	47
505.075.00.8 *	black / matt coated	Yes	118.4	113	110.9	74.4	26.6	47

* Order-based production

Can be combined with

- Geberit iCon washbasin → p. 599
- Geberit iCon Light washbasin → p. 600
- Geberit iCon Light washbasin with shelf surface → p. 601
- Geberit iCon vanity basin → p. 605
- Geberit Acanto washbasin → p. 553
- Geberit Acanto washbasin with shelf surface → p. 554
- Geberit ONE vanity basin → p. 468
- Geberit ONE lay-on washbasin, rectangular → p. 477
- Geberit ONE lay-on washbasin, bowl shape → p. 475
- Geberit ONE lay-on washbasin, rectangular, CleanDrain → p. 476
- Geberit ONE lay-on washbasin, bowl shape, CleanDrain → p. 474
- Geberit ONE vanity basin CleanDrain → p. 465
- Geberit ONE vanity basin, CleanDrain, right shelf surface → p. 466
- Geberit ONE vanity basin, CleanDrain, left shelf surface → p. 467
- Geberit ONE washbasin CleanDrain → p. 461
- Geberit ONE washbasin CleanDrain, right shelf surface → p. 462
- Geberit ONE washbasin CleanDrain, left shelf surface → p. 463
- Geberit ONE low cabinet with one drawer → p. 490
- Geberit ONE low cabinet with two drawers → p. 490
- Geberit ONE side element → p. 491
- Geberit ONE design cover for washbasin traps → p. 478
- Geberit ONE washbasin → p. 464

Accessories


- Accessory overview – Geberit ONE bathroom furniture → p. 481



- A Geberit washbasin connector, space-saving model is required for the installation of the base cabinet. See assortment overview washbasin series or online catalogue, washbasin accessories
- Mix & Match: Articles of the same width can be freely combined in the Geberit ONE, Acanto and iCon series

Mix & Match

Geberit ONE cabinet for washbasin, with two drawers

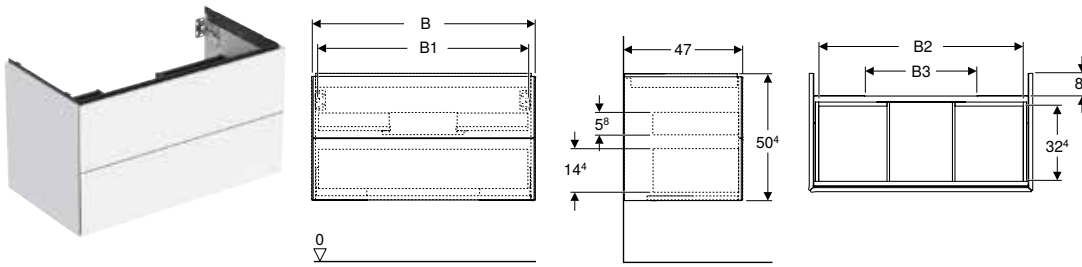

Technical data

Product material	High-compressed three-layer chipboard
Drawer load max.	20 kg

Characteristics

- FSC™ C134279 certified
- Wall-hung
- Fully usable storage space in upper drawer
- With two drawers
- Opening with push-to-open mechanism
- Drawer with soft closing
- Moisture-resistant
- Delivered preassembled

Scope of delivery

- Cabinet for washbasin
- Fastening material

Art. no.	Colour / surface	Mix & Match	B [cm]	B1 [cm]	B2 [cm]	B3 [cm]	H [cm]	T [cm]
Washbasin width: 60 cm								
505.261.00.1	white / high-gloss coated	Yes	59.2	53.8	51.7	15.2	50.4	47
505.261.00.2 *	white / matt coated	Yes	59.2	53.8	51.7	15.2	50.4	47
505.261.00.3	lava / matt coated	Yes	59.2	53.8	51.7	15.2	50.4	47
505.261.00.4 *	sand grey / high-gloss coated	Yes	59.2	53.8	51.7	15.2	50.4	47
505.261.00.5	oak / wood-textured melamine	Yes	59.2	53.8	51.7	15.2	50.4	47
505.261.00.6 *	hickory / wood-textured melamine	Yes	59.2	53.8	51.7	15.2	50.4	47
505.261.00.7 *	greige / matt coated	Yes	59.2	53.8	51.7	15.2	50.4	47
505.261.00.8 *	black / matt coated	Yes	59.2	53.8	51.7	15.2	50.4	47
Washbasin width: 75 cm								
505.262.00.1	white / high-gloss coated	Yes	74	68.6	66.5	30	50.4	47
505.262.00.2 *	white / matt coated	Yes	74	68.6	66.5	30	50.4	47
505.262.00.3	lava / matt coated	Yes	74	68.6	66.5	30	50.4	47
505.262.00.4 *	sand grey / high-gloss coated	Yes	74	68.6	66.5	30	50.4	47
505.262.00.5	oak / wood-textured melamine	Yes	74	68.6	66.5	30	50.4	47
505.262.00.6 *	hickory / wood-textured melamine	Yes	74	68.6	66.5	30	50.4	47
505.262.00.7 *	greige / matt coated	Yes	74	68.6	66.5	30	50.4	47
505.262.00.8 *	black / matt coated	Yes	74	68.6	66.5	30	50.4	47
Washbasin width: 90 cm								
505.263.00.1	white / high-gloss coated	Yes	88.8	83.4	81.3	44.8	50.4	47
505.263.00.2 *	white / matt coated	Yes	88.8	83.4	81.3	44.8	50.4	47
505.263.00.3	lava / matt coated	Yes	88.8	83.4	81.3	44.8	50.4	47
505.263.00.4 *	sand grey / high-gloss coated	Yes	88.8	83.4	81.3	44.8	50.4	47
505.263.00.5	oak / wood-textured melamine	Yes	88.8	83.4	81.3	44.8	50.4	47
505.263.00.6 *	hickory / wood-textured melamine	Yes	88.8	83.4	81.3	44.8	50.4	47
505.263.00.7 *	greige / matt coated	Yes	88.8	83.4	81.3	44.8	50.4	47
505.263.00.8 *	black / matt coated	Yes	88.8	83.4	81.3	44.8	50.4	47
Washbasin width: 105 cm								
505.264.00.1	white / high-gloss coated	No	103.6	98.2	96.1	59.6	50.4	47
505.264.00.2 *	white / matt coated	No	103.6	98.2	96.1	59.6	50.4	47
505.264.00.3	lava / matt coated	No	103.6	98.2	96.1	59.6	50.4	47
505.264.00.4 *	sand grey / high-gloss coated	No	103.6	98.2	96.1	59.6	50.4	47
505.264.00.5	oak / wood-textured melamine	No	103.6	98.2	96.1	59.6	50.4	47
505.264.00.6 *	hickory / wood-textured melamine	No	103.6	98.2	96.1	59.6	50.4	47
505.264.00.7 *	greige / matt coated	No	103.6	98.2	96.1	59.6	50.4	47
505.264.00.8 *	black / matt coated	No	103.6	98.2	96.1	59.6	50.4	47

* Order-based production

Art. no.	Colour / surface	Mix & Match	B [cm]	B1 [cm]	B2 [cm]	B3 [cm]	H [cm]	T [cm]
Washbasin width: 120 cm								
505.265.00.1	white / high-gloss coated	Yes	118.4	113	110.9	74.4	50.4	47
505.265.00.2 *	white / matt coated	Yes	118.4	113	110.9	74.4	50.4	47
505.265.00.3	lava / matt coated	Yes	118.4	113	110.9	74.4	50.4	47
505.265.00.4 *	sand grey / high-gloss coated	Yes	118.4	113	110.9	74.4	50.4	47
505.265.00.5	oak / wood-textured melamine	Yes	118.4	113	110.9	74.4	50.4	47
505.265.00.6 *	hickory / wood-textured melamine	Yes	118.4	113	110.9	74.4	50.4	47
505.265.00.7 *	greige / matt coated	Yes	118.4	113	110.9	74.4	50.4	47
505.265.00.8 *	black / matt coated	Yes	118.4	113	110.9	74.4	50.4	47

* Order-based production

Can be combined with

- Geberit iCon washbasin → p. 599
- Geberit iCon Light washbasin → p. 600
- Geberit iCon Light washbasin with shelf surface → p. 601
- Geberit iCon vanity basin → p. 605
- Geberit Acanto washbasin → p. 553
- Geberit Acanto washbasin with shelf surface → p. 554
- Geberit ONE vanity basin → p. 468
- Geberit ONE lay-on washbasin, rectangular → p. 477
- Geberit ONE lay-on washbasin, bowl shape → p. 475
- Geberit ONE lay-on washbasin, rectangular, CleanDrain → p. 476
- Geberit ONE lay-on washbasin, bowl shape, CleanDrain → p. 474
- Geberit ONE vanity basin CleanDrain → p. 465
- Geberit ONE vanity basin, CleanDrain, right shelf surface → p. 466
- Geberit ONE vanity basin, CleanDrain, left shelf surface → p. 467
- Geberit ONE washbasin CleanDrain → p. 461
- Geberit ONE washbasin CleanDrain, right shelf surface → p. 462
- Geberit ONE washbasin CleanDrain, left shelf surface → p. 463
- Geberit ONE low cabinet with one drawer → p. 490
- Geberit ONE low cabinet with two drawers → p. 490
- Geberit ONE side element → p. 491
- Geberit ONE washbasin → p. 464




Accessories

- Accessory overview – Geberit ONE bathroom furniture → p. 481



- A Geberit washbasin connector, space-saving model is required for the installation of the base cabinet. See assortment overview washbasin series or online catalogue, washbasin accessories
- Mix & Match: Articles of the same width can be freely combined in the Geberit ONE, Acanto and iCon series

Geberit ONE cabinet for lay-on washbasin, with two drawers

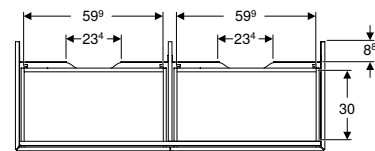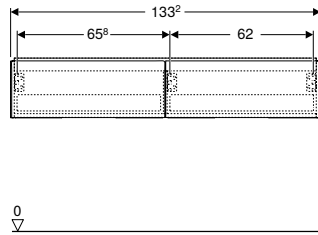

click & scan

Technical data

Product material	High-compressed three-layer chipboard
Drawer load max.	20 kg

Scope of delivery

- Cabinet for washbasin
- Fastening material

Characteristics

- FSC™ C134279 certified
- Wall-hung
- Fully usable storage space in upper drawer
- With two drawers
- Opening with push-to-open mechanism
- Drawer with soft closing
- Moisture-resistant
- Delivered preassembled

Art. no.	Colour / surface	Washbasin, width [cm]	H [cm]	T [cm]
B / width: 133.2 cm				
505.076.00.1	white / high-gloss coated	135	26.6	47
505.076.00.2 *	white / matt coated	135	26.6	47
505.076.00.3	lava / matt coated	135	26.6	47
505.076.00.4 *	sand grey / high-gloss coated	135	26.6	47
505.076.00.5	oak / wood-textured melamine	135	26.6	47
505.076.00.6 *	hickory / wood-textured melamine	135	26.6	47
505.076.00.7 *	greige / matt coated	135	26.6	47
505.076.00.8 *	black / matt coated	135	26.6	47

* Order-based production

Can be combined with

- Geberit ONE lay-on washbasin, bowl shape → p. 475
- Geberit ONE lay-on washbasin, rectangular, CleanDrain → p. 476
- Geberit ONE lay-on washbasin, bowl shape, CleanDrain → p. 474
- Geberit ONE lay-on washbasin, rectangular → p. 477
- Geberit ONE design cover for washbasin traps → p. 478
- Geberit ONE low cabinet with one drawer → p. 490
- Geberit ONE low cabinet with two drawers → p. 490
- Geberit ONE side element → p. 491


Accessories

- Accessory overview – Geberit ONE bathroom furniture → p. 481



- A Geberit washbasin connector, space-saving model is required for the installation of the base cabinet. See assortment overview washbasin series or online catalogue, washbasin accessories

Geberit ONE cabinet for lay-on washbasin, with four drawers

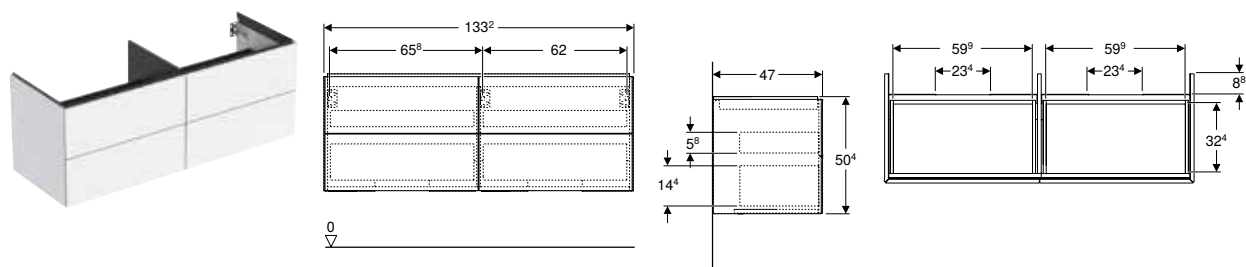

Technical data

Product material	High-compressed three-layer chipboard
Drawer load max.	20 kg

Scope of delivery

- Cabinet for washbasin
- Fastening material

Characteristics

- FSC™ C134279 certified
- Wall-hung
- Fully usable storage space in upper drawer
- With four drawers
- Opening with push-to-open mechanism
- Drawer with soft closing
- Moisture-resistant
- Delivered preassembled

Art. no.	Colour / surface	Washbasin, width [cm]	H [cm]	T [cm]
B / width: 133.2 cm				
505.266.00.1	white / high-gloss coated	135	50.4	47
505.266.00.2 *	white / matt coated	135	50.4	47
505.266.00.3	lava / matt coated	135	50.4	47
505.266.00.4 *	sand grey / high-gloss coated	135	50.4	47
505.266.00.5	oak / wood-textured melamine	135	50.4	47
505.266.00.6 *	hickory / wood-textured melamine	135	50.4	47
505.266.00.7 *	greige / matt coated	135	50.4	47
505.266.00.8 *	black / matt coated	135	50.4	47

* Order-based production

Can be combined with

- Geberit ONE lay-on washbasin, bowl shape → p. 475
- Geberit ONE lay-on washbasin, rectangular, CleanDrain → p. 476
- Geberit ONE lay-on washbasin, rectangular → p. 477
- Geberit ONE lay-on washbasin, bowl shape, CleanDrain → p. 474
- Geberit ONE low cabinet with one drawer → p. 490
- Geberit ONE low cabinet with two drawers → p. 490
- Geberit ONE side element → p. 491

Accessories


- Accessory overview – Geberit ONE bathroom furniture → p. 481



- A Geberit washbasin connector, space-saving model is required for the installation of the base cabinet. See assortment overview washbasin series or online catalogue, washbasin accessories

Side cabinets

Geberit ONE low cabinet with one drawer

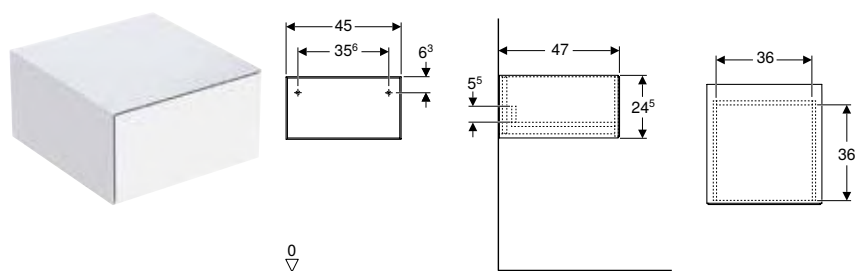

click & scan

Technical data

Product material	High-compressed three-layer chipboard
Drawer load max.	20 kg

Characteristics

- FSC™ C134279 certified
- Wall-hung
- With one drawer
- Opening with push-to-open mechanism
- Drawer with soft closing
- Moisture-resistant
- Delivered preassembled

Scope of delivery

- Fastening material

Art. no.	Colour / surface	H [cm]	T [cm]
B / width: 45 cm			
505.078.00.1	white / high-gloss coated	24.5	47
505.078.00.2 *	white / matt coated	24.5	47
505.078.00.3	lava / matt coated	24.5	47
505.078.00.4 *	sand grey / high-gloss coated	24.5	47
505.078.00.5	oak / wood-textured melamine	24.5	47
505.078.00.6 *	hickory / wood-textured melamine	24.5	47
505.078.00.7 *	greige / matt coated	24.5	47
505.078.00.8 *	black / matt coated	24.5	47

* Order-based production


Can be combined with

- Geberit ONE cabinet for washbasin, with one drawer → p. 484
- Geberit ONE cabinet for lay-on washbasin, with two drawers → p. 488
- Geberit ONE cabinet for washbasin, with two drawers → p. 486
- Geberit ONE cabinet for lay-on washbasin, with four drawers → p. 489
- Geberit ONE cover for low cabinet and side element, stoneware → p. 507
- Geberit ONE cover for low cabinet and side element, glass → p. 507

Accessories

- Accessory overview – Geberit ONE bathroom furniture → p. 481

Geberit ONE low cabinet with two drawers

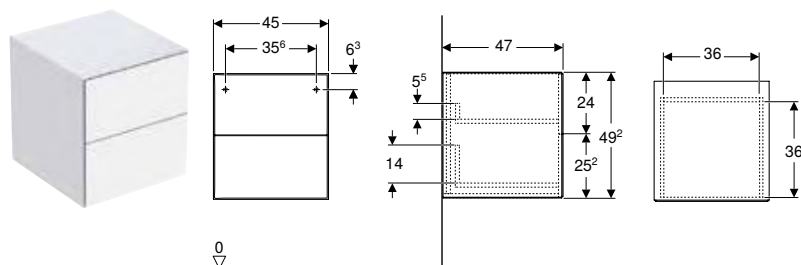

click & scan

Technical data

Product material	High-compressed three-layer chipboard
Drawer load max.	20 kg

Characteristics

- FSC™ C134279 certified
- Wall-hung
- With two drawers
- Opening with push-to-open mechanism
- Drawer with soft closing
- Moisture-resistant
- Delivered preassembled

Scope of delivery

- Fastening material

Art. no.	Colour / surface	H [cm]	T [cm]
B / width: 45 cm			
505.077.00.1	white / high-gloss coated	49.2	47
505.077.00.2 *	white / matt coated	49.2	47
505.077.00.3	lava / matt coated	49.2	47
505.077.00.4 *	sand grey / high-gloss coated	49.2	47
505.077.00.5	oak / wood-textured melamine	49.2	47
505.077.00.6 *	hickory / wood-textured melamine	49.2	47
505.077.00.7 *	greige / matt coated	49.2	47
505.077.00.8 *	black matt	49.2	47

* Order-based production


Can be combined with

- Geberit ONE cover for low cabinet and side element, stoneware → p. 507
- Geberit ONE cover for low cabinet and side element, glass → p. 507
- Geberit ONE cabinet for washbasin, with one drawer → p. 484
- Geberit ONE cabinet for lay-on washbasin, with two drawers → p. 488
- Geberit ONE cabinet for washbasin, with two drawers → p. 486
- Geberit ONE cabinet for lay-on washbasin, with four drawers → p. 489

Accessories

- Accessory overview – Geberit ONE bathroom furniture → p. 38

Geberit ONE side element

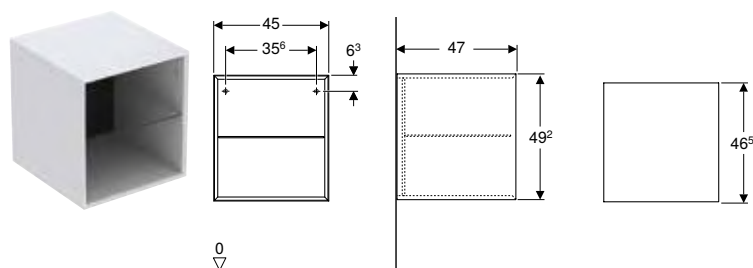

click & scan

Technical data

Product material	High-compressed three-layer chipboard
------------------	---------------------------------------

Scope of delivery

- Fastening material

Characteristics

- FSC™ C134279 certified
- Wall-hung
- With glass shelf
- Moisture-resistant
- Delivered preassembled

Art. no.	Colour / surface	H [cm]	T [cm]
B / width: 45 cm			
505.079.00.1	white / high-gloss coated	49.2	47
505.079.00.2 *	white / matt coated	49.2	47
505.079.00.3	lava / matt coated	49.2	47
505.079.00.4 *	sand grey / high-gloss coated	49.2	47
505.079.00.5	oak / wood-textured melamine	49.2	47
505.079.00.6 *	hickory / wood-textured melamine	49.2	47
505.079.00.7 *	greige / matt coated	49.2	47
505.079.00.8 *	black matt	49.2	47

* Order-based production


Can be combined with

- Geberit ONE cabinet for washbasin, with one drawer → p. 484
- Geberit ONE cabinet for lay-on washbasin, with two drawers → p. 488
- Geberit ONE cabinet for washbasin, with two drawers → p. 486
- Geberit ONE cabinet for lay-on washbasin, with four drawers → p. 489
- Geberit ONE cover for low cabinet and side element, stoneware → p. 507
- Geberit ONE cover for low cabinet and side element, glass → p. 507

Accessories

- Accessory overview – Geberit ONE bathroom furniture → p. 481

Geberit tall cabinet with one door

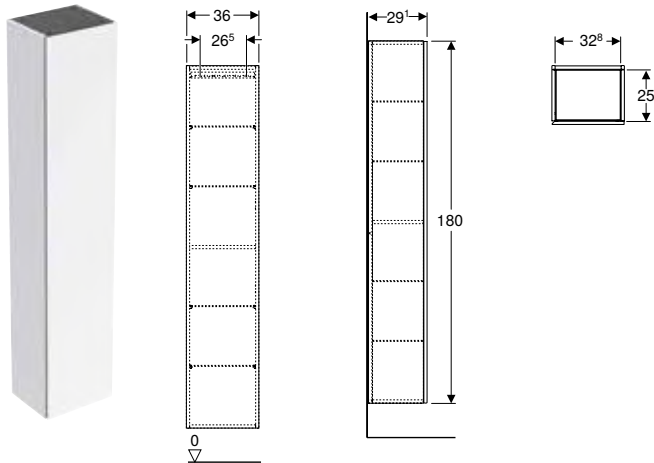

click & scan

Application purposes

- For Geberit ONE, Acanto and iCon series

Technical data

Product material	High-compressed three-layer chipboard
------------------	---------------------------------------

Scope of delivery

- Tall cabinet
- 4 glass shelves
- Fastening material

Characteristics

- FSC™ C134279 certified
- Wall-hung
- With one door
- Door with soft closing
- Opening with recessed handle or push-to-open mechanism
- With four movable glass shelves
- With one fixed shelf
- Hinge side left or right
- Moisture-resistant
- Delivered preassembled


Art. no.	Colour / surface	H [cm]	T [cm]
B / width: 36 cm			
502.316.01.1	Body, Front: white / high-gloss coated	180	29.1
502.316.01.2	Body: white / high-gloss coated Front: white / glossy glass	180	29.1
502.316.01.3 *	Body, Front: white / matt coated	180	29.1
502.316.JH.1	Body, Front: oak / wood-textured melamine	180	29.1
502.316.JK.1	Body, Front: lava / matt coated	180	29.1
502.316.JK.2	Body: lava / matt coated Front: lava / glossy glass	180	29.1
502.316.JR.1 *	Body, Front: hickory / wood-textured melamine	180	29.1
505.083.00.7 *	Body, Front: greige / matt coated	180	29.1
505.083.00.8 *	Body, Front: black / matt coated	180	29.1

* Order-based production

Accessories

- Geberit set of narrow feet → p. 579

Geberit tall cabinet with one door and internal mirror, small projection

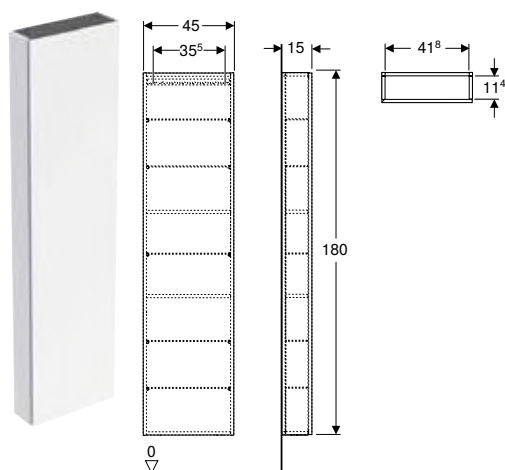

click & scan

Application purposes

- For Geberit ONE, Acanto and iCon series

Technical data

Product material	High-compressed three-layer chipboard
------------------	---------------------------------------

Scope of delivery

- Tall cabinet
- 5 glass shelves
- Fastening material

Characteristics

- FSC™ C134279 certified
- Wall-hung
- With one door
- Door with soft closing
- Opening with recessed handle or push-to-open mechanism
- With five movable glass shelves
- Door mirrored on inside
- With two fixed shelves
- Hinge side left or right
- Door opening angle 155°
- Moisture-resistant
- Delivered preassembled


Art. no.	Colour / surface	H [cm]	T [cm]
B / width: 45 cm			
502.317.01.1	Body, Front: white / High-gloss coated	180	15
502.317.01.2	Body: white / High-gloss coated Front: white / Glass glossy	180	15
502.317.01.3 *	Body, Front: white / Matt coated	180	15
502.317.JH.1	Body, Front: oak / Wood-textured melamine	180	15
502.317.JK.1	Body, Front: lava / Matt coated	180	15
502.317.JK.2	Body: lava / Matt coated Front: lava / Glass glossy	180	15
502.317.JL.1 *	Body, Front: sand grey / High-gloss coated	180	15
502.317.JR.1 *	Body, Front: hickory / Wood-textured melamine	180	15

* Order-based production

Accessories

- Geberit set of narrow feet → p. 579

Geberit tall cabinet with two cargoes

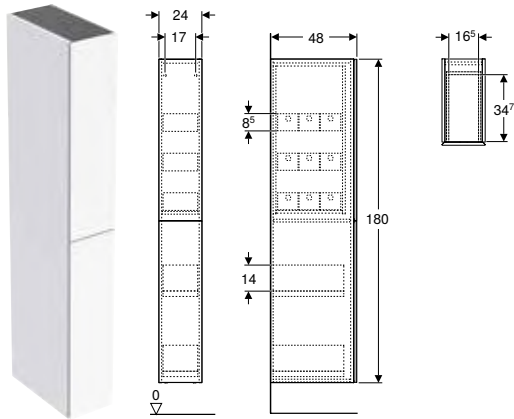

click & scan

Application purposes

- For Geberit ONE, Acanto and iCon series

Technical data

Product material	High-compressed three-layer chipboard
Drawer load max.	20 kg

Scope of delivery

- Tall cabinet
- 9 organising boxes
- Fastening material

Characteristics

- FSC™ C134279 certified
- Wall-hung
- With two drawers
- Wooden organiser boxes
- Drawer with soft closing
- Moisture-resistant
- Delivered preassembled

Art. no.	Colour / surface	H [cm]	T [cm]
B / width: 24 cm			
503.011.01.1	Body, Front: white / high-gloss coated	180	48
503.011.01.2	Body: white / high-gloss coated Front: white / glossy glass	180	48
503.011.01.3 *	Body, Front: white / matt coated	180	48
503.011.JH.1	Body, Front: oak / wood-textured melamine	180	48
503.011.JK.1	Body, Front: lava / matt coated	180	48
503.011.JK.2	Body: lava / matt coated Front: lava / glossy glass	180	48
503.011.JR.1 *	Body, Front: hickory / wood-textured melamine	180	48

* Order-based production


Can be combined with

- Geberit internal storage shelf → p. 1041
- Geberit organising box → p. 1041

Accessories

- Geberit internal storage shelf → p. 1041
- Geberit organising box → p. 1041
- Geberit power socket element with mains plug → p. 506

Geberit high-level cabinet, square, with one door

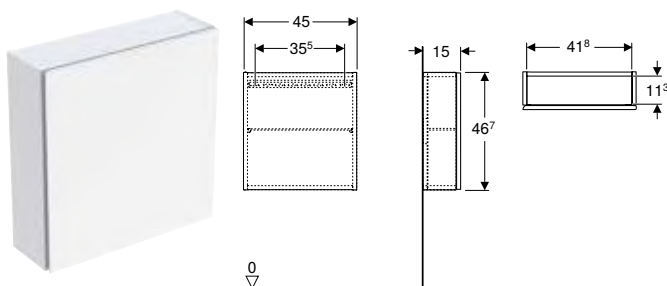

click & scan

Application purposes

- For Geberit ONE, Acanto and iCon series

Technical data

Product material	High-compressed three-layer chipboard
------------------	---------------------------------------

Scope of delivery

- High-level cabinet
- Glass shelf
- Fastening material


Characteristics

- FSC™ C134279 certified
- Wall-hung
- With one door
- Door with soft closing
- Opening with recessed handle or push-to-open mechanism
- Movable glass shelf
- Hinge side left or right
- Moisture-resistant
- Delivered preassembled

Art. no.	Colour / surface	H [cm]	T [cm]
B / width: 45 cm			
502.319.01.1	Body, Front: white / high-gloss coated	46.7	15
502.319.01.2	Body: white / high-gloss coated Front: white / glossy glass	46.7	15
502.319.01.3 *	Body, Front: white / matt coated	46.7	15
502.319.JH.1	Body, Front: oak / wood-textured melamine	46.7	15
502.319.JK.1	Body, Front: lava / matt coated	46.7	15
502.319.JK.2	Body: lava / matt coated Front: lava / glossy glass	46.7	15
502.319.JL.1 *	Body, Front: sand grey / high-gloss coated	46.7	15
502.319.JR.1 *	Body, Front: hickory / wood-textured melamine	46.7	15

* Order-based production

Geberit high-level cabinet, rectangular, with one door

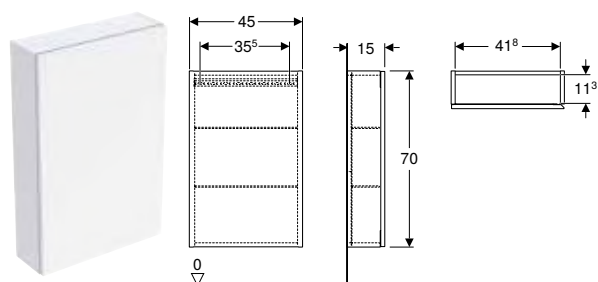

click & scan

Application purposes

- For Geberit ONE, Acanto and iCon series

Technical data

Product material	High-compressed three-layer chipboard
------------------	---------------------------------------

Scope of delivery

- High-level cabinet
- 2 glass shelves
- Fastening material


Characteristics

- FSC™ C134279 certified
- Wall-hung
- With one door
- Door with soft closing
- Opening with recessed handle or push-to-open mechanism
- With two adjustable glass shelves
- Hinge side left or right
- Moisture-resistant
- Delivered preassembled

Art. no.	Colour / surface	H [cm]	T [cm]
B / width: 45 cm			
502.318.01.1	Body, Front: white / high-gloss coated	70	15
502.318.01.2	Body: white / high-gloss coated Front: white / glossy glass	70	15
502.318.01.3 *	Body, Front: white / matt coated	70	15
502.318.JH.1	Body, Front: oak / wood-textured melamine	70	15
502.318.JK.1	Body, Front: lava / matt coated	70	15
502.318.JK.2	Body: lava / matt coated Front: lava / glossy glass	70	15
502.318.JL.1 *	Body, Front: sand grey / high-gloss coated	70	15
502.318.JR.1 *	Body, Front: hickory / wood-textured melamine	70	15

* Order-based production

Geberit shelf unit, rectangular

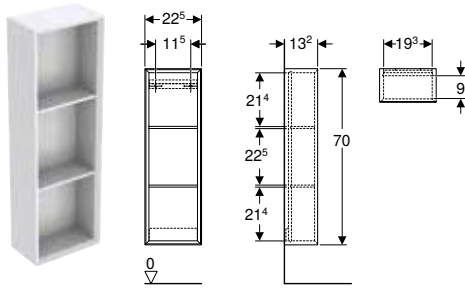

click & scan

Application purposes

- For Geberit ONE, Acanto and iCon series

Technical data

Product material	High-compressed three-layer chipboard
------------------	---------------------------------------

Scope of delivery

- High-level cabinet
- Fastening material

Characteristics

- FSC™ C134279 certified
- Wall-hung
- Hidden fastening
- With two fixed shelves
- Moisture-resistant
- Delivered preassembled


Art. no.	Colour / surface	H [cm]	T [cm]
----------	------------------	-----------	-----------

B / width: 22.5 cm

502.320.01.1	white / high-gloss coated	70	13.2
502.320.01.3 *	white / matt coated	70	13.2
502.320.JH.1	oak / wood-textured melamine	70	13.2
502.320.JK.1	lava / matt coated	70	13.2
502.320.JL.1 *	sand grey / high-gloss coated	70	13.2
502.320.JR.1 *	hickory / wood-textured melamine	70	13.2

* Order-based production

Geberit shelf unit, square

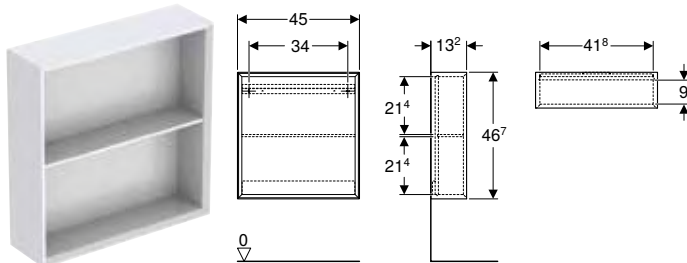

click & scan

Application purposes

- For Geberit ONE, iCon, Acanto and VariForm series

Technical data

Product material	High-compressed three-layer chipboard
------------------	---------------------------------------

Scope of delivery

- High-level cabinet
- Fastening material

Characteristics

- FSC™ C134279 certified
- Wall-hung
- With one fixed shelf
- Hidden fastening
- Moisture-resistant
- Delivered preassembled


Art. no.	Colour / surface	H [cm]	T [cm]
----------	------------------	-----------	-----------

B / width: 45 cm

502.323.01.1	white / high-gloss coated	46.7	13.2
502.323.01.3 *	white / matt coated	46.7	13.2
502.323.JH.1	oak / wood-textured melamine	46.7	13.2
502.323.JK.1	lava / matt coated	46.7	13.2
502.323.JL.1 *	sand grey / high-gloss coated	46.7	13.2
502.323.JR.1 *	hickory / wood-textured melamine	46.7	13.2

* Order-based production

Geberit wall box, rectangular

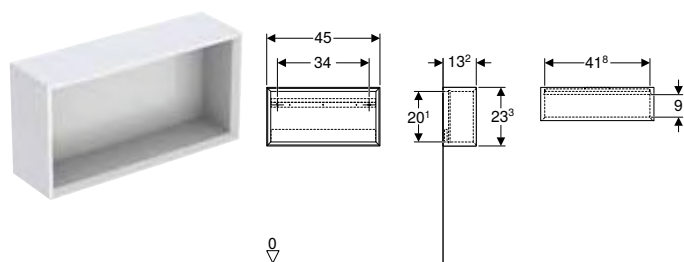

click & scan

Application purposes

- For Geberit ONE, Acanto and iCon series

Technical data

Product material	High-compressed three-layer chipboard
------------------	---------------------------------------

Characteristics

- FSC™ C134279 certified
- Wall-hung
- Hidden fastening
- Moisture-resistant
- Delivered preassembled


Scope of delivery

- High-level cabinet
- Fastening material

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]
502.322.01.1	white / high-gloss coated	45	23.3	13.2
502.322.01.3 *	white / matt coated	45	23.3	13.2
502.322.JH.1	oak / wood-textured melamine	45	23.3	13.2
502.322.JK.1	lava / matt coated	45	23.3	13.2
502.322.JL.1 *	sand grey / high-gloss coated	45	23.3	13.2
502.322.JR.1 *	hickory / wood-textured melamine	45	23.3	13.2

* Order-based production

Geberit wall box, square

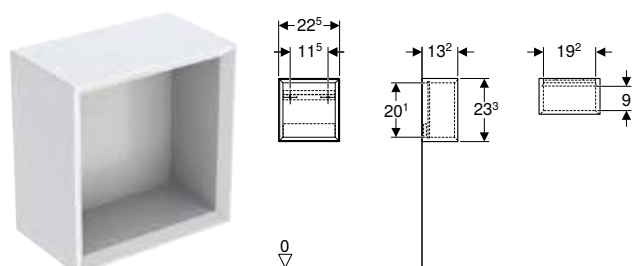

click & scan

Application purposes

- For Geberit ONE, Acanto and iCon series

Technical data

Product material	High-compressed three-layer chipboard
------------------	---------------------------------------

Characteristics

- FSC™ C134279 certified
- Wall-hung
- Hidden fastening
- Moisture-resistant
- Delivered preassembled

Scope of delivery

- High-level cabinet
- Fastening material




Art. no.	Colour / surface	H [cm]	T [cm]
B / width: 22.5 cm			
502.321.01.1	white / high-gloss coated	23.3	13.2
502.321.01.3 *	white / matt coated	23.3	13.2
502.321.JH.1	oak / wood-textured melamine	23.3	13.2
502.321.JK.1	lava / matt coated	23.3	13.2
502.321.JL.1 *	sand grey / high-gloss coated	23.3	13.2
502.321.JR.1 *	hickory / wood-textured melamine	23.3	13.2

* Order-based production

Washtops

Mix & Match

Geberit ONE washtop with cutout, for lay-on washbasin, bowl shape

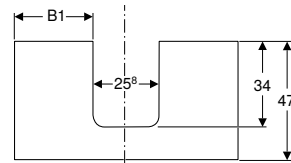

click & scan

Application purposes

- For mounting on a Geberit ONE, Acanto, iCon washbasin cabinet

Technical data

Product material	High-compressed three-layer chipboard
------------------	---------------------------------------

Characteristics

- FSC™ C134279 certified
- Moisture-resistant

Scope of delivery

- Washtop
- Fastening material

Art. no.	Colour / surface	Mix & Match	Section	B1 [cm]	H [cm]	T [cm]
B / width: 59.8 cm						
505.271.00.1 *	white / high-gloss coated	Yes	centred	17	3.2	47.3
505.271.00.2 *	white / matt coated	Yes	centred	17	3.2	47.3
505.271.00.3 *	lava / matt coated	Yes	centred	17	3.2	47.3
505.271.00.4 *	sand grey / high-gloss coated	Yes	centred	17	3.2	47.3
505.271.00.5 *	oak / wood-textured melamine	Yes	centred	17	3.2	47.3
505.271.00.6 *	hickory / wood-textured melamine	Yes	centred	17	3.2	47.3
505.271.00.7 *	greige / matt coated	Yes	centred	17	3.2	47.3
B / width: 74.6 cm						
505.272.00.1 *	white / high-gloss coated	Yes	centred	24.4	3.2	47.3
505.272.00.2 *	white / matt coated	Yes	centred	24.4	3.2	47.3
505.272.00.3 *	lava / matt coated	Yes	centred	24.4	3.2	47.3
505.272.00.4 *	sand grey / high-gloss coated	Yes	centred	24.4	3.2	47.3
505.272.00.5 *	oak / wood-textured melamine	Yes	centred	24.4	3.2	47.3
505.272.00.6 *	hickory / wood-textured melamine	Yes	centred	24.4	3.2	47.3
505.272.00.7 *	greige / matt coated	Yes	centred	24.4	3.2	47.3
B / width: 89.4 cm						
505.273.00.1 *	white / high-gloss coated	Yes	centred	31.8	3.2	47.3
505.273.00.2 *	white / matt coated	Yes	centred	31.8	3.2	47.3
505.273.00.3 *	lava / matt coated	Yes	centred	31.8	3.2	47.3
505.273.00.4 *	sand grey / high-gloss coated	Yes	centred	31.8	3.2	47.3
505.273.00.5 *	oak / wood-textured melamine	Yes	centred	31.8	3.2	47.3
505.273.00.6 *	hickory / wood-textured melamine	Yes	centred	31.8	3.2	47.3
505.273.00.7 *	greige / matt coated	Yes	centred	31.8	3.2	47.3
505.293.00.1 *	white / high-gloss coated	Yes	left	22.1	3.2	47.3
505.293.00.2 *	white / matt coated	Yes	left	22.1	3.2	47.3
505.293.00.3 *	lava / matt coated	Yes	left	22.1	3.2	47.3
505.293.00.4 *	sand grey / high-gloss coated	Yes	left	22.1	3.2	47.3
505.293.00.5 *	oak / wood-textured melamine	Yes	left	22.1	3.2	47.3
505.293.00.6 *	hickory / wood-textured melamine	Yes	left	22.1	3.2	47.3
505.293.00.7 *	greige / matt coated	Yes	left	22.1	3.2	47.3
505.313.00.1 *	white / high-gloss coated	Yes	right	41.5	3.2	47.3
505.313.00.2 *	white / matt coated	Yes	right	41.5	3.2	47.3
505.313.00.3 *	lava / matt coated	Yes	right	41.5	3.2	47.3
505.313.00.4 *	sand grey / high-gloss coated	Yes	right	41.5	3.2	47.3
505.313.00.5 *	oak / wood-textured melamine	Yes	right	41.5	3.2	47.3
505.313.00.6 *	hickory / wood-textured melamine	Yes	right	41.5	3.2	47.3
505.313.00.7 *	greige / matt coated	Yes	right	41.5	3.2	47.3
B / width: 104.2 cm						
505.274.00.1 *	white / high-gloss coated	No	centred	39.2	3.2	47.3
505.274.00.2 *	white / matt coated	No	centred	39.2	3.2	47.3
505.274.00.3 *	lava / matt coated	No	centred	39.2	3.2	47.3
505.274.00.4 *	sand grey / high-gloss coated	No	centred	39.2	3.2	47.3
505.274.00.5 *	oak / wood-textured melamine	No	centred	39.2	3.2	47.3
505.274.00.6 *	hickory / wood-textured melamine	No	centred	39.2	3.2	47.3
505.274.00.7 *	greige / matt coated	No	centred	39.2	3.2	47.3
505.294.00.1 *	white / high-gloss coated	No	left	22.1	3.2	47.3

* Order-based production

Art. no.	Colour / surface	Mix & Match	Section	B1 [cm]	H [cm]	T [cm]
505.294.00.2*	white / matt coated	No	left	22.1	3.2	47.3
505.294.00.3*	lava / matt coated	No	left	22.1	3.2	47.3
505.294.00.4*	sand grey / high-gloss coated	No	left	22.1	3.2	47.3
505.294.00.5*	oak / wood-textured melamine	No	left	22.1	3.2	47.3
505.294.00.6*	hickory / wood-textured melamine	No	left	22.1	3.2	47.3
505.294.00.7*	greige / matt coated	No	left	22.1	3.2	47.3
505.314.00.1*	white / high-gloss coated	No	right	56.3	3.2	47.3
505.314.00.2*	white / matt coated	No	right	56.3	3.2	47.3
505.314.00.3*	lava / matt coated	No	right	56.3	3.2	47.3
505.314.00.4*	sand grey / high-gloss coated	No	right	56.3	3.2	47.3
505.314.00.5*	oak / wood-textured melamine	No	right	56.3	3.2	47.3
505.314.00.6*	hickory / wood-textured melamine	No	right	56.3	3.2	47.3
505.314.00.7*	greige / matt coated	No	right	56.3	3.2	47.3
B / width: 119 cm						
505.275.00.1*	white / high-gloss coated	Yes	centred	46.6	3.2	47.3
505.275.00.2*	white / matt coated	Yes	centred	46.6	3.2	47.3
505.275.00.3*	lava / matt coated	Yes	centred	46.6	3.2	47.3
505.275.00.4*	sand grey / high-gloss coated	Yes	centred	46.6	3.2	47.3
505.275.00.5*	oak / wood-textured melamine	Yes	centred	46.6	3.2	47.3
505.275.00.6*	hickory / wood-textured melamine	Yes	centred	46.6	3.2	47.3
505.275.00.7*	greige / matt coated	Yes	centred	46.6	3.2	47.3
505.295.00.1*	white / high-gloss coated	Yes	left	22.4	3.2	47.3
505.295.00.2*	white / matt coated	Yes	left	22.4	3.7	47.3
505.295.00.3*	lava / matt coated	Yes	left	22.4	3.2	47.3
505.295.00.4*	sand grey / high-gloss coated	Yes	left	22.4	3.2	47.3
505.295.00.5*	oak / wood-textured melamine	Yes	left	22.4	3.2	47.3
505.295.00.6*	hickory / wood-textured melamine	Yes	left	22.4	3.2	47.3
505.295.00.7*	greige / matt coated	Yes	left	22.4	3.2	47.3
505.315.00.1*	white / high-gloss coated	Yes	right	70.8	3.2	47.3
505.315.00.2*	white / matt coated	Yes	right	70.8	3.2	47.3
505.315.00.3*	lava / matt coated	Yes	right	70.8	3.2	47.3
505.315.00.4*	sand grey / high-gloss coated	Yes	right	70.8	3.2	47.3
505.315.00.5*	oak / wood-textured melamine	Yes	right	70.8	3.2	47.3
505.315.00.6*	hickory / wood-textured melamine	Yes	right	70.8	3.2	47.3
505.315.00.7*	greige / matt coated	Yes	right	70.8	3.2	47.3
505.335.00.1*	white / high-gloss coated	Yes	left and right	17.6	3.2	47.3
505.335.00.2*	white / matt coated	Yes	left and right	17.6	3.2	47.3
505.335.00.3*	lava / matt coated	Yes	left and right	17.6	3.2	47.3
505.335.00.4*	sand grey / high-gloss coated	Yes	left and right	17.6	3.2	47.3
505.335.00.5*	oak / wood-textured melamine	Yes	left and right	17.6	3.2	47.3
505.335.00.6*	hickory / wood-textured melamine	Yes	left and right	17.6	3.2	47.3
505.335.00.7*	greige / matt coated	Yes	left and right	17.6	3.2	47.3
B / width: 133.8 cm						
505.276.00.1*	white / high-gloss coated	No	left and right	19.9	3.2	47.3
505.276.00.2*	white / matt coated	No	left and right	19.9	3.2	47.3
505.276.00.3*	lava / matt coated	No	left and right	19.9	3.2	47.3
505.276.00.4*	sand grey / high-gloss coated	No	left and right	19.9	3.2	47.3
505.276.00.5*	oak / wood-textured melamine	No	left and right	19.9	3.2	47.3
505.276.00.6*	hickory / wood-textured melamine	No	left and right	19.9	3.2	47.3
505.276.00.7*	greige / matt coated	No	left and right	19.9	3.2	47.3

* Order-based production

To order additionally



- Geberit ONE lay-on washbasin, bowl shape, CleanDrain → p. 30
- Geberit ONE lay-on washbasin, bowl shape → p. 32



- A Geberit washbasin connector, space-saving model is required for the installation of the base cabinet. See assortment overview washbasin series or online catalogue, washbasin accessories
- Mix & Match: Articles of the same width can be freely combined in the Geberit ONE, Acanto and iCon series

Mix & Match

Geberit ONE washtop with cutout, stoneware, for lay-on washbasin, bowl shape

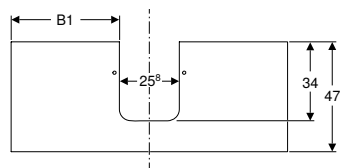

click & scan

Application purposes

- For mounting on a Geberit ONE, Acanto, iCon washbasin cabinet

Technical data

Product material	Fine stoneware
------------------	----------------

Characteristics

- Scratchproof
- Moisture-resistant

Scope of delivery

- Washtop
- Fastening material

Art. no.	Colour / surface	Mix & Match	Section	B1 [cm]	H [cm]	T [cm]
B / width: 119 cm						
505.105.00.1 *	white marble look / matt	Yes	centred	46.6	2	47.3
505.105.00.2 *	black marble look / matt	Yes	centred	46.6	2	47.3
505.125.00.1 *	white marble look / matt	Yes	left	22.3	2	47.3
505.125.00.2 *	black marble look / matt	Yes	left	22.3	2	47.3
505.145.00.1 *	white marble look / matt	Yes	right	70.9	2	47.3
505.145.00.2 *	black marble look / matt	Yes	right	70.9	2	47.3
505.175.00.1 *	white marble look / matt	Yes	left and right	17.6	2	47.3
505.175.00.2 *	black marble look / matt	Yes	left and right	17.6	2	47.3

* Order-based production

To order additionally


- Geberit ONE lay-on washbasin, bowl shape → p. 475
- Geberit ONE lay-on washbasin, bowl shape, CleanDrain → p. 474



- A Geberit washbasin connector, space-saving model is required for the installation of the base cabinet. See assortment overview washbasin series or online catalogue, washbasin accessories
- Mix & Match: Articles of the same width can be freely combined in the Geberit ONE, Acanto and iCon series

Mix & Match

Geberit ONE washtop with cutout, for lay-on washbasin, rectangular

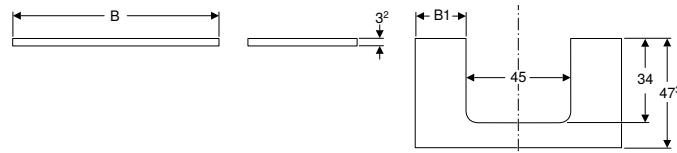

Application purposes

- For mounting on a Geberit ONE, Acanto, iCon washbasin cabinet

Technical data

Product material	High-compressed three-layer chipboard
------------------	---------------------------------------

Characteristics

- FSC™ C134279 certified
- Moisture-resistant

Scope of delivery

- Washtop
- Fastening material

Art. no.	Colour / surface	Mix & Match	Section	B1 [cm]	H [cm]	T [cm]
B / width: 74.6 cm						
505.282.00.1 *	white / high-gloss coated	Yes	centred	14.8	3.2	47.3
505.282.00.2 *	white / matt coated	Yes	centred	14.8	3.2	47.3
505.282.00.3 *	lava / matt coated	Yes	centred	14.8	3.2	47.3
505.282.00.4 *	sand grey / high-gloss coated	Yes	centred	14.8	3.2	47.3
505.282.00.5 *	oak / wood-textured melamine	Yes	centred	14.8	3.2	47.3
505.282.00.6 *	hickory / wood-textured melamine	Yes	centred	14.8	3.2	47.3
505.282.00.7 *	greige / matt coated	Yes	centred	14.8	3.2	47.3
B / width: 89.4 cm						
505.283.00.1 *	white / high-gloss coated	Yes	centred	22.2	3.2	47.3
505.283.00.2 *	white / matt coated	Yes	centred	22.2	3.2	47.3
505.283.00.3 *	lava / matt coated	Yes	centred	22.2	3.2	47.3
505.283.00.4 *	sand grey / high-gloss coated	Yes	centred	22.2	3.2	47.3
505.283.00.5 *	oak / wood-textured melamine	Yes	centred	22.2	3.2	47.3
505.283.00.6 *	hickory / wood-textured melamine	Yes	centred	22.2	3.2	47.3
505.283.00.7 *	greige / matt coated	Yes	centred	22.2	3.2	47.3
505.303.00.1 *	white / high-gloss coated	Yes	left	12.8	3.2	47.2
505.303.00.2 *	white / matt coated	Yes	left	12.8	3.2	47.3
505.303.00.3 *	lava / matt coated	Yes	left	12.8	3.2	47.3
505.303.00.4 *	sand grey / high-gloss coated	Yes	left	12.8	3.2	47.3
505.303.00.5 *	oak / wood-textured melamine	Yes	left	12.8	3.2	47.3
505.303.00.6 *	hickory / wood-textured melamine	Yes	left	12.8	3.2	47.3
505.303.00.7 *	greige / matt coated	Yes	left	12.8	3.2	47.3
505.323.00.1 *	white / high-gloss coated	Yes	right	31.6	3.2	47.3
505.323.00.2 *	white / matt coated	Yes	right	31.6	3.2	47.3
505.323.00.3 *	lava / matt coated	Yes	right	31.6	3.2	47.3
505.323.00.4 *	sand grey / high-gloss coated	Yes	right	31.6	3.2	47.3
505.323.00.5 *	oak / wood-textured melamine	Yes	right	31.6	3.2	47.3
505.323.00.6 *	hickory / wood-textured melamine	Yes	right	31.6	3.2	47.3
505.323.00.7 *	greige / matt coated	Yes	right	31.6	3.2	47.3
B / width: 104.2 cm						
505.284.00.1 *	white / high-gloss coated	No	centred	29.6	3.2	47.3
505.284.00.2 *	white / matt coated	No	centred	29.6	3.2	47.3
505.284.00.3 *	lava / matt coated	No	centred	29.6	3.2	47.3
505.284.00.4 *	sand grey / high-gloss coated	No	centred	29.6	3.2	47.3
505.284.00.5 *	oak / wood-textured melamine	No	centred	29.6	3.2	47.3
505.284.00.6 *	hickory / wood-textured melamine	No	centred	29.6	3.2	47.3
505.284.00.7 *	greige / matt coated	No	centred	29.6	3.2	47.3
505.304.00.1 *	white / high-gloss coated	No	left	12.5	3.2	47.3
505.304.00.2 *	white / matt coated	No	left	12.5	3.2	47.3
505.304.00.3 *	lava / matt coated	No	left	12.5	3.2	47.3
505.304.00.4 *	sand grey / high-gloss coated	No	left	12.5	3.2	47.3
505.304.00.5 *	oak / wood-textured melamine	No	left	12.5	3.2	47.3
505.304.00.6 *	hickory / wood-textured melamine	No	left	12.5	3.2	47.3
505.304.00.7 *	greige / matt coated	No	left	12.5	3.2	47.3
505.324.00.1 *	white / high-gloss coated	No	right	46.7	3.2	47.3
505.324.00.2 *	white / matt coated	No	right	46.7	3.2	47.3
505.324.00.3 *	lava / matt coated	No	right	46.7	3.2	47.3
505.324.00.4 *	sand grey / high-gloss coated	No	right	46.7	3.2	47.3

* Order-based production

Art. no.	Colour / surface	Mix & Match	Section	B1 [cm]	H [cm]	T [cm]
505.324.00.5 *	oak / wood-textured melamine	No	right	46.7	3.2	47.3
505.324.00.6 *	hickory / wood-textured melamine	No	right	46.7	3.2	47.3
505.324.00.7 *	greige / matt coated	No	right	46.7	3.2	47.3
B / width: 119 cm						
505.285.00.1 *	white / high-gloss coated	Yes	centred	37	3.2	47.3
505.285.00.2 *	white / matt coated	Yes	centred	37	3.2	47.3
505.285.00.3 *	lava / matt coated	Yes	centred	37	3.2	47.3
505.285.00.4 *	sand grey / high-gloss coated	Yes	centred	37	3.2	47.3
505.285.00.5 *	oak / wood-textured melamine	Yes	centred	37	3.2	47.3
505.285.00.6 *	hickory / wood-textured melamine	Yes	centred	37	3.2	47.3
505.285.00.7 *	greige / matt coated	Yes	centred	37	3.2	47.3
505.305.00.1 *	white / high-gloss coated	Yes	left	12.8	3.2	47.3
505.305.00.2 *	white / matt coated	Yes	left	12.8	3.2	47.3
505.305.00.3 *	lava / matt coated	Yes	left	12.8	3.2	47.3
505.305.00.4 *	sand grey / high-gloss coated	Yes	left	12.8	3.2	47.3
505.305.00.5 *	oak / wood-textured melamine	Yes	left	12.8	3.2	47.3
505.305.00.6 *	hickory / wood-textured melamine	Yes	left	12.5	3.2	47.3
505.305.00.7 *	greige / matt coated	Yes	left	12.8	3.2	47.3
505.325.00.1 *	white / high-gloss coated	Yes	right	61.2	3.2	47.3
505.325.00.2 *	white / matt coated	Yes	right	61.2	3.2	47.3
505.325.00.3 *	lava / matt coated	Yes	right	61.2	3.2	47.3
505.325.00.4 *	sand grey / high-gloss coated	Yes	right	61.2	3.2	47.3
505.325.00.5 *	oak / wood-textured melamine	Yes	right	61.2	3.2	47.3
505.325.00.6 *	hickory / wood-textured melamine	Yes	right	61.2	3.2	47.3
505.325.00.7 *	greige / matt coated	Yes	right	61.2	3.2	47.3
505.345.00.1 *	white / high-gloss coated	Yes	left and right	8	3.2	47.3
505.345.00.2 *	white / matt coated	Yes	left and right	8	3.2	47.3
505.345.00.3 *	lava / matt coated	Yes	left and right	8	3.2	47.3
505.345.00.4 *	sand grey / high-gloss coated	Yes	left and right	8	3.2	47.3
505.345.00.5 *	oak / wood-textured melamine	Yes	left and right	8	3.2	47.3
505.345.00.6 *	hickory / wood-textured melamine	Yes	left and right	8	3.2	47.3
505.345.00.7 *	greige / matt coated	Yes	left and right	8	3.2	47.3
B / width: 133.8 cm						
505.286.00.1 *	white / high-gloss coated	No	left and right	10.3	3.2	47.3
505.286.00.2 *	white / matt coated	No	left and right	10.3	3.2	47.3
505.286.00.3 *	lava / matt coated	No	left and right	10.3	3.2	47.3
505.286.00.4 *	sand grey / high-gloss coated	No	left and right	10.3	3.2	47.3
505.286.00.5 *	oak / wood-textured melamine	No	left and right	10.3	3.2	47.3
505.286.00.6 *	hickory / wood-textured melamine	No	left and right	10.3	3.2	47.3
505.286.00.7 *	greige / matt coated	No	left and right	10.3	3.2	47.3

* Order-based production

To order additionally


- Geberit ONE lay-on washbasin, rectangular, CleanDrain → p. 476
- Geberit ONE lay-on washbasin, rectangular → p. 477



- A Geberit washbasin connector, space-saving model is required for the installation of the base cabinet. See assortment overview washbasin series or online catalogue, washbasin accessories
- Mix & Match: Articles of the same width can be freely combined in the Geberit ONE, Acanto and iCon series

Mix & Match

Geberit ONE washtop with cutout, stoneware, for lay-on washbasin, rectangular

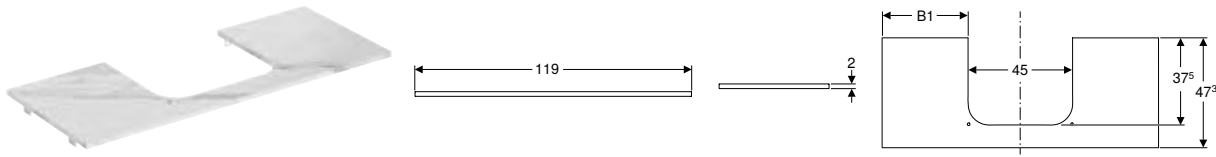

Application purposes

- For mounting on a Geberit ONE, Acanto, iCon washbasin cabinet

Technical data

Product material	Fine stoneware
------------------	----------------

Characteristics

- Scratchproof
- Moisture-resistant

Scope of delivery

- Washtop
- Fastening material

Art. no.	Colour / surface	Mix & Match	Section	B1 [cm]	H [cm]	T [cm]
B / width: 119 cm						
505.115.00.1 *	white marble look / matt	Yes	centred	37	2	47.3
505.115.00.2 *	black marble look / matt	Yes	centred	37	2	47.3
505.135.00.1 *	white marble look / matt	Yes	left	12.8	2	47.3
505.135.00.2 *	black marble look / matt	Yes	left	12.8	2	47.3
505.155.00.1 *	white marble look / matt	Yes	right	69.2	2	47.3
505.155.00.2 *	black marble look / matt	Yes	right	69.2	2	47.3
505.165.00.1 *	white marble look / matt	Yes	left and right	8	2	47.3
505.165.00.2 *	black marble look / matt	Yes	left and right	8	2	47.3

* Order-based production

To order additionally


- Geberit ONE lay-on washbasin, rectangular, CleanDrain → p. 476
- Geberit ONE lay-on washbasin, rectangular → p. 477



- A Geberit washbasin connector, space-saving model is required for the installation of the base cabinet. See assortment overview washbasin series or online catalogue, washbasin accessories
- Mix & Match: Articles of the same width can be freely combined in the Geberit ONE, Acanto and iCon series

Additional furniture

Geberit wall shelf

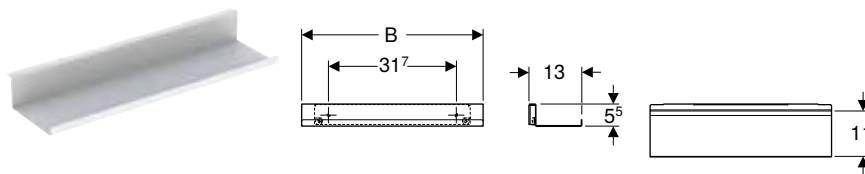

Technical data

Product material	Steel
------------------	-------

Scope of delivery

- Wall shelf
- Fastening material

Characteristics

- Wall-hung
- Hidden fastening

Art. no.	Colour / surface	H [cm]	T [cm]
B / width: 45 cm			
502.326.01.3	white / matt powder-coated	5.5	13
502.326.JK.1	lava / matt powder-coated	5.5	13
502.326.JL.1	sand grey / matt powder-coated	5.5	13
B / width: 67.5 cm			
502.327.01.3	white / matt powder-coated	5.5	13
502.327.JK.1	lava / matt powder-coated	5.5	13
502.327.JL.1	sand grey / matt powder-coated	5.5	13

Accessories

Geberit set of drawer inserts for top drawer



click & scan

Application purposes

- For Geberit ONE, Acanto and iCon series

Scope of delivery


- Drawer insert
- Cover

Technical data

Product material	Bamboo
------------------	--------

Art. no.	Washbasin, width [cm]
502.349.00.1	60
502.350.00.1	75
502.351.00.1	90
502.352.00.1	105
502.353.00.1	120
502.354.00.1	135

Geberit towel rail for bathroom furniture



click & scan

Application purposes

- For mounting on a washbasin cabinet
- For Geberit ONE, Acanto and iCon series

Scope of delivery


- Towel rail
- Fastening material

Technical data

Product material	Aluminium
------------------	-----------

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]
503.012.01.1	white / matt powder-coated	40	0.8	7.2
503.012.14.1	black matt / matt powder-coated	40	0.8	7.2
503.012.21.1	chrome / glossy	40	0.8	7.2
503.012.JK.1	lava / matt powder-coated	40	0.8	7.2

Geberit towel rail for bathroom furniture

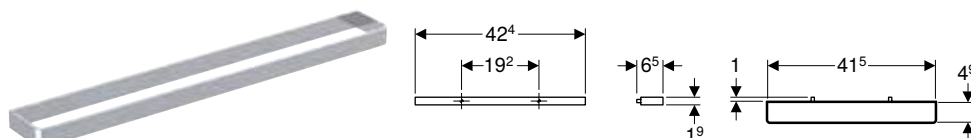

click & scan

Application purposes

- For mounting on a washbasin cabinet

Characteristics

- Right-angled corner

Technical data


Product material	Steel
------------------	-------

Scope of delivery

- Towel rail
- Fastening material

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]
502.328.00.1	chrome / glossy	42.4	1.9	4.9
502.328.01.3	white / matt powder-coated	42.4	1.9	4.9
502.328.14.1	black matt / matt powder-coated	42.4	1.9	4.9
502.328.JK.1	lava / matt powder-coated	42.4	1.9	4.9
502.328.JL.1	sand grey / matt powder-coated	42.4	1.9	4.9

Geberit light strip for drawer, left and right, length 35 cm



click & scan

Application purposes

- For Geberit ONE, Acanto and iCon series

Technical data

Operating voltage	7.5 V DC
Product material	Plastic
Light source energy efficiency class	E
Light colour	3500 K

Characteristics

- Period of use, 3–6 months
- Rechargeable with Micro-USB cable

Scope of delivery


- Light strip left and right
- Fastening material
- USB cable

Art. no.	L [cm]	Protection class	Power consumption [W]
502.031.00.1	35	III	≤ 1

Accessories

- Accessory overview – Geberit iCon bathroom furniture → p. 607
- Accessory overview – Geberit ONE bathroom furniture → p. 481
- Accessory overview – Geberit Acanto bathroom furniture → p. 559

Geberit light strip for drawer, left and right, length 40 cm



click & scan

Application purposes

- For Geberit ONE and Variform series

Technical data

Operating voltage	7.5 V DC
Product material	Plastic
Light source energy efficiency class	E
Light colour	3500 K

Characteristics

- Period of use, 3–6 months
- Rechargeable with Micro-USB cable

Scope of delivery


- Light strip left and right
- Fastening material
- USB cable

Art. no.	L [cm]	Protection class	Power consumption [W]
502.032.00.1	40	III	≤ 1

Accessories

- Accessory overview – Geberit VariForm bathroom furniture
- Accessory overview – Geberit ONE bathroom furniture → p. 481

Geberit power socket element with mains plug

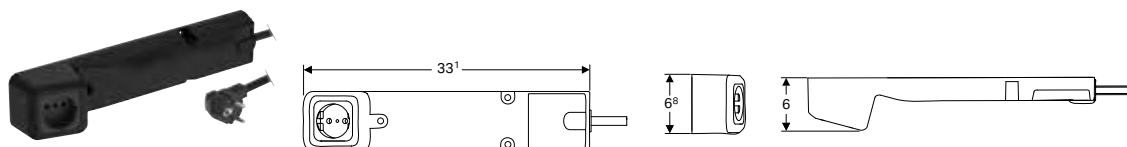

click & scan

Application purposes

- For Geberit ONE, Acanto and iCon series

Technical data

Degree of protection	IP20
Nominal voltage	230 V AC
Mains frequency	50 Hz

Scope of delivery




- Power socket element with mains plug
- Fastening material

Art. no.	Plug type	Power socket
505.090.00.2	CEE 7/7	CEE 7/4



- The prerequisite for installing the Geberit ONE power socket element is an existing mains connection in the area behind the washbasin cabinet

Geberit ONE cover for low cabinet and side element, glass



click & scan

Application purposes

- For Geberit ONE side cabinets

Technical data

Product material	Glass
------------------	-------

Characteristics




- Scratchproof
- Moisture-resistant

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]
505.082.00.1	white / glass	45	0.6	46.5
505.082.00.2	lava / glass	45	0.6	46.5

Can be combined with

- Geberit ONE low cabinet with two drawers → p. 490
- Geberit ONE low cabinet with one drawer → p. 490
- Geberit ONE side element → p. 491

Geberit ONE cover for low cabinet and side element, stoneware



click & scan

Application purposes

- For Geberit ONE side cabinets

Technical data

Product material	Fine stoneware
------------------	----------------

Characteristics

- Scratchproof
- Moisture-resistant

Scope of delivery

- Antislip mat

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]
505.080.00.1	black marble look / matt	45	0.4	46.5


Can be combined with

- Geberit ONE low cabinet with two drawers → p. 490
- Geberit ONE low cabinet with one drawer → p. 490
- Geberit ONE side element → p. 491

Mirror cabinets

Concealed mirror cabinets

Geberit ONE mirror cabinet with ComfortLight and one door, concealed installation, height 90 cm

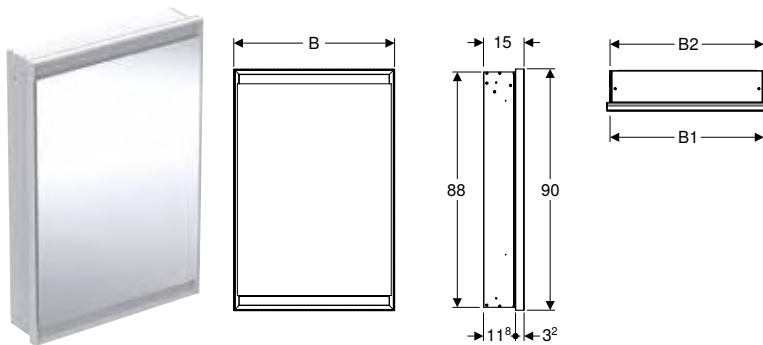

Application purposes

- For concealed installation

Technical data

Degree of protection	IP44
Nominal voltage	230 V AC
Mains frequency	50 Hz
Operating voltage	24 V DC
Product material	Aluminium
Light source energy efficiency class	E
Light colour	2200–4000 K
Service life of LED lighting max.	72000 h
Measuring method	L80B10
Colour rendering index	90
Standard deviation of colour matching	3 SDCM

Characteristics

- With ComfortLight
- LED lighting
- Indirect lighting
- Internal lighting
- Lighting mood infinitely adjustable from orientation light to day-light
- Functions can be triggered via touch sensor
- DALI-compatible control
- Compatible with Geberit Home App
- Time slot in desired luminous intensity adjustable with Geberit Home App
- With one door
- Door mirrored on both sides
- With two power sockets
- Power sockets mounted on the internal side at the top left and top right
- Continuously movable glass shelves

Scope of delivery

- 3 glass shelves
- Dummy cover for power socket left or right
- Mounting material

Art. no.	Colour / surface	B1 [cm]	B2 [cm]	H [cm]	H1 [cm]	T [cm]	T1 [cm]	T2 [cm]	Protec- tion class	Power con- sumption [W]	Door	Luminous flux (max. / above / below) [lm]
B / width: 60 cm												
505.800.00.1	anodised aluminium	57.5	58	90	88	15	11.8	3.2	I	60	left-hand hinge	3273 / 2552 / 721
505.801.00.1	anodised aluminium	57.5	58	90	88	15	11.8	3.2	I	60	right-hand hinge	3273 / 2552 / 721
505.800.00.2	white / powder-coated aluminium	57.5	58	90	88	15	11.8	3.2	I	60	left-hand hinge	3273 / 2552 / 721
505.801.00.2	white / powder-coated aluminium	57.5	58	90	88	15	11.8	3.2	I	60	right-hand hinge	3273 / 2552 / 721
505.800.00.7	black matt / powder-coated aluminium	57.5	58	90	88	15	11.8	3.2	I	60	left-hand hinge	3273 / 2552 / 721
505.801.00.7	black matt / powder-coated aluminium	57.5	58	90	88	15	11.8	3.2	I	60	right-hand hinge	3273 / 2552 / 721

To order additionally

- Installation box for Geberit ONE mirror cabinet, height 90 cm


Accessories

- Cover frame for Geberit ONE mirror cabinet, concealed installation → p. 516
- Geberit magnetic holder → p. 516
- Geberit magnifying mirror → p. 516



- Standard actuation via mirror cabinet and room push-button. Actuation via room switch must be changed accordingly in the Geberit Home app

Geberit ONE mirror cabinet with ComfortLight and two doors, concealed installation, height 90 cm

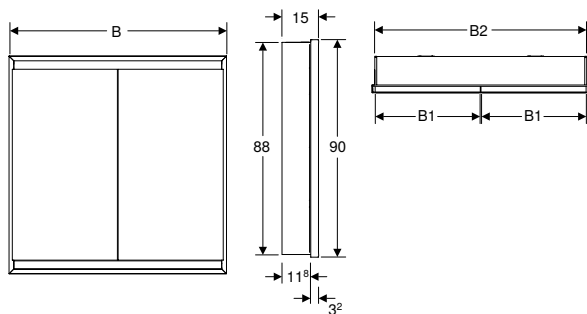

click & scan

Application purposes

- For concealed installation

Technical data

Degree of protection	IP44
Nominal voltage	230 V AC
Mains frequency	50 Hz
Operating voltage	24 V DC
Product material	Aluminium
Light source energy efficiency class	E
Light colour	2200–4000 K
Service life of LED lighting max.	72000 h
Measuring method	L80B10
Colour rendering index	90
Standard deviation of colour matching	3 SDCM

Characteristics

- With ComfortLight
- LED lighting
- Indirect lighting
- Internal lighting
- Lighting mood infinitely adjustable from orientation light to day-light
- Functions can be triggered via touch sensor
- DALI-compatible control
- Compatible with Geberit Home App
- Time slot in desired luminous intensity adjustable with Geberit Home App
- With two doors
- Doors mirrored on both sides
- With two power sockets
- Power sockets mounted on the internal side at the top left and top right
- Continuously movable glass shelves

Scope of delivery

- 3 glass shelves
- Dummy cover for power socket left or right
- Mounting material

Art. no.	Colour / surface	B1 [cm]	B2 [cm]	H [cm]	H1 [cm]	T [cm]	T1 [cm]	T2 [cm]	Protection class	Power consumption [W]	Luminous flux (max. / above / below) [lm]
B / width: 75 cm											
505.802.00.1	anodised aluminium	36	73	90	88	15	11.8	3.2	I	75	4165 / 3248 / 917
505.802.00.2	white / powder-coated aluminium	36	73	90	88	15	11.8	3.2	I	75	4165 / 3248 / 917
505.802.00.7	black matt / powder-coated aluminium	36	73	90	88	15	11.8	3.2	I	75	4165 / 3248 / 917
B / width: 90 cm											
505.803.00.1	anodised aluminium	43.5	88	90	88	15	11.8	3.2	I	90	5058 / 3944 / 1114
505.803.00.2	white / powder-coated aluminium	43.5	88	90	88	15	11.8	3.2	I	90	5058 / 3944 / 1114
505.803.00.7	black matt / powder-coated aluminium	43.5	88	90	88	15	11.8	3.2	I	90	5058 / 3944 / 1114
B / width: 105 cm											
505.804.00.1	anodised aluminium	51	103	90	88	15	11.8	3.2	I	105	5950 / 4640 / 1310
505.804.00.2	white / powder-coated aluminium	51	103	90	88	15	11.8	3.2	I	105	5950 / 4640 / 1310
505.804.00.7	black matt / powder-coated aluminium	51	103	90	88	15	11.8	3.2	I	105	5950 / 4640 / 1310
B / width: 120 cm											
505.805.00.1	anodised aluminium	58.5	118	90	88	15	11.8	3.2	I	120	6843 / 5336 / 1507
505.805.00.2	white / powder-coated aluminium	58.5	118	90	88	15	11.8	3.2	I	120	6843 / 5336 / 1507
505.805.00.7	black matt / powder-coated aluminium	58.5	118	90	88	15	11.8	3.2	I	120	6843 / 5336 / 1507

To order additionally

- Installation box for Geberit ONE mirror cabinet, height 90 cm


Accessories

- Cover frame for Geberit ONE mirror cabinet, concealed installation → p. 516
- Geberit magnetic holder → p. 516
- Geberit magnifying mirror → p. 516



- Standard actuation via mirror cabinet and room push-button. Actuation via room switch must be changed accordingly in the Geberit Home app

Geberit ONE mirror cabinet with niche and ComfortLight, with one door, concealed installation, height 90 cm

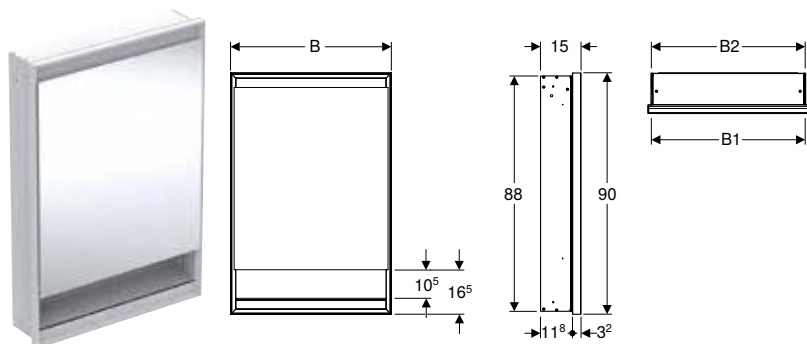

Application purposes

- For concealed installation

Technical data

Degree of protection	IP44
Nominal voltage	230 V AC
Mains frequency	50 Hz
Operating voltage	24 V DC
Product material	Aluminium
Light source energy efficiency class	E
Light colour	2200–4000 K
Service life of LED lighting max.	72000 h
Measuring method	L80B10
Colour rendering index	90
Standard deviation of colour matching	3 SDCM

Characteristics

- With ComfortLight
- LED lighting
- Indirect lighting
- Internal lighting
- Lighting mood infinitely adjustable from orientation light to day-light
- Functions can be triggered via touch sensor
- DALI-compatible control
- Compatible with Geberit Home App
- Time slot in desired luminous intensity adjustable with Geberit Home App
- With one door
- Door mirrored on both sides
- With two power sockets
- Power sockets mounted on the internal side at the top left and top right
- Continuously movable glass shelves

Scope of delivery

- 3 glass shelves
- Dummy cover for power socket left or right
- Mounting material

Art. no.	Colour / surface	B1 [cm]	B2 [cm]	H [cm]	H1 [cm]	H2 [cm]	T [cm]	T1 [cm]	T2 [cm]	Protec- tion class	Power con- sumption [W]	Door	Luminous flux (max. / above / below) [lm]
B / width: 60 cm													
505.820.00.1	anodised aluminium	57.5	58	90	88	10.5	15	11.8	3.2	I	60	left-hand hinge	3273 / 2552 / 721
505.821.00.1	anodised aluminium	57.5	58	90	88	10.5	15	11.8	3.2	I	60	right-hand hinge	3273 / 2552 / 721
505.820.00.2	white / powder-coated aluminium	57.5	58	90	88	10.5	15	11.8	3.2	I	60	left-hand hinge	3273 / 2552 / 721
505.821.00.2	white / powder-coated aluminium	57.5	58	90	88	10.5	15	11.8	3.2	I	60	right-hand hinge	3273 / 2552 / 721
505.820.00.7	black matt / powder-coated aluminium	57.5	58	90	88	10.5	15	11.8	3.2	I	60	left-hand hinge	3273 / 2552 / 721
505.821.00.7	black matt / powder-coated aluminium	57.5	58	90	88	10.5	15	11.8	3.2	I	60	right-hand hinge	3273 / 2552 / 721

To order additionally

- Installation box for Geberit ONE mirror cabinet, height 90 cm


Accessories

- Cover frame for Geberit ONE mirror cabinet, concealed installation → p. 516
- Geberit magnetic holder → p. 516
- Geberit magnifying mirror → p. 516



- Standard actuation via mirror cabinet and room push-button. Actuation via room switch must be changed accordingly in the Geberit Home app

Geberit ONE mirror cabinet with niche and ComfortLight, with two doors, concealed installation, height 90 cm

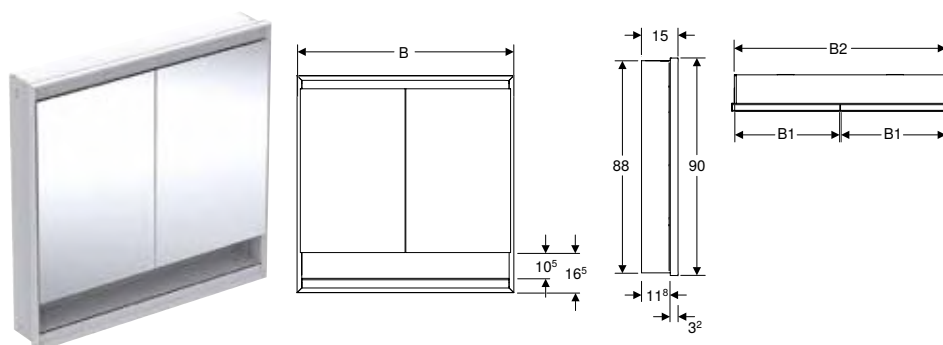

click & scan

Application purposes

- For concealed installation

Technical data

Degree of protection	IP44
Nominal voltage	230 V AC
Mains frequency	50 Hz
Operating voltage	24 V DC
Product material	Aluminium
Light source energy efficiency class	E
Light colour	2200–4000 K
Service life of LED lighting max.	72000 h
Measuring method	L80B10
Colour rendering index	90
Standard deviation of colour matching	3 SDCM

Characteristics

- With ComfortLight
- LED lighting
- Indirect lighting
- Internal lighting
- Lighting mood infinitely adjustable from orientation light to day-light
- Functions can be triggered via touch sensor
- DALI-compatible control
- Compatible with Geberit Home App
- Time slot in desired luminous intensity adjustable with Geberit Home App
- With two doors
- Doors mirrored on both sides
- With two power sockets
- Power sockets mounted on the internal side at the top left and top right
- Continuously movable glass shelves

Scope of delivery

- 3 glass shelves
- Dummy cover for power socket left or right
- Mounting material

Art. no.	Colour / surface	B1 [cm]	B2 [cm]	H [cm]	H1 [cm]	H2 [cm]	T [cm]	T1 [cm]	T2 [cm]	Protec- tion class	Power consumption [W]	Luminous flux (max. / above / below) [lm]
B / width: 75 cm												
505.822.00.1	anodised aluminium	36	73	90	88	10.5	15	11.8	3.2	I	75	4165 / 3248 / 917
505.822.00.2	white / powder-coated aluminium	36	73	90	88	10.5	15	11.8	3.2	I	75	4165 / 3248 / 917
505.822.00.7	black matt / powder-coated aluminium	36	73	90	88	10.5	15	11.8	3.2	I	75	4165 / 3248 / 917
B / width: 90 cm												
505.823.00.1	anodised aluminium	43.5	88	90	88	10.5	15	11.8	3.2	I	90	5058 / 3944 / 1114
505.823.00.2	white / powder-coated aluminium	43.5	88	90	88	10.5	15	11.8	3.2	I	90	5058 / 3944 / 1114
505.823.00.7	black matt / powder-coated aluminium	43.5	88	90	88	10.5	15	11.8	3.2	I	90	5058 / 3944 / 1114
B / width: 105 cm												
505.824.00.1	anodised aluminium	51	103	90	88	10.5	15	11.8	3.2	I	105	5950 / 4640 / 1310
505.824.00.2	white / powder-coated aluminium	51	103	90	88	10.5	15	11.8	3.2	I	105	5950 / 4640 / 1310
505.824.00.7	black matt / powder-coated aluminium	51	103	90	88	10.5	15	11.8	3.2	I	105	5950 / 4640 / 1310
B / width: 120 cm												
505.825.00.1	anodised aluminium	58.5	118	90	88	10.5	15	11.8	3.2	I	120	6843 / 5336 / 1507
505.825.00.2	white / powder-coated aluminium	58.5	118	90	88	10.5	15	11.8	3.2	I	120	6843 / 5336 / 1507
505.825.00.7	black matt / powder-coated aluminium	58.5	118	90	88	10.5	15	11.8	3.2	I	120	6843 / 5336 / 1507

To order additionally

- Installation box for Geberit ONE mirror cabinet, height 90 cm

Accessories


- Cover frame for Geberit ONE mirror cabinet, concealed installation → p. 516
- Geberit magnetic holder → p. 516
- Geberit magnifying mirror → p. 516



- Standard actuation via mirror cabinet and room push-button. Actuation via room switch must be changed accordingly in the Geberit Home app

Exposed mirror cabinets

Geberit ONE mirror cabinet with ComfortLight and one door, exposed installation, height 90 cm

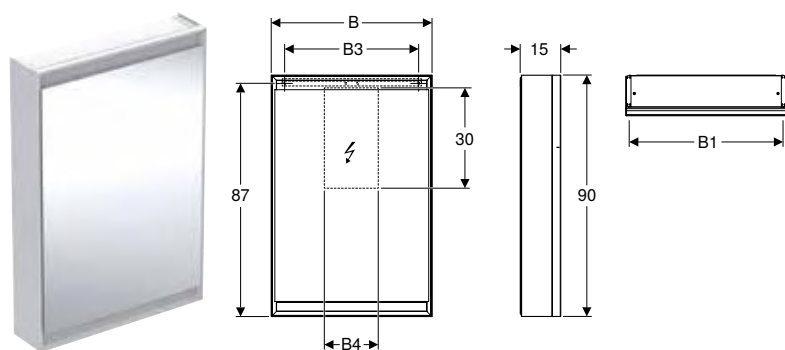

Technical data

Degree of protection	IP44
Nominal voltage	230 V AC
Mains frequency	50 Hz
Operating voltage	24 V DC
Product material	Aluminium
Light source energy efficiency class	E
Light colour	2200–4000 K
Service life of LED lighting max.	72000 h
Measuring method	L80B10
Colour rendering index	90
Standard deviation of colour matching	3 SDCM

Scope of delivery

- 3 glass shelves
- Dummy cover for power socket left or right
- Mounting material

Characteristics

- With ComfortLight
- LED lighting
- Indirect lighting
- Internal lighting
- Lighting mood infinitely adjustable from orientation light to day-light
- Functions can be triggered via touch sensor
- DALI-compatible control
- Compatible with Geberit Home App
- Time slot in desired luminous intensity adjustable with Geberit Home App
- With one door
- Door mirrored on both sides
- With two power sockets
- Power sockets mounted on the internal side at the top left and top right
- Continuously movable glass shelves

Art. no.	Colour / surface	B1 [cm]	B3 [cm]	B4 [cm]	H [cm]	T [cm]	Protec- tion class	Power consumption [W]	Door	Luminous flux (max. / above / below) [lm]
----------	------------------	------------	------------	------------	-----------	-----------	-----------------------	--------------------------	------	---

B / width: 60 cm

505.810.00.1	anodised aluminium	57.5	50	20	90	15	I	60	left-hand hinge	3273 / 2552 / 721
505.811.00.1	anodised aluminium	57.5	50	20	90	15	I	60	right-hand hinge	3273 / 2552 / 721
505.810.00.2	white / powder-coated aluminium	57.5	50	20	90	15	I	60	left-hand hinge	3273 / 2552 / 721
505.811.00.2	white / powder-coated aluminium	57.5	50	20	90	15	I	60	right-hand hinge	3273 / 2552 / 721


Accessories

- Geberit magnetic holder → p. 516
- Geberit magnifying mirror → p. 516



- Standard actuation via mirror cabinet and room push-button. Actuation via room switch must be changed accordingly in the Geberit Home app

Geberit ONE mirror cabinet with ComfortLight and two doors, exposed installation, height 90 cm

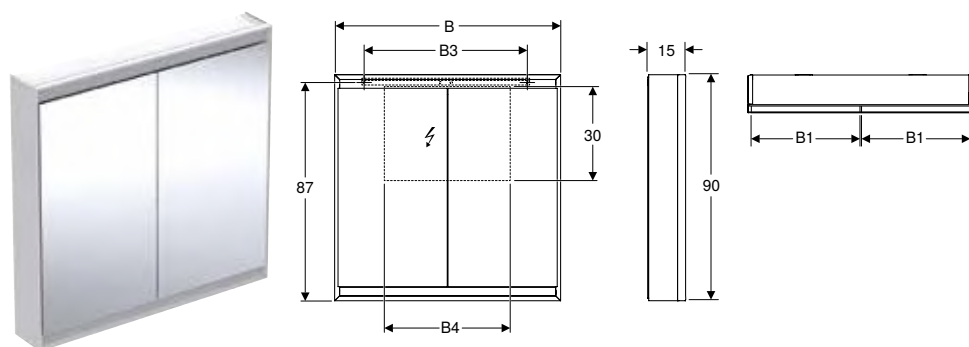

click & scan

Technical data

Degree of protection	IP44
Nominal voltage	230 V AC
Mains frequency	50 Hz
Operating voltage	24 V DC
Product material	Aluminium
Light source energy efficiency class	E
Light colour	2200–4000 K
Service life of LED lighting max.	72000 h
Measuring method	L80B10
Colour rendering index	90
Standard deviation of colour matching	3 SDCM

Characteristics

- With ComfortLight
- LED lighting
- Indirect lighting
- Internal lighting
- Lighting mood infinitely adjustable from orientation light to day-light
- Functions can be triggered via touch sensor
- DALI-compatible control
- Compatible with Geberit Home App
- Time slot in desired luminous intensity adjustable with Geberit Home App
- With two doors
- Doors mirrored on both sides
- With two power sockets
- Power sockets mounted on the internal side at the top left and top right
- Continuously movable glass shelves

Scope of delivery

- 3 glass shelves
- Dummy cover for power socket left or right
- Mounting material

Art. no.	Colour / surface	B1 [cm]	B3 [cm]	B4 [cm]	H [cm]	T [cm]	Protection class	Power consumption [W]	Luminous flux (max. / above / below) [lm]
B / width: 75 cm									
505.812.00.1	anodised aluminium	36	65	35	90	15	I	75	4165 / 3248 / 917
505.812.00.2	white / powder-coated aluminium	36	65	35	90	15	I	75	4165 / 3248 / 917
B / width: 90 cm									
505.813.00.1	anodised aluminium	43.5	65	50	90	15	I	90	5058 / 3944 / 1114
505.813.00.2	white / powder-coated aluminium	43.5	65	50	90	15	I	90	5058 / 3944 / 1114
B / width: 105 cm									
505.814.00.1	anodised aluminium	51	95	65	90	15	I	105	5950 / 4640 / 1310
505.814.00.2	white / powder-coated aluminium	51	95	65	90	15	I	105	5950 / 4640 / 1310
B / width: 120 cm									
505.815.00.1	anodised aluminium	58.5	95	80	90	15	I	120	6843 / 5336 / 1507
505.815.00.2	white / powder-coated aluminium	58.5	95	80	90	15	I	120	6843 / 5336 / 1507


Accessories

- Geberit magnetic holder → p. 516
- Geberit magnifying mirror → p. 516



- Standard actuation via mirror cabinet and room push-button. Actuation via room switch must be changed accordingly in the Geberit Home app

Geberit ONE mirror cabinet with niche and ComfortLight, with one door, exposed installation, height 90 cm

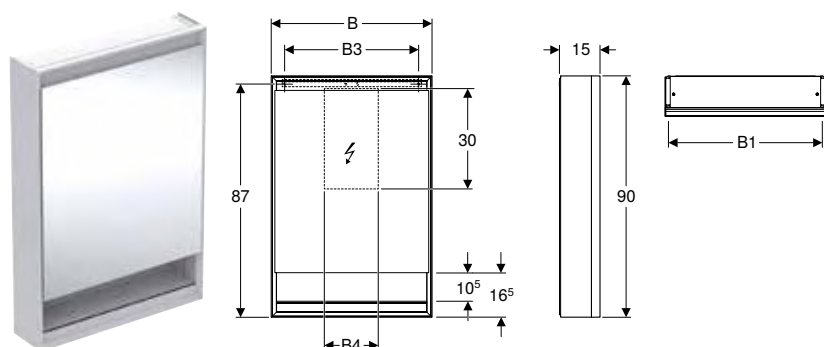

Technical data

Degree of protection	IP44
Nominal voltage	230 V AC
Mains frequency	50 Hz
Operating voltage	24 V DC
Product material	Aluminium
Light source energy efficiency class	E
Light colour	2200–4000 K
Service life of LED lighting max.	72000 h
Measuring method	L80B10
Colour rendering index	90
Standard deviation of colour matching	3 SDCM

Scope of delivery

- 3 glass shelves
- Dummy cover for power socket left or right
- Mounting material

Characteristics

- With ComfortLight
- LED lighting
- Indirect lighting
- Internal lighting
- Lighting mood infinitely adjustable from orientation light to day-light
- Functions can be triggered via touch sensor
- DALI-compatible control
- Compatible with Geberit Home App
- Time slot in desired luminous intensity adjustable with Geberit Home App
- With one door
- Door mirrored on both sides
- With two power sockets
- Power sockets mounted on the internal side at the top left and top right
- Continuously movable glass shelves

Art. no.	Colour / surface	B1 [cm]	B3 [cm]	B4 [cm]	H [cm]	H2 [cm]	T [cm]	Protec- tion class	Power consumption [W]	Door	Luminous flux (max. / above / below) [lm]
B / width: 60 cm											
505.830.00.1	anodised aluminium	57.5	50	20	90	10.5	15	I	60	left-hand hinge	3273 / 2552 / 721
505.831.00.1	anodised aluminium	57.5	50	20	90	10.5	15	I	60	right-hand hinge	3273 / 2552 / 721
505.830.00.2	white / powder-coated aluminium	57.5	50	20	90	10.5	15	I	60	left-hand hinge	3273 / 2552 / 721
505.831.00.2	white / powder-coated aluminium	57.5	50	20	90	10.5	15	I	60	right-hand hinge	3273 / 2552 / 721


Accessories

- Geberit magnetic holder → p. 516
- Geberit magnifying mirror → p. 516



- Standard actuation via mirror cabinet and room push-button. Actuation via room switch must be changed accordingly in the Geberit Home app

Geberit ONE mirror cabinet with niche and ComfortLight, with two doors, exposed installation, height 90 cm

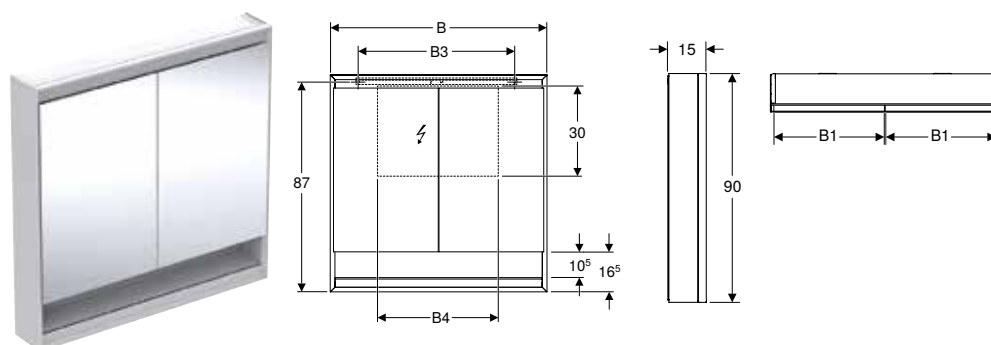

Technical data

Degree of protection	IP44
Nominal voltage	230 V AC
Mains frequency	50 Hz
Operating voltage	24 V DC
Product material	Aluminium
Light source energy efficiency class	E
Light colour	2200–4000 K
Service life of LED lighting max.	72000 h
Measuring method	L80B10
Colour rendering index	90
Standard deviation of colour matching	3 SDCM

Characteristics

- With ComfortLight
- LED lighting
- Indirect lighting
- Internal lighting
- Lighting mood infinitely adjustable from orientation light to day-light
- Functions can be triggered via touch sensor
- DALI-compatible control
- Compatible with Geberit Home App
- Time slot in desired luminous intensity adjustable with Geberit Home App
- With two doors
- Doors mirrored on both sides
- With two power sockets
- Power sockets mounted on the internal side at the top left and top right
- Continuously movable glass shelves

Scope of delivery

- 3 glass shelves
- Dummy cover for power socket left or right
- Mounting material

Art. no.	Colour / surface	B1 [cm]	B3 [cm]	B4 [cm]	H [cm]	H2 [cm]	T [cm]	Protection class	Power consumption [W]	Luminous flux (max. / above / below) [lm]
----------	------------------	------------	------------	------------	-----------	------------	-----------	------------------	--------------------------	---

B / width: 75 cm

505.832.00.1	anodised aluminium	36	65	35	90	10.5	15	I	75	4165 / 3248 / 917
505.832.00.2	white / powder-coated aluminium	36	65	35	90	10.5	15	I	75	4165 / 3248 / 917

B / width: 90 cm

505.833.00.1	anodised aluminium	43.5	65	50	90	10.5	15	I	90	5058 / 3944 / 1114
505.833.00.2	white / powder-coated aluminium	43.5	65	50	90	10.5	15	I	90	5058 / 3944 / 1114

B / width: 105 cm

505.834.00.1	anodised aluminium	51	95	65	90	10.5	15	I	105	5950 / 4640 / 1310
505.834.00.2	white / powder-coated aluminium	51	95	65	90	10.5	15	I	105	5950 / 4640 / 1310

B / width: 120 cm

505.835.00.1	anodised aluminium	58.5	95	80	90	10.5	15	I	120	6843 / 5336 / 1507
505.835.00.2	white / powder-coated aluminium	58.5	95	80	90	10.5	15	I	120	6843 / 5336 / 1507

Accessories


- Geberit magnetic holder → p. 516
- Geberit magnifying mirror → p. 516



- Standard actuation via mirror cabinet and room push-button. Actuation via room switch must be changed accordingly in the Geberit Home app

Accessories

Geberit magnetic holder




click & scan

Characteristics

- Self-adhesive

Art. no.	B [cm]	H [cm]	T [cm]
510010000	10	2	0.5

Geberit magnifying mirror

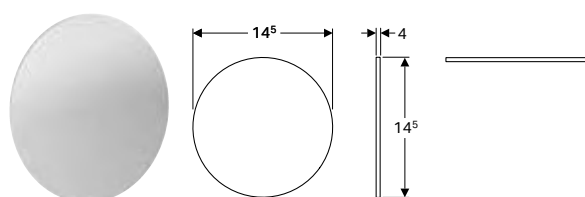

click & scan


Characteristics

- With triple magnification
- Self-adhesive

Art. no.

510100000

Cover frame for Geberit ONE mirror cabinet, concealed installation

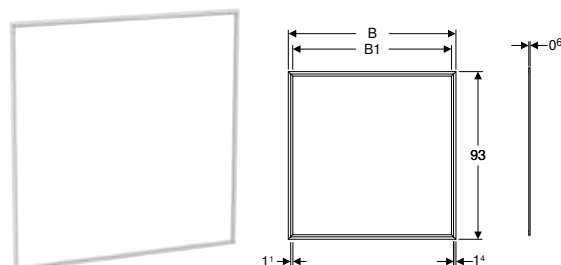

click & scan

Application purposes

- For covering unfinished tile edges

Characteristics

- Cover width 14 mm

Technical data


Product material	Aluminium
------------------	-----------

Art. no.	Colour / surface	B1 [cm]
B / width: 62.8 cm		
505.841.00.1	white / powder-coated aluminium	60
505.841.00.2	anodised aluminium	60
B / width: 77.8 cm		
505.842.00.1	white / powder-coated aluminium	75
505.842.00.2	anodised aluminium	75
B / width: 92.8 cm		
505.843.00.1	white / powder-coated aluminium	90
505.843.00.2	anodised aluminium	90
B / width: 107.8 cm		
505.844.00.1	white / powder-coated aluminium	105
505.844.00.2	anodised aluminium	105
B / width: 122.8 cm		
505.845.00.1	white / powder-coated aluminium	120
505.845.00.2	anodised aluminium	120

WCs

Wall-hung WCs

Geberit ONE wall-hung WC set, washdown, shrouded, TurboFlush, with WC seat

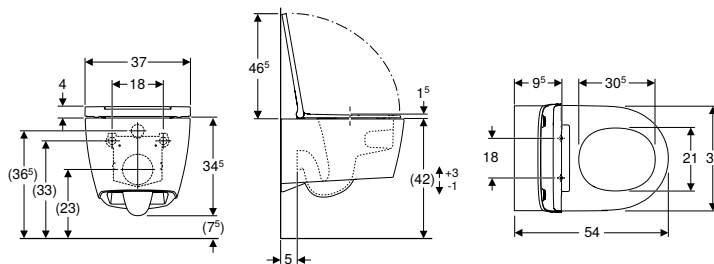

click & scan

Application purposes

- For concealed cisterns

Technical data

Product material	Vitreous china
------------------	----------------

Scope of delivery

- WC ceramic appliance
- WC seat
- Sound insulation set
- Connection set
- Fastening material

Characteristics

- Wall-hung
- Washdown WC
- Rimless WC ceramic appliance featuring TurboFlush flush technology
- Easy fastening with Easy Fast Fixing (type EFF3)
- Height-adjustable, ceramic upper edge 41–45 cm
- Type 1, full flush volume 7 / 6 / 5 / 4 l, according to EN 997
- Type 2 in accordance with EN 997
- 4 l flush
- Hidden fastening
- Easy fastening with gearbox for optimised force transmission
- WC seat made of Duroplast
- Hinges made of metal
- Overlapping WC lid
- Narrow design
- WC seat can be removed without tools
- According to recommendation in line with SINTEF

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]	QuickRelease function	Soft-closing mechanism	Hinge material
500.201.01.1	WC ceramic appliance: white / KeraTect Design cover: white	37	34.5	54	Yes, with QuickRelease hinges	yes	Metal
500.202.01.1	WC ceramic appliance: white / KeraTect Design cover: chrome / glossy	37	34.5	54	Yes, with QuickRelease hinges	yes	Metal
500.202.JT.1	WC ceramic appliance: white / matt Design cover: white	37	34.5	54	Yes, with QuickRelease hinges	yes	Metal


Can be combined with

- Geberit ONE wall-hung bidet, shrouded → p. 518
- Geberit AquaClean Tuma Comfort WC enhancement solution → p. 876
- Geberit AquaClean Tuma Classic WC enhancement solution → p. 878

Bidets

Wall-hung bidets

Geberit ONE wall-hung bidet, shrouded

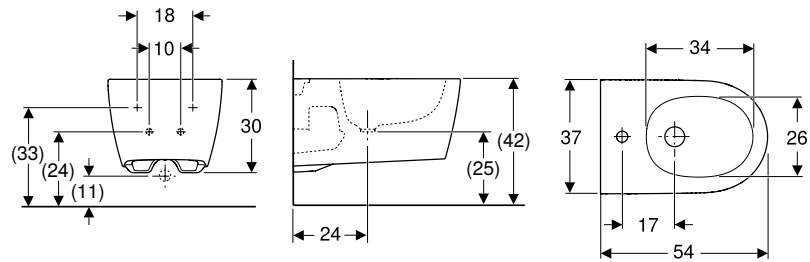

click & scan

Application purposes

- For single-hole taps with flexible hoses

Technical data

Product material	Vitreous china
------------------	----------------

Characteristics

- Wall-hung
- Height-adjustable, ceramic upper edge 41–45 cm
- Easy fastening with Easy Fast Fixing (type EFF3)
- Hidden water supply connection
- Easy fastening with gearbox for optimised force transmission
- Shrouded
- Hidden fastening
- Narrow design

Scope of delivery

- Fastening material
- Sound insulation set
- Connection set with Clou washbasin connector

Art. no.	Colour / surface	Overflow	B [cm]	H [cm]	T [cm]
500.690.01.1	white / KeraTect	hidden	37	30	54
500.690.JT.1	white / matt	hidden	37	30	54

Can be combined with

- Geberit ONE wall-hung WC set, washdown, shrouded, TurboFlush, with WC seat → p. 517











Geberit Xeno²







Washbasins.....	522
Accessory overview – Geberit Xeno ² washbasins and washbasin cabinets	523
Accessory overview – Geberit Xeno ² washbasins.....	527
Handrinse basins.....	528
Washbasins	529
Washbasins made of solid surface material.....	531
Bathroom furniture.....	532
Accessory overview – Geberit Xeno ² bathroom furniture	533
Washbasin cabinets.....	536
Side cabinets	542
Mirrors	543
Accessories.....	544

Washbasins

Accessory overview – Geberit Xenos² washbasins and washbasin cabinets

Geberit International Sales, version: December 2025

				Handrinse basins		Washbasins	
				Geberit Xenos ² handrinse basin	40 cm	Geberit Xenos ² washbasin	60 cm
KeraTect, left tap hole, without overflow				500.528.01.1			
KeraTect, right tap hole, without overflow				500.529.01.1			
KeraTect, central tap hole, without overflow						500.530.01.1	
KeraTect, without tap hole, without overflow							
KeraTect, left and right tap hole, without overflow							
Varicor, white alpine, without tap hole, without overflow							
Varicor, white alpine, left and right tap hole, without overflow							
							
Washbasin, width				→ p. 528		→ p. 529	
Cabinets for handrinse basins							
Geberit Xenos ² cabinet for handrinse basin, with one door	500.502.43.1		40 cm	scultura grey	→ p. 536	✓	
	500.502.00.1		40 cm	greige	→ p. 536	✓	
	500.502.01.1		40 cm	white	→ p. 536	✓	
Cabinets for washbasin							
Geberit Xenos ² cabinet for washbasin, with one drawer	500.505.43.1		60 cm	scultura grey	→ p. 537		✓
	500.505.00.1		60 cm	greige	→ p. 537		✓
	500.505.01.1		60 cm	white	→ p. 537		✓
Geberit Xenos ² cabinet for washbasin, with two drawers	500.506.43.1		60 cm	scultura grey	→ p. 537		✓
	500.506.00.1		60 cm	greige	→ p. 537		✓
	500.506.01.1		60 cm	white	→ p. 537		✓
Geberit Xenos ² cabinet for washbasin, with one drawer	500.508.43.1		90 cm	scultura grey	→ p. 537		
	500.508.00.1		90 cm	greige	→ p. 537		
	500.508.01.1		90 cm	white	→ p. 537		
Geberit Xenos ² cabinet for washbasin, with two drawers	500.509.43.1		90 cm	scultura grey	→ p. 537		
	500.509.00.1		90 cm	greige	→ p. 537		
	500.509.01.1		90 cm	white	→ p. 537		
Geberit Xenos ² cabinet for washbasin with shelf surface, with one drawer	500.513.43.1		90 cm	Scultura grey, left trap cutout	→ p. 538		
	500.513.00.1		90 cm	Greige, left trap cutout	→ p. 538		
	500.513.01.1		90 cm	White, left trap cutout	→ p. 538		
	500.514.43.1		90 cm	Scultura grey, right trap cutout	→ p. 538		
	500.514.00.1		90 cm	Greige, right trap cutout	→ p. 538		
	500.514.01.1		90 cm	White, right trap cutout	→ p. 538		

	Washbasins	Washbasins	Washbasins	Washbasins	Vanity basins	Vanity basins
	Geberit Xeno ² washbasin	Geberit Xeno ² washbasin	Geberit Xeno ² washbasin with shelf surface	Geberit Xeno ² washbasin with shelf surface	Geberit Xeno ² vanity basin	Geberit Xeno ² vanity basin
	90 cm	120 cm	90 cm, right shelf surface	90 cm, left shelf surface	140 cm	160 cm
	500.531.01.1	500.551.01.1	500.533.01.1	500.535.01.1		
	500.532.01.1	500.552.01.1	500.534.01.1	500.536.01.1		
		500.550.01.1				
					500.276.00.1	500.278.00.1
					500.277.00.1	500.279.00.1
						
	→ p. 529	→ p. 529	→ p. 530	→ p. 530	→ p. 531	→ p. 531
	✓					
	✓					
	✓					
	✓					
	✓					
	✓					
	✓					
			✓			
			✓			
			✓			
				✓		
				✓		
				✓		

Geberit International Sales, version: December 2025

						Handrinse basins	Washbasins	
						Geberit Xeno ² handrinse basin	Geberit Xeno ² washbasin	
						40 cm	60 cm	
Geberit Xeno ² cabinet for washbasin with shelf surface, with two drawers	500.515.43.1		90 cm	Scultura grey, left trap cutout	→ p. 539			
	500.515.00.1		90 cm	Greige, left trap cutout	→ p. 539			
	500.515.01.1		90 cm	White, left trap cutout	→ p. 539			
	500.516.43.1		90 cm	Scultura grey, right trap cutout	→ p. 539			
	500.516.00.1		90 cm	Greige, right trap cutout	→ p. 539			
	500.516.01.1		90 cm	White, right trap cutout	→ p. 539			
Geberit Xeno ² cabinet for washbasin, with width from 120 cm, with two drawers	500.517.43.1		120 cm	scultura grey	→ p. 540			
	500.517.00.1		120 cm	greige	→ p. 540			
	500.517.01.1		120 cm	white	→ p. 540			
Geberit Xeno ² cabinet for washbasin with width from 120 cm, with four drawers	500.518.43.1		120 cm	scultura grey	→ p. 541			
	500.518.00.1		120 cm	greige	→ p. 541			
	500.518.01.1		120 cm	white	→ p. 541			
Cabinets for vanity basin								
Geberit Xeno ² cabinet for washbasin made of solid surface material, with two drawers	500.348.43.1		140 cm	scultura grey	→ p. 541			
	500.348.00.1		140 cm	greige	→ p. 541			
	500.347.00.1		140 cm	white	→ p. 541			
	500.346.43.1		160 cm	scultura grey	→ p. 541			
	500.346.00.1		160 cm	greige	→ p. 541			
	500.346.01.1		160 cm	white	→ p. 541			

✓ Compatible

Washbasins		Washbasins		Washbasins		Washbasins		Vanity basins		Vanity basins	
Geberit Xeno ² washbasin		Geberit Xeno ² washbasin		Geberit Xeno ² washbasin with shelf surface		Geberit Xeno ² washbasin with shelf surface		Geberit Xeno ² vanity basin		Geberit Xeno ² vanity basin	
90 cm		120 cm		90 cm, right shelf surface		90 cm, left shelf surface		140 cm		160 cm	
				✓							
				✓							
				✓							
						✓					
						✓					
						✓					
		✓									
		✓									
		✓									
		✓									
		✓									
		✓									
		✓									
								✓			
								✓			
								✓			
										✓	
										✓	
										✓	

Geberit Xeno²

Accessory overview – Geberit Xeno² washbasins


Geberit International Sales, version: December 2025

					Handrinse basins	Washbasins		
					Geberit Xeno ² handrinse basin	Geberit Xeno ² washbasin		
					40 cm	60 cm	90 cm	
KeraTect, left tap hole, without overflow					500.528.01.1			
KeraTect, right tap hole, without overflow					500.529.01.1			
KeraTect, central tap hole, without overflow						500.530.01.1	500.531.01.1	
KeraTect, without tap hole, without overflow							500.532.01.1	
KeraTect, left and right tap hole, without overflow								
Varicor, white alpine, without tap hole, without overflow								
Varicor, white alpine, left and right tap hole, without overflow								
								
					→ p. 528	→ p. 529	→ p. 529	
Geberit waste outlet with free outlet and valve cover	152.050.21.1		Length 5 cm, glossy chrome		✓	✓	✓	
	152.050.14.1		Length 5 cm, black matt	→ p. 527	✓	✓	✓	
	152.080.21.1		Length 8 cm, glossy chrome	→ p. 527	✓	✓	✓	
	152.080.14.1		Length 8 cm, black matt	→ p. 527	✓	✓	✓	
Geberit dip tube trap for washbasin, horizontal outlet	151.034.21.1		DN32, glossy chrome	→ p. 527	✓	✓	✓	
	151.034.14.1		DN32, black matt	→ p. 527	✓	✓	✓	
	151.035.21.1		DN40, glossy chrome	→ p. 527	✓	✓	✓	
	151.035.14.1		DN40, black matt	→ p. 527	✓	✓	✓	
For furniture assembly, please include when placing order								
Geberit dip tube trap for washbasin, space-saving model, horizontal outlet	151.116.11.1		DN32, glossy chrome	→ p. 527		✓	✓	
	151.117.11.1		DN40, glossy chrome	→ p. 527		✓	✓	
Or								
Geberit valve cover for waste outlet with free outlet	241.993.21.1		glossy chrome	→ p. 527	✓	✓	✓	
	241.993.01.1		White, ceramic	→ p. 527	✓	✓	✓	
Geberit Clou washbasin connector with lever actuation	152.018.00.1		white alpine	→ p. 527				

✓ Compatible

Handrinse basins

Geberit Xeno² handrinse basin

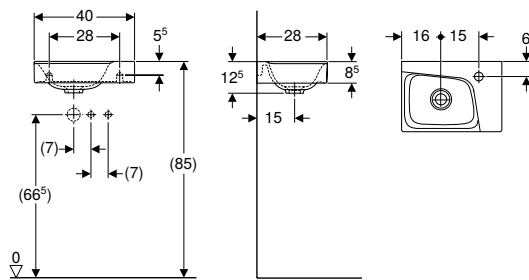

click & scan

Technical data

Product material	Fine fireclay
------------------	---------------

Characteristics

- Can be installed with a washbasin cabinet
- Asymmetrical

Art. no.	Colour / surface	Tap hole	Overflow	H [cm]	T [cm]
B / width: 40 cm					
500.529.01.1	white / KeraTect	right	without	12.5	28
500.528.01.1	white / KeraTect	left	without	12.5	28

Can be combined with


- Geberit Xeno² cabinet for handrinse basin, with one door → p. 536

Accessories

- Accessory overview – Geberit Xeno² washbasins → p. 527

Washbasins

Geberit Xeno² washbasin

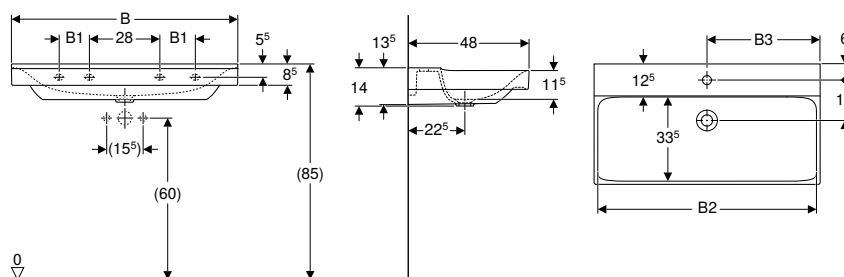

Technical data

Product material	Fine fireclay
------------------	---------------

Characteristics

- Can be installed with a washbasin cabinet

Art. no.	Colour / surface	Tap hole	Overflow	B1 [cm]	B2 [cm]	B3 [cm]	Cabinet width [cm]	H [cm]	T [cm]	Fastening points
B / width: 60 cm										
500.530.01.1	white / KeraTect	centred	without	57.2	30		58	14	48	2
B / width: 90 cm										
500.531.01.1	white / KeraTect	centred	without	12	87.2	45	88	14	48	4
500.532.01.1	white / KeraTect	without	without	12	87.2		88	14	48	4
B / width: 120 cm										
500.550.01.1	white / KeraTect	left and right	without	24	117.2	30	118	14	48	4
500.551.01.1	white / KeraTect	centred	without	24	117.2	60	118	14	48	4
500.552.01.1	white / KeraTect	without	without	24	117.2		118	14	48	4

To order additionally

- Washbasin connector

Can be combined with

- Geberit Xeno² cabinet for washbasin, with one drawer → p. 536
- Geberit Xeno² cabinet for washbasin, with two drawers → p. 537
- Geberit Xeno² cabinet for washbasin, with width from 120 cm, with two drawers → p. 540
- Geberit Xeno² cabinet for washbasin with width from 120 cm, with four drawers → p. 540


Accessories

- Accessory overview – Geberit Xeno² washbasins → p. 527



- Geberit washbasin connector Clou with lever actuation only for washbasins with one tap hole. Compatible with washbasins with one tap hole 60 and 90 cm only when installed without cabinet

Geberit Xenos² washbasin with shelf surface

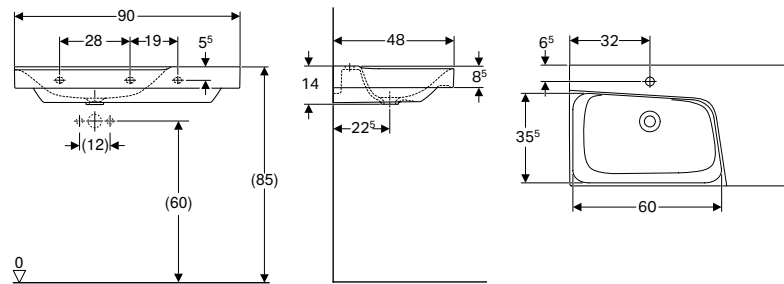

click & scan

Technical data

Product material	Fine fireclay
------------------	---------------

Characteristics

- Can be installed with a washbasin cabinet
- Asymmetrical
- With shelf surface

Art. no.	Colour / surface	Tap hole	Overflow	H [cm]	T [cm]	Shelf space
B / width: 90 cm						
500.533.01.1	white / KeraTect	centred	without	14	48	right
500.535.01.1	white / KeraTect	centred	without	14	48	left
500.534.01.1	white / KeraTect	without	without	14	48	right
500.536.01.1	white / KeraTect	without	without	14	48	left

To order additionally

- Washbasin connector

Can be combined with

- Geberit Xenos² cabinet for washbasin with shelf surface, with one drawer → p. 538
- Geberit Xenos² cabinet for washbasin with shelf surface, with two drawers → p. 539

Accessories


- Accessory overview – Geberit Xenos² washbasins → p. 527



- Geberit washbasin connector Clou with lever actuation only for washbasins with one tap hole. Compatible with washbasins with one tap hole 60 and 90 cm only when installed without cabinet

Washbasins made of solid surface material

Geberit Xeno² vanity basin

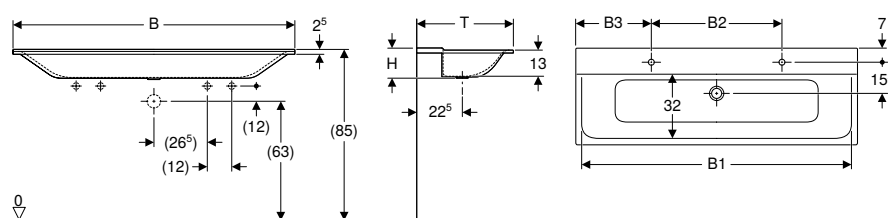

Geberit Xeno²

Application purposes

- For mounting on washbasin cabinets

Technical data

Product material	Varicor
------------------	---------

Characteristics

- Two washbasin areas
- Slim rim
- Antibacterial
- Shockproof
- Scratchproof
- Easy cleaning
- Seamless surface repair

Art. no.	Colour / surface	Tap hole	Overflow	B1 [cm]	B2 [cm]	B3 [cm]	Cabinet width [cm]	H [cm]	T [cm]
B / width: 140 cm									
500.277.00.1	white / matt	left and right	without	135	65	37.5	139.5	15	48
500.276.00.1	white / matt	without	without	135			139.5	15	48
B / width: 160 cm									
500.279.00.1	white / matt	left and right	without	155	70	45	159.5	15	48
500.278.00.1	white / matt	without	without	155			159.5	15	48

Can be combined with

- Geberit Xeno² cabinet for washbasin made of solid surface material, with two drawers → p. 541












Accessories









- Accessory overview – Geberit Xeno² washbasins → p. 527

Bathroom furniture







Accessory overview – Geberit Xeno² bathroom furniture

Geberit International Sales, version: December 2025

				Geberit Xeno ² drawer insert, T-partition, for top drawer	Geberit Xeno ² drawer insert, H-partition, for top drawer	
				500.525.00.1	500.526.00.1	
						
				→ p. 545	→ p. 544	
Cabinets for handrinse basins						
Geberit Xeno ² cabinet for handrinse basin, with one door	500.502.43.1		40 cm	scultura grey	→ p. 536	
	500.502.00.1		40 cm	greige	→ p. 536	
	500.502.01.1		40 cm	white	→ p. 536	
Cabinets for washbasin						
Geberit Xeno ² cabinet for washbasin, with one drawer	500.505.43.1		60 cm	scultura grey	→ p. 537	✓ ¹⁾
	500.505.00.1		60 cm	greige	→ p. 537	✓ ¹⁾
	500.505.01.1		60 cm	white	→ p. 537	✓ ¹⁾
Geberit Xeno ² cabinet for washbasin, with two drawers	500.506.43.1		60 cm	scultura grey	→ p. 537	✓ ¹⁾
	500.506.00.1		60 cm	greige	→ p. 537	✓ ¹⁾
	500.506.01.1		60 cm	white	→ p. 537	✓ ¹⁾
Geberit Xeno ² cabinet for washbasin, with one drawer	500.508.43.1		90 cm	scultura grey	→ p. 537	✓ ²⁾
	500.508.00.1		90 cm	greige	→ p. 537	✓ ²⁾
	500.508.01.1		90 cm	white	→ p. 537	✓ ²⁾
Geberit Xeno ² cabinet for washbasin, with two drawers	500.509.43.1		90 cm	scultura grey	→ p. 537	✓ ²⁾
	500.509.00.1		90 cm	greige	→ p. 537	✓ ²⁾
	500.509.01.1		90 cm	white	→ p. 537	✓ ²⁾
Geberit Xeno ² cabinet for washbasin with shelf surface, with one drawer	500.513.43.1		90 cm	Scultura grey, left trap cutout	→ p. 538	✓ ²⁾
	500.513.00.1		90 cm	Greige, left trap cutout	→ p. 538	✓ ²⁾
	500.513.01.1		90 cm	White, left trap cutout	→ p. 538	✓ ²⁾
	500.514.43.1		90 cm	Scultura grey, right trap cutout	→ p. 538	✓ ²⁾
	500.514.00.1		90 cm	Greige, right trap cutout	→ p. 538	✓ ²⁾
	500.514.01.1		90 cm	White, right trap cutout	→ p. 538	✓ ²⁾
Geberit Xeno ² cabinet for washbasin with shelf surface, with two drawers	500.515.43.1		90 cm	Scultura grey, left trap cutout	→ p. 539	✓ ²⁾
	500.515.00.1		90 cm	Greige, left trap cutout	→ p. 539	✓ ²⁾
	500.515.01.1		90 cm	White, left trap cutout	→ p. 539	✓ ²⁾
	500.516.43.1		90 cm	Scultura grey, right trap cutout	→ p. 539	✓ ²⁾
	500.516.00.1		90 cm	Greige, right trap cutout	→ p. 539	✓ ²⁾
	500.516.01.1		90 cm	White, right trap cutout	→ p. 539	✓ ²⁾
Geberit Xeno ² cabinet for washbasin, with width from 120 cm, with two drawers	500.517.43.1		120 cm	scultura grey	→ p. 540	✓ ²⁾
	500.517.00.1		120 cm	greige	→ p. 540	✓ ²⁾
	500.517.01.1		120 cm	white	→ p. 540	✓ ²⁾
Geberit Xeno ² cabinet for washbasin with width from 120 cm, with four drawers	500.518.43.1		120 cm	scultura grey	→ p. 541	✓ ²⁾
	500.518.00.1		120 cm	greige	→ p. 541	✓ ²⁾
	500.518.01.1		120 cm	white	→ p. 541	✓ ²⁾








Geberit Xeno ² drawer insert, H- partition, for bottom drawer	Geberit Xeno ² glass shelf		Geberit towel rail for bathroom furniture	Geberit towel rail for bathroom furniture, with right-angled corner	Geberit towel rail for bathroom furniture, with radius corner	Geberit magnetic holder	Geberit magnifying mirror
500.527.00.1	500.523.00.1	500.524.00.1	502.328.00.1 502.328.01.3 502.328.JK.1 502.328.JL.1	510040000	510140000	510010000	510100000
							
	→ p. 545		→ p. 505	→ p. 1039	→ p. 1040	→ p. 516	
						✓	
						✓	
						✓	
			✓	✓	✓	✓	
			✓	✓	✓	✓	
			✓	✓	✓	✓	
✓ ¹⁾			✓	✓	✓	✓	
✓ ¹⁾			✓	✓	✓	✓	
✓ ¹⁾			✓	✓	✓	✓	
			✓	✓	✓	✓	
			✓	✓	✓	✓	
			✓	✓	✓	✓	
✓ ⁴⁾			✓	✓	✓	✓	
✓ ⁴⁾			✓	✓	✓	✓	
✓ ⁴⁾			✓	✓	✓	✓	
			✓	✓	✓	✓	
			✓	✓	✓	✓	
			✓	✓	✓	✓	
			✓	✓	✓	✓	
			✓	✓	✓	✓	
✓ ⁴⁾			✓	✓	✓	✓	
✓ ⁴⁾			✓	✓	✓	✓	
✓ ⁴⁾			✓	✓	✓	✓	
✓ ⁴⁾			✓	✓	✓	✓	
✓ ⁴⁾			✓	✓	✓	✓	
✓ ⁴⁾			✓	✓	✓	✓	
			✓	✓	✓	✓	
			✓	✓	✓	✓	
			✓	✓	✓	✓	
✓ ²⁾			✓	✓	✓	✓	
✓ ²⁾			✓	✓	✓	✓	
✓ ²⁾			✓	✓	✓	✓	

Geberit International Sales, version: December 2025

				Geberit Xeno ² drawer insert, T-partition, for top drawer	Geberit Xeno ² drawer insert, H-partition, for top drawer				
				500.525.00.1	500.526.00.1				
									
				→ p. 545	→ p. 544				
Cabinets for vanity basin									
Geberit Xeno ² cabinet for washbasin made of solid surface material, with two drawers	500.348.43.1		140 cm	scultura grey	→ p. 541	✓ ²⁾	✓ ²⁾		
	500.348.00.1		140 cm	greige	→ p. 541	✓ ²⁾	✓ ²⁾		
	500.347.00.1		140 cm	white	→ p. 541	✓ ²⁾	✓ ²⁾		
	500.346.43.1		160 cm	scultura grey	→ p. 541	✓ ³⁾	✓ ³⁾		
	500.346.00.1		160 cm	greige	→ p. 541	✓ ³⁾	✓ ³⁾		
	500.346.01.1		160 cm	white	→ p. 541	✓ ³⁾	✓ ³⁾		
Side cabinets									
Geberit Xeno ² tall cabinet with one door and internal mirror	500.503.01.1			white	→ p. 542				
	500.503.43.1			scultura grey	→ p. 542				
	500.503.00.1			greige	→ p. 542				
Geberit Xeno ² low cabinet with one drawer	500.507.01.1			white	→ p. 542	✓ ⁴⁾	✓ ⁴⁾		
	500.507.43.1			scultura grey	→ p. 542	✓ ⁴⁾	✓ ⁴⁾		
	500.507.00.1			greige	→ p. 542	✓ ⁴⁾	✓ ⁴⁾		
Geberit Xeno ² low cabinet with two drawers	500.504.01.1			white	→ p. 543	✓ ¹⁾	✓ ¹⁾		
	500.504.43.1			scultura grey	→ p. 543	✓ ¹⁾	✓ ¹⁾		
	500.504.00.1			greige	→ p. 543	✓ ¹⁾	✓ ¹⁾		


✓ Compatible

¹⁾ Maximum number of drawer inserts per cabinet = 2
²⁾ Maximum number of drawer inserts per cabinet = 4
³⁾ Maximum number of drawer inserts per cabinet = 6
⁴⁾ Maximum number of drawer inserts per cabinet = 3
⁵⁾ Maximum number of drawer inserts per cabinet = 1

Geberit Xenos ² drawer insert, H- partition, for bottom drawer	Geberit Xenos ² glass shelf		Geberit towel rail for bathroom furniture	Geberit towel rail for bathroom furniture, with right-angled corner	Geberit towel rail for bathroom furniture, with radius corner	Geberit magnetic holder	Geberit magnifying mirror
	500.527.00.1	500.523.00.1					
			502.328.00.1 502.328.01.3 502.328.JK.1 502.328.JL.1	510040000	510140000	510010000	510100000
							
	→ p. 545		→ p. 505	→ p. 1039	→ p. 1040	→ p. 516	
			✓	✓	✓	✓	
			✓	✓	✓	✓	
			✓	✓	✓	✓	
			✓	✓	✓	✓	
			✓	✓	✓	✓	
			✓	✓	✓	✓	
						✓	✓
						✓	✓
						✓	✓
		✓	✓	✓	✓	✓	
		✓	✓	✓	✓	✓	
		✓	✓	✓	✓	✓	
✓ ⁵⁾	✓		✓	✓	✓	✓	
✓ ⁵⁾	✓		✓	✓	✓	✓	
✓ ⁵⁾	✓		✓	✓	✓	✓	

Washbasin cabinets

Geberit Xeno² cabinet for handrinse basin, with one door

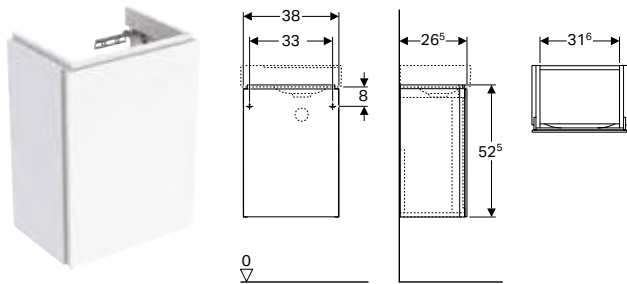

click & scan

Technical data

Product material	High-compressed three-layer chipboard
------------------	---------------------------------------

Scope of delivery

- Fastening material

Characteristics

- FSC™ C134279 certified
- Wall-hung
- With one door
- Door with soft closing
- Hinge side left or right
- Moisture-resistant
- Delivered preassembled

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]
Washbasin width: 40 cm				
500.502.01.1	white / high-gloss coated	38	52.5	26.5
500.502.00.1 *	greige / matt coated	38	52.5	26.5
500.502.43.1	scultura grey / wood-textured melamine	38	52.5	26.5

* Order-based production


Can be combined with

- Geberit Xeno² handrinse basin → p. 528
- Geberit Xeno² illuminated mirror → p. 543

Accessories

- Accessory overview – Geberit Xeno² bathroom furniture → p. 533

Geberit Xeno² cabinet for washbasin, with one drawer

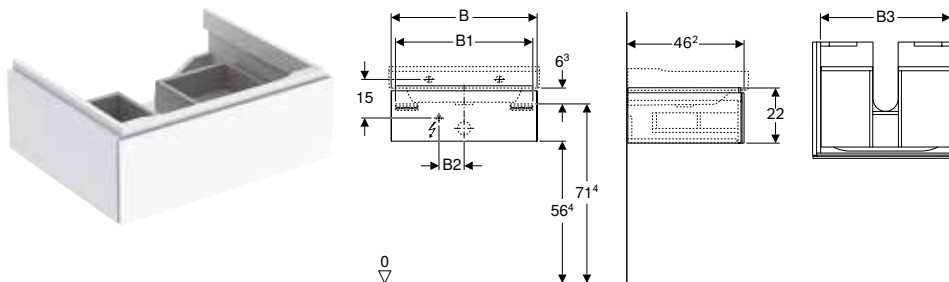

click & scan

Technical data

Degree of protection	IP21
Nominal voltage	230 V AC
Mains frequency	50 Hz
Operating voltage	12 V DC
Product material	High-compressed three-layer chipboard
Drawer load max.	20 kg
Light source energy efficiency class	F
Light colour	3000 K

Scope of delivery

- Fastening material

Characteristics

- FSC™ C134279 certified
- Wall-hung
- With one drawer
- Opening with push-to-open mechanism
- Drawer with antislip mat
- Drawer with LED light
- Moisture-resistant
- Delivered preassembled

Art. no.	Colour / surface	B [cm]	B1 [cm]	B2 [cm]	B3 [cm]	H [cm]	T [cm]	Protection class	Power consumption [W]	Luminous flux [lm]
Washbasin width: 60 cm										
500.505.01.1	white / high-gloss coated	58	54.6	10	51.6	22	46.2	II	2.25	270
500.505.00.1 *	greige / matt coated	58	54.6	10	51.6	22	46.2	II	2.25	270
500.505.43.1	scultura grey / wood-textured melamine	58	54.6	10	51.6	22	46.2	II	2.25	270
Washbasin width: 90 cm										
500.508.01.1	white / high-gloss coated	88	84.6	23	81.6	22	46.2	II	3.75	450
500.508.00.1 *	greige / matt coated	88	84.6	23	81.6	22	46.2	II	3.75	450
500.508.43.1	scultura grey / wood-textured melamine	88	84.6	23	81.6	22	46.2	II	3.75	450

* Order-based production

Can be combined with

- Geberit Xeno² washbasin → p. 529
- Geberit Xeno² illuminated mirror with direct and indirect lighting → p. 544


Accessories

- Accessory overview – Geberit Xeno² bathroom furniture → p. 533



- A Geberit washbasin connector, space-saving model is required for the installation of the base cabinet. See assortment overview washbasin series or online catalogue, washbasin accessories

Geberit Xeno² cabinet for washbasin, with two drawers

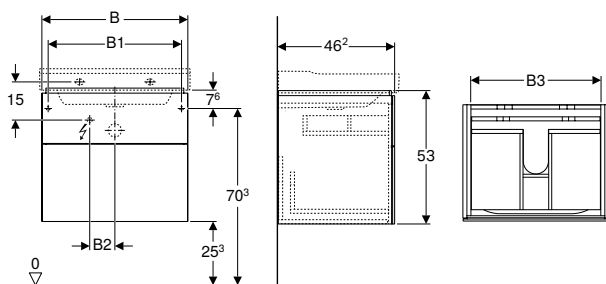

Technical data

Degree of protection	IP21
Nominal voltage	230 V AC
Mains frequency	50 Hz
Operating voltage	12 V DC
Product material	High-compressed three-layer chipboard
Drawer load max.	20 kg
Light source energy efficiency class	F
Light colour	3000 K

Scope of delivery

- Fastening material

Characteristics

- FSC™ C134279 certified
- Wall-hung
- With two drawers
- Opening with push-to-open mechanism
- Drawer with antislip mat
- Drawer with LED light
- Moisture-resistant
- Delivered preassembled

Art. no.	Colour / surface	B [cm]	B1 [cm]	B2 [cm]	B3 [cm]	H [cm]	T [cm]	Protection class	Power consumption [W]	Luminous flux [lm]
Washbasin width: 60 cm										
500.506.01.1	white / high-gloss coated	58	53	10	51.6	53	46.2	II	2.25	270
500.506.00.1 *	greige / matt coated	58	53	10	51.6	53	46.2	II	2.25	270
500.506.43.1	scultura grey / wood-textured melamine	58	53	10	51.6	53	46.2	II	2.25	270
Washbasin width: 90 cm										
500.509.01.1	white / high-gloss coated	88	83	23	81.6	53	46.2	II	3.75	450
500.509.00.1 *	greige / matt coated	88	83	23	81.6	53	46.2	II	3.75	450
500.509.43.1	scultura grey / wood-textured melamine	88	83	23	81.6	53	46.2	II	3.75	450

* Order-based production

Can be combined with

- Geberit Xeno² washbasin → p. 529
- Geberit Xeno² illuminated mirror with direct and indirect lighting → p. 544


Accessories

- Accessory overview – Geberit Xeno² bathroom furniture → p. 533



- A Geberit washbasin connector, space-saving model is required for the installation of the base cabinet. See assortment overview washbasin series or online catalogue, washbasin accessories

Geberit Xeno² cabinet for washbasin with shelf surface, with one drawer

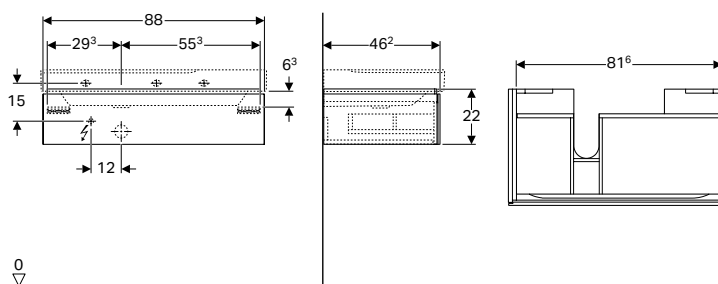

click & scan

Technical data

Degree of protection	IP21
Nominal voltage	230 V AC
Mains frequency	50 Hz
Operating voltage	12 V DC
Product material	High-compressed three-layer chipboard
Drawer load max.	20 kg
Light source energy efficiency class	F
Light colour	3000 K

Scope of delivery

- Fastening material

Characteristics

- FSC™ C134279 certified
- Wall-hung
- With one drawer
- Opening with push-to-open mechanism
- With shelf surface
- Drawer with antislip mat
- Drawer with LED light
- Moisture-resistant
- Delivered preassembled

Art. no.	Colour / surface	B Washbasin, width [cm]	H [cm]	T [cm]	Protection class	Power consumption [W]	Luminous flux [lm]	
Trap cutout: left								
500.513.01.1	white / high-gloss coated	88	90	22	46.2	II	3.75	450
500.513.00.1 *	greige / matt coated	88	90	22	46.2	II	3.75	450
500.513.43.1	scultura grey / wood-textured melamine	88	90	22	46.2	II	3.75	450
Trap cutout: right								
500.514.01.1	white / high-gloss coated	88	90	22	46.2	II	3.75	450
500.514.00.1 *	greige / matt coated	88	90	22	46.2	II	3.75	450
500.514.43.1	scultura grey / wood-textured melamine	88	90	22	46.2	II	3.75	450

* Order-based production

Can be combined with

- Geberit Xeno² washbasin with shelf surface → p. 530
- Geberit Xeno² illuminated mirror with direct and indirect lighting → p. 544


Accessories

- Accessory overview – Geberit Xeno² bathroom furniture → p. 533



- A Geberit washbasin connector, space-saving model is required for the installation of the base cabinet. See assortment overview washbasin series or online catalogue, washbasin accessories

Geberit Xeno² cabinet for washbasin with shelf surface, with two drawers

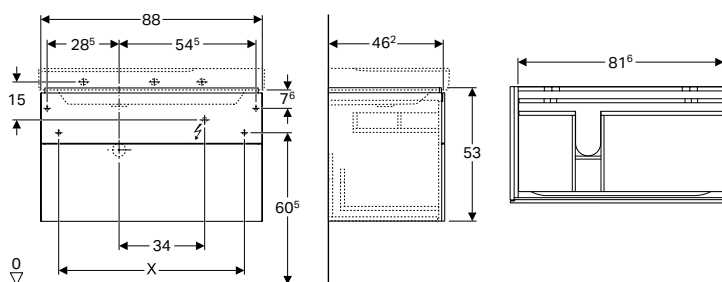

click & scan

Geberit Xeno²

Technical data

Degree of protection	IP21
Nominal voltage	230 V AC
Mains frequency	50 Hz
Operating voltage	12 V DC
Product material	High-compressed three-layer chipboard
Drawer load max.	20 kg
Light source energy efficiency class	F
Light colour	3000 K

Scope of delivery

- Fastening material

Characteristics

- FSC™ C134279 certified
- Wall-hung
- With two drawers
- Opening with push-to-open mechanism
- With shelf surface
- Drawer with antislip mat
- Drawer with LED light
- Moisture-resistant
- Delivered preassembled

Art. no.	Colour / surface	B	Washbasin, width	H	T	Protection class	Power consumption	Luminous flux
		[cm]	[cm]	[cm]	[cm]		[W]	[lm]
Trap cutout: left								
500.515.01.1	white / high-gloss coated	88	90	53	46.2	II	3.75	450
500.515.00.1 *	greige / matt coated	88	90	53	46.2	II	3.75	450
500.515.43.1	scultura grey / wood-textured melamine	88	90	53	46.2	II	3.75	450
Trap cutout: right								
500.516.01.1	white / high-gloss coated	88	90	53	46.2	II	3.75	450
500.516.00.1 *	greige / matt coated	88	90	53	46.2	II	3.75	450
500.516.43.1	scultura grey / wood-textured melamine	88	90	53	46.2	II	3.75	450

* Order-based production

Can be combined with

- Geberit Xeno² washbasin with shelf surface → p. 530
- Geberit Xeno² illuminated mirror with direct and indirect lighting → p. 544



Accessories

- Accessory overview – Geberit Xeno² bathroom furniture → p. 533



- A Geberit washbasin connector, space-saving model is required for the installation of the base cabinet. See assortment overview washbasin series or online catalogue, washbasin accessories

Geberit Xeno² cabinet for washbasin, with width from 120 cm, with two drawers

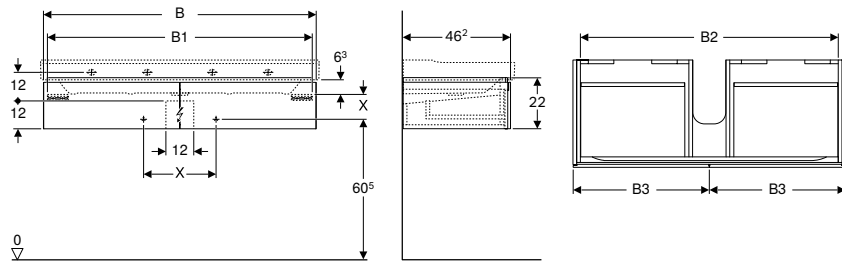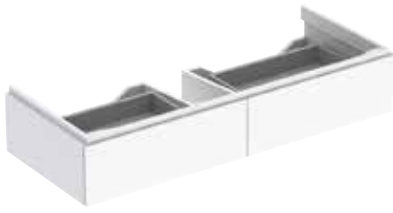

Technical data

Degree of protection	IP21
Nominal voltage	230 V AC
Mains frequency	50 Hz
Operating voltage	12 V DC
Product material	High-compressed three-layer chipboard
Drawer load max.	20 kg
Light source energy efficiency class	F
Light colour	3000 K

Scope of delivery

- Fastening material

Characteristics

- FSC™ C134279 certified
- Wall-hung
- With two drawers
- Opening with push-to-open mechanism
- Drawer with antislip mat
- Drawer with LED light
- Moisture-resistant
- Delivered preassembled

Art. no.	Colour / surface	B [cm]	B1 [cm]	B2 [cm]	B3 [cm]	H [cm]	T [cm]	Protection class	Power consumption [W]	Luminous flux [lm]
Washbasin width: 120 cm										
500.517.01.1	white / high-gloss coated	117.4	114	111	58.5	22	46.2	II	4	480
500.517.00.1 *	greige / matt coated	117.4	114	111	58.5	22	46.2	II	4	480
500.517.43.1	scultura grey / wood-textured melamine	117.4	114	111	58.5	22	46.2	II	4	480

* Order-based production

Can be combined with

- Geberit Xeno² washbasin → p. 529
- Geberit Xeno² illuminated mirror with direct and indirect lighting → p. 544


Accessories

- Accessory overview – Geberit Xeno² bathroom furniture → p. 533



- A Geberit washbasin connector, space-saving model is required for the installation of the base cabinet. See assortment overview washbasin series or online catalogue, washbasin accessories

Geberit Xeno² cabinet for washbasin with width from 120 cm, with four drawers

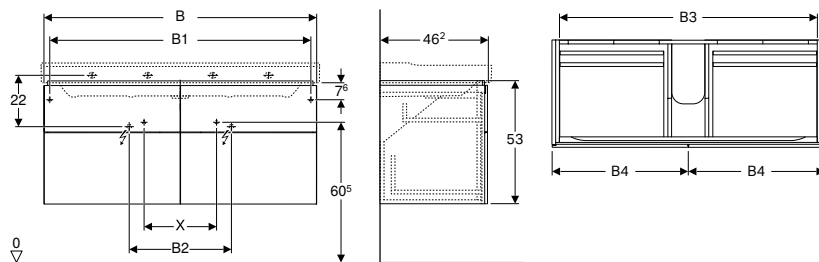

Technical data

Degree of protection	IP21
Nominal voltage	230 V AC
Mains frequency	50 Hz
Operating voltage	12 V DC
Product material	High-compressed three-layer chipboard
Drawer load max.	20 kg
Light source energy efficiency class	F
Light colour	3000 K

Scope of delivery

- Fastening material

Characteristics

- FSC™ C134279 certified
- Wall-hung
- With four drawers
- Opening with push-to-open mechanism
- Drawer with antislip mat
- Drawer with LED light
- Moisture-resistant
- Delivered preassembled

Art. no.	Colour / surface	B [cm]	B1 [cm]	B2 [cm]	B3 [cm]	B4 [cm]	H [cm]	T [cm]	Protection class	Power consumption [W]	Luminous flux [lm]
Washbasin width: 120 cm											
500.518.01.1	white / high-gloss coated	117.4	112.4	44	111	58.5	53	46.2	II	4	480
500.518.00.1 *	greige / matt coated	117.4	112.4	44	111	58.5	53	46.2	II	4	480
500.518.43.1	scultura grey / wood-textured melamine	117.4	112.4	44	111	58.5	53	46.2	II	4	480


* Order-based production

Can be combined with


- Geberit Xeno² washbasin → p. 529
- Geberit Xeno² illuminated mirror with direct and indirect lighting → p. 544

Accessories

- Accessory overview – Geberit Xeno² bathroom furniture → p. 533

-  A Geberit washbasin connector, space-saving model is required for the installation of the base cabinet. See assortment overview washbasin series or online catalogue, washbasin accessories

Geberit Xeno² cabinet for washbasin made of solid surface material, with two drawers

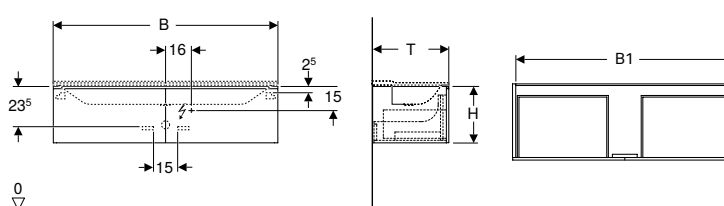

Technical data

Degree of protection	IP44
Nominal voltage	230 V AC
Mains frequency	50 Hz
Operating voltage	12 V DC
Product material	High-compressed three-layer chipboard
Drawer load max.	20 kg
Light source energy efficiency class	F
Light colour	6400 K

Scope of delivery

- Fastening material

Characteristics

- FSC™ C134279 certified
- Wall-hung
- With two drawers
- Opening with push-to-open mechanism
- Drawer with soft closing
- Drawer with antislip mat
- Drawer with LED light
- LED lighting with proximity sensor
- Moisture-resistant
- Delivered preassembled

Art. no.	Colour / surface	B [cm]	B1 [cm]	H [cm]	T [cm]	Protection class	Power consumption [W]	Luminous flux [lm]
Washbasin width: 140 cm								
500.347.00.1 *	white / matt coated	139.5	135.4	35	47.3	II	13.5	1080
500.348.00.1 *	greige / matt coated	139.5	135.4	35	47.3	II	13.5	1080
500.348.43.1	scultura grey / wood-textured melamine	139.5	135.4	35	47.3	II	13.5	1080

Washbasin width: 160 cm								
500.346.01.1 *	white / matt coated	159.5	156.2	35	47.3	II	15	1240
500.346.00.1 *	greige / matt coated	159.5	156.2	35	47.3	II	15	1240
500.346.43.1	scultura grey / wood-textured melamine	159.5	156.2	35	47.3	II	15	1240


* Order-based production

Can be combined with

- Geberit Xeno² vanity basin → p. 531
- Geberit Xeno² illuminated mirror with direct and indirect lighting → p. 544


Accessories

- Accessory overview – Geberit Xeno² bathroom furniture → p. 533

-  A Geberit washbasin connector, space-saving model is required for the installation of the base cabinet. See assortment overview washbasin series or online catalogue, washbasin accessories

Side cabinets

Geberit Xeno² tall cabinet with one door and internal mirror

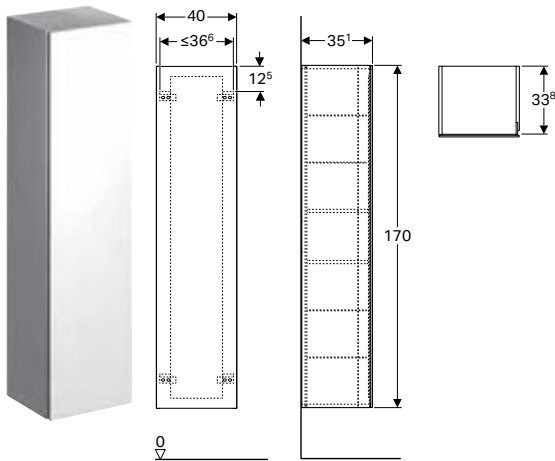

click & scan

Technical data

Product material	High-compressed three-layer chipboard
------------------	---------------------------------------

Scope of delivery

- 4 movable shelves
- Fastening material

Characteristics

- FSC™ C134279 certified
- Wall-hung
- With one door
- Door with soft closing
- With two fixed shelves
- With four movable shelves
- Hinge side left or right
- Moisture-resistant
- Mirror on inside of door
- Delivered preassembled


Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]
500.503.01.1	white / high-gloss coated	40	170	35.1
500.503.00.1 *	greige / matt coated	40	170	35.1
500.503.43.1	scultura grey / wood-textured melamine	40	170	35.1

* Order-based production

Accessories

- Accessory overview – Geberit Xeno² bathroom furniture → p. 533

Geberit Xeno² low cabinet with one drawer

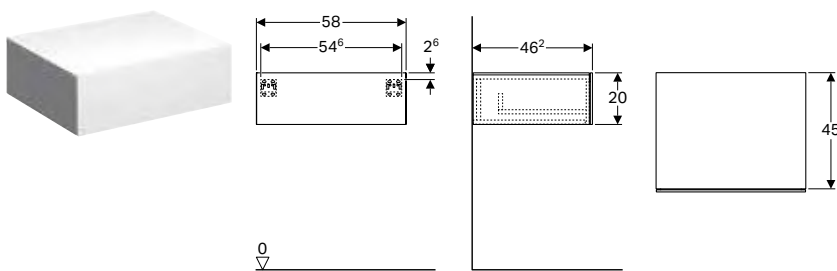

click & scan

Technical data

Product material	High-compressed three-layer chipboard
Drawer load max.	20 kg

Scope of delivery

- Fastening material

Characteristics

- FSC™ C134279 certified
- Wall-hung
- With one drawer
- Opening with push-to-open mechanism
- Moisture-resistant
- Delivered preassembled


Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]
500.507.01.1	white / high-gloss coated	58	20	46.2
500.507.00.1 *	greige / matt coated	58	20	46.2
500.507.43.1	scultura grey / wood-textured melamine	58	20	46.2

* Order-based production

Accessories

- Accessory overview – Geberit Xeno² bathroom furniture → p. 533

Geberit Xeno² low cabinet with two drawers

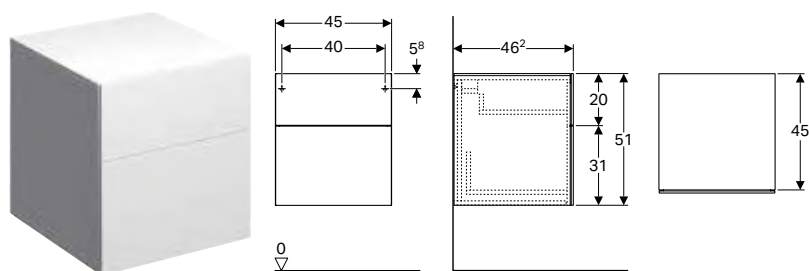

click & scan

Technical data

Product material	High-compressed three-layer chipboard
Drawer load max.	20 kg

Characteristics

- FSC™ C134279 certified
- Wall-hung
- With two drawers
- Opening with push-to-open mechanism
- Moisture-resistant
- Delivered preassembled

Scope of delivery

- Fastening material

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]
500.504.01.1	white / high-gloss coated	45	51	46.2
500.504.00.1 *	greige / matt coated	45	51	46.2
500.504.43.1	scultura grey / wood-textured melamine	45	51	46.2


* Order-based production

Accessories

- Accessory overview – Geberit Xeno² bathroom furniture → p. 533

Mirrors

Geberit Xeno² illuminated mirror

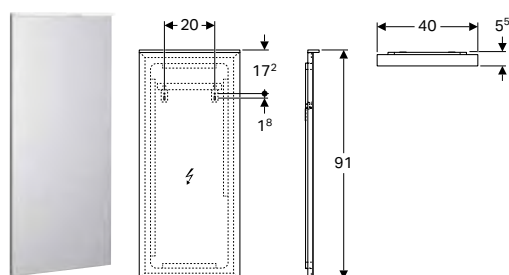

click & scan

Technical data


Degree of protection	IP44
Nominal voltage	100–230 V AC
Mains frequency	50 Hz / 60 Hz
Operating voltage	12 V DC
Output voltage	12 V DC
Product material	Glass
Light source energy efficiency class	F
Light colour	4200 K

Characteristics

- LED lighting
- Heated rear to prevent mirror steaming up
- Touch-sensor switch
- Dimmable
- With memory function for the lighting

Art. no.	Colour / surface	B [cm]	B1 [cm]	H [cm]	T [cm]	Protection class	Power consumption [W]	Power consumption of mirror heating [W]	Luminous flux [lm]
500.520.00.1	brushed aluminium	40	20	91	5.5	I	9.4	18	975

Geberit Xeno² illuminated mirror with direct and indirect lighting

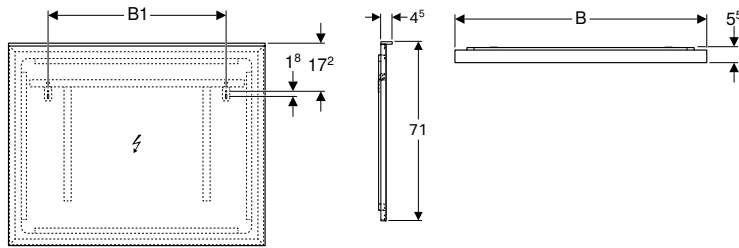

click & scan

Technical data

Degree of protection	IP44
Nominal voltage	100–230 V AC
Mains frequency	50 Hz / 60 Hz
Operating voltage	12 V DC
Output voltage	12 V DC
Product material	Glass
Light source energy efficiency class	F
Light colour	4200 K


Characteristics

- Suitable for all bathroom series
- LED lighting
- Direct and indirect lighting
- Direct lighting, dimmable
- Heated rear to prevent mirror steaming up, when activating direct lighting
- Touch-sensor switch
- With memory function for the lighting

Art. no.	Colour / surface	B1 [cm]	H [cm]	T [cm]	Protec- tion class	Power consumption [W]	Power consumption of mirror heating [W]	Luminous flux [lm]	Luminous flux, indirect [lm]
B / width: 60 cm									
500.521.00.1	brushed aluminium	32.5	71	5.5	I	25	35	1495	1540
B / width: 90 cm									
500.522.00.1	brushed aluminium	62.5	71	5.5	I	38.6	53	2275	1960
B / width: 120 cm									
500.519.00.1	brushed aluminium	71.5	71	5.5	I	46	54	3055	2380
B / width: 140 cm									
500.203.00.1	brushed aluminium	91.5	71	5.5	I	52	54	3575	2660
B / width: 160 cm									
500.204.00.1	brushed aluminium	91.5	71	5.5	I	57.2	88	4095	2940

Accessories

Geberit Xeno² drawer insert, H-partition, for top drawer

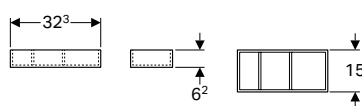

click & scan

Application purposes

- For washbasin cabinets and side cabinets

Technical data


Product material	High-compressed three-layer chipboard
------------------	---------------------------------------

Characteristics

- FSC™ C134279 certified
- H-partition

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]
500.526.00.1	scultura grey / wood-textured melamine	32.3	6.2	15

Geberit Xeno² drawer insert, T-partition, for top drawer

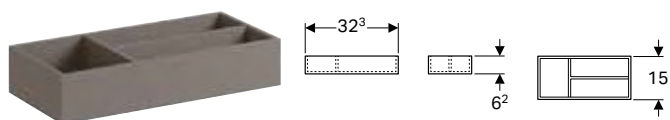

click & scan

Application purposes

- For washbasin cabinets and side cabinets

Characteristics


- FSC™ C134279 certified
- T-partition

Technical data

Product material	High-compressed three-layer chipboard
------------------	---------------------------------------

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]
500.525.00.1	scultura grey / wood-textured melamine	32.3	6.2	15

Geberit Xeno² drawer insert, H-partition, for bottom drawer

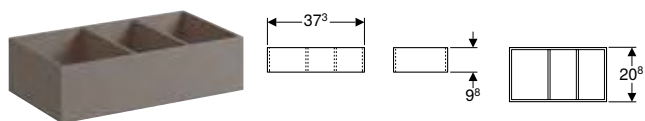

click & scan

Application purposes

- For washbasin cabinets and side cabinets

Characteristics


- FSC™ C134279 certified
- H-partition

Technical data

Product material	High-compressed three-layer chipboard
------------------	---------------------------------------

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]
500.527.00.1	scultura grey / wood-textured melamine	37.3	9.8	20.8

Geberit Xeno² glass shelf

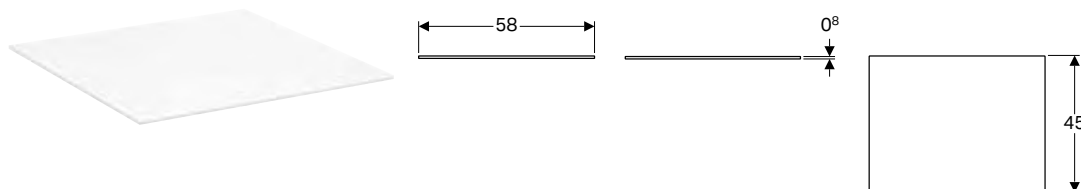

click & scan

Application purposes


- For Xeno² side cabinets with one drawer

Technical data

Product material	Glass
------------------	-------

Art. no.	B [cm]	H [cm]	T [cm]
500.524.00.1	58	0.8	45

Geberit Xeno² glass shelf

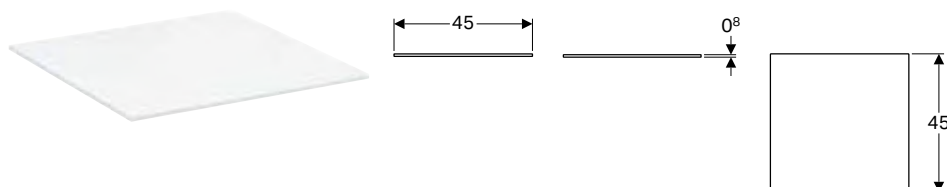

click & scan

Application purposes

- For Xeno² side cabinets with two drawers

Technical data

Product material	Glass
------------------	-------

Art. no.	B [cm]	H [cm]	T [cm]
500.523.00.1	45	0.8	45











Geberit Acanto

Washbasins	548
Assortment overview – Geberit Acanto washbasins and washbasin cabinets	549
Assortment overview – Geberit Acanto washbasin connections, space-saving model	550
Handrinse basins.....	552
Washbasins	553
Double washbasins.....	556
Bathroom furniture	558
Accessory overview – Geberit Acanto bathroom furniture	559
Washbasin cabinets.....	562
Side cabinets	568
Additional furniture.....	575
Accessories.....	576
WCs	580
Accessory overview – Geberit Acanto WC ceramic appliance in combination with connection pipes	580
Wall-hung WCs.....	580
Floor-standing WCs, raised.....	582
WC seats.....	582
Bidets	583
Wall-hung bidets	583
Floor-standing bidets	584

Washbasins

Assortment overview – Geberit Acanto washbasins and washbasin cabinets

Geberit International Sales, version: December 2025

		Handrinse basins					
		40 cm	45 cm				
White, central tap hole, visible overflow			500.636.01.2				
White, without tap hole, visible overflow							
White, right tap hole, without overflow		500.635.01.2					
White, without tap hole, without overflow							
White, left and right tap hole, visible overflow							
White, left and right tap hole, without overflow							
							
		→ p. 552	→ p. 552				
Washbasin, width 40 cm							
Geberit Acanto cabinet for handrinse basin, with one door	503.001.01.1		white	→ p. 562	✓		
	503.001.01.2		White matt	→ p. 562	✓		
	503.001.01.3		White glass	→ p. 562	✓		
	503.001.JH.1		oak	→ p. 562	✓		
	503.001.JK.1		Lava matt	→ p. 562	✓		
	503.001.JK.2		Lava glass	→ p. 562	✓		
	503.001.JR.1		hickory	→ p. 562	✓		
Washbasin, width 45 cm							
Geberit Acanto cabinet for handrinse basin, with one drawer	503.002.01.1		white	→ p. 563		✓	
	503.002.01.2		White matt	→ p. 563		✓	
	503.002.01.3		White glass	→ p. 563		✓	
	503.002.JH.1		oak	→ p. 563		✓	
	503.002.JK.1		Lava matt	→ p. 563		✓	
	503.002.JK.2		Lava glass	→ p. 563		✓	
	503.002.JR.1		hickory	→ p. 563		✓	
Washbasin, width 60 cm							
Geberit Acanto cabinet for washbasin, with one drawer and one internal drawer	503.003.01.1		white	→ p. 564			
	503.003.01.2		White matt	→ p. 564			
	503.003.01.3		White glass	→ p. 564			
	503.003.JH.1		oak	→ p. 564			
	503.003.JK.1		Lava matt	→ p. 564			
	503.003.JK.2		Lava glass	→ p. 564			
	503.003.JR.1		hickory	→ p. 564			
Geberit Acanto cabinet for washbasin, with one drawer and one internal drawer, small projection	503.008.01.1		white	→ p. 566			
	503.008.01.2		White matt	→ p. 566			
	503.008.01.3		White glass	→ p. 566			
	503.008.JH.1		oak	→ p. 566			
	503.008.JK.1		Lava matt	→ p. 566			
	503.008.JK.2		Lava glass	→ p. 566			
	503.008.JR.1		hickory	→ p. 566			
Washbasin, width 75 cm							
Geberit Acanto cabinet for washbasin, with one drawer and one internal drawer	503.004.01.1		white	→ p. 564			
	503.004.01.2		White matt	→ p. 564			
	503.004.01.3		White glass	→ p. 564			
	503.004.JH.1		oak	→ p. 564			
	503.004.JK.1		Lava matt	→ p. 564			
	503.004.JK.2		Lava glass	→ p. 564			
	503.004.JR.1		hickory	→ p. 564			
Geberit Acanto cabinet for washbasin, with one drawer and one internal drawer, small projection	503.009.01.1		white	→ p. 566			
	503.009.01.2		White matt	→ p. 566			
	503.009.01.3		White glass	→ p. 566			
	503.009.JH.1		oak	→ p. 566			
	503.009.JK.1		Lava matt	→ p. 566			
	503.009.JK.2		Lava glass	→ p. 566			
	503.009.JR.1		hickory	→ p. 566			

Geberit International Sales, version: December 2025

		Handrinse basins				
		40 cm	45 cm			
Washbasin, width 90 cm						
Geberit Acanto cabinet for washbasin, with one drawer and one internal drawer	503.005.01.1		white	→ p. 564		
	503.005.01.2		White matt	→ p. 564		
	503.005.01.3		White glass	→ p. 564		
	503.005.JH.1		oak	→ p. 564		
	503.005.JK.1		Lava matt	→ p. 565		
	503.005.JK.2		Lava glass	→ p. 565		
	503.005.JR.1		hickory	→ p. 565		
Washbasin, width 120 cm						
Geberit Acanto cabinet for washbasin, with one drawer and one internal drawer	503.006.01.1		white	→ p. 565		
	503.006.01.2		White matt	→ p. 565		
	503.006.01.3		White glass	→ p. 565		
	503.006.JH.1		oak	→ p. 565		
	503.006.JK.1		Lava matt	→ p. 565		
	503.006.JK.2		Lava glass	→ p. 565		
	503.006.JR.1		hickory	→ p. 565		
Geberit Acanto cabinet for double washbasin, with two drawers and two internal drawers	503.007.01.1		white	→ p. 567		
	503.007.01.2		White matt	→ p. 567		
	503.007.01.3		White glass	→ p. 567		
	503.007.JH.1		oak	→ p. 567		
	503.007.JK.1		Lava matt	→ p. 567		
	503.007.JK.2		Lava glass	→ p. 567		
	503.007.JR.1		hickory	→ p. 567		

✓ Compatible

Assortment overview – Geberit Acanto washbasin connections, space-saving model

Geberit International Sales, version: December 2025

D, ø / outer diameter (mm)	Washbasins with cabinet					Double washbasins with cabinet			
	With overflow hole			Without overflow hole		With overflow hole			
	For 1 deck-mounted tap	For 2 deck-mounted taps	For wall-mounted taps	For 2 deck-mounted taps	For wall-mounted taps	For deck-mounted taps	For wall-mounted taps		
Washbasin connection, dammable									
152.072.21.1 Geberit washbasin drain, space-saving model, slim design, with external waste plug and lever actuation		32 mm	✓	✓ ¹⁾	✓ ¹⁾			✓	✓ ¹⁾
152.074.21.1 Geberit washbasin drain, space-saving model, slim design, with external waste plug and lever actuation		40 mm	✓	✓ ¹⁾	✓ ¹⁾			✓	✓ ¹⁾
152.073.21.1 Geberit washbasin drain, space-saving model, slim design, with external waste plug with push actuation		32 mm	✓	✓	✓			✓	✓
152.075.21.1 Geberit washbasin drain, space-saving model, slim design, with external waste plug with push actuation		40 mm	✓	✓	✓			✓	✓
Washbasin connection, not dammable									
152.091.21.1 Geberit washbasin drain, space-saving model, slim design, with free outlet and valve cover		32 mm				✓	✓		
152.092.21.1 Geberit washbasin drain, space-saving model, slim design, with free outlet and valve cover		40 mm				✓	✓		

✓ Compatible


¹⁾ To be ordered additionally: 245.900.20.1

	Washbasins				Washbasins, small projection		Double washbasins
	60 cm	75 cm	90 cm	120 cm	60 cm	75 cm	120 cm
			✓				
			✓				
			✓				
			✓				
			✓				
			✓				
			✓				
				✓			
				✓			
				✓			
				✓			
				✓			
				✓			
							✓
							✓
							✓
							✓
							✓
							✓
							✓

Geberit Acanto

Handrinse basins

Geberit Acanto handrinse basin, right tap hole

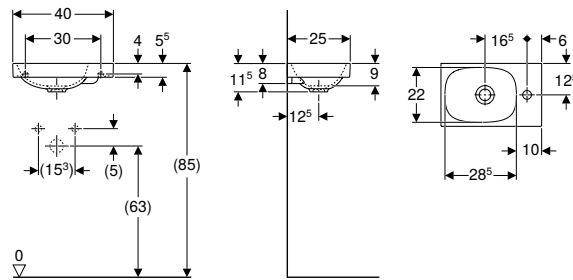

Technical data

Product material	Fine fireclay
------------------	---------------

Characteristics

- Can be installed with a washbasin cabinet
- Asymmetrical

Art. no.	Colour / surface	Tap hole	Overflow	H [cm]	T [cm]
B / width: 40 cm					
500.635.01.2	white	right	without	11.5	25


Can be combined with

- Geberit Acanto cabinet for handrinse basin, with one door → p. 562

Accessories

- Geberit waste outlet with free outlet and valve cover
- Geberit waste outlet with free outlet, screen
- Geberit dip tube trap for washbasin, horizontal outlet
- Geberit dip tube trap for washbasin, space-saving model, horizontal outlet
- Geberit fastening material for handrinse basin → p. 1035

Geberit Acanto handrinse basin

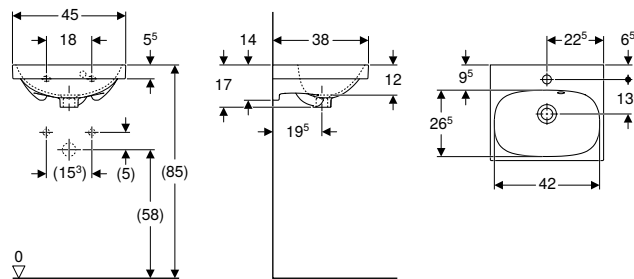

Technical data

Product material	Fine fireclay
------------------	---------------

Characteristics

- Can be installed with a washbasin cabinet
- Asymmetrical overflow

Art. no.	Colour / surface	Tap hole	Overflow	H [cm]	T [cm]
B / width: 45 cm					
500.636.01.2	white	centred	visible, symmetrical	17	38

Can be combined with

- Geberit Acanto cabinet for handrinse basin, with one drawer → p. 563


Accessories

- Geberit dip tube trap for washbasin, horizontal outlet
- Geberit dip tube trap for washbasin, space-saving model, horizontal outlet
- Geberit fastening material for handrinse basin → p. 1035

Washbasins

Mix & Match

Geberit Acanto washbasin

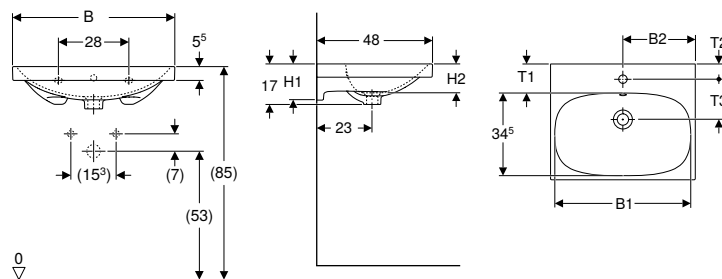

click & scan

Technical data

Product material	Fine fireclay
------------------	---------------

Characteristics

- Can be installed with a washbasin cabinet

Art. no.	Colour / surface	Mix & Match	Tap hole	Overflow	B1 [cm]	B2 [cm]	Cabinet width [cm]	H [cm]	H1 [cm]	H2 [cm]	T [cm]	T1 [cm]	T2 [cm]	T3 [cm]	Fastening points
B / width: 60 cm															
500.620.01.2	white	Yes	centred	visible, symmetrical	57	60	59.5	17	15	12	48	11.5	6.5	16.5	2
B / width: 120 cm															
501.880.00.1	white	Yes	left and right	visible, symmetrical	117	30	119	17	15.5	13	48	12	6	17	4
501.880.00.5 *	white	Yes	left and right	without	117	30	119	17	15.5	13	48	12	6	17	4
501.880.00.3 *	white	Yes	without	visible, symmetrical	117		119	17	15.5	13	48	12			4
501.880.00.7 *	white	Yes	without	without	117		119	17	15.5	13	48	12			4

* Order-based production

Can be combined with

- Geberit iCon cabinet for washbasin, with one drawer → p. 614
- Geberit iCon cabinet for washbasin, with two drawers → p. 616
- Geberit Acanto cabinet for washbasin, with one drawer and one internal drawer → p. 564
- Geberit ONE cabinet for washbasin, with two drawers → p. 486
- Geberit ONE cabinet for washbasin, with one drawer → p. 484

Accessories




- Geberit dip tube trap for washbasin, horizontal outlet
- Geberit washbasin drain, space-saving model, slim design, with external waste plug with push actuation
- Geberit washbasin drain, space-saving model, slim design, with external waste plug and lever actuation
- Geberit washbasin drain, space-saving model, slim design, with free outlet and valve cover
- Geberit fastening material for washbasin → p. 1035



- A Geberit washbasin connector, space-saving model is required for the installation of the washbasin with base cabinet. See 'Assortment overview – Geberit Acanto washbasin connectors space-saving model' or online catalogue, washbasin accessories
- Mix & Match: Articles of the same width can be freely combined in the Geberit ONE, Acanto and iCon series

Mix & Match

Geberit Acanto washbasin with shelf surface

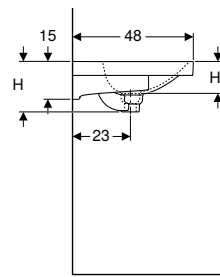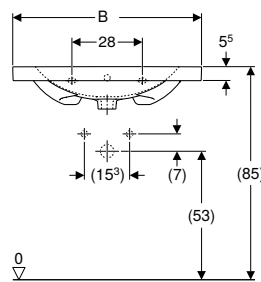

Technical data

Product material	Fine fireclay
------------------	---------------

Characteristics

- Can be installed with a washbasin cabinet
- With shelf surface

Art. no.	Colour / surface	Mix & Match	Tap hole	Overflow	B1 [cm]	Cabinet width [cm]	H [cm]	H1 [cm]	T [cm]	T1 [cm]	Fastening points	Shelf space
B / width: 75 cm												
500.622.01.2	white	Yes	centred	visible, symmetrical	37.5	74	19.5	12	48	12	2	on both sides
B / width: 90 cm												
500.623.01.2	white	Yes	centred	visible, symmetrical	45	89	16.5	13.5	48	11.5	4	on both sides
500.624.01.2	white	Yes	without	visible, symmetrical		89	16.5	13.5	48	11.5	4	on both sides

Can be combined with

- Geberit iCon cabinet for washbasin, with one drawer → p. 614
- Geberit iCon cabinet for washbasin, with two drawers → p. 616
- Geberit ONE cabinet for washbasin, with one drawer → p. 484
- Geberit Acanto cabinet for washbasin, with one drawer and one internal drawer → p. 564
- Geberit ONE cabinet for washbasin, with two drawers → p. 486


Accessories

- Geberit dip tube trap for washbasin, horizontal outlet
- Geberit washbasin drain, space-saving model, slim design, with external waste plug with push actuation
- Geberit washbasin drain, space-saving model, slim design, with external waste plug and lever actuation
- Geberit washbasin drain, space-saving model, slim design, with free outlet and valve cover
- Geberit fastening material for washbasin → p. 1035



- A Geberit washbasin connector, space-saving model is required for the installation of the washbasin with base cabinet. See 'Assortment overview – Geberit Acanto washbasin connectors space-saving model' or online catalogue, washbasin accessories
- Mix & Match: Articles of the same width can be freely combined in the Geberit ONE, Acanto and iCon series

Geberit Acanto washbasin, small projection

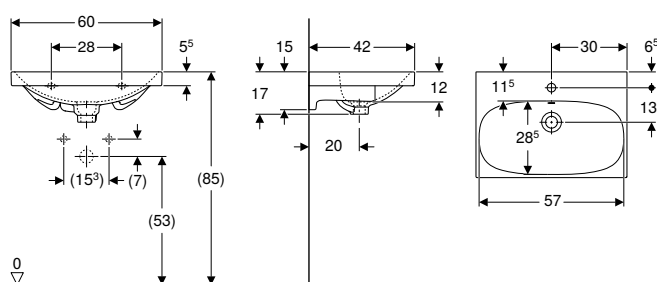

Technical data

Product material	Fine fireclay
------------------	---------------

Characteristics

- Can be installed with a washbasin cabinet
- Small projection

Art. no.	Colour / surface	Tap hole	Overflow	Cabinet width	H	T
				[cm]	[cm]	[cm]

B / width: 60 cm

500.631.01.2	white	centred	visible, symmetrical	59.5	17	42
--------------	-------	---------	----------------------	------	----	----

Can be combined with

- Geberit Acanto cabinet for washbasin, with one drawer and one internal drawer, small projection → p. 566


Accessories

- Geberit dip tube trap for washbasin, horizontal outlet
- Geberit washbasin drain, space-saving model, slim design, with external waste plug with push actuation
- Geberit washbasin drain, space-saving model, slim design, with external waste plug and lever actuation
- Geberit washbasin drain, space-saving model, slim design, with free outlet and valve cover
- Geberit fastening material for washbasin → p. 1035



- A Geberit washbasin connector, space-saving model is required for the installation of the washbasin with base cabinet. See 'Assortment overview – Geberit Acanto washbasin connectors space-saving model' or online catalogue, washbasin accessories

Geberit Acanto washbasin, small projection, with shelf surface

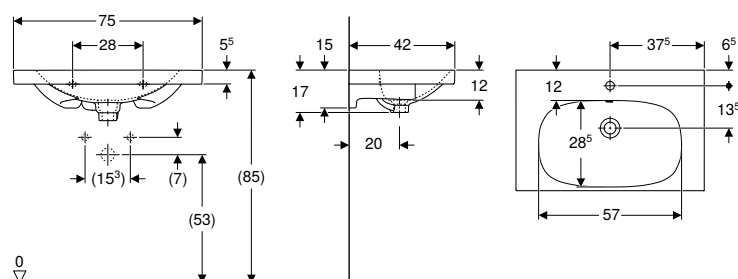

Technical data

Product material	Fine fireclay
------------------	---------------

Characteristics

- Can be installed with a washbasin cabinet
- Small projection
- With shelf surface

Art. no.	Colour / surface	Tap hole	Overflow	Cabinet width	H	T	Shelf space
				[cm]	[cm]	[cm]	

B / width: 75 cm

500.632.01.2	white	centred	visible, symmetrical	74	17	42	on both sides
--------------	-------	---------	----------------------	----	----	----	---------------

Can be combined with

- Geberit Acanto cabinet for washbasin, with one drawer and one internal drawer, small projection → p. 566

Accessories

- Geberit dip tube trap for washbasin, horizontal outlet
- Geberit washbasin drain, space-saving model, slim design, with external waste plug with push actuation
- Geberit washbasin drain, space-saving model, slim design, with external waste plug and lever actuation
- Geberit washbasin drain, space-saving model, slim design, with free outlet and valve cover
- Geberit fastening material for washbasin → p. 1035




- A Geberit washbasin connector, space-saving model is required for the installation of the washbasin with base cabinet. See 'Assortment overview – Geberit Acanto washbasin connectors space-saving model' or online catalogue, washbasin accessories

Double washbasins

Mix & Match

Geberit Acanto double washbasin

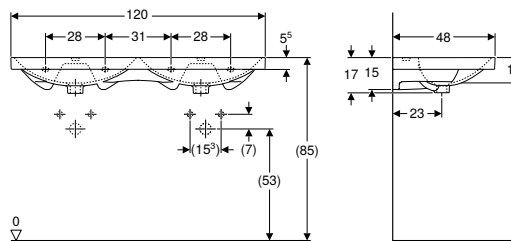

click & scan

Technical data

Product material	Fine fireclay
------------------	---------------

Characteristics

- Can be installed with a washbasin cabinet

Art. no.	Colour / surface	Mix & Match	Tap hole	Overflow	H [cm]	T [cm]
----------	------------------	-------------	----------	----------	--------	--------

B / width: 120 cm

500.627.01.2	white	Yes	centred	visible, symmetrical	17	48
500.628.01.2	white	Yes	without	visible, symmetrical	17	48

Can be combined with

- Geberit Acanto cabinet for double washbasin, with two drawers and two internal drawers → p. 567
- Geberit iCon cabinet for double washbasin, with two drawers → p. 619
- Geberit iCon cabinet for double washbasin, with four drawers → p. 620

Accessories

- Geberit dip tube trap for washbasin, horizontal outlet
- Geberit washbasin drain, space-saving model, slim design, with external waste plug with push actuation
- Geberit washbasin drain, space-saving model, slim design, with external waste plug and lever actuation
- Geberit washbasin drain, space-saving model, slim design, with free outlet and valve cover
- Geberit fastening material for washbasin → p. 1035









- A Geberit washbasin connector, space-saving model is required for the installation of the washbasin with base cabinet. See 'Assortment overview – Geberit Acanto washbasin connectors space-saving model' or online catalogue, washbasin accessories
- Mix & Match: Articles of the same width can be freely combined in the Geberit ONE, Acanto and iCon series

Bathroom furniture

Accessory overview – Geberit Acanto bathroom furniture


Geberit International Sales, December 2025







	Towel rail		Drawer insert			
			60 cm	75 cm	90 cm	120 cm
						
	502.328.00.1	503.012.01.1	502.349.00.1	502.350.00.1	502.351.00.1	502.353.00.1
	502.328.01.3	503.012.14.1				
	502.328.JK.1	503.012.21.1				
	502.328.JL.1	503.012.JK.1				
	502.328.00.1					
Washbasin, width	→ p. 505	→ p. 505	→ p. 505	→ p. 505	→ p. 505	→ p. 505

Cabinets for handrinse basins

Geberit Acanto cabinet for handrinse basin, with one door		40 cm	503.001.01.1	white → p. 562							
			503.001.01.2	White matt → p. 562							
			503.001.01.3	White glass → p. 562							
			503.001.JH.1	oak → p. 562							
			503.001.JK.1	Lava matt → p. 562							
			503.001.JK.2	Lava glass → p. 562							
			503.001.JR.1	hickory → p. 562							
Geberit Acanto cabinet for handrinse basin, with one drawer		45 cm	503.002.01.1	white → p. 563							
			503.002.01.2	White matt → p. 563							
			503.002.01.3	White glass → p. 563							
			503.002.JH.1	oak → p. 563							
			503.002.JK.1	Lava matt → p. 563							
			503.002.JK.2	Lava glass → p. 563							
			503.002.JR.1	hickory → p. 563							


Cabinets for washbasin

Geberit Acanto cabinet for washbasin, with one drawer and one internal drawer		60 cm	503.003.01.1	white → p. 564	✓	✓	✓			
			503.003.01.2	White matt → p. 564	✓	✓	✓			
			503.003.01.3	White glass → p. 564	✓	✓	✓			
			503.003.JH.1	oak → p. 564	✓	✓	✓			
			503.003.JK.1	Lava matt → p. 564	✓	✓	✓			
			503.003.JK.2	Lava glass → p. 564	✓	✓	✓			
			503.003.JR.1	hickory → p. 564	✓	✓	✓			
			75 cm	503.004.01.1	white → p. 564	✓	✓		✓	
		503.004.01.2		White matt → p. 564	✓	✓		✓		
		503.004.01.3		White glass → p. 564	✓	✓		✓		
		503.004.JH.1		oak → p. 564	✓	✓		✓		
		503.004.JK.1		Lava matt → p. 564	✓	✓		✓		
		503.004.JK.2		Lava glass → p. 564	✓	✓		✓		
		503.004.JR.1		hickory → p. 564	✓	✓		✓		
		90 cm		503.005.01.1	white → p. 564	✓	✓			✓
			503.005.01.2	White matt → p. 564	✓	✓			✓	
			503.005.01.3	White glass → p. 564	✓	✓			✓	
			503.005.JH.1	oak → p. 564	✓	✓			✓	
			503.005.JK.1	Lava matt → p. 565	✓	✓			✓	
			503.005.JK.2	Lava glass → p. 565	✓	✓			✓	
			503.005.JR.1	hickory → p. 565	✓	✓			✓	
			120 cm	503.006.01.1	white → p. 565	✓	✓			
		503.006.01.2		White matt → p. 565	✓	✓				✓
		503.006.01.3		White glass → p. 565	✓	✓				✓
503.006.JH.1	oak → p. 565	✓		✓				✓		
503.006.JK.1	Lava matt → p. 565	✓		✓				✓		
503.006.JK.2	Lava glass → p. 565	✓		✓				✓		
503.006.JR.1	hickory → p. 565	✓		✓				✓		

				Towel rail		Drawer insert			
						60 cm	75 cm	90 cm	120 cm
									
				502.328.00.1	503.012.01.1	502.349.00.1	502.350.00.1	502.351.00.1	502.353.00.1
				502.328.01.3	503.012.14.1				
				502.328.JK.1	503.012.21.1				
				502.328.JL.1	503.012.JK.1				
				502.328.00.1					
Washbasin, width				→ p. 505	→ p. 505	→ p. 505	→ p. 505	→ p. 505	→ p. 505
Geberit Acanto cabinet for washbasin, with one drawer and one internal drawer, small projection	503.008.01.1	60 cm	white	→ p. 566					
	503.008.01.2		White matt	→ p. 566					
	503.008.01.3		White glass	→ p. 566					
	503.008.JH.1		oak	→ p. 566					
	503.008.JK.1		Lava matt	→ p. 566					
	503.008.JK.2		Lava glass	→ p. 566					
	503.008.JR.1	hickory	→ p. 566						
	503.009.01.1	75 cm	white	→ p. 566					
	503.009.01.2		White matt	→ p. 566					
	503.009.01.3		White glass	→ p. 566					
	503.009.JH.1		oak	→ p. 566					
	503.009.JK.1		Lava matt	→ p. 566					
	503.009.JK.2		Lava glass	→ p. 566					
	503.009.JR.1	hickory	→ p. 566						
Cabinets for double washbasin									
Geberit Acanto cabinet for double washbasin, with two drawers and two internal drawers	503.007.01.1	120 cm	white	→ p. 567	✓	✓	✓		
	503.007.01.2		White matt	→ p. 567	✓	✓	✓		
	503.007.01.3		White glass	→ p. 567	✓	✓	✓		
	503.007.JH.1		oak	→ p. 567	✓	✓	✓		
	503.007.JK.1		Lava matt	→ p. 567	✓	✓	✓		
	503.007.JK.2		Lava glass	→ p. 567	✓	✓	✓		
	503.007.JR.1		hickory	→ p. 567	✓	✓	✓		
Side cabinets									
Geberit Acanto cabinet for double washbasin, with two drawers and two internal drawers	503.010.01.1		white	→ p. 569	✓				
	503.010.01.2		White matt	→ p. 569	✓				
	503.010.01.3		White glass	→ p. 569	✓				
	503.010.JH.1		oak	→ p. 569	✓				
	503.010.JK.1		Lava matt	→ p. 569	✓				
	503.010.JK.2		Lava glass	→ p. 569	✓				
	503.010.JR.1		hickory	→ p. 569	✓				
✓ Compatible									

Washbasin cabinets

Geberit Acanto cabinet for handrinse basin, with one door

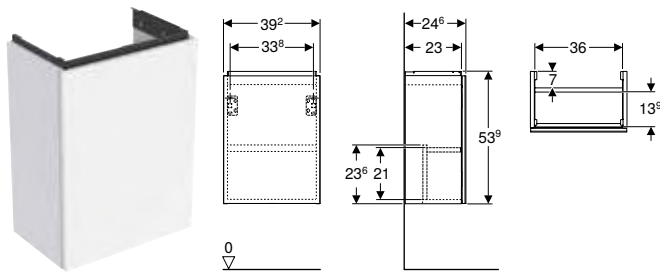

click & scan

Technical data

Product material	High-compressed three-layer chipboard
------------------	---------------------------------------

Scope of delivery

- Cabinet for handrinse basin
- Fastening material

Characteristics

- FSC™ C134279 certified
- Wall-hung
- With one door
- Hinge side left or right
- Opening with push-to-open mechanism
- Door with soft closing
- Moisture-resistant
- Delivered preassembled

Art. no.	Colour / surface	B	H	T
		[cm]	[cm]	[cm]

Washbasin width: 40 cm

503.001.01.1	Body, Front: white / high-gloss coated	39.2	53.9	24.6
503.001.01.2	Body: white / high-gloss coated Front: white / glossy glass	39.2	53.9	24.6
503.001.01.3 *	Body, Front: white / matt coated	39.2	53.9	24.6
503.001.JH.1	Body, Front: oak / wood-textured melamine	39.2	53.9	24.6
503.001.JK.1	Body, Front: lava / matt coated	39.2	53.9	24.6
503.001.JK.2	Body: lava / matt coated Front: lava / glossy glass	39.2	53.9	24.6
503.001.JR.1 *	Body, Front: hickory / wood-textured melamine	39.2	53.9	24.6

* Order-based production


Can be combined with

- Geberit Acanto handrinse basin, right tap hole → p. 552

Accessories

- Accessory overview – Geberit Acanto bathroom furniture → p. 559

Geberit Acanto cabinet for handrinse basin, with one drawer

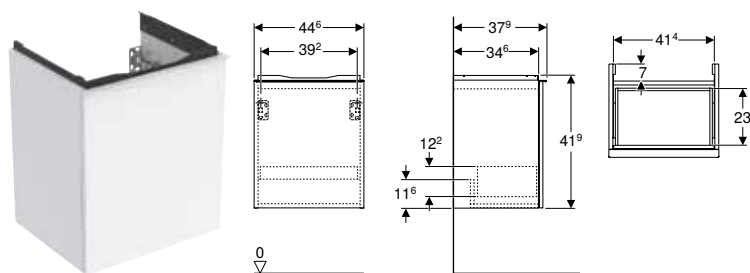

click & scan

Technical data

Product material	High-compressed three-layer chipboard
Drawer load max.	20 kg

Scope of delivery

- Cabinet for handrinse basin
- Fastening material

Characteristics

- FSC™ C134279 certified
- Wall-hung
- With one drawer
- Drawer with soft closing
- Drawer without trap cutout
- Opening with handle
- Exchangeable handle
- Moisture-resistant
- Delivered preassembled

Art. no.	Colour / surface	B H T		
		[cm]	[cm]	[cm]

Washbasin width: 45 cm

503.002.01.1	Body, Front: white / high-gloss coated Handle: white / matt powder-coated	44.6	41.9	37.9
503.002.01.2	Body: white / high-gloss coated Front: white / glossy glass Handle: white / matt powder-coated	44.6	41.9	37.9
503.002.01.3 *	Body, Front: white / matt coated Handle: white / matt powder-coated	44.6	41.9	37.9
503.002.JH.1	Body, Front: oak / wood-textured melamine Handle: lava / matt powder-coated	44.6	41.9	37.9
503.002.JK.1	Body, Front: lava / matt coated Handle: lava / matt powder-coated	44.6	41.9	37.9
503.002.JK.2	Body: lava / matt coated Front: lava / glossy glass Handle: lava / matt powder-coated	44.6	41.9	37.9
503.002.JR.1 *	Body, Front: hickory / wood-textured melamine Handle: lava / matt powder-coated	44.6	41.9	37.9

* Order-based production

Can be combined with


- Geberit Acanto handrinse basin → p. 552

Accessories

- Accessory overview – Geberit Acanto bathroom furniture → p. 559

Mix & Match

Geberit Acanto cabinet for washbasin, with one drawer and one internal drawer

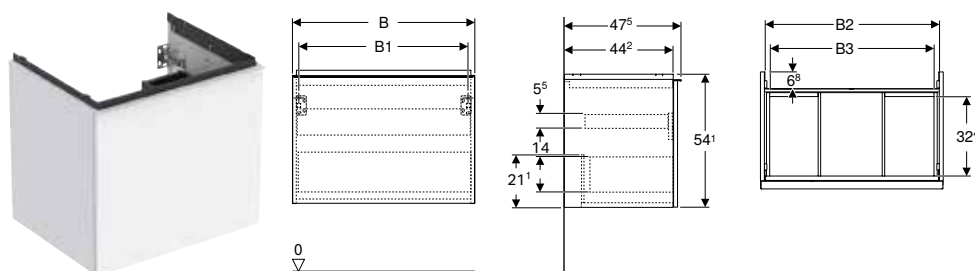

Technical data

Product material	High-compressed three-layer chipboard
Drawer load max.	20 kg

Scope of delivery

- Cabinet for washbasin
- Fastening material

Characteristics

- FSC™ C134279 certified
- Wall-hung
- With one drawer
- With one internal drawer
- Opening with handle
- Exchangeable handle
- Drawer with soft closing
- Drawer without trap cutout
- Moisture-resistant
- Delivered preassembled

Art. no.	Colour / surface	Mix & Match	B [cm]	B1 [cm]	B2 [cm]	B3 [cm]	H [cm]	T [cm]
Washbasin width: 60 cm								
503.003.01.1	Body, Front: white / high-gloss coated Handle: white / matt powder-coated	Yes	59.2	53.8	56	51.8	54.1	47.5
503.003.01.2	Body: white / high-gloss coated Front: white / glossy glass Handle: white / matt powder-coated	Yes	59.2	53.8	56	51.8	54.1	47.5
503.003.01.3 *	Body, Front: white / matt coated Handle: white / matt powder-coated	Yes	59.2	53.8	56	51.8	54.1	47.5
503.003.JH.1	Body, Front: oak / wood-textured melamine Handle: lava / matt powder-coated	Yes	59.2	53.8	56	56	54.1	47.5
503.003.JK.1	Body, Front: lava / matt coated Handle: lava / matt powder-coated	Yes	59.2	53.8	56	51.8	54.1	47.5
503.003.JK.2	Body: lava / matt coated Front: lava / glossy glass Handle: lava / matt powder-coated	Yes	59.2	53.8	56	51.8	54.1	47.5
503.003.JR.1 *	Body, Front: hickory / wood-textured melamine Handle: lava / matt powder-coated	Yes	59.2	53.8	56	51.8	54.1	47.5
Washbasin width: 75 cm								
503.004.01.1	Body, Front: white / high-gloss coated Handle: white / matt powder-coated	Yes	74	68.8	70.8	66.5	54.1	47.5
503.004.01.2	Body: white / high-gloss coated Front: white / glossy glass Handle: white / matt powder-coated	Yes	74	68.8	70.8	66.5	54.1	47.5
503.004.01.3 *	Body, Front: white / matt coated Handle: white / matt powder-coated	Yes	74	68.8	70.8	66.5	54.1	47.5
503.004.JH.1	Body, Front: oak / wood-textured melamine Handle: lava / matt powder-coated	Yes	74	68.8	70.8	66.5	54.1	47.5
503.004.JK.1	Body, Front: lava / matt coated Handle: lava / matt powder-coated	Yes	74	68.8	70.8	66.5	54.1	47.5
503.004.JK.2	Body: lava / matt coated Front: lava / glossy glass Handle: lava / matt powder-coated	Yes	74	68.8	70.8	66.5	54.1	47.5
503.004.JR.1 *	Body, Front: hickory / wood-textured melamine Handle: lava / matt powder-coated	Yes	74	68.8	70.8	66.5	54.1	47.5
Washbasin width: 90 cm								
503.005.01.1	Body, Front: white / high-gloss coated Handle: white / matt powder-coated	Yes	88.8	83.4	85.6	81.4	54.1	47.5
503.005.01.2	Body: white / high-gloss coated Front: white / glossy glass Handle: white / matt powder-coated	Yes	88.8	83.4	85.6	81.4	54.1	47.5
503.005.01.3 *	Body, Front: white / matt coated Handle: white / matt powder-coated	Yes	88.8	83.4	85.6	81.4	54.1	47.5
503.005.JH.1	Body, Front: oak / wood-textured melamine Handle: lava / matt powder-coated	Yes	88.8	83.4	85.6	81.4	54.1	47.5

* Order-based production

Art. no.	Colour / surface	Mix & Match	B [cm]	B1 [cm]	B2 [cm]	B3 [cm]	H [cm]	T [cm]
503.005.JK.1	Body, Front: lava / matt coated Handle: lava / matt powder-coated	Yes	88.8	83.4	85.6	81.4	54.1	47.5
503.005.JK.2	Body: lava / matt coated Front: lava / glossy glass Handle: lava / matt powder-coated	Yes	88.8	83.4	85.6	81.4	54.1	47.5
503.005.JR.1 *	Body, Front: hickory / wood-textured melamine Handle: lava / matt powder-coated	Yes	88.8	83.4	85.6	81.4	54.1	47.5
Washbasin width: 120 cm								
503.006.01.1	Body, Front: white / high-gloss coated Handle: white / matt powder-coated	Yes	118.4	113	115.2	110	54.1	47.5
503.006.01.2	Body: white / high-gloss coated Front: white / glossy glass Handle: white / matt powder-coated	Yes	118.4	113	115.2	110	54.1	47.5
503.006.01.3 *	Body, Front: white / matt coated Handle: white / matt powder-coated	Yes	118.4	113	115.2	110	54.1	47.5
503.006.JH.1	Body, Front: oak / wood-textured melamine Handle: lava / matt powder-coated	Yes	118.4	113	115.2	110	54.1	47.5
503.006.JK.1	Body, Front: lava / matt coated Handle: lava / matt powder-coated	Yes	118.4	113	115.2	110	54.1	47.5
503.006.JK.2	Body: lava / matt coated Front: lava / glossy glass Handle: lava / matt powder-coated	Yes	118.4	113	115.2	113	54.1	47.5
503.006.JR.1 *	Body, Front: hickory / wood-textured melamine Handle: lava / matt powder-coated	Yes	118.4	113	115.2	110	54.1	47.5

* Order-based production

Can be combined with

- Geberit Acanto low cabinet with one drawer and one internal drawer → p. 569
- Geberit iCon Light washbasin → p. 600
- Geberit iCon Light washbasin with shelf surface → p. 601
- Geberit iCon vanity basin → p. 605
- Geberit Acanto washbasin → p. 553
- Geberit Acanto washbasin with shelf surface → p. 554
- Geberit ONE vanity basin → p. 468
- Geberit ONE lay-on washbasin, rectangular → p. 477
- Geberit ONE lay-on washbasin, bowl shape → p. 475
- Geberit ONE lay-on washbasin, rectangular, CleanDrain → p. 476
- Geberit ONE lay-on washbasin, bowl shape, CleanDrain → p. 474
- Geberit ONE vanity basin CleanDrain → p. 465
- Geberit ONE vanity basin, CleanDrain, right shelf surface → p. 466
- Geberit ONE vanity basin, CleanDrain, left shelf surface → p. 467
- Geberit ONE washbasin CleanDrain → p. 461
- Geberit ONE washbasin CleanDrain, right shelf surface → p. 462
- Geberit ONE washbasin CleanDrain, left shelf surface → p. 463
- Geberit ONE washbasin → p. 464
- Geberit iCon washbasin → p. 599


Accessories

- Accessory overview – Geberit Acanto bathroom furniture → p. 559



- A Geberit washbasin connector, space-saving model is required for the installation of the base cabinet. See assortment overview washbasin series or online catalogue, washbasin accessories
- Mix & Match: Articles of the same width can be freely combined in the Geberit ONE, Acanto and iCon series

Geberit Acanto cabinet for washbasin, with one drawer and one internal drawer, small projection

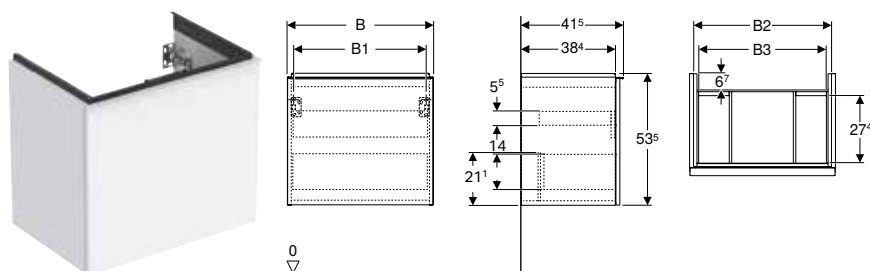

click & scan

Technical data

Product material	High-compressed three-layer chipboard
Drawer load max.	20 kg

Scope of delivery

- Cabinet for washbasin
- Fastening material

Characteristics

- FSC™ C134279 certified
- Wall-hung
- With one drawer
- With one internal drawer
- Opening with handle
- Exchangeable handle
- Drawer with soft closing
- Drawer without trap cutout
- Small projection
- Moisture-resistant
- Delivered preassembled

Art. no.	Colour / surface	B	B1	B2	B3	H	T
		[cm]	[cm]	[cm]	[cm]	[cm]	[cm]
Washbasin width: 60 cm							
503.008.01.1	Body, Front: white / high-gloss coated Handle: white / matt powder-coated	59.2	53.8	56	51.9	53.5	41.5
503.008.01.2	Body: white / high-gloss coated Front: white / glossy glass Handle: white / matt powder-coated	59.2	53.8	56	51.9	53.5	41.5
503.008.01.3 *	Body, Front: white / matt coated Handle: white / matt powder-coated	59.2	53.8	56	51.9	53.5	41.5
503.008.JH.1	Body, Front: oak / wood-textured melamine Handle: lava / matt powder-coated	59.2	53.8	56	51.9	53.5	41.5
503.008.JK.1	Body, Front: lava / matt coated Handle: lava / matt powder-coated	59.2	53.8	56	51.9	53.5	41.5
503.008.JK.2	Body: lava / matt coated Front: lava / glossy glass Handle: lava / matt powder-coated	59.2	53.8	56	51.9	53.5	41.5
503.008.JR.1 *	Body, Front: hickory / wood-textured melamine Handle: lava / matt powder-coated	59.2	53.8	56	51.9	53.5	41.5
Washbasin width: 75 cm							
503.009.01.1	Body, Front: white / high-gloss coated Handle: white / matt powder-coated	74	68	70.8	66.7	53.5	41.5
503.009.01.2	Body: white / high-gloss coated Front: white / glossy glass Handle: white / matt powder-coated	74	68	70.8	66.7	53.5	41.5
503.009.01.3 *	Body, Front: white / matt coated Handle: white / matt powder-coated	74	68	70.8	66.7	53.5	41.5
503.009.JH.1	Body, Front: oak / wood-textured melamine Handle: lava / matt powder-coated	74	68	70.8	66.7	53.5	41.5
503.009.JK.1	Body, Front: lava / matt coated Handle: lava / matt powder-coated	74	68	70.8	66.7	53.5	41.5
503.009.JK.2	Body: lava / matt coated Front: lava / glossy glass Handle: lava / matt powder-coated	74	68	70.8	66.7	53.5	41.5
503.009.JR.1 *	Body, Front: hickory / wood-textured melamine Handle: lava / matt powder-coated	74	68	70.8	66.7	53.5	41.5

* Order-based production

Can be combined with

- Geberit Acanto washbasin, small projection → p. 555
- Geberit Acanto washbasin, small projection, with shelf surface → p. 555

Accessories




- Accessory overview – Geberit Acanto bathroom furniture → p. 559



- A Geberit washbasin connector, space-saving model is required for the installation of the base cabinet. See assortment overview washbasin series or online catalogue, washbasin accessories

Mix & Match

Geberit Acanto cabinet for double washbasin, with two drawers and two internal drawers

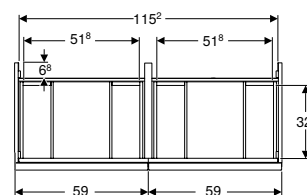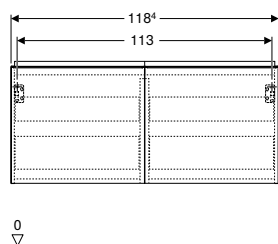

Technical data

Product material	High-compressed three-layer chipboard
Drawer load max.	20 kg

Scope of delivery

- Cabinet for double washbasin
- Fastening material

Characteristics

- FSC™ C134279 certified
- Wall-hung
- With two drawers
- With two internal drawers
- Opening with handle
- Exchangeable handle
- Drawer with soft closing
- Drawer without trap cutout
- Moisture-resistant
- Delivered preassembled

Art. no.	Colour / surface	Mix & Match	B [cm]	H [cm]	T [cm]
Washbasin width: 120 cm					
503.007.01.1	Body, Front: white / high-gloss coated Handle: white / matt powder-coated	Yes	118.4	54.1	47.5
503.007.01.2	Body: white / high-gloss coated Front: white / glossy glass Handle: white / matt powder-coated	Yes	118.4	54.1	47.5
503.007.01.3 *	Body, Front: white / matt coated Handle: white / matt powder-coated	Yes	118.4	54.1	47.5
503.007.JH.1	Body, Front: oak / wood-textured melamine Handle: lava / matt powder-coated	Yes	118.4	54.1	47.5
503.007.JK.1	Body, Front: lava / matt coated Handle: lava / matt powder-coated	Yes	118.4	54.1	47.5
503.007.JK.2	Body: lava / matt coated Front: lava / glossy glass Handle: lava / matt powder-coated	Yes	118.4	54.1	47.5
503.007.JR.1 *	Body, Front: hickory / wood-textured melamine Handle: lava / matt powder-coated	Yes	118.4	54.1	47.5

* Order-based production

Can be combined with

- Geberit Acanto low cabinet with one drawer and one internal drawer → p. 569
- Geberit iCon Light double washbasin → p. 603
- Geberit Acanto double washbasin → p. 556
- Geberit iCon double washbasin → p. 602

Accessories


- Accessory overview – Geberit Acanto bathroom furniture → p. 559



- A Geberit washbasin connector, space-saving model is required for the installation of the base cabinet. See assortment overview washbasin series or online catalogue, washbasin accessories
- Mix & Match: Articles of the same width can be freely combined in the Geberit ONE, Acanto and iCon series

Side cabinets

Geberit tall cabinet with two cargoes

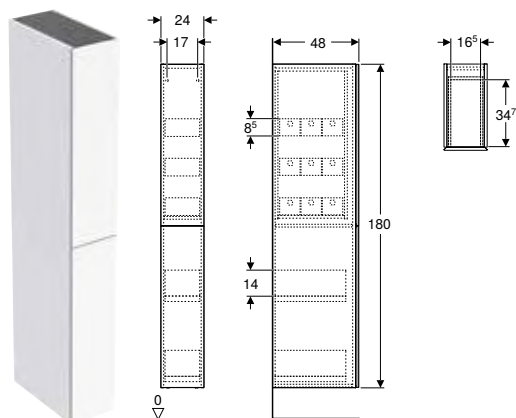

click & scan

Application purposes

- For Geberit ONE, Acanto and iCon series

Technical data

Product material	High-compressed three-layer chipboard
Drawer load max.	20 kg

Scope of delivery

- Tall cabinet
- 9 organising boxes
- Fastening material

Characteristics

- FSC™ C134279 certified
- Wall-hung
- With two drawers
- Wooden organiser boxes
- Drawer with soft closing
- Moisture-resistant
- Delivered preassembled

Art. no.	Colour / surface	H [cm]	T [cm]
B / width: 24 cm			
503.011.01.1	Body, Front: white / high-gloss coated	180	48
503.011.01.2	Body: white / high-gloss coated Front: white / glossy glass	180	48
503.011.01.3 *	Body, Front: white / matt coated	180	48
503.011.JH.1	Body, Front: oak / wood-textured melamine	180	48
503.011.JK.1	Body, Front: lava / matt coated	180	48
503.011.JK.2	Body: lava / matt coated Front: lava / glossy glass	180	48
503.011.JR.1 *	Body, Front: hickory / wood-textured melamine	180	48

* Order-based production


Can be combined with

- Geberit internal storage shelf → p. 1041
- Geberit organising box → p. 1041

Accessories

- Geberit internal storage shelf → p. 1041
- Geberit organising box → p. 1041
- Geberit power socket element with mains plug → p. 506

Geberit Acanto low cabinet with one drawer and one internal drawer

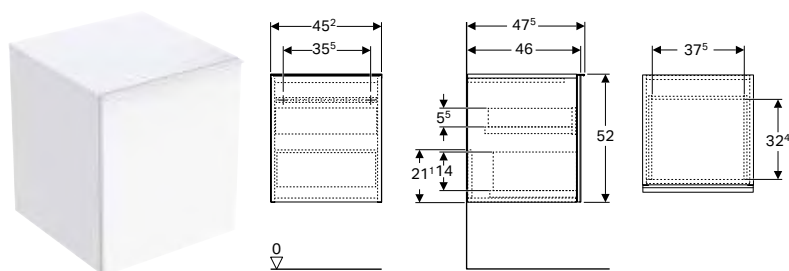

click & scan

Technical data

Product material	High-compressed three-layer chipboard
Drawer load max.	20 kg

Scope of delivery

- Side cabinet
- Fastening material

Characteristics

- FSC™ C134279 certified
- Wall-hung
- With one drawer
- With one internal drawer
- Opening with handle
- Exchangeable handle
- Drawer with soft closing
- Moisture-resistant
- Delivered preassembled

Art. no.	Colour / surface	H [cm]	T [cm]
B / width: 45.2 cm			
503.010.01.1	Body, Front: white / high-gloss coated Handle: white / matt coated	52	47.5
503.010.01.2	Body: white / high-gloss coated Front: white / glossy glass Handle: white / matt powder-coated	52	47.5
503.010.01.3 *	Body, Front: white / matt coated Handle: lava / matt powder-coated	52	47.5
503.010.JH.1	Body, Front: oak / wood-textured melamine Handle: lava / matt powder-coated	52	47.5
503.010.JK.1	Body, Front: lava / matt coated Handle: lava / matt powder-coated	52	47.5
503.010.JK.2	Body: lava / matt coated Front: lava / glossy glass Handle: lava / matt powder-coated	52	47.5
503.010.JR.1 *	Body, Front: hickory / wood-textured melamine Handle: lava / matt powder-coated	52	47.5

* Order-based production


Can be combined with

- Geberit Acanto cabinet for double washbasin, with two drawers and two internal drawers → p. 567
- Geberit Acanto cabinet for washbasin, with one drawer and one internal drawer → p. 564

Accessories

- Geberit towel rail for bathroom furniture → p. 505
- Geberit set of narrow feet → p. 579
- Geberit handle → p. 578
- Geberit light strip for drawer, left and right, length 35 cm → p. 506
- Geberit power socket element with mains plug → p. 506

Geberit tall cabinet with one door

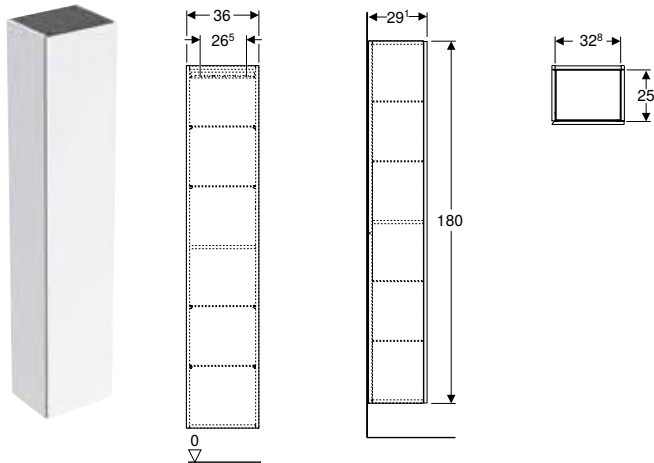

click & scan

Application purposes

- For Geberit ONE, Acanto and iCon series

Technical data

Product material	High-compressed three-layer chipboard
------------------	---------------------------------------

Scope of delivery

- Tall cabinet
- 4 glass shelves
- Fastening material

Characteristics

- FSC™ C134279 certified
- Wall-hung
- With one door
- Door with soft closing
- Opening with recessed handle or push-to-open mechanism
- With four movable glass shelves
- With one fixed shelf
- Hinge side left or right
- Moisture-resistant
- Delivered preassembled


Art. no.	Colour / surface	H [cm]	T [cm]
B / width: 36 cm			
502.316.01.1	Body, Front: white / high-gloss coated	180	29.1
502.316.01.2	Body: white / high-gloss coated Front: white / glossy glass	180	29.1
502.316.01.3 *	Body, Front: white / matt coated	180	29.1
502.316.JH.1	Body, Front: oak / wood-textured melamine	180	29.1
502.316.JK.1	Body, Front: lava / matt coated	180	29.1
502.316.JK.2	Body: lava / matt coated Front: lava / glossy glass	180	29.1
502.316.JR.1 *	Body, Front: hickory / wood-textured melamine	180	29.1
505.083.00.7 *	Body, Front: greige / matt coated	180	29.1
505.083.00.8 *	Body, Front: black / matt coated	180	29.1

* Order-based production

Accessories

- Geberit set of narrow feet → p. 579

Geberit tall cabinet with one door and internal mirror, small projection

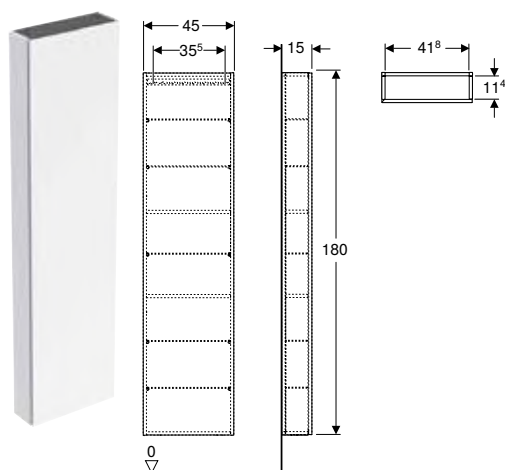

click & scan

Application purposes

- For Geberit ONE, Acanto and iCon series

Technical data

Product material	High-compressed three-layer chipboard
------------------	---------------------------------------

Scope of delivery

- Tall cabinet
- 5 glass shelves
- Fastening material

Characteristics

- FSC™ C134279 certified
- Wall-hung
- With one door
- Door with soft closing
- Opening with recessed handle or push-to-open mechanism
- With five movable glass shelves
- Door mirrored on inside
- With two fixed shelves
- Hinge side left or right
- Door opening angle 155°
- Moisture-resistant
- Delivered preassembled


Art. no.	Colour / surface	H [cm]	T [cm]
B / width: 45 cm			
502.317.01.1	Body, Front: white / high-gloss coated	180	15
502.317.01.2	Body: white / high-gloss coated Front: white / glossy glass	180	15
502.317.01.3 *	Body, Front: white / matt coated	180	15
502.317.JH.1	Body, Front: oak / wood-textured melamine	180	15
502.317.JK.1	Body, Front: lava / matt coated	180	15
502.317.JK.2	Body: lava / matt coated Front: lava / glossy glass	180	15
502.317.JL.1 *	Body, Front: sand grey / high-gloss coated	180	15
502.317.JR.1 *	Body, Front: hickory / wood-textured melamine	180	15

* Order-based production

Accessories

- Geberit set of narrow feet → p. 579

Geberit high-level cabinet, square, with one door

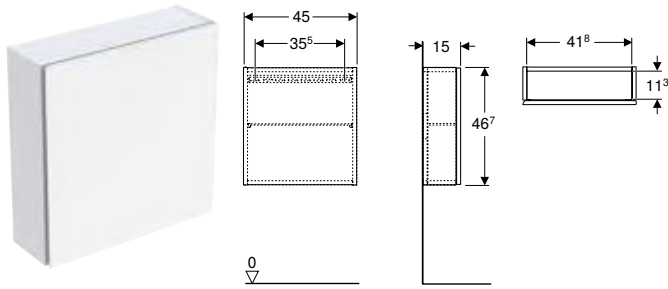

click & scan

Application purposes

- For Geberit ONE, Acanto and iCon series

Technical data

Product material	High-compressed three-layer chipboard
------------------	---------------------------------------

Scope of delivery

- High-level cabinet
- Glass shelf
- Fastening material


Characteristics

- FSC™ C134279 certified
- Wall-hung
- With one door
- Door with soft closing
- Opening with recessed handle or push-to-open mechanism
- Movable glass shelf
- Hinge side left or right
- Moisture-resistant
- Delivered preassembled

Art. no.	Colour / surface	H [cm]	T [cm]
B / width: 45 cm			
502.319.01.1	Body, Front: white / high-gloss coated	46.7	15
502.319.01.2	Body: white / high-gloss coated Front: white / glossy glass	46.7	15
502.319.01.3 *	Body, Front: white / matt coated	46.7	15
502.319.JH.1	Body, Front: oak / wood-textured melamine	46.7	15
502.319.JK.1	Body, Front: lava / matt coated	46.7	15
502.319.JK.2	Body: lava / matt coated Front: lava / glossy glass	46.7	15
502.319.JL.1 *	Body, Front: sand grey / high-gloss coated	46.7	15
502.319.JR.1 *	Body, Front: hickory / wood-textured melamine	46.7	15

* Order-based production

Geberit high-level cabinet, rectangular, with one door

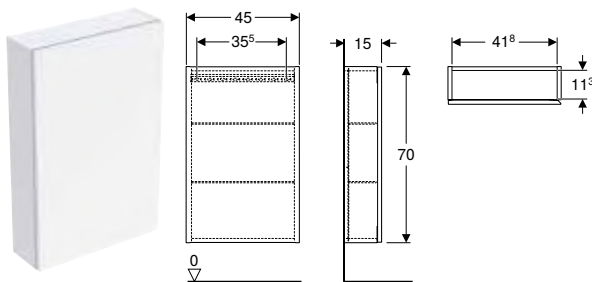

click & scan

Application purposes

- For Geberit ONE, Acanto and iCon series

Technical data

Product material	High-compressed three-layer chipboard
------------------	---------------------------------------

Scope of delivery

- High-level cabinet
- 2 glass shelves
- Fastening material

Characteristics

- FSC™ C134279 certified
- Wall-hung
- With one door
- Door with soft closing
- Opening with recessed handle or push-to-open mechanism
- With two adjustable glass shelves
- Hinge side left or right
- Moisture-resistant
- Delivered preassembled


Art. no.	Colour / surface	H [cm]	T [cm]
B / width: 45 cm			
502.318.01.1	Body, Front: white / high-gloss coated	70	15
502.318.01.2	Body: white / high-gloss coated Front: white / glossy glass	70	15
502.318.01.3 *	Body, Front: white / matt coated	70	15
502.318.JH.1	Body, Front: oak / wood-textured melamine	70	15

* Order-based production

Art. no.	Colour / surface	H [cm]	T [cm]
502.318.JK.1	Body, Front: lava / matt coated	70	15
502.318.JK.2	Body: lava / matt coated Front: lava / glossy glass	70	15
502.318.JL.1 *	Body, Front: sand grey / high-gloss coated	70	15
502.318.JR.1 *	Body, Front: hickory / wood-textured melamine	70	15

* Order-based production

Geberit shelf unit, rectangular

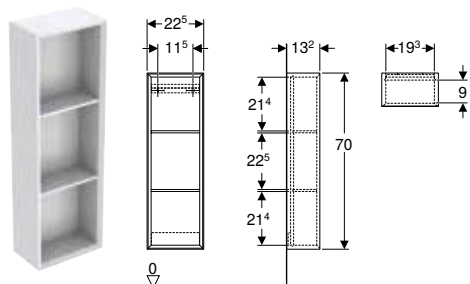

click & scan

Geberit Acanto

Application purposes

- For Geberit ONE, Acanto and iCon series

Technical data

Product material	High-compressed three-layer chipboard
------------------	---------------------------------------

Characteristics

- FSC™ C134279 certified
- Wall-hung
- Hidden fastening
- With two fixed shelves
- Moisture-resistant
- Delivered preassembled


Scope of delivery

- High-level cabinet
- Fastening material

Art. no.	Colour / surface	H [cm]	T [cm]
B / width: 22.5 cm			
502.320.01.1	white / high-gloss coated	70	13.2
502.320.01.3 *	white / matt coated	70	13.2
502.320.JH.1	oak / wood-textured melamine	70	13.2
502.320.JK.1	lava / matt coated	70	13.2
502.320.JL.1 *	sand grey / high-gloss coated	70	13.2
502.320.JR.1 *	hickory / wood-textured melamine	70	13.2

* Order-based production

Geberit shelf unit, square

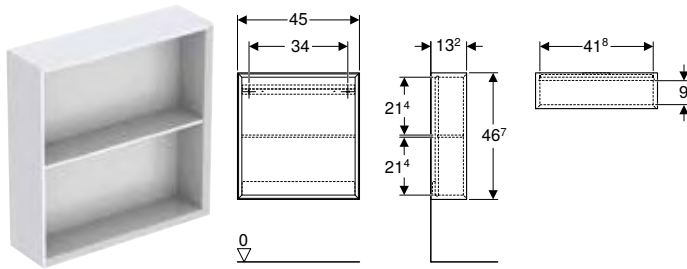

click & scan

Application purposes

- For Geberit ONE, Acanto and iCon series

Technical data

Product material	High-compressed three-layer chipboard
------------------	---------------------------------------

Characteristics

- FSC™ C134279 certified
- Wall-hung
- With one fixed shelf
- Hidden fastening
- Moisture-resistant
- Delivered preassembled


Scope of delivery

- High-level cabinet
- Fastening material

Art. no.	Colour / surface	H [cm]	T [cm]
B / width: 45 cm			
502.323.01.1	white / high-gloss coated	46.7	13.2
502.323.01.3 *	white / matt coated	46.7	13.2
502.323.JH.1	oak / wood-textured melamine	46.7	13.2
502.323.JK.1	lava / matt coated	46.7	13.2
502.323.JL.1 *	sand grey / high-gloss coated	46.7	13.2
502.323.JR.1 *	hickory / wood-textured melamine	46.7	13.2

* Order-based production

Geberit wall box, rectangular

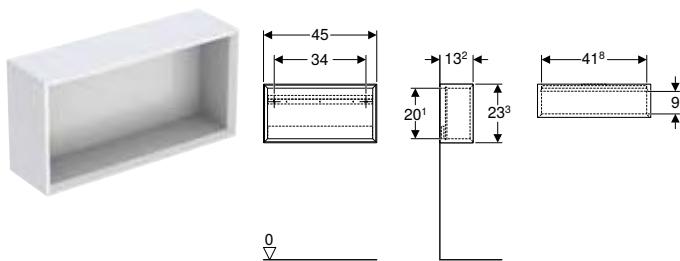

click & scan

Application purposes

- For Geberit ONE, Acanto and iCon series

Technical data

Product material	High-compressed three-layer chipboard
------------------	---------------------------------------

Characteristics

- FSC™ C134279 certified
- Wall-hung
- Hidden fastening
- Moisture-resistant
- Delivered preassembled


Scope of delivery

- High-level cabinet
- Fastening material

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]
502.322.01.1	white / high-gloss coated	45	23.3	13.2
502.322.01.3 *	white / matt coated	45	23.3	13.2
502.322.JH.1	oak / wood-textured melamine	45	23.3	13.2
502.322.JK.1	lava / matt coated	45	23.3	13.2
502.322.JL.1 *	sand grey / high-gloss coated	45	23.3	13.2
502.322.JR.1 *	hickory / wood-textured melamine	45	23.3	13.2

* Order-based production

Geberit wall box, square

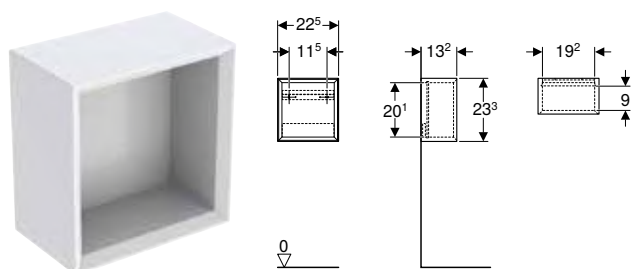

click & scan

Application purposes

- For Geberit ONE, Acanto and iCon series

Technical data

Product material	High-compressed three-layer chipboard
------------------	---------------------------------------

Characteristics

- FSC™ C134279 certified
- Wall-hung
- Hidden fastening
- Moisture-resistant
- Delivered preassembled

Scope of delivery


- High-level cabinet
- Fastening material

Art. no.	Colour / surface	H [cm]	T [cm]
B / width: 22.5 cm			
502.321.01.1	white / high-gloss coated	23.3	13.2
502.321.01.3 *	white / matt coated	23.3	13.2
502.321.JH.1	oak / wood-textured melamine	23.3	13.2
502.321.JK.1	lava / matt coated	23.3	13.2
502.321.JL.1 *	sand grey / high-gloss coated	23.3	13.2
502.321.JR.1 *	hickory / wood-textured melamine	23.3	13.2

* Order-based production

Additional furniture

Geberit wall shelf

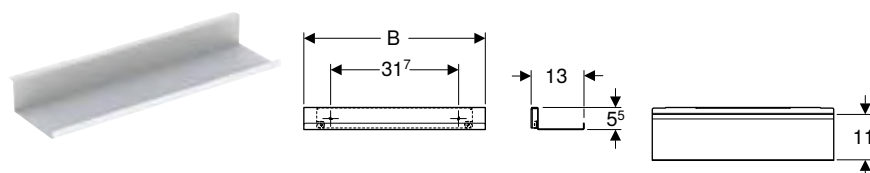

click & scan

Technical data

Product material	Steel
------------------	-------

Scope of delivery


- Wall shelf
- Fastening material

Characteristics

- Wall-hung
- Hidden fastening

Art. no.	Colour / surface	H [cm]	T [cm]
B / width: 45 cm			
502.326.01.3	white / matt powder-coated	5.5	13
502.326.JK.1	lava / matt powder-coated	5.5	13
502.326.JL.1	sand grey / matt powder-coated	5.5	13
B / width: 67.5 cm			
502.327.01.3	white / matt powder-coated	5.5	13
502.327.JK.1	lava / matt powder-coated	5.5	13
502.327.JL.1	sand grey / matt powder-coated	5.5	13

Geberit magnetic board with storage boxes

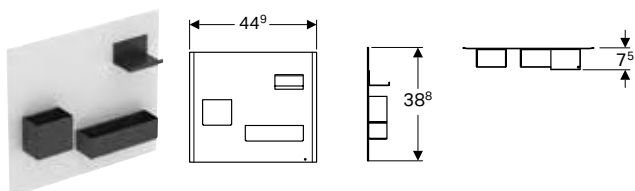

click & scan

Technical data

Product material	Steel
------------------	-------

Scope of delivery

- Magnetic board
- Storage boxes

Characteristics

- Storage boxes of different sizes
- Storage boxes fixed with magnetic fixing

Art. no.	Colour / surface
500.649.01.2	Magnetic board: white / matt powder-coated Storage boxes with magnetic fixing: lava / matt powder-coated
500.649.JL.2	Magnetic board: sand grey / matt powder-coated Storage boxes with magnetic fixing: lava / matt powder-coated
500.649.JK.2	Magnetic board, Storage boxes with magnetic fixing: lava / matt powder-coated
500.649.16.1	Magnetic board: black / matt powder-coated Storage boxes with magnetic fixing: lava / matt powder-coated

Can be combined with

- Geberit iCon low cabinet with two drawers → p. 624
- Geberit Smyle low cabinet with two drawers → p. 681

Accessories

Geberit set of drawer inserts for top drawer



click & scan

Application purposes

- For Geberit ONE, Acanto and iCon series

Scope of delivery


- Drawer insert
- Cover

Technical data

Product material	Bamboo
------------------	--------

Art. no.	Washbasin, width [cm]
502.349.00.1	60
502.350.00.1	75
502.351.00.1	90
502.352.00.1	105
502.353.00.1	120
502.354.00.1	135

Geberit towel rail for bathroom furniture



click & scan

Application purposes

- For mounting on a washbasin cabinet
- For Geberit ONE, Acanto and iCon series

Scope of delivery


- Towel rail
- Fastening material

Technical data

Product material	Aluminium
------------------	-----------

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]
503.012.01.1	white / matt powder-coated	40	0.8	7.2
503.012.14.1	black matt / matt powder-coated	40	0.8	7.2
503.012.21.1	chrome / glossy	40	0.8	7.2
503.012.JK.1	lava / matt powder-coated	40	0.8	7.2

Geberit towel rail for bathroom furniture

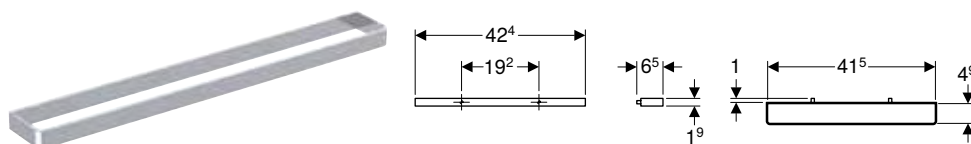

click & scan

Application purposes

- For mounting on a washbasin cabinet

Characteristics

- Right-angled corner

Technical data



Product material	Steel
------------------	-------

Scope of delivery

- Towel rail
- Fastening material

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]
502.328.00.1	chrome / glossy	42.4	1.9	4.9
502.328.01.3	white / matt powder-coated	42.4	1.9	4.9
502.328.14.1	black matt / matt powder-coated	42.4	1.9	4.9
502.328.JK.1	lava / matt powder-coated	42.4	1.9	4.9
502.328.JL.1	sand grey / matt powder-coated	42.4	1.9	4.9

Geberit handle



click & scan

Application purposes

- For Acanto and iCon series

Technical data

Product material	Aluminium
------------------	-----------

Characteristics


- Suitable for all Acanto and iCon washbasin cabinets with handle
- Fastening with screw

Scope of delivery

- Handle
- Fastening material

Art. no.	Colour / surface	B1 [cm]	H [cm]	T [cm]
B / width: 36.7 cm				
502.356.00.1	chrome / glossy	25.6	1.9	3.3
502.356.01.1	white / matt powder-coated	25.6	1.9	3.3
502.356.14.1	black matt / matt powder-coated	25.6	1.9	3.3
502.356.JK.1	lava / matt powder-coated	25.6	1.9	3.3
502.356.JL.1	sand grey / matt powder-coated	25.6	1.9	3.3
B / width: 44.7 cm				
502.357.00.1	chrome / glossy	32	1.9	3.3
502.357.01.1	white / matt powder-coated	32	1.9	3.3
502.357.14.1	black matt / matt powder-coated	32	1.9	3.3
502.357.JK.1	lava / matt powder-coated	32	1.9	3.3
502.357.JL.1	sand grey / matt powder-coated	32	1.9	3.3
B / width: 51.7 cm				
502.358.00.1	chrome / glossy	38.4	1.9	3.3
502.358.01.1	white / matt powder-coated	38.4	1.9	3.3
502.358.14.1	black matt / matt powder-coated	38.4	1.9	3.3
502.358.JK.1	lava / matt powder-coated	38.4	1.9	3.3
502.358.JL.1	sand grey / matt powder-coated	38.4	1.9	3.3
B / width: 58.9 cm				
502.359.00.1	chrome / glossy	44.8	1.9	3.3
502.359.01.1	white / matt powder-coated	44.8	1.9	3.3
502.359.14.1	black matt / matt powder-coated	44.8	1.9	3.3
502.359.JK.1	lava / matt powder-coated	44.8	1.9	3.3
502.359.JL.1	sand grey / matt powder-coated	44.8	1.9	3.3
B / width: 73.7 cm				
502.360.00.1	chrome / glossy	64.4	1.9	3.3
502.360.01.1	white / matt powder-coated	64.4	1.9	3.3
502.360.14.1	black matt / matt powder-coated	64.4	1.9	3.3
502.360.JK.1	lava / matt powder-coated	64.4	1.9	3.3
502.360.JL.1	sand grey / matt powder-coated	64.4	1.9	3.3
B / width: 88.5 cm				
502.361.00.1	chrome / glossy	76.8	1.9	3.3
502.361.01.1	white / matt powder-coated	76.8	1.9	3.3
502.361.14.1	black matt / matt powder-coated	76.8	1.9	3.3
502.361.JK.1	lava / matt powder-coated	76.8	1.9	3.3
502.361.JL.1	sand grey / matt powder-coated	76.8	1.9	3.3
B / width: 118.1 cm				
502.362.00.1	chrome / glossy	89.6	1.9	3.3
502.362.01.1	white / matt powder-coated	89.6	1.9	3.3
502.362.14.1	black matt / matt powder-coated	89.6	1.9	3.3
502.362.JK.1	lava / matt powder-coated	89.6	1.9	3.3
502.362.JL.1	sand grey / matt powder-coated	89.6	1.9	3.3

Geberit light strip for drawer, left and right, length 35 cm



click & scan

Application purposes

- For Geberit ONE, Acanto and iCon series

Characteristics

- Period of use, 3–6 months
- Rechargeable with Micro-USB cable

Technical data

Operating voltage	7.5 V DC
Product material	Plastic
Light source energy efficiency class	E
Light colour	3500 K

Scope of delivery


- Light strip left and right
- Fastening material
- USB cable

Art. no.	L [cm]	Protection class	Power consumption [W]
502.031.00.1	35	III	≤ 1

Accessories

- Accessory overview – Geberit iCon bathroom furniture → p. 607
- Accessory overview – Geberit ONE bathroom furniture → p. 481
- Accessory overview – Geberit Acanto bathroom furniture → p. 559

Geberit power socket element with mains plug

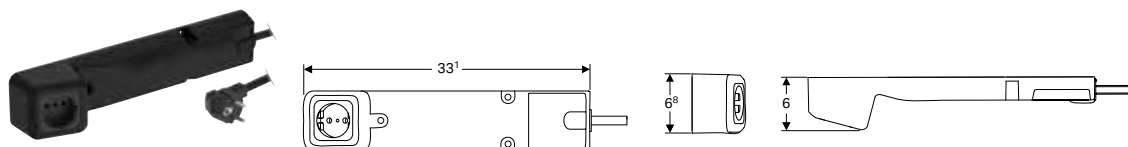

click & scan

Application purposes

- For Geberit ONE, Acanto and iCon series

Scope of delivery

- Power socket element with mains plug
- Fastening material


Technical data

Degree of protection	IP20
Nominal voltage	230 V AC
Mains frequency	50 Hz

Art. no.	Plug type	Power socket
505.090.00.2	CEE 7/7	CEE 7/4

- The prerequisite for installing the Geberit ONE power socket element is an existing mains connection in the area behind the washbasin cabinet

Geberit set of narrow feet

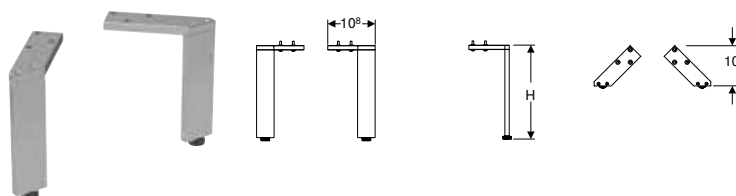

click & scan

Technical data

Product material	Aluminium
------------------	-----------

Scope of delivery

- Set of 2 pieces
- Fastening material

Characteristics


- Height adjustable for compensating floor unevenness

Art. no.	Colour / surface	H [cm]
500.367.00.1	chrome / glossy	15–15.8
500.658.00.2	chrome / glossy	26–26.8
500.657.00.2	chrome / glossy	30–30.8

WCs


Accessory overview – Geberit Acanto WC ceramic appliance in combination with connection pipes

Geberit International Sales, version: December 2025

		Geberit Acanto floor-standing WC, washdown, raised, back-to-wall, shrouded, Rimfree	
White		500.602.01.2	
			
		→ p. 582	
Geberit connection bend 90°	152.610.11.1		
		X = 65 mm	

Wall-hung WCs

Geberit Acanto wall-hung WC set, washdown, shrouded, TurboFlush, with WC seat

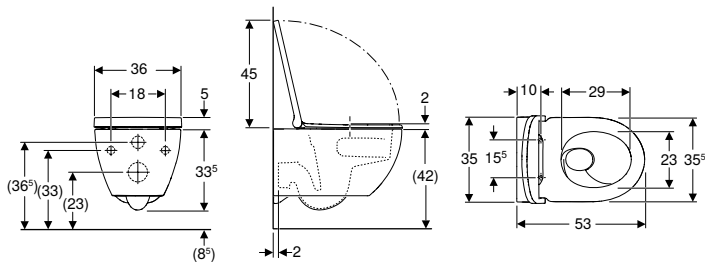

click & scan

Application purposes

- For concealed cisterns
- For pressure flushing valves

Technical data

Product material	Vitreous china
------------------	----------------

Scope of delivery

- WC ceramic appliance
- WC seat
- Fastening material

Characteristics


- Wall-hung
- Washdown WC
- Rimless WC ceramic appliance featuring TurboFlush flush technology
- Easy fastening with Easy Fast Fixing (type EFF3)
- Type 1, full flush volume 6 / 5 / 4 l, in accordance with EN 997
- Quick-release hinges, lockable
- Type 2 in accordance with EN 997
- 4 l flush
- Shrouded
- Hidden fastening
- WC seat made of Duroplast
- Overlapping WC lid
- WC seat with EasyMount hinges

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]	QuickRelease function	Soft-closing mechanism	Fastening
502.718.00.1	white	35.5	33.5	53	Yes, with lockable QuickRelease hinges		yes from above

Can be combined with

- Geberit Acanto wall-hung bidet, shrouded → p. 583

Geberit Acanto wall-hung WC set, washdown, shrouded, TurboFlush, with WC seat

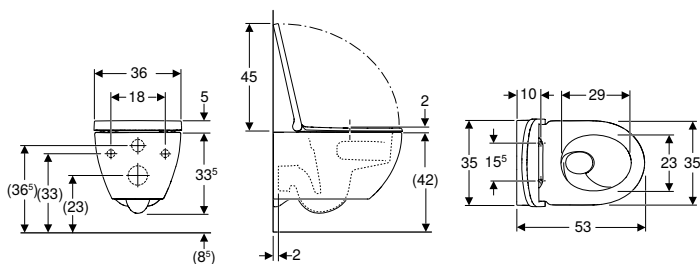

click & scan

Application purposes

- For concealed cisterns
- For pressure flushing valves

Technical data

Product material	Vitreous china
------------------	----------------

Scope of delivery

- WC ceramic appliance
- WC seat
- Fastening material

Characteristics


- Wall-hung
- Washdown WC
- Rimless WC ceramic appliance featuring TurboFlush flush technology
- Easy fastening with Easy Fast Fixing (type EFF3)
- Type 1, full flush volume 6 / 5 / 4 l, in accordance with EN 997
- Quick-release hinges, lockable
- Type 2 in accordance with EN 997
- 4 l flush
- Shrouded
- Hidden fastening
- WC seat made of Duroplast
- Overlapping WC lid
- WC seat with EasyMount hinges

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]	QuickRelease function	Soft-closing mechanism	Fastening	Hinge material
502.774.00.1	white	35.5	33.5	53	Yes, with lockable QuickRelease hinges	yes	from above	Stainless steel / plastic

Can be combined with

- Geberit Acanto wall-hung bidet, shrouded → p. 583

Geberit Acanto wall-hung WC, washdown, shrouded, TurboFlush

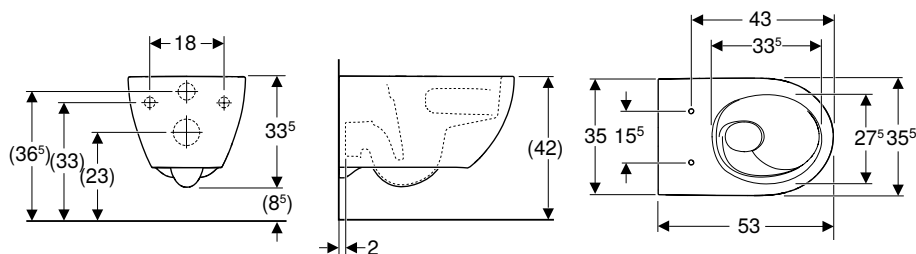

click & scan

Application purposes

- For concealed cisterns
- For pressure flushing valves

Technical data

Product material	Vitreous china
------------------	----------------

Scope of delivery

- Fastening material

Characteristics

- Wall-hung
- Washdown WC
- Rimless WC ceramic appliance featuring TurboFlush flush technology
- Easy fastening with Easy Fast Fixing (type EFF3)
- Type 1, full flush volume 6 / 5 / 4 l, in accordance with EN 997
- Type 2 in accordance with EN 997
- 4 l flush
- Shrouded
- Hidden fastening

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]
502.717.00.1	white	35.5	33.5	53

To order additionally


- WC seat

Can be combined with

- Geberit Acanto wall-hung bidet, shrouded → p. 583
- Geberit Acanto WC seat, EasyMount hinges → p. 583
- Geberit AquaClean Tuma Comfort WC enhancement solution → p. 876
- Geberit AquaClean Tuma Classic WC enhancement solution → p. 878

Floor-standing WCs, raised

Geberit Acanto floor-standing WC, washdown, raised, back-to-wall, shrouded, Rimfree

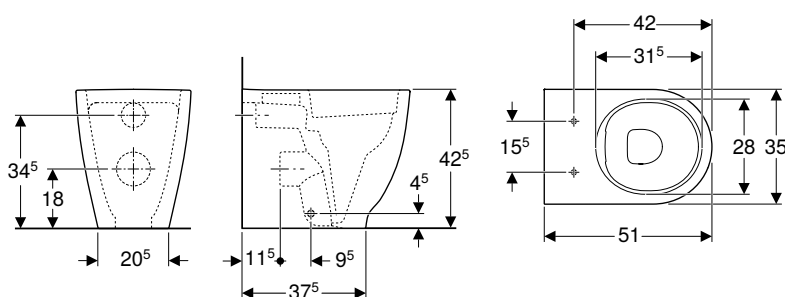

click & scan

Application purposes

- For concealed cisterns
- For pressure flushing valves

Technical data

Product material	Vitreous china
------------------	----------------

Scope of delivery

- WC ceramic appliance
- Fastening material

Characteristics

- Floor-standing
- Back-to-wall
- Washdown WC
- Rimless WC ceramic appliance featuring Rimfree flush technology
- Type 1, full flush volume 6 / 5 / 4 l, in accordance with EN 997
- Horizontal or vertical outlet
- Type 2 in accordance with EN 997
- Flushes with 4.5 l
- 4 l flush
- Shrouded
- Hidden fastening
- Small projection
- Raised seat height

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]
500.602.01.2	white	35	42.5	51

To order additionally

- WC seat

Can be combined with


- Geberit Acanto WC seat → p. 582

Accessories

- Accessory overview – Geberit Acanto WC ceramic appliance in combination with connection pipes → p. 580

WC seats

Geberit Acanto WC seat

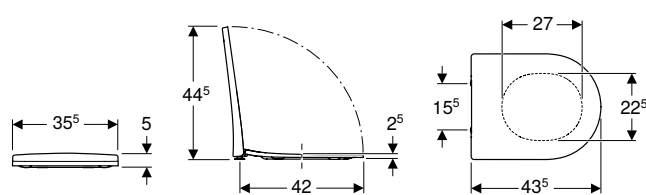

click & scan

Technical data

Product material	Duroplast
Fastening distance	15.5 cm

Characteristics


- Overlapping WC lid
- Narrow design
- Antibacterial

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]	QuickRelease function	Soft-closing mechanism	Fastening	Hinge material
500.605.01.2	white / glossy	35.5	5	43.5	Yes, with QuickRelease hinges	yes	from above	Brass chrome-plated
500.660.01.2	white / glossy	35.5	5	43.5	no	yes	from above	Brass chrome-plated

Can be combined with

- Geberit Acanto floor-standing WC, washdown, raised, back-to-wall, shrouded, Rimfree → p. 582

Geberit Acanto WC seat, EasyMount hinges

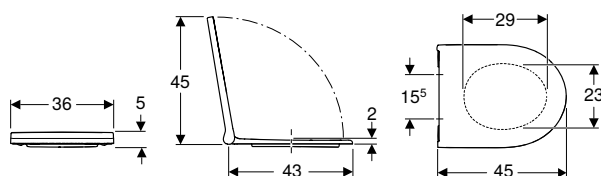

click & scan

Technical data

Product material	Duroplast
Fastening distance	15.5 cm

Characteristics

- Overlapping WC lid
- Narrow design
- WC seat with EasyMount hinges
- Quick-release hinges, lockable

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]	QuickRelease function	Soft-closing mechanism	Fastening	Hinge material
502.719.01.1	white / glossy	36	5	45	Yes, with lockable QuickRelease hinges	yes	from above	Stainless steel / plastic


Can be combined with

- Geberit Acanto wall-hung WC, washdown, shrouded, TurboFlush → p. 581

Bidets

Wall-hung bidets

Geberit Acanto wall-hung bidet, shrouded

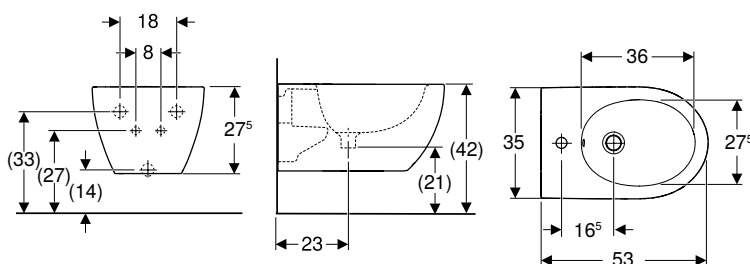

click & scan

Application purposes

- For single-hole taps with flexible hoses

Technical data

Product material	Vitreous china
------------------	----------------

Characteristics

- Wall-hung
- Hidden water supply connection
- Easy fastening with Easy Fast Fixing (type EFF3)
- Shrouded
- Hidden fastening

Scope of delivery

- Fastening material


Art. no.	Colour / surface	Overflow	B [cm]	H [cm]	T [cm]
502.825.00.1	white	visible, symmetrical	35.5	27.5	53

Can be combined with

- Geberit Acanto wall-hung WC set, washdown, shrouded, TurboFlush, with WC seat → p. 580
- Geberit Acanto wall-hung WC set, washdown, shrouded, TurboFlush, with WC seat → p. 581
- Geberit Acanto wall-hung WC, washdown, shrouded, TurboFlush → p. 581

Floor-standing bidets

Geberit Acanto floor-standing bidet, back-to-wall, shrouded

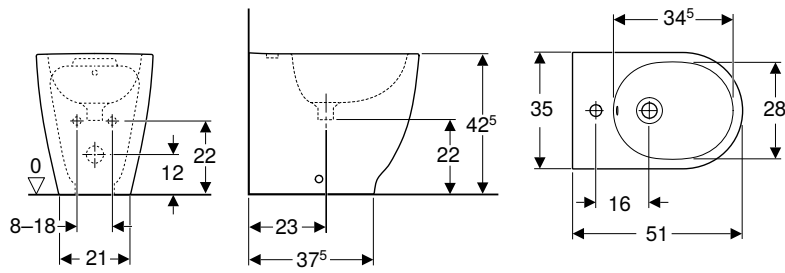

click & scan

Technical data

Product material	Vitreous china
------------------	----------------

Scope of delivery

- Fastening material

Characteristics

- Floor-standing
- Back-to-wall
- Hidden water supply connection
- Small projection
- Shrouded
- Hidden fastening

Art. no.	Colour / surface	Overflow	B	H	T
			[cm]	[cm]	[cm]
500.603.01.2	white	visible, symmetrical	35	42.5	51








Geberit iCon

Washbasins	588
Assortment overview – Geberit iCon washbasins and washbasin cabinets	589
Assortment overview – Geberit washbasin connections, space-saving model	595
Handrinse basins	596
Corner handrinse basins	598
Washbasins	599
Double washbasins	602
Lay-on washbasins	604
Vanity basins	605
Bathroom furniture	606
Accessory overview – Geberit iCon bathroom furniture	607
Washbasin cabinets	612
Side cabinets	621
Additional furniture	628
Accessories	629
WCs	634
Accessory overview – Geberit iCon WC ceramic appliance in combination with connection pipes	634
Assortment overview – Geberit iCon WCs and WC seats	635
Accessory overview – Geberit iCon Square WC ceramic appliance in combination with connection pipes	635
Accessory overview – Geberit iCon WC ceramic appliance TurboFlush in combination with connection pipes	636
Wall-hung WCs	636
Floor-standing WCs	642
WC seats	645
Exposed cisterns	646
Exposed cisterns for WCs, made of sanitary ceramic	646
Bidets	648
Wall-hung bidets	648
Floor-standing bidets	649

Washbasins

Assortment overview – Geberit iCon washbasins and washbasin cabinets

Geberit International Sales, version: December 2025

	Handrinse basins	Washbasins				
	38 cm	53 cm	53 cm	60 cm	75 cm	
White, right tap hole, without overflow	124736000 501.830.00.1	124053000	501.832.00.1			
White matt, tap hole on the right, without overflow	501.830.JT.1		501.832.JT.1			
White, without tap hole, without overflow	501.830.00.3 501.831.00.3		501.832.00.3 501.833.00.3	124061000 501.834.00.7	501.835.00.7	
White, left tap hole, without overflow	124836000 501.831.00.1	124153000	501.833.00.1			
White matt, tap hole on the left, without overflow	501.831.JT.1		501.833.JT.1			
White, central tap hole, visible overflow				124060000 501.834.00.1	124075000 501.835.00.1	
White, central tap hole, without overflow				124062000 501.834.00.5	501.835.00.5	
White, without tap hole, visible overflow				124063000 501.834.00.3	124078000 501.835.00.3	
White, left and right tap hole, visible overflow						
White, left and right tap hole, without overflow						
						
	→ p. 596	→ p. 596	→ p. 598	→ p. 599	→ p. 599	


A Geberit washbasin connector, space-saving model is required for the installation of cabinet and washbasin. See Assortment overview – Geberit iCon washbasin connectors, space-saving model

Cabinets for handrinse basins

Washbasin, width 38 cm


Geberit iCon cabinet for handrinse basin, with one door		502.300.01.1	white	→ p. 612	✓				
		502.300.01.2	white, chrome-plated handle	→ p. 612	✓				
		502.300.01.3	white / matt	→ p. 612	✓				
		502.300.JK.1	lava	→ p. 612	✓				
		502.300.JL.1	sand grey	→ p. 612	✓				
		502.300.JH.1	oak	→ p. 612	✓				
		502.300.JR.1	hickory	→ p. 612	✓				
		502.301.01.1	white	→ p. 612	✓				
		502.301.01.2	white, chrome-plated handle	→ p. 612	✓				
		502.301.01.3	white / matt	→ p. 612	✓				
		502.301.JK.1	lava	→ p. 612	✓				
		502.301.JL.1	sand grey	→ p. 612	✓				
		502.301.JH.1	oak	→ p. 612	✓				
		502.301.JR.1	hickory	→ p. 612	✓				







Washbasin, width 53 cm






Geberit iCon cabinet for handrinse basin, with one drawer		502.302.01.1	white	→ p. 613		✓	✓		
		502.302.01.2	white, chrome-plated handle	→ p. 613		✓	✓		
		502.302.01.3	white / matt	→ p. 613		✓	✓		
		502.302.JK.1	lava	→ p. 613		✓	✓		
		502.302.JL.1	sand grey	→ p. 613		✓	✓		
		502.302.JH.1	oak	→ p. 613		✓	✓		
		502.302.JR.1	hickory	→ p. 613		✓	✓		

Cabinets for washbasin

Washbasin, width 60 cm

Geberit iCon cabinet for washbasin, with one drawer		502.310.01.1	white	→ p. 614			✓	
		502.310.01.2	white, chrome-plated handle	→ p. 614			✓	
		502.310.01.3	white / matt	→ p. 614			✓	
		502.310.JK.1	lava	→ p. 614			✓	
		502.310.JL.1	sand grey	→ p. 614			✓	
		502.310.JH.1	oak	→ p. 614			✓	
		502.310.JR.1	hickory	→ p. 614			✓	


















				Handrinse basins	Washbasins					
				38 cm	53 cm	53 cm	60 cm	75 cm		
Washbasin, width 75 cm										
Geberit iCon cabinet for washbasin, with one drawer	502.311.01.1		white	→ p. 614					✓	
	502.311.01.2		white, chrome-plated handle	→ p. 614					✓	
	502.311.01.3		white / matt	→ p. 614					✓	
	502.311.JK.1		lava	→ p. 614					✓	
	502.311.JL.1		sand grey	→ p. 614					✓	
	502.311.JH.1		oak	→ p. 614					✓	
	502.311.JR.1		hickory	→ p. 614					✓	
Washbasin, width 90 cm										
Geberit iCon cabinet for washbasin, with one drawer	502.312.01.1		white	→ p. 614						
	502.312.01.2		white, chrome-plated handle	→ p. 614						
	502.312.01.3		white / matt	→ p. 614						
	502.312.JK.1		lava	→ p. 614						
	502.312.JL.1		sand grey	→ p. 614						
	502.312.JH.1		oak	→ p. 614						
	502.312.JR.1		hickory	→ p. 614						
Washbasin, width 120 cm										
Geberit iCon cabinet for washbasin, with one drawer	502.313.01.1		white	→ p. 615						
	502.313.01.2		white, chrome-plated handle	→ p. 615						
	502.313.01.3		white / matt	→ p. 615						
	502.313.JK.1		lava	→ p. 615						
	502.313.JL.1		sand grey	→ p. 615						
	502.313.JH.1		oak	→ p. 615						
	502.313.JR.1		hickory	→ p. 615						
Washbasin, width 60 cm										
Geberit iCon cabinet for washbasin, with two drawers	502.303.01.1		white	→ p. 616				✓		
	502.303.01.2		white, chrome-plated handle	→ p. 616				✓		
	502.303.01.3		white / matt	→ p. 616					✓	
	502.303.JK.1		lava	→ p. 616					✓	
	502.303.JL.1		sand grey	→ p. 616					✓	
	502.303.JH.1		oak	→ p. 616					✓	
	502.303.JR.1		hickory	→ p. 616					✓	
Washbasin, width 75 cm										
Geberit iCon cabinet for washbasin, with two drawers	502.304.01.1		white	→ p. 616					✓	
	502.304.01.2		white, chrome-plated handle	→ p. 616					✓	
	502.304.01.3		white / matt	→ p. 616					✓	
	502.304.JK.1		lava	→ p. 616					✓	
	502.304.JL.1		sand grey	→ p. 616					✓	
	502.304.JH.1		oak	→ p. 616					✓	
	502.304.JR.1		hickory	→ p. 616					✓	
Washbasin, width 90 cm										
Geberit iCon cabinet for washbasin, with two drawers	502.305.01.1		white	→ p. 616						
	502.305.01.2		white, chrome-plated handle	→ p. 616						
	502.305.01.3		white / matt	→ p. 616						
	502.305.JK.1		lava	→ p. 616						
	502.305.JL.1		sand grey	→ p. 616						
	502.305.JH.1		oak	→ p. 616						
	502.305.JR.1		hickory	→ p. 616						

				Handrinse basins	Washbasins				
				38 cm	53 cm	53 cm	60 cm	75 cm	
Washbasin, width 120 cm									
Geberit iCon cabinet for washbasin, with two drawers	502.306.01.1		white	→ p. 617					
	502.306.01.2		white, chrome-plated handle	→ p. 617					
	502.306.01.3		white / matt	→ p. 617					
	502.306.JK.1		lava	→ p. 617					
	502.306.JL.1		sand grey	→ p. 617					
	502.306.JH.1		oak	→ p. 617					
	502.306.JR.1		hickory	→ p. 617					
Washbasin, width 60 cm									
Geberit iCon cabinet for washbasin, with two drawers, small projection	502.307.01.1		white	→ p. 618					
	502.307.01.2		white, chrome-plated handle	→ p. 618					
	502.307.01.3		white / matt	→ p. 618					
	502.307.JK.1		lava	→ p. 618					
	502.307.JL.1		sand grey	→ p. 618					
	502.307.JH.1		oak	→ p. 618					
	502.307.JR.1		hickory	→ p. 618					
Washbasin, width 75 cm									
Geberit iCon cabinet for washbasin, with two drawers, small projection	502.308.01.1		white	→ p. 618					
	502.308.01.2		white, chrome-plated handle	→ p. 618					
	502.308.01.3		white / matt	→ p. 618					
	502.308.JK.1		lava	→ p. 618					
	502.308.JL.1		sand grey	→ p. 618					
	502.308.JH.1		oak	→ p. 618					
	502.308.JR.1		hickory	→ p. 618					
Cabinets for double washbasin									
Washbasin, width 120 cm									
Geberit iCon cabinet for double washbasin, with two drawers	502.314.01.1		white	→ p. 619					
	502.314.01.2		white, chrome-plated handle	→ p. 619					
	502.314.01.3		white / matt	→ p. 619					
	502.314.JK.1		lava	→ p. 619					
	502.314.JL.1		sand grey	→ p. 619					
	502.314.JH.1		oak	→ p. 619					
	502.314.JR.1		hickory	→ p. 619					
Geberit iCon cabinet for double washbasin, with four drawers	502.309.01.1		white	→ p. 620					
	502.309.01.2		white, chrome-plated handle	→ p. 620					
	502.309.01.3		white / matt	→ p. 620					
	502.309.JK.1		lava	→ p. 620					
	502.309.JL.1		sand grey	→ p. 620					
	502.309.JH.1		oak	→ p. 620					
	502.309.JR.1		hickory	→ p. 620					

✓ Compatible

Assortment overview – Geberit washbasin connections, space-saving model

Geberit International Sales, version: October 2025

D, ø / outer diameter (mm)	Washbasins with cabinet						
	With overflow hole			Without overflow hole			
	For 1 deck-mounted tap	For 2 deck-mounted taps	For wall-mounted taps	For 1 deck-mounted tap	For 2 deck-mounted taps	For wall-mounted taps	
							
Washbasin connection, dammable							
152.013.21.1 Geberit Clou washbasin connector, space-saving model, slim design, with lever actuation and valve cover	 32 mm						
152.049.21.1 Geberit Clou washbasin drain, space-saving model, slim design, with lever actuation and valve cover	 32 mm						
152.059.21.1 Geberit Clou washbasin drain, space-saving model, slim design, with lever actuation and valve cover	 40 mm						
152.072.21.1 Geberit washbasin drain, space-saving model, slim design, with external waste plug and lever actuation	 32 mm	✓	✓ ¹⁾	✓ ¹⁾			
152.074.21.1 Geberit washbasin drain, space-saving model, slim design, with external waste plug and lever actuation	 40 mm	✓	✓ ¹⁾	✓ ¹⁾			
152.073.21.1 Geberit washbasin drain, space-saving model, slim design, with external waste plug with push actuation	 32 mm	✓	✓	✓			
152.075.21.1 Geberit washbasin drain, space-saving model, slim design, with external waste plug with push actuation	 40 mm	✓	✓	✓			
Washbasin connection, not dammable							
152.084.21.1 Geberit washbasin drain, space-saving model, slim design, with free outlet and valve cover	 32 mm						
152.093.21.1 Geberit washbasin drain, space-saving model, slim design, with free outlet and valve cover	 40 mm						
152.091.21.1 Geberit washbasin drain, space-saving model, slim design, with free outlet and valve cover	 32 mm				✓	✓	✓
152.092.21.1 Geberit washbasin drain, space-saving model, slim design, with free outlet and valve cover	 40 mm				✓	✓	✓

✓ Compatible


¹⁾ To be ordered additionally: 245.900.20.1

Double washbasins with cabinet				Vanity basins with cabinet			
With overflow hole		Without overflow hole					
For deck-mount- ed taps	For wall-mount- ed taps	For deck-mount- ed taps	For wall-mount- ed taps	For 1 deck- mounted tap	For 2 deck- mounted taps	For wall-mounted taps	
				✓	✓ ¹⁾	✓ ¹⁾	
				✓	✓ ¹⁾	✓ ¹⁾	
				✓	✓ ¹⁾	✓ ¹⁾	
✓	✓ ¹⁾						
✓	✓ ¹⁾						
✓	✓						
✓	✓						
				✓	✓	✓	
				✓	✓	✓	
		✓	✓				
		✓	✓				

Geberit iCon

Handrinse basins

Geberit iCon handrinse basin

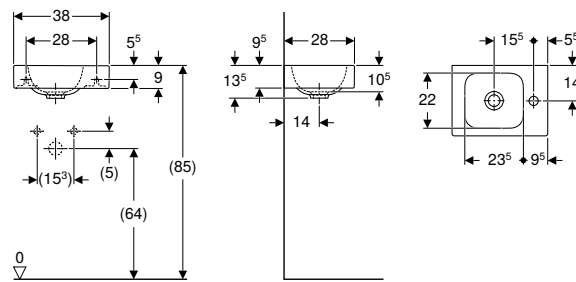

click & scan

Technical data

Product material	Fine fireclay
------------------	---------------

Characteristics

- Can be installed with a washbasin cabinet
- Asymmetrical

Art. no.	Colour / surface	Tap hole	Overflow	H [cm]	T [cm]
B / width: 38 cm					
124736000	white	right	without	13.5	28
124836000	white	left	without	13.5	28


Can be combined with

- Geberit iCon cabinet for handrinse basin, with one door → p. 612

Accessories

- Geberit waste outlet with free outlet and valve cover
- Geberit waste outlet with free outlet, screen
- Geberit dip tube trap for washbasin, horizontal outlet
- Geberit dip tube trap for washbasin, space-saving model, horizontal outlet
- Geberit fastening material for handrinse basin → p. 1035

Geberit iCon handrinse basin with shelf surface

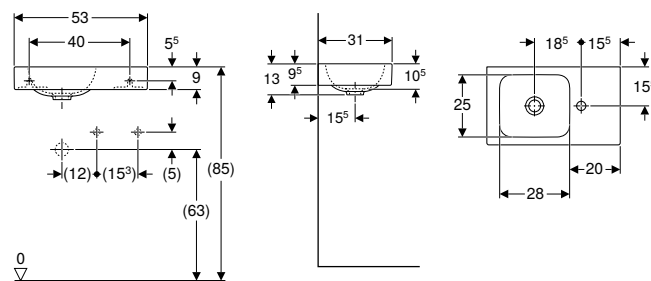

click & scan

Technical data

Product material	Fine fireclay
------------------	---------------

Characteristics

- Can be installed with a washbasin cabinet
- Asymmetrical
- With shelf surface

Art. no.	Colour / surface	Tap hole	Overflow	H [cm]	T [cm]	Shelf space
B / width: 53 cm						
124053000	white	right	without	13	31	right
124153000	white	left	without	13	31	left


Can be combined with

- Geberit iCon cabinet for handrinse basin, with one drawer → p. 613

Accessories

- Geberit waste outlet with free outlet, screen
- Geberit waste outlet with free outlet and valve cover
- Geberit dip tube trap for washbasin, horizontal outlet
- Geberit dip tube trap for washbasin, space-saving model, horizontal outlet
- Geberit fastening material for handrinse basin → p. 1035

Geberit iCon Light handrinse basin

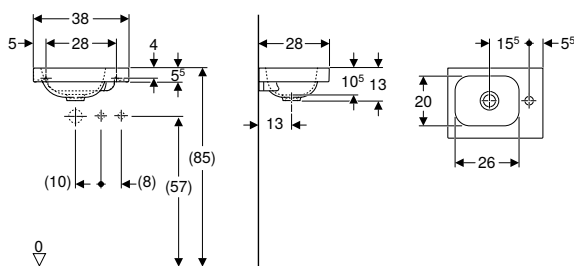

click & scan

Technical data

Product material	Fine fireclay
------------------	---------------

Characteristics

- Can be installed with a washbasin cabinet
- Asymmetrical

Art. no.	Colour / surface	Tap hole	Overflow	H [cm]	T [cm]	Shelf space
B / width: 38 cm						
501.830.00.1	white	right	without	13	28	right
501.830.00.3 *	white	without	without	13	28	right
501.830.JT.1	white / matt	right	without	13	28	right
501.831.00.1	white	left	without	13	28	left
501.831.00.3 *	white	without	without	13	28	left
501.831.JT.1	white / matt	left	without	13	28	left

* Order-based production


Can be combined with

- Geberit iCon cabinet for handrinse basin, with one door → p. 612

Accessories

- Geberit dip tube trap for washbasin, horizontal outlet
- Geberit dip tube trap for washbasin, space-saving model, horizontal outlet
- Geberit waste outlet with free outlet, screen
- Geberit waste outlet with free outlet and valve cover
- Geberit fastening material for handrinse basin → p. 1035

Geberit iCon Light handrinse basin with shelf surface

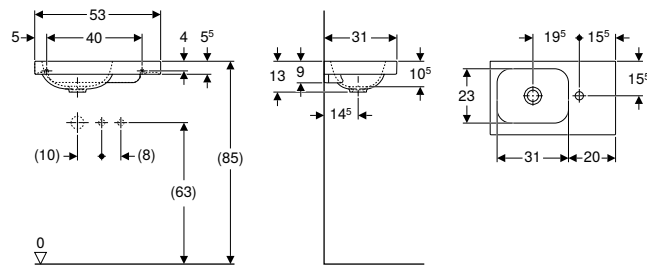

click & scan

Technical data

Product material	Fine fireclay
------------------	---------------

Characteristics

- Can be installed with a washbasin cabinet
- Asymmetrical
- With shelf surface

Art. no.	Colour / surface	Tap hole	Overflow	H [cm]	T [cm]	Shelf space
B / width: 53 cm						
501.832.00.1	white	right	without	13	31	right
501.832.00.3 *	white	without	without	13	31	right
501.832.JT.1	white / matt	right	without	13	31	right
501.833.00.1	white	left	without	13	31	left
501.833.00.3 *	white	without	without	13	31	left
501.833.JT.1	white / matt	left	without	13	31	left

* Order-based production

Can be combined with


- Geberit iCon cabinet for handrinse basin, with one drawer → p. 613

Accessories

- Geberit dip tube trap for washbasin, horizontal outlet
- Geberit dip tube trap for washbasin, space-saving model, horizontal outlet
- Geberit waste outlet with free outlet, screen
- Geberit waste outlet with free outlet and valve cover
- Geberit fastening material for handrinse basin → p. 1035

Corner handrinse basins

Geberit iCon corner handrinse basin

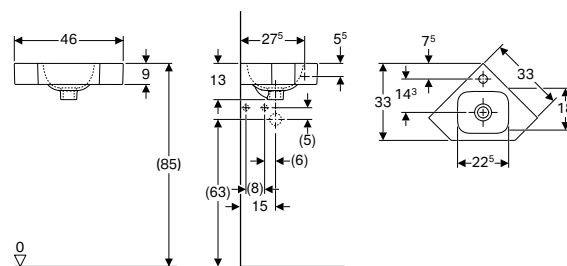

click & scan

Application purposes

- For corner installation

Technical data

Product material	Fine fireclay
------------------	---------------

Art. no.	Colour / surface	Tap hole	Overflow	H [cm]	T [cm]
B / width: 46 cm					
124729000	white	centred	without	13	33
124730000	white	without	without	13	33


Accessories

- Geberit dip tube trap for washbasin, horizontal outlet
- Geberit waste outlet with free outlet and valve cover
- Geberit dip tube trap for washbasin, space-saving model, horizontal outlet
- Geberit waste outlet with free outlet, screen
- Geberit fastening material for handrinse basin → p. 1035

Washbasins

Mix & Match

Geberit iCon washbasin

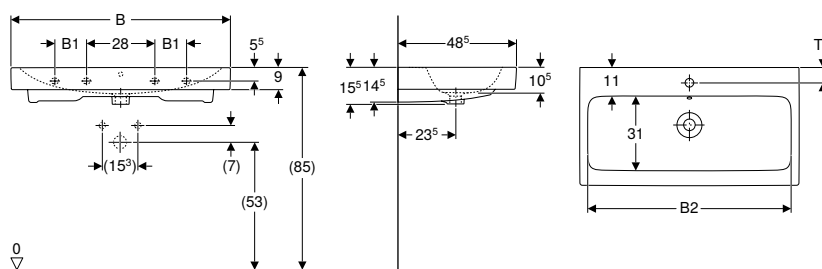

click & scan

Technical data

Product material	Fine fireclay
------------------	---------------

Characteristics

- Can be installed with a washbasin cabinet

Art. no.	Colour / surface	Mix & Match	Tap hole	Overflow	B1 [cm]	B2 [cm]	Cabinet width [cm]	H [cm]	T [cm]	T1 [cm]	Fastening points
B / width: 60 cm											
124060000	white	Yes	centred	visible, symmetrical	54.5	59.2	15.5	48.5	6	2	2
124062000	white	Yes	centred	without	54.5	59.2	15.5	48.5	6	2	2
124063000	white	Yes	without	visible, symmetrical	54.5	59.2	15.5	48.5	6	2	2
124061000	white	Yes	without	without	54.5	59.2	15.5	48.5	6	2	2
B / width: 75 cm											
124075000	white	Yes	centred	visible, symmetrical	69	74	15.5	48.5	6	2	2
124078000	white	Yes	without	visible, symmetrical	69	74	15.5	48.5	6	2	2
B / width: 90 cm											
124090000	white	Yes	centred	visible, symmetrical	13	84	89	15.5	48.5	6	4
124093000	white	Yes	without	visible, symmetrical	13	84	89	15.5	48.5	6	4
B / width: 120 cm											
124020000	white	Yes	left and right	visible, symmetrical	28	114.5	119	16	48.5	6	4
124025000	white	Yes	without	visible, symmetrical	28	114.5	119	16	48.5	6	4

Can be combined with

- Geberit iCon cabinet for washbasin, with one drawer → p. 614
- Geberit iCon cabinet for washbasin, with two drawers → p. 616
- Geberit ONE cabinet for washbasin, with two drawers → p. 486
- Geberit ONE cabinet for washbasin, with one drawer → p. 484
- Geberit Acanto cabinet for washbasin, with one drawer and one internal drawer → p. 564

Accessories


- Geberit dip tube trap for washbasin, horizontal outlet
- Geberit washbasin drain, space-saving model, slim design, with external waste plug with push actuation
- Geberit washbasin drain, space-saving model, slim design, with external waste plug and lever actuation
- Geberit washbasin drain, space-saving model, slim design, with free outlet and valve cover
- Geberit fastening material for washbasin → p. 1035



- A Geberit washbasin connector, space-saving model is required for the installation of the washbasin with base cabinet. See 'Assortment overview – Geberit iCon washbasin connectors space-saving model' or online catalogue, washbasin accessories
- Mix & Match: Articles of the same width can be freely combined in the Geberit ONE, Acanto and iCon series

Mix & Match

Geberit iCon Light washbasin

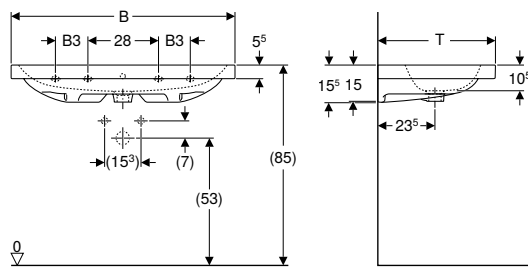

Technical data

Product material	Fine fireclay
------------------	---------------

Characteristics

- Can be installed with a washbasin cabinet

Art. no.	Colour / surface	Mix & Match	Tap hole	Overflow	B1 [cm]	B2 [cm]	B3 [cm]	Cabinet width [cm]	H [cm]	T [cm]	T1 [cm]	Fastening points
B / width: 60 cm												
501.834.00.1	white	Yes	centred	visible, symmetrical	54	30		59.2	15.5	48	11	2
501.834.00.5 *	white	Yes	centred	without	54	30		59.2	15.5	48	11	2
501.834.00.3 *	white	Yes	without	visible, symmetrical	54	30		59.2	15.5	48	11	2
501.834.00.7 *	white	Yes	without	without	54	30		59.2	15.5	48	11	2
B / width: 75 cm												
501.835.00.1	white	Yes	centred	visible, symmetrical	68	37.5		74	15.5	48	11	2
501.835.00.5 *	white	Yes	centred	without	68	37.5		74	15.5	48	11	2
501.835.00.3 *	white	Yes	without	visible, symmetrical	68	37.5		74	15.5	48	11	2
501.835.00.7 *	white	Yes	without	without	68	37.5		74	15.5	48	11	2
B / width: 90 cm												
501.836.00.1	white	Yes	centred	visible, symmetrical	83	45	13	88.8	15.5	48	11	4
501.836.00.5 *	white	Yes	centred	without	83	45	13	88.8	15.5	48	11	4
501.836.00.3 *	white	Yes	without	visible, symmetrical	83	45	13	88.8	15.5	48	11	4
501.836.00.7 *	white	Yes	without	without	83	45	13	88.8	15.5	48	11	4
B / width: 120 cm												
501.837.00.1	white	Yes	left and right	visible, symmetrical	113	60	28	118.4	15.5	48	11.5	4
501.837.00.5 *	white	Yes	left and right	without	113	60	28	118.4	15.5	48	11.5	4
501.837.00.3 *	white	Yes	without	visible, symmetrical	113	60	28	118.4	15.5	48	11.5	4
501.837.00.7 *	white	Yes	without	without	113	60	28	118.4	15.5	48	11.5	4

* Order-based production

Can be combined with

- Geberit iCon cabinet for washbasin, with one drawer → p. 614
- Geberit iCon cabinet for washbasin, with two drawers → p. 616
- Geberit ONE cabinet for washbasin, with two drawers → p. 486
- Geberit ONE cabinet for washbasin, with one drawer → p. 484
- Geberit Acanto cabinet for washbasin, with one drawer and one internal drawer → p. 564

Accessories


- Geberit dip tube trap for washbasin, horizontal outlet
- Geberit washbasin drain, space-saving model, slim design, with external waste plug with push actuation
- Geberit washbasin drain, space-saving model, slim design, with external waste plug and lever actuation
- Geberit washbasin drain, space-saving model, slim design, with free outlet and valve cover
- Geberit fastening material for washbasin → p. 1035



- A Geberit washbasin connector, space-saving model is required for the installation of the washbasin with base cabinet. See 'Assortment overview – Geberit iCon washbasin connectors space-saving model' or online catalogue, washbasin accessories
- Mix & Match: Articles of the same width can be freely combined in the Geberit ONE, Acanto and iCon series

Mix & Match

Geberit iCon Light washbasin with shelf surface

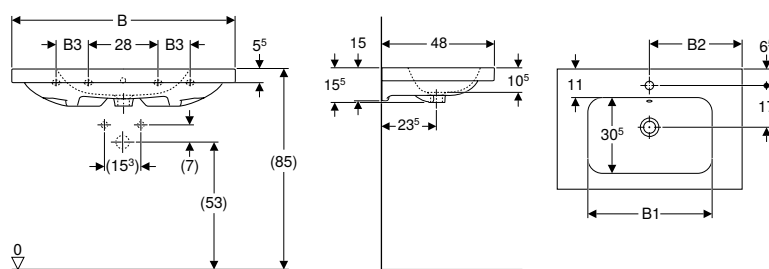

Technical data

Product material	Fine fireclay
------------------	---------------

Characteristics

- Can be installed with a washbasin cabinet
- With shelf surface

Art. no.	Colour / surface	Mix & Tap hole Match	Overflow	B1 [cm]	B2 [cm]	B3 [cm]	Cabinet width [cm]	H [cm]	T [cm]	Fastening points	Shelf space
B / width: 75 cm											
501.839.00.1	white	Yes centred	visible, symmetrical	52	37.5		74	15.5	48	2	on both sides
501.839.00.3*	white	Yes without	visible, symmetrical	52	37.5		74	15.5	48	2	on both sides
501.839.00.5*	white	Yes centred	without	52	37.5		74	15.5	48	2	on both sides
501.839.00.7*	white	Yes without	without	52	37.5		74	15.5	48	2	on both sides
B / width: 90 cm											
501.840.00.1	white	Yes centred	visible, symmetrical	54	45	13	88.8	16	48	4	on both sides
501.840.00.3*	white	Yes without	visible, symmetrical	54	45	13	88.8	16	48	4	on both sides
501.840.00.5*	white	Yes centred	without	54	45	13	88.8	16	48	4	on both sides
501.840.00.7*	white	Yes without	without	54	45	13	88.8	16	48	4	on both sides

* Order-based production

Can be combined with

- Geberit iCon cabinet for washbasin, with one drawer → p. 614
- Geberit iCon cabinet for washbasin, with two drawers → p. 616
- Geberit ONE cabinet for washbasin, with two drawers → p. 486
- Geberit ONE cabinet for washbasin, with one drawer → p. 484
- Geberit Acanto cabinet for washbasin, with one drawer and one internal drawer → p. 564


Accessories

- Geberit dip tube trap for washbasin, horizontal outlet
- Geberit washbasin drain, space-saving model, slim design, with external waste plug with push actuation
- Geberit washbasin drain, space-saving model, slim design, with external waste plug and lever actuation
- Geberit washbasin drain, space-saving model, slim design, with free outlet and valve cover
- Geberit fastening material for washbasin → p. 1035



- A Geberit washbasin connector, space-saving model is required for the installation of the washbasin with base cabinet. See 'Assortment overview – Geberit iCon washbasin connectors space-saving model' or online catalogue, washbasin accessories
- Mix & Match: Articles of the same width can be freely combined in the Geberit ONE, Acanto and iCon series

Geberit iCon Light washbasin, small projection

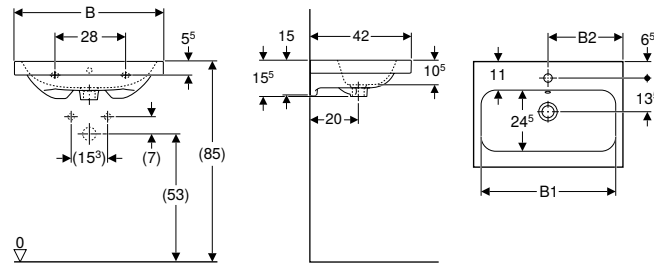

Technical data

Product material	Fine fireclay
------------------	---------------

Characteristics

- Can be installed with a washbasin cabinet
- Small projection

Art. no.	Colour / surface	Tap hole	Overflow	B1 [cm]	B2 [cm]	Cabinet width [cm]	H [cm]	T [cm]
B / width: 60 cm								
501.841.00.1	white	centred	visible, symmetrical	54	30	60	15.5	42
501.841.00.3 *	white	without	visible, symmetrical	54	30	60	15.5	42
501.841.00.5 *	white	centred	without	54	30	60	15.5	42
501.841.00.7 *	white	without	without	54	30	60	15.5	42
B / width: 75 cm								
501.842.00.1	white	centred	visible, symmetrical	69	37.5	75	15.5	42
501.842.00.3 *	white	without	visible, symmetrical	69	37.5	75	15.5	42
501.842.00.5 *	white	centred	without	69	37.5	75	15.5	42
501.842.00.7 *	white	without	without	69	37.5	75	15.5	42

* Order-based production

Can be combined with

- Geberit iCon cabinet for washbasin, with two drawers, small projection → p. 618

Accessories

- Geberit dip tube trap for washbasin, horizontal outlet
- Geberit washbasin drain, space-saving model, slim design, with external waste plug with push actuation
- Geberit washbasin drain, space-saving model, slim design, with external waste plug and lever actuation
- Geberit washbasin drain, space-saving model, slim design, with free outlet and valve cover
- Geberit fastening material for washbasin → p. 1035




- A Geberit washbasin connector, space-saving model is required for the installation of the washbasin with base cabinet. See 'Assortment overview – Geberit iCon washbasin connectors space-saving model' or online catalogue, washbasin accessories

Double washbasins

Mix & Match

Geberit iCon double washbasin

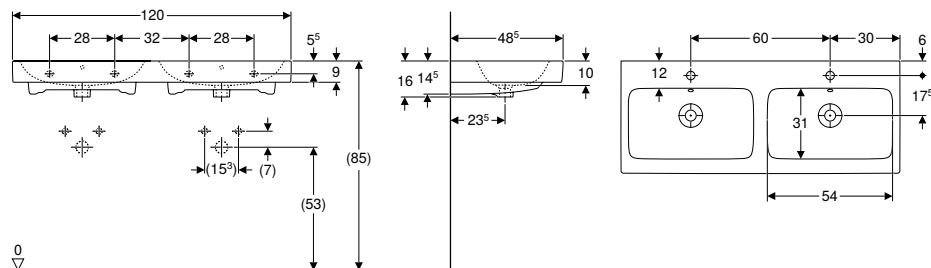

Technical data

Product material	Fine fireclay
------------------	---------------

Characteristics

- Can be installed with a washbasin cabinet

Art. no.	Colour / surface	Mix & Match	Tap hole	Overflow	H [cm]	T [cm]
B / width: 120 cm						
124120000	white	Yes	centred	visible, symmetrical	16	48.5

Can be combined with

- Geberit iCon cabinet for double washbasin, with two drawers → p. 619
- Geberit iCon cabinet for double washbasin, with four drawers → p. 620
- Geberit Acanto cabinet for double washbasin, with two drawers and two internal drawers → p. 567

Accessories


- Geberit dip tube trap for washbasin, horizontal outlet
- Geberit washbasin drain, space-saving model, slim design, with external waste plug with push actuation
- Geberit washbasin drain, space-saving model, slim design, with external waste plug and lever actuation
- Geberit washbasin drain, space-saving model, slim design, with free outlet and valve cover
- Geberit fastening material for washbasin → p. 1035



- A Geberit washbasin connector, space-saving model is required for the installation of the washbasin with base cabinet. See 'Assortment overview – Geberit iCon washbasin connectors space-saving model' or online catalogue, washbasin accessories
- Mix & Match: Articles of the same width can be freely combined in the Geberit ONE, Acanto and iCon series

Mix & Match

Geberit iCon Light double washbasin

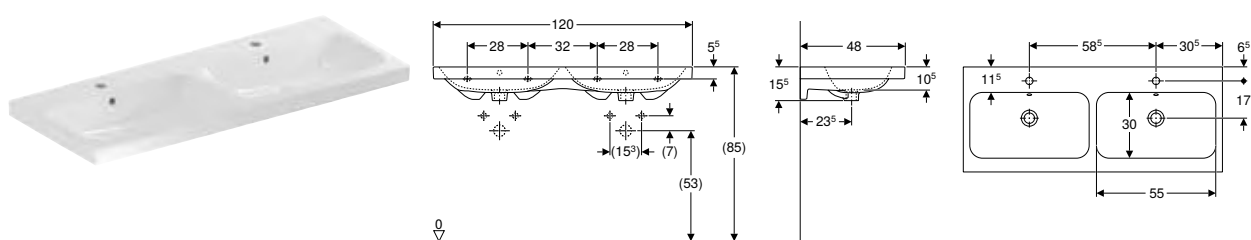

Geberit iCon

Technical data

Product material	Fine fireclay
------------------	---------------

Characteristics

- Can be installed with a washbasin cabinet

Art. no.	Colour / surface	Mix & Match	Tap hole	Overflow	Cabinet width [cm]	H [cm]	T [cm]
B / width: 120 cm							
501.838.00.1	white	Yes	centred	visible, symmetrical	118.4	15.5	48
501.838.00.3*	white	Yes	without	visible, symmetrical	118.4	15.5	48
501.838.00.5*	white	Yes	centred	without	118.4	15.5	48
501.838.00.7*	white	Yes	without	without	118.4	15.5	48

* Order-based production

Can be combined with

- Geberit iCon cabinet for double washbasin, with two drawers → p. 619
- Geberit iCon cabinet for double washbasin, with four drawers → p. 620
- Geberit Acanto cabinet for double washbasin, with two drawers and two internal drawers → p. 567

Accessories


- Geberit dip tube trap for washbasin, horizontal outlet
- Geberit washbasin drain, space-saving model, slim design, with external waste plug with push actuation
- Geberit washbasin drain, space-saving model, slim design, with external waste plug and lever actuation
- Geberit washbasin drain, space-saving model, slim design, with free outlet and valve cover
- Geberit fastening material for washbasin → p. 1035



- A Geberit washbasin connector, space-saving model is required for the installation of the washbasin with base cabinet. See 'Assortment overview – Geberit iCon washbasin connectors space-saving model' or online catalogue, washbasin accessories
- Mix & Match: Articles of the same width can be freely combined in the Geberit ONE, Acanto and iCon series

Lay-on washbasins

Geberit iCon lay-on washbasin

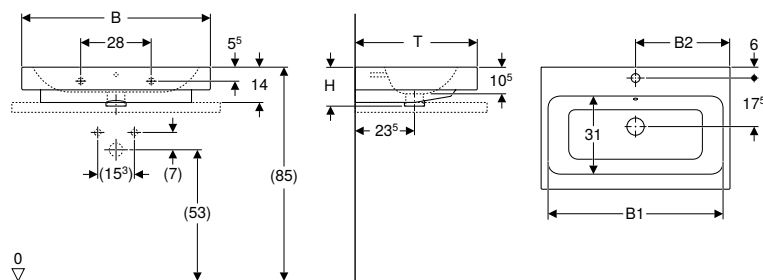

click & scan

Application purposes

- For mounting on washtops

Technical data

Product material	Fine fireclay
------------------	---------------

Art. no.	Colour / surface	Tap hole	Overflow	B1 [cm]	B2 [cm]	H [cm]	T [cm]
----------	------------------	----------	----------	------------	------------	-----------	-----------

B / width: 60 cm

124560000	white	centred	visible, symmetrical	54.5	30	15.5	48.5
-----------	-------	---------	----------------------	------	----	------	------

B / width: 75 cm

124575000	white	centred	visible, symmetrical	69	37.5	15.5	48.5
-----------	-------	---------	----------------------	----	------	------	------

B / width: 90 cm

124590000	white	centred	visible, symmetrical	85	45	15.5	48.5
-----------	-------	---------	----------------------	----	----	------	------


Characteristics

- Wall fixation
- Ground bottom and rear sides

Accessories

- Geberit dip tube trap for washbasin, horizontal outlet
- Geberit washbasin drain, space-saving model, slim design, with external waste plug with push actuation
- Geberit washbasin drain, space-saving model, slim design, with external waste plug and lever actuation
- Geberit washbasin drain, space-saving model, slim design, with free outlet and valve cover
- Geberit fastening material for washbasin → p. 1035

Geberit iCon Light lay-on washbasin

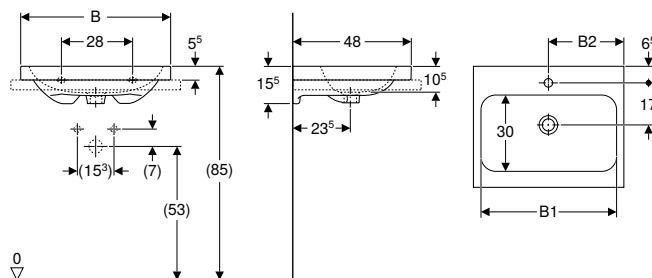

click & scan

Application purposes

- For mounting on washtops

Technical data

Product material	Fine fireclay
------------------	---------------

Art. no.	Colour / surface	Tap hole	Overflow	B1 [cm]	B2 [cm]	H [cm]	T [cm]
----------	------------------	----------	----------	------------	------------	-----------	-----------

B / width: 60 cm

501.847.00.1	white	centred	visible, symmetrical	54	30	15.5	48
--------------	-------	---------	----------------------	----	----	------	----

501.847.00.3 *	white	without	visible, symmetrical	54	30	15.5	48
----------------	-------	---------	----------------------	----	----	------	----

501.847.00.5 *	white	centred	without	54	30	15.5	48
----------------	-------	---------	---------	----	----	------	----

501.847.00.7 *	white	without	without	54	30	15.5	48
----------------	-------	---------	---------	----	----	------	----

501.847.JT.1	white / matt	centred	visible, symmetrical	54	30	15.5	48
--------------	--------------	---------	----------------------	----	----	------	----

B / width: 75 cm

501.848.00.1	white	centred	visible, symmetrical	68	37.5	15.5	48
--------------	-------	---------	----------------------	----	------	------	----

501.848.00.3 *	white	without	visible, symmetrical	68	37.5	15.5	48
----------------	-------	---------	----------------------	----	------	------	----

501.848.00.5 *	white	centred	without	68	37.5	15.5	48
----------------	-------	---------	---------	----	------	------	----

501.848.00.7 *	white	without	without	68	37.5	15.5	48
----------------	-------	---------	---------	----	------	------	----

501.848.JT.1	white / matt	centred	visible, symmetrical	68	37.5	15.5	48
--------------	--------------	---------	----------------------	----	------	------	----

* Order-based production


Accessories

- Geberit dip tube trap for washbasin, horizontal outlet
- Geberit washbasin drain, space-saving model, slim design, with external waste plug with push actuation
- Geberit washbasin drain, space-saving model, slim design, with external waste plug and lever actuation
- Geberit washbasin drain, space-saving model, slim design, with free outlet and valve cover
- Geberit fastening material for washbasin → p. 1035

Vanity basins

Mix & Match

Geberit iCon vanity basin

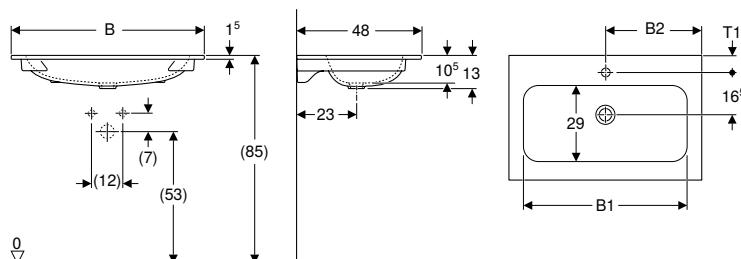

Application purposes

- For mounting on washbasin cabinets

Characteristics

- Slim rim

Technical data

Product material	Fine fireclay
------------------	---------------

Art. no.	Colour / surface	Mix & Match	Tap hole	Overflow	B1 [cm]	B2 [cm]	Cabinet width [cm]	H [cm]	T [cm]	T1 [cm]
----------	------------------	-------------	----------	----------	---------	---------	--------------------	--------	--------	---------

B / width: 60 cm

501.843.00.1	white	Yes	centred	without	49	30	60	13	48	6.5
--------------	-------	-----	---------	---------	----	----	----	----	----	-----

501.843.00.3*	white	Yes	without	without	49	30	60	13	48	
---------------	-------	-----	---------	---------	----	----	----	----	----	--

B / width: 75 cm

501.844.00.1	white	Yes	centred	without	63.5	37.5	75	13	48	6.5
--------------	-------	-----	---------	---------	------	------	----	----	----	-----

501.844.00.3*	white	Yes	without	without	63.5	37.5	75	13	48	
---------------	-------	-----	---------	---------	------	------	----	----	----	--

B / width: 90 cm

501.845.00.1	white	Yes	centred	without	78.5	45	90	13	48	6.5
--------------	-------	-----	---------	---------	------	----	----	----	----	-----

501.845.00.3*	white	Yes	without	without	78.5	45	90	13	48	
---------------	-------	-----	---------	---------	------	----	----	----	----	--

B / width: 120 cm

501.846.00.1	white	Yes	left and right	without	108	60	120	13	48	7
--------------	-------	-----	----------------	---------	-----	----	-----	----	----	---

501.846.00.3*	white	Yes	without	without	108	60	120	13	48	
---------------	-------	-----	---------	---------	-----	----	-----	----	----	--

* Order-based production

Can be combined with

- Geberit iCon cabinet for washbasin, with one drawer → p. 614
- Geberit iCon cabinet for washbasin, with two drawers → p. 616
- Geberit ONE cabinet for washbasin, with two drawers → p. 486
- Geberit ONE cabinet for washbasin, with one drawer → p. 484
- Geberit Acanto cabinet for washbasin, with one drawer and one internal drawer → p. 564

Accessories

- Geberit washbasin drain, space-saving model, slim design, with free outlet and valve cover
- Geberit Clou washbasin drain, space-saving model, slim design, with lever actuation and valve cover









- A Geberit washbasin connector, space-saving model is required for the installation of the washbasin with base cabinet. See 'Assortment overview – Geberit iCon washbasin connectors space-saving model' or online catalogue, washbasin accessories
- Mix & Match: Articles of the same width can be freely combined in the Geberit ONE, Acanto and iCon series

Bathroom furniture

Accessory overview – Geberit iCon bathroom furniture

Geberit International Sales, version: December 2025


	Towel rail		Drawer insert			
			60 cm	75 cm	90 cm	120 cm
						
	→ p. 505	→ p. 505	→ p. 505	→ p. 505	→ p. 505	→ p. 505
	502.328.00.1	503.012.01.1	502.349.00.1	502.350.00.1	502.351.00.1	502.353.00.1
	502.328.01.3	503.012.14.1				
	502.328.JK.1	503.012.21.1				
	502.328.JL.1	503.012.JK.1				
	502.328.14.1					

Cabinets for handrinse basins

Washbasin, width 38 cm

Geberit iCon cabinet for handrinse basin, with one door	502.300.01.1		white	→ p. 612							
	502.300.01.2		white, chrome-plated handle	→ p. 612							
	502.300.01.3		white / matt	→ p. 612							
	502.300.JK.1		lava	→ p. 612							
	502.300.JL.1		sand grey	→ p. 612							
	502.300.JH.1		oak	→ p. 612							
	502.300.JR.1		hickory	→ p. 612							
	502.301.01.1		white	→ p. 612							
	502.301.01.2		white, chrome-plated handle	→ p. 612							
	502.301.01.3		white / matt	→ p. 612							
	502.301.JK.1		lava	→ p. 612							
	502.301.JL.1		sand grey	→ p. 612							
	502.301.JH.1		oak	→ p. 612							
	502.301.JR.1		hickory	→ p. 612							

Washbasin, width 53 cm


Geberit iCon cabinet for handrinse basin, with one drawer	502.302.01.1		white	→ p. 613							
	502.302.01.2		white, chrome-plated handle	→ p. 613							
	502.302.01.3		white / matt	→ p. 613							
	502.302.JK.1		lava	→ p. 613							
	502.302.JL.1		sand grey	→ p. 613							
	502.302.JH.1		oak	→ p. 613							
	502.302.JR.1		hickory	→ p. 613							





Cabinets for washbasin

Washbasin, width 60 cm

Geberit iCon cabinet for washbasin, with one drawer	502.310.01.1		white	→ p. 614	✓	✓	✓				
	502.310.01.2		white, chrome-plated handle	→ p. 614	✓	✓	✓				
	502.310.01.3		white / matt	→ p. 614	✓	✓	✓				
	502.310.JK.1		lava	→ p. 614	✓	✓	✓				
	502.310.JL.1		sand grey	→ p. 614	✓	✓	✓				
	502.310.JH.1		oak	→ p. 614	✓	✓	✓				
	502.310.JR.1		hickory	→ p. 614	✓	✓	✓				

Washbasin, width 75 cm

Geberit iCon cabinet for washbasin, with one drawer	502.311.01.1		white	→ p. 614	✓	✓	✓				
	502.311.01.2		white, chrome-plated handle	→ p. 614	✓	✓	✓				
	502.311.01.3		white / matt	→ p. 614	✓	✓	✓				
	502.311.JK.1		lava	→ p. 614	✓	✓	✓				
	502.311.JL.1		sand grey	→ p. 614	✓	✓	✓				
	502.311.JH.1		oak	→ p. 614	✓	✓	✓				
	502.311.JR.1		hickory	→ p. 614	✓	✓	✓				

	Feet	Handles							Light strip for drawer	Power socket element
		38 cm	45 cm	53 cm	60 cm	75 cm	90 cm	120 cm		
										
	→ p. 579	→ p. 578	→ p. 578	→ p. 578	→ p. 578	→ p. 578	→ p. 578	→ p. 578	→ p. 506	→ p. 506
500.367.00.1		502.356.00.1	502.357.00.1	502.358.00.1	502.359.00.1	502.360.00.1	502.361.00.1	502.362.00.1	502.031.00.1	
		502.356.01.1	502.357.01.1	502.358.01.1	502.359.01.1	502.360.01.1	502.361.01.1	502.362.01.1		505.090.00.2
		502.356.JK.1	502.357.JK.1	502.358.JK.1	502.359.JK.1	502.360.JK.1	502.361.JK.1	502.362.JK.1		
500.657.00.2		502.356.JL.1	502.357.JL.1	502.358.JL.1	502.359.JL.1	502.360.JL.1	502.361.JL.1	502.362.JL.1		
500.658.00.2		502.356.14.1	502.357.14.1	502.358.14.1	502.359.14.1	502.360.14.1	502.361.14.1	502.362.14.1		













		✓								
		✓								
		✓								
		✓								
		✓								
		✓								
		✓								
		✓								
		✓								
		✓								
		✓								
		✓								
		✓								
		✓								
		✓								
		✓								







				✓						
				✓						
				✓						
				✓						
				✓						
				✓						
				✓						
				✓						

					✓				✓	✓
					✓				✓	✓
					✓				✓	✓
					✓				✓	✓
					✓				✓	✓
					✓				✓	✓
					✓				✓	✓
					✓				✓	✓


						✓			✓	✓
						✓			✓	✓
						✓			✓	✓
						✓			✓	✓
						✓			✓	✓
						✓			✓	✓
						✓			✓	✓
						✓			✓	✓

Geberit iCon


				Towel rail		Drawer insert				
						60 cm	75 cm	90 cm	120 cm	
										
				→ p. 505	→ p. 505	→ p. 505	→ p. 505	→ p. 505	→ p. 505	
				502.328.00.1	503.012.01.1	502.349.00.1	502.350.00.1	502.351.00.1	502.353.00.1	
				502.328.01.3	503.012.14.1					
				502.328.JK.1	503.012.21.1					
				502.328.JL.1	503.012.JK.1					
				502.328.14.1						
Washbasin, width 90 cm										
Geberit iCon cabinet for washbasin, with one drawer	502.312.01.1		white	→ p. 614	✓	✓			✓	
	502.312.01.2		white, chrome-plated handle	→ p. 614	✓	✓			✓	
	502.312.01.3		white / matt	→ p. 614	✓	✓			✓	
	502.312.JK.1		lava	→ p. 614	✓	✓			✓	
	502.312.JL.1		sand grey	→ p. 614	✓	✓			✓	
	502.312.JH.1		oak	→ p. 614	✓	✓			✓	
	502.312.JR.1		hickory	→ p. 614	✓	✓			✓	
Washbasin, width 120 cm										
Geberit iCon cabinet for washbasin, with one drawer	502.313.01.1		white	→ p. 615	✓	✓				✓
	502.313.01.2		white, chrome-plated handle	→ p. 615	✓	✓				✓
	502.313.01.3		white / matt	→ p. 615	✓	✓				✓
	502.313.JK.1		lava	→ p. 615	✓	✓				✓
	502.313.JL.1		sand grey	→ p. 615	✓	✓				✓
	502.313.JH.1		oak	→ p. 615	✓	✓				✓
	502.313.JR.1		hickory	→ p. 615	✓	✓				✓
Washbasin, width 60 cm										
Geberit iCon cabinet for washbasin, with two drawers	502.303.01.1		white	→ p. 616	✓	✓	✓			
	502.303.01.2		white, chrome-plated handle	→ p. 616	✓	✓	✓			
	502.303.01.3		white / matt	→ p. 616	✓	✓	✓			
	502.303.JK.1		lava	→ p. 616	✓	✓	✓			
	502.303.JL.1		sand grey	→ p. 616	✓	✓	✓			
	502.303.JH.1		oak	→ p. 616	✓	✓	✓			
	502.303.JR.1		hickory	→ p. 616	✓	✓	✓			
Washbasin, width 75 cm										
Geberit iCon cabinet for washbasin, with two drawers	502.304.01.1		white	→ p. 616	✓	✓		✓		
	502.304.01.2		white, chrome-plated handle	→ p. 616	✓	✓		✓		
	502.304.01.3		white / matt	→ p. 616	✓	✓		✓		
	502.304.JK.1		lava	→ p. 616	✓	✓		✓		
	502.304.JL.1		sand grey	→ p. 616	✓	✓		✓		
	502.304.JH.1		oak	→ p. 616	✓	✓		✓		
	502.304.JR.1		hickory	→ p. 616	✓	✓		✓		
Washbasin, width 90 cm										
Geberit iCon cabinet for washbasin, with two drawers	502.305.01.1		white	→ p. 616	✓	✓			✓	
	502.305.01.2		white, chrome-plated handle	→ p. 616	✓	✓			✓	
	502.305.01.3		white / matt	→ p. 616	✓	✓			✓	
	502.305.JK.1		lava	→ p. 616	✓	✓			✓	
	502.305.JL.1		sand grey	→ p. 616	✓	✓			✓	
	502.305.JH.1		oak	→ p. 616	✓	✓			✓	
	502.305.JR.1		hickory	→ p. 616	✓	✓			✓	
Washbasin, width 120 cm										
Geberit iCon cabinet for washbasin, with two drawers	502.306.01.1		white	→ p. 617	✓	✓				✓
	502.306.01.2		white, chrome-plated handle	→ p. 617	✓	✓				✓
	502.306.01.3		white / matt	→ p. 617	✓	✓				✓
	502.306.JK.1		lava	→ p. 617	✓	✓				✓
	502.306.JL.1		sand grey	→ p. 617	✓	✓				✓
	502.306.JH.1		oak	→ p. 617	✓	✓				✓
	502.306.JR.1		hickory	→ p. 617	✓	✓				✓

	Towel rail		Drawer insert			
			60 cm	75 cm	90 cm	120 cm
						
	→ p. 505	→ p. 505	→ p. 505	→ p. 505	→ p. 505	→ p. 505
	502.328.00.1	503.012.01.1	502.349.00.1	502.350.00.1	502.351.00.1	502.353.00.1
	502.328.01.3	503.012.14.1				
	502.328.JK.1	503.012.21.1				
	502.328.JL.1	503.012.JK.1				
	502.328.14.1					

Washbasin, width 60 cm

Geberit iCon cabinet for washbasin, with two drawers, small projection	502.307.01.1		white	→ p. 618							
	502.307.01.2		white, chrome-plated handle	→ p. 618							
	502.307.01.3		white / matt	→ p. 618							
	502.307.JK.1		lava	→ p. 618							
	502.307.JL.1		sand grey	→ p. 618							
	502.307.JH.1		oak	→ p. 618							
	502.307.JR.1		hickory	→ p. 618							

Washbasin, width 75 cm


Geberit iCon cabinet for washbasin, with two drawers, small projection	502.308.01.1		white	→ p. 618							
	502.308.01.2		white, chrome-plated handle	→ p. 618							
	502.308.01.3		white / matt	→ p. 618							
	502.308.JK.1		lava	→ p. 618							
	502.308.JL.1		sand grey	→ p. 618							
	502.308.JH.1		oak	→ p. 618							
	502.308.JR.1		hickory	→ p. 618							

Cabinets for double washbasin

Washbasin, width 120 cm

Geberit iCon cabinet for double washbasin, with two drawers	502.314.01.1		white	→ p. 619	✓	✓	✓				
	502.314.01.2		white, chrome-plated handle	→ p. 619	✓	✓	✓				
	502.314.01.3		white / matt	→ p. 619	✓	✓	✓				
	502.314.JK.1		lava	→ p. 619	✓	✓	✓				
	502.314.JL.1		sand grey	→ p. 619	✓	✓	✓				
	502.314.JH.1		oak	→ p. 619	✓	✓	✓				
	502.314.JR.1		hickory	→ p. 619	✓	✓	✓				
Geberit iCon cabinet for double washbasin, with four drawers	502.309.01.1		white	→ p. 620	✓	✓	✓				
	502.309.01.2		white, chrome-plated handle	→ p. 620	✓	✓	✓				
	502.309.01.3		white / matt	→ p. 620	✓	✓	✓				
	502.309.JK.1		lava	→ p. 620	✓	✓	✓				
	502.309.JL.1		sand grey	→ p. 620	✓	✓	✓				
	502.309.JH.1		oak	→ p. 620	✓	✓	✓				
	502.309.JR.1		hickory	→ p. 620	✓	✓	✓				


Side cabinets

Geberit iCon low cabinet with two drawers	502.315.01.1		white	→ p. 624	✓						
	502.315.01.2		white, chrome-plated handle	→ p. 624	✓						
	502.315.01.3		white / matt	→ p. 624	✓						
	502.315.JK.1		lava	→ p. 624	✓						
	502.315.JH.1		oak	→ p. 624	✓						
	502.315.JR.1		hickory	→ p. 624	✓						

✓ Compatible

Washbasin cabinets

Geberit iCon cabinet for handrinse basin, with one door

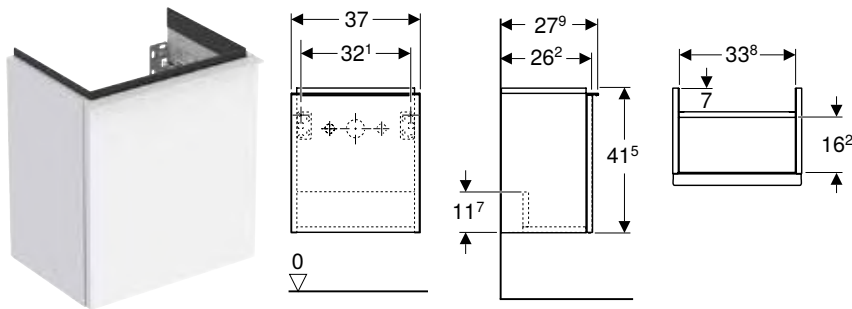

click & scan

Technical data

Product material	High-compressed three-layer chipboard
------------------	---------------------------------------

Scope of delivery

- Cabinet for handrinse basin
- Fastening material

Characteristics

- FSC™ C134279 certified
- Wall-hung
- With one door
- Door with soft closing
- Can be subdivided for service room
- Opening with handle
- Exchangeable handle
- Moisture-resistant
- Delivered preassembled

Art. no.	Colour / surface	B [cm]	Washbasin, width [cm]	H [cm]	T [cm]
----------	------------------	-----------	--------------------------	-----------	-----------

Door: left-hand hinge

502.301.01.1	Body, Front: white / high-gloss coated Handle: white / matt powder-coated	37	38	41.5	27.9
502.301.01.2	Body, Front: white / high-gloss coated Handle: chrome / glossy	37	38	41.5	27.9
502.301.01.3 *	Body, Front: white / matt coated Handle: white / matt powder-coated	37	38	41.5	27.9
502.301.JH.1	Body, Front: oak / wood-textured melamine Handle: lava / matt powder-coated	37	38	41.5	27.9
502.301.JK.1	Body, Front: lava / matt coated Handle: lava / matt powder-coated	37	38	41.5	27.9
502.301.JL.1 *	Body, Front: sand grey / high-gloss coated Handle: sand grey / matt powder-coated	37	38	41.5	27.9
502.301.JR.1 *	Body, Front: hickory / wood-textured melamine Handle: lava / matt powder-coated	37	38	41.5	27.9

Door: right-hand hinge

502.300.01.1	Body, Front: white / high-gloss coated Handle: white / matt powder-coated	37	38	41.5	27.9
502.300.01.2	Body, Front: white / high-gloss coated Handle: chrome / glossy	37	38	41.5	27.9
502.300.01.3 *	Body, Front: white / matt coated Handle: white / matt powder-coated	37	38	41.5	27.9
502.300.JH.1	Body, Front: oak / wood-textured melamine Handle: lava / matt powder-coated	37	38	41.5	27.9
502.300.JK.1	Body, Front: lava / matt coated Handle: lava / matt powder-coated	37	38	41.5	27.9
502.300.JL.1 *	Body, Front: sand grey / high-gloss coated Handle: sand grey / matt powder-coated	37	38	41.5	27.9
502.300.JR.1 *	Body, Front: hickory / wood-textured melamine Handle: lava / matt powder-coated	37	38	41.5	27.9

* Order-based production


Can be combined with

- Geberit iCon handrinse basin → p. 596
- Geberit iCon Light handrinse basin → p. 597
- Geberit iCon side element → p. 624
- Geberit Option Plus illuminated mirror, square design, with direct and indirect lighting → p. 816
- Geberit Option illuminated mirror, round design, with direct and indirect lighting → p. 817

Accessories

- Accessory overview – Geberit iCon bathroom furniture → p. 607

Geberit iCon cabinet for handrinse basin, with one drawer

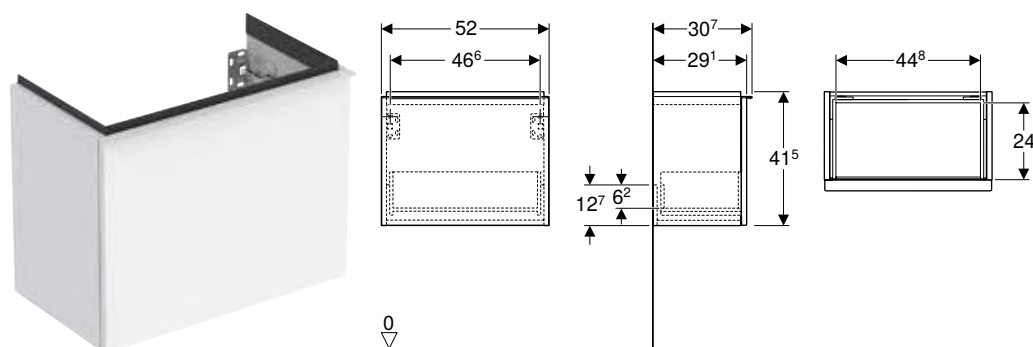

click & scan

Technical data

Product material	High-compressed three-layer chipboard
Drawer load max.	30 kg

Scope of delivery

- Cabinet for handrinse basin
- Fastening material

Characteristics

- FSC™ C134279 certified
- Wall-hung
- With one drawer
- Opening with handle
- Drawer with soft closing
- Exchangeable handle
- Drawer without trap cutout
- Moisture-resistant
- Delivered preassembled

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]
Washbasin width: 53 cm				
502.302.01.1	Body, Front: white / high-gloss coated Handle: white / matt powder-coated	52	41.5	30.7
502.302.01.2	Body, Front: white / high-gloss coated Handle: chrome / glossy	52	41.5	30.7
502.302.01.3 *	Body, Front: white / matt coated Handle: white / matt powder-coated	52	41.5	30.7
502.302.JH.1	Body, Front: oak / wood-textured melamine Handle: lava / matt powder-coated	52	41.5	30.7
502.302.JK.1	Body, Front: lava / matt coated Handle: lava / matt powder-coated	52	41.5	30.7
502.302.JL.1 *	Body, Front: sand grey / high-gloss coated Handle: sand grey / matt powder-coated	52	41.5	30.7
502.302.JR.1 *	Body, Front: hickory / wood-textured melamine Handle: lava / matt powder-coated	52	41.5	30.7

* Order-based production

Can be combined with


- Geberit iCon handrinse basin with shelf surface → p. 596
- Geberit iCon Light handrinse basin with shelf surface → p. 598
- Geberit iCon side element → p. 624
- Geberit Option illuminated mirror, round design, with direct and indirect lighting → p. 817
- Geberit Option Plus illuminated mirror, square design, with direct and indirect lighting → p. 816
- Geberit Option illuminated mirror, oval design, indirect lighting → p. 818

Accessories

- Accessory overview – Geberit iCon bathroom furniture → p. 607

Mix & Match

Geberit iCon cabinet for washbasin, with one drawer

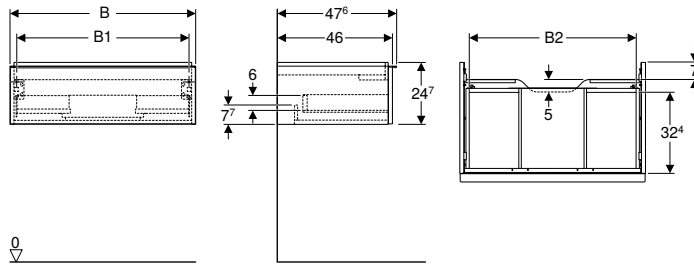

Technical data

Product material	High-compressed three-layer chipboard
Drawer load max.	20 kg

Scope of delivery

- Cabinet for washbasin
- Fastening material

Characteristics

- FSC™ C134279 certified
- Wall-hung
- With one drawer
- Opening with handle
- Exchangeable handle
- Drawer with soft closing
- Drawer without trap cutout
- Moisture-resistant
- Delivered preassembled

Art. no.	Colour / surface	Mix & Match	B [cm]	B1 [cm]	B2 [cm]	H [cm]	T [cm]
Washbasin width: 60 cm							
502.310.01.1	Body, Front: white / high-gloss coated Handle: white / matt powder-coated	Yes	59.2	53.8	51.7	24.7	47.6
502.310.01.2	Body, Front: white / high-gloss coated Handle: chrome / glossy	Yes	59.2	53.8	51.7	24.7	47.6
502.310.01.3 *	Body, Front: white / matt coated Handle: white / matt powder-coated	Yes	59.2	53.8	51.7	24.7	47.6
502.310.JH.1	Body, Front: oak / wood-textured melamine Handle: lava / matt powder-coated	Yes	59.2	53.8	51.7	24.7	47.6
502.310.JK.1	Body, Front: lava / matt coated Handle: lava / matt powder-coated	Yes	59.2	53.8	51.7	24.7	47.6
502.310.JL.1 *	Body, Front: sand grey / high-gloss coated Handle: sand grey / matt powder-coated	Yes	59.2	53.8	51.7	24.7	47.6
502.310.JR.1 *	Body, Front: hickory / wood-textured melamine Handle: lava / matt powder-coated	Yes	59.2	53.8	51.7	24.7	47.6
Washbasin width: 75 cm							
502.311.01.1	Body, Front: white / high-gloss coated Handle: white / matt powder-coated	Yes	74	68.6	66.5	24.7	47.6
502.311.01.2	Body, Front: white / high-gloss coated Handle: chrome / glossy	Yes	74	68.6	66.5	24.7	47.6
502.311.01.3 *	Body, Front: white / matt coated Handle: white / matt powder-coated	Yes	74	68.6	66.5	24.7	47.6
502.311.JH.1	Body, Front: oak / wood-textured melamine Handle: lava / matt powder-coated	Yes	74	68.6	66.5	24.7	47.6
502.311.JK.1	Body, Front: lava / matt coated Handle: lava / matt powder-coated	Yes	74	68.6	66.5	24.7	47.6
502.311.JL.1 *	Body, Front: sand grey / high-gloss coated Handle: sand grey / matt powder-coated	Yes	74	68.6	66.5	24.7	47.6
502.311.JR.1 *	Body, Front: hickory / wood-textured melamine Handle: lava / matt powder-coated	Yes	74	68.6	66.5	24.7	47.6
Washbasin width: 90 cm							
502.312.01.1	Body, Front: white / high-gloss coated Handle: white / matt powder-coated	Yes	88.8	83.4	81.5	24.7	47.6
502.312.01.2	Body, Front: white / high-gloss coated Handle: chrome / glossy	Yes	88.8	83.4	81.5	24.7	47.6
502.312.01.3 *	Body, Front: white / matt coated Handle: white / matt powder-coated	Yes	88.8	83.4	81.5	24.7	47.6
502.312.JH.1	Body, Front: oak / wood-textured melamine Handle: lava / matt powder-coated	Yes	88.8	83.4	81.5	24.7	47.6
502.312.JK.1	Body, Front: lava / matt coated Handle: lava / matt powder-coated	Yes	88.8	83.4	81.5	24.7	47.6
502.312.JL.1 *	Body, Front: sand grey / high-gloss coated Handle: sand grey / matt powder-coated	Yes	88.8	83.4	81.5	24.7	47.6
502.312.JR.1 *	Body, Front: hickory / wood-textured melamine Handle: lava / matt powder-coated	Yes	88.8	83.4	81.5	24.7	47.6

* Order-based production

Art. no.	Colour / surface	Mix & Match	B [cm]	B1 [cm]	B2 [cm]	H [cm]	T [cm]
Washbasin width: 120 cm							
502.313.01.1	Body, Front: white / high-gloss coated Handle: white / matt powder-coated	Yes	118.4	113	111.2	24.7	47.6
502.313.01.2	Body, Front: white / high-gloss coated Handle: chrome / glossy	Yes	118.4	113	111.2	24.7	47.6
502.313.01.3 *	Body, Front: white / matt coated Handle: white / matt powder-coated	Yes	118.4	113	111.2	24.7	47.6
502.313.JH.1	Body, Front: oak / wood-textured melamine Handle: lava / matt powder-coated	Yes	118.4	113	111.2	24.7	47.6
502.313.JK.1	Body, Front: lava / matt coated Handle: lava / matt powder-coated	Yes	118.4	113	111.2	24.7	47.6
502.313.JL.1 *	Body, Front: sand grey / high-gloss coated Handle: sand grey / matt powder-coated	Yes	118.4	113	111.2	24.7	47.6
502.313.JR.1 *	Body, Front: hickory / wood-textured melamine Handle: lava / matt powder-coated	Yes	118.4	113	111.2	24.7	47.6

* Order-based production

Can be combined with

- Geberit iCon washbasin → p. 599
- Geberit iCon Light washbasin → p. 600
- Geberit iCon Light washbasin with shelf surface → p. 601
- Geberit iCon vanity basin → p. 605
- Geberit iCon low cabinet with two drawers → p. 624
- Geberit Acanto washbasin → p. 553
- Geberit Acanto washbasin with shelf surface → p. 554
- Geberit ONE vanity basin → p. 468
- Geberit ONE lay-on washbasin, rectangular → p. 477
- Geberit ONE lay-on washbasin, bowl shape → p. 475
- Geberit ONE lay-on washbasin, rectangular, CleanDrain → p. 476
- Geberit ONE lay-on washbasin, bowl shape, CleanDrain → p. 474
- Geberit ONE vanity basin CleanDrain → p. 465
- Geberit ONE vanity basin, CleanDrain, right shelf surface → p. 466
- Geberit ONE vanity basin, CleanDrain, left shelf surface → p. 467
- Geberit ONE washbasin CleanDrain → p. 461
- Geberit ONE washbasin CleanDrain, right shelf surface → p. 462
- Geberit ONE washbasin CleanDrain, left shelf surface → p. 463
- Geberit ONE design cover for washbasin traps → p. 478
- Geberit ONE washbasin → p. 464

Accessories


- Accessory overview – Geberit iCon bathroom furniture → p. 607



- A Geberit washbasin connector, space-saving model is required for the installation of the base cabinet. See assortment overview washbasin series or online catalogue, washbasin accessories
- Mix & Match: Articles of the same width can be freely combined in the Geberit ONE, Acanto and iCon series

Mix & Match

Geberit iCon cabinet for washbasin, with two drawers

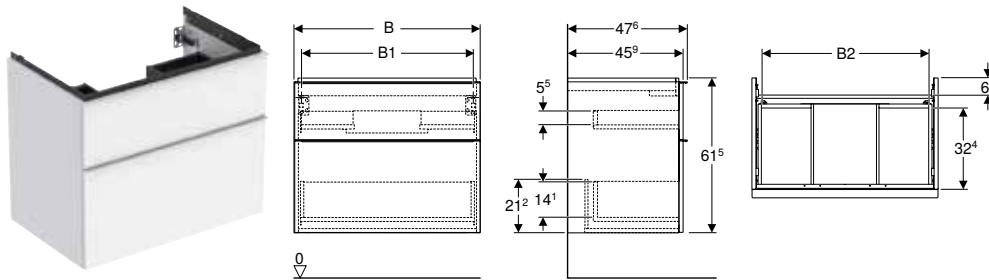

click & scan

Technical data

Product material	High-compressed three-layer chipboard
Drawer load max.	20 kg

Scope of delivery

- Cabinet for washbasin
- Fastening material

Characteristics

- FSC™ C134279 certified
- Wall-hung
- With two drawers
- Opening with handle
- Exchangeable handle
- Drawer with soft closing
- Drawer without trap cutout
- Moisture-resistant
- Delivered preassembled

Art. no.	Colour / surface	Mix & Match	B [cm]	B1 [cm]	B2 [cm]	H [cm]	T [cm]
Washbasin width: 60 cm							
502.303.01.1	Body, Front: white / high-gloss coated Handle: white / matt powder-coated	Yes	59.2	53.8	51.7	61.5	47.6
502.303.01.2	Body, Front: white / high-gloss coated Handle: chrome / glossy	Yes	59.2	53.8	51.7	61.5	47.6
502.303.01.3 *	Body, Front: white / matt coated Handle: white / matt powder-coated	Yes	59.2	53.8	51.7	61.5	47.6
502.303.JH.1	Body, Front: oak / wood-textured melamine Handle: lava / matt powder-coated	Yes	59.2	53.8	51.7	61.5	47.6
502.303.JK.1	Body, Front: lava / matt coated Handle: lava / matt powder-coated	Yes	59.2	53.8	51.7	61.5	47.6
502.303.JL.1 *	Body, Front: sand grey / high-gloss coated Handle: sand grey / matt powder-coated	Yes	59.2	53.8	51.7	61.5	47.6
502.303.JR.1 *	Body, Front: hickory / wood-textured melamine Handle: lava / matt powder-coated	Yes	59.2	53.8	51.7	61.5	47.6
Washbasin width: 75 cm							
502.304.01.1	Body, Front: white / high-gloss coated Handle: white / matt powder-coated	Yes	74	68.6	66.5	61.5	47.6
502.304.01.2	Body, Front: white / high-gloss coated Handle: chrome / glossy	Yes	74	68.6	66.5	61.5	47.6
502.304.01.3 *	Body, Front: white / matt coated Handle: white / matt powder-coated	Yes	74	68.6	66.5	61.5	47.6
502.304.JH.1	Body, Front: oak / wood-textured melamine Handle: lava / matt powder-coated	Yes	74	68.6	66.5	61.5	47.6
502.304.JK.1	Body, Front: lava / matt coated Handle: lava / matt powder-coated	Yes	74	68.6	66.5	61.5	47.6
502.304.JL.1 *	Body, Front: sand grey / high-gloss coated Handle: sand grey / matt powder-coated	Yes	74	68.6	66.5	61.5	47.6
502.304.JR.1 *	Body, Front: hickory / wood-textured melamine Handle: lava / matt powder-coated	Yes	74	68.6	66.5	61.5	47.6
Washbasin width: 90 cm							
502.305.01.1	Body, Front: white / high-gloss coated Handle: white / matt powder-coated	Yes	88.8	83.4	81.5	61.5	47.6
502.305.01.2	Body, Front: white / high-gloss coated Handle: chrome / glossy	Yes	88.8	83.4	81.5	61.5	47.6
502.305.01.3 *	Body, Front: white / matt coated Handle: white / matt powder-coated	Yes	88.8	83.4	81.5	61.5	47.6
502.305.JH.1	Body, Front: oak / wood-textured melamine Handle: lava / matt powder-coated	Yes	88.8	83.4	81.5	61.5	47.6
502.305.JK.1	Body, Front: lava / matt coated Handle: lava / matt powder-coated	Yes	88.8	83.4	81.5	61.5	47.6
502.305.JL.1 *	Body, Front: sand grey / high-gloss coated Handle: sand grey / matt powder-coated	Yes	88.8	83.4	81.5	61.5	47.6
502.305.JR.1 *	Body, Front: hickory / wood-textured melamine Handle: lava / matt powder-coated	Yes	88.8	83.4	81.5	61.5	47.6

* Order-based production

Art. no.	Colour / surface	Mix & Match	B [cm]	B1 [cm]	B2 [cm]	H [cm]	T [cm]
Washbasin width: 120 cm							
502.306.01.1	Body, Front: white / high-gloss coated Handle: white / matt powder-coated	Yes	118.4	113	112	61.5	47.6
502.306.01.2	Body, Front: white / high-gloss coated Handle: chrome / glossy	Yes	118.4	113	112	61.5	47.6
502.306.01.3 *	Body, Front: white / matt coated Handle: white / matt powder-coated	Yes	118.4	113	112	61.5	47.6
502.306.JH.1	Body, Front: oak / wood-textured melamine Handle: lava / matt powder-coated	Yes	118.4	113	112	61.5	47.6
502.306.JK.1	Body, Front: lava / matt coated Handle: lava / matt powder-coated	Yes	118.4	113	112	61.5	47.6
502.306.JL.1 *	Body, Front: sand grey / high-gloss coated Handle: sand grey / matt powder-coated	Yes	118.4	113	112	61.5	47.6
502.306.JR.1 *	Body, Front: hickory / wood-textured melamine Handle: lava / matt powder-coated	Yes	118.4	113	112	61.5	47.6


* Order-based production

Can be combined with


- Geberit iCon washbasin → p. 599
- Geberit iCon Light washbasin → p. 600
- Geberit iCon Light washbasin with shelf surface → p. 601
- Geberit iCon vanity basin → p. 605
- Geberit iCon low cabinet with two drawers → p. 624
- Geberit Acanto washbasin → p. 553
- Geberit Acanto washbasin with shelf surface → p. 554
- Geberit ONE vanity basin → p. 468
- Geberit ONE lay-on washbasin, rectangular → p. 477
- Geberit ONE lay-on washbasin, bowl shape → p. 475
- Geberit ONE lay-on washbasin, rectangular, CleanDrain → p. 476
- Geberit ONE lay-on washbasin, bowl shape, CleanDrain → p. 474
- Geberit ONE vanity basin CleanDrain → p. 465
- Geberit ONE vanity basin, CleanDrain, right shelf surface → p. 466
- Geberit ONE vanity basin, CleanDrain, left shelf surface → p. 467
- Geberit ONE washbasin CleanDrain → p. 461
- Geberit ONE washbasin CleanDrain, right shelf surface → p. 462
- Geberit ONE washbasin CleanDrain, left shelf surface → p. 463
- Geberit ONE washbasin → p. 464

Accessories

- Accessory overview – Geberit iCon bathroom furniture → p. 607

-  A Geberit washbasin connector, space-saving model is required for the installation of the base cabinet. See assortment overview washbasin series or online catalogue, washbasin accessories
- Mix & Match: Articles of the same width can be freely combined in the Geberit ONE, Acanto and iCon series

Geberit iCon cabinet for washbasin, with two drawers, small projection

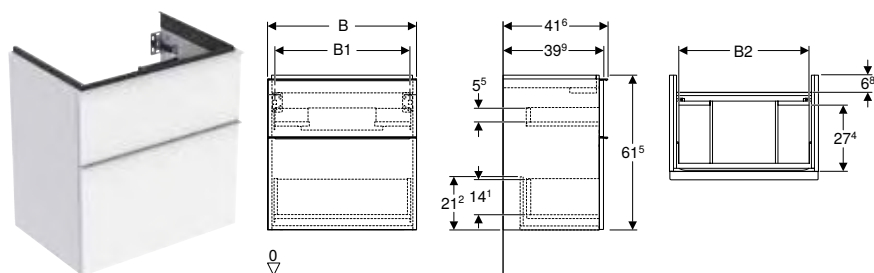

click & scan

Technical data

Product material	High-compressed three-layer chipboard
Drawer load max.	20 kg

Scope of delivery

- Cabinet for washbasin
- Fastening material

Characteristics

- FSC™ C134279 certified
- Wall-hung
- With two drawers
- Opening with handle
- Exchangeable handle
- Drawer with soft closing
- Drawer without trap cutout
- Small projection
- Moisture-resistant
- Delivered preassembled

Art. no.	Colour / surface	B [cm]	B1 [cm]	B2 [cm]	H [cm]	T [cm]
----------	------------------	-----------	------------	------------	-----------	-----------

Washbasin width: 60 cm

502.307.01.1	Body, Front: white / high-gloss coated Handle: white / matt powder-coated	59.2	53.8	51.7	61.5	41.6
502.307.01.2	Body, Front: white / high-gloss coated Handle: chrome / glossy	59.2	53.8	51.7	61.5	41.6
502.307.01.3 *	Body, Front: white / matt coated Handle: white / matt powder-coated	59.2	53.8	51.7	61.5	41.6
502.307.JH.1	Body, Front: oak / wood-textured melamine Handle: lava / matt powder-coated	59.2	53.8	51.7	61.5	41.6
502.307.JK.1	Body, Front: lava / matt coated Handle: lava / matt powder-coated	59.2	53.8	51.7	61.5	41.6
502.307.JL.1 *	Body, Front: sand grey / high-gloss coated Handle: sand grey / matt powder-coated	59.2	53.8	51.7	61.5	41.6
502.307.JR.1 *	Body, Front: hickory / wood-textured melamine Handle: lava / matt powder-coated	59.2	53.8	51.7	61.5	41.6

Washbasin width: 75 cm

502.308.01.1	Body, Front: white / high-gloss coated Handle: white / matt powder-coated	74	68.6	66.5	61.5	41.6
502.308.01.2	Body, Front: white / high-gloss coated Handle: chrome / glossy	74	68.6	66.5	61.5	41.6
502.308.01.3 *	Body, Front: white / matt coated Handle: white / matt powder-coated	74	68.6	66.5	61.5	41.6
502.308.JH.1	Body, Front: oak / wood-textured melamine Handle: lava / matt powder-coated	74	68.6	66.5	61.5	41.6
502.308.JK.1	Body, Front: lava / matt coated Handle: lava / matt powder-coated	74	68.6	66.5	61.5	41.6
502.308.JL.1 *	Body, Front: sand grey / high-gloss coated Handle: sand grey / matt powder-coated	74	68.6	66.5	61.5	41.6
502.308.JR.1 *	Body, Front: hickory / wood-textured melamine Handle: lava / matt powder-coated	74	68.6	66.5	61.5	41.6

* Order-based production

Can be combined with

- Geberit iCon Light washbasin, small projection → p. 602

Accessories




- Accessory overview – Geberit iCon bathroom furniture → p. 607



- A Geberit washbasin connector, space-saving model is required for the installation of the base cabinet. See assortment overview washbasin series or online catalogue, washbasin accessories

Mix & Match

Geberit iCon cabinet for double washbasin, with two drawers

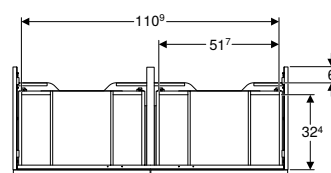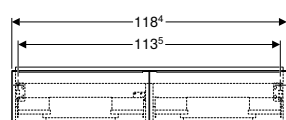

Technical data

Product material	High-compressed three-layer chipboard
Drawer load max.	20 kg

Scope of delivery

- Cabinet for double washbasin
- Fastening material

Characteristics

- FSC™ C134279 certified
- Wall-hung
- With two drawers
- Opening with handle
- Exchangeable handle
- Drawer with soft closing
- Drawer without trap cutout
- Moisture-resistant
- Delivered preassembled

Art. no.	Colour / surface	Mix & Match	B [cm]	H [cm]	T [cm]
Washbasin width: 120 cm					
502.314.01.1	Body, Front: white / high-gloss coated Handle: white / matt powder-coated	Yes	118.4	24.7	47.6
502.314.01.2	Body, Front: white / high-gloss coated Handle: chrome / glossy	Yes	118.4	24.7	47.6
502.314.01.3 *	Body, Front: white / matt coated Handle: white / matt powder-coated	Yes	118.4	24.7	47.6
502.314.JH.1	Body, Front: oak / wood-textured melamine Handle: lava / matt powder-coated	Yes	118.4	24.7	47.6
502.314.JK.1	Body, Front: lava / matt coated Handle: lava / matt powder-coated	Yes	118.4	24.7	47.6
502.314.JL.1 *	Body, Front: sand grey / high-gloss coated Handle: sand grey / matt powder-coated	Yes	118.4	24.7	47.6
502.314.JR.1 *	Body, Front: hickory / wood-textured melamine Handle: lava / matt powder-coated	Yes	118.4	24.7	47.6

* Order-based production

Can be combined with

- Geberit iCon Light double washbasin → p. 603
- Geberit iCon low cabinet with two drawers → p. 624
- Geberit iCon double washbasin → p. 602
- Geberit Acanto double washbasin → p. 556

Accessories




- Accessory overview – Geberit iCon bathroom furniture → p. 607



- A Geberit washbasin connector, space-saving model is required for the installation of the base cabinet. See assortment overview washbasin series or online catalogue, washbasin accessories
- Mix & Match: Articles of the same width can be freely combined in the Geberit ONE, Acanto and iCon series

Mix & Match

Geberit iCon cabinet for double washbasin, with four drawers

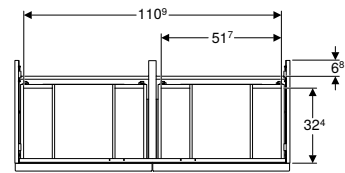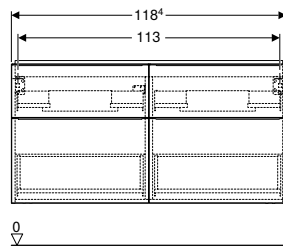

click & scan

Technical data

Product material	High-compressed three-layer chipboard
Drawer load max.	20 kg

Scope of delivery

- Cabinet for double washbasin
- Fastening material

Characteristics

- FSC™ C134279 certified
- Wall-hung
- With four drawers
- Opening with handle
- Exchangeable handle
- Drawer with soft closing
- Drawer without trap cutout
- Moisture-resistant
- Delivered preassembled

Art. no.	Colour / surface	Mix & Match	B [cm]	H [cm]	T [cm]
----------	------------------	-------------	--------	--------	--------

Washbasin width: 120 cm

502.309.01.1	Body, Front: white / high-gloss coated Handle: white / matt powder-coated	Yes	118.4	61.5	47.6
502.309.01.2	Body, Front: white / high-gloss coated Handle: chrome / glossy	Yes	118.4	61.5	47.6
502.309.01.3 *	Body, Front: white / matt coated Handle: white / matt powder-coated	Yes	118.4	61.5	47.6
502.309.JH.1	Body, Front: oak / wood-textured melamine Handle: lava / matt powder-coated	Yes	118.4	61.5	47.6
502.309.JK.1	Body, Front: lava / matt coated Handle: lava / matt powder-coated	Yes	118.4	61.5	47.6
502.309.JL.1 *	Body, Front: sand grey / high-gloss coated Handle: sand grey / matt powder-coated	Yes	118.4	61.5	47.6
502.309.JR.1 *	Body, Front: hickory / wood-textured melamine Handle: lava / matt powder-coated	Yes	118.4	61.5	47.6

* Order-based production

Can be combined with

- Geberit iCon Light double washbasin → p. 603
- Geberit iCon low cabinet with two drawers → p. 624
- Geberit Acanto double washbasin → p. 556
- Geberit iCon double washbasin → p. 602

Accessories


- Accessory overview – Geberit iCon bathroom furniture → p. 607



- A Geberit washbasin connector, space-saving model is required for the installation of the base cabinet. See assortment overview washbasin series or online catalogue, washbasin accessories
- Mix & Match: Articles of the same width can be freely combined in the Geberit ONE, Acanto and iCon series

Side cabinets

Geberit tall cabinet with one door

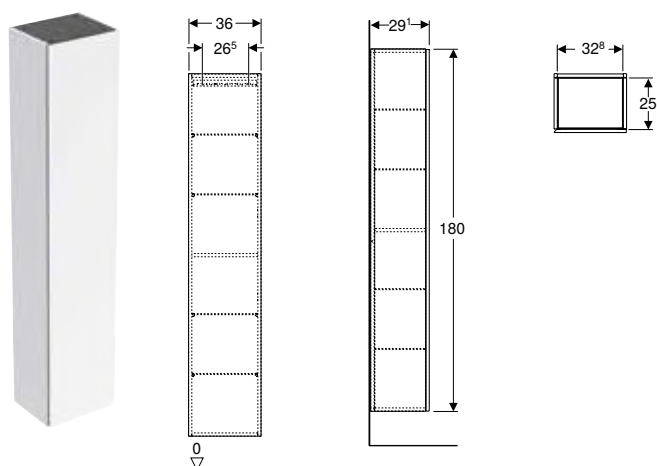

click & scan

Application purposes

- For Geberit ONE, Acanto and iCon series

Technical data

Product material	High-compressed three-layer chipboard
------------------	---------------------------------------

Scope of delivery

- Tall cabinet
- 4 glass shelves
- Fastening material

Characteristics

- FSC™ C134279 certified
- Wall-hung
- With one door
- Door with soft closing
- Opening with recessed handle or push-to-open mechanism
- With four movable glass shelves
- With one fixed shelf
- Hinge side left or right
- Moisture-resistant
- Delivered preassembled


Art. no.	Colour / surface	H [cm]	T [cm]
B / width: 36 cm			
502.316.01.1	Body, Front: white / high-gloss coated	180	29.1
502.316.01.2	Body: white / high-gloss coated Front: white / glossy glass	180	29.1
502.316.01.3 *	Body, Front: white / matt coated	180	29.1
502.316.JH.1	Body, Front: oak / wood-textured melamine	180	29.1
502.316.JK.1	Body, Front: lava / matt coated	180	29.1
502.316.JK.2	Body: lava / matt coated Front: lava / glossy glass	180	29.1
502.316.JR.1 *	Body, Front: hickory / wood-textured melamine	180	29.1
505.083.00.7 *	Body, Front: greige / matt coated	180	29.1
505.083.00.8 *	Body, Front: black / matt coated	180	29.1

* Order-based production

Accessories

- Geberit set of narrow feet → p. 579

Geberit tall cabinet with one door and internal mirror, small projection

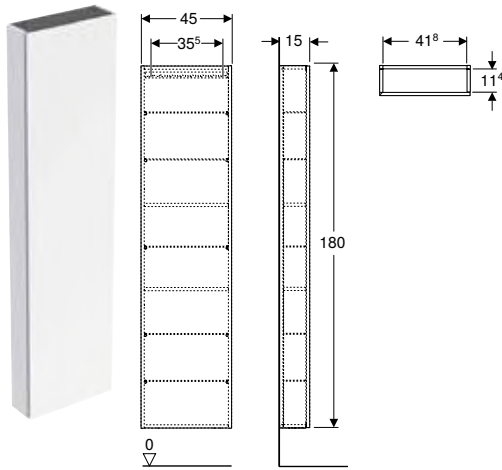

Application purposes

- For Geberit ONE, Acanto and iCon series

Technical data

Product material	High-compressed three-layer chipboard
------------------	---------------------------------------

Scope of delivery

- Tall cabinet
- 5 glass shelves
- Fastening material

Characteristics

- FSC™ C134279 certified
- Wall-hung
- With one door
- Door with soft closing
- Opening with recessed handle or push-to-open mechanism
- With five movable glass shelves
- Door mirrored on inside
- With two fixed shelves
- Hinge side left or right
- Door opening angle 155°
- Moisture-resistant
- Delivered preassembled


Art. no.	Colour / surface	H [cm]	T [cm]
B / width: 45 cm			
502.317.01.1	Body, Front: white / high-gloss coated	180	15
502.317.01.2	Body: white / high-gloss coated Front: white / glossy glass	180	15
502.317.01.3 *	Body, Front: white / matt coated	180	15
502.317.JH.1	Body, Front: oak / wood-textured melamine	180	15
502.317.JK.1	Body, Front: lava / matt coated	180	15
502.317.JK.2	Body: lava / matt coated Front: lava / glossy glass	180	15
502.317.JL.1 *	Body, Front: sand grey / high-gloss coated	180	15
502.317.JR.1 *	Body, Front: hickory / wood-textured melamine	180	15

* Order-based production

Accessories

- Geberit set of narrow feet → p. 579

Geberit tall cabinet with two cargoes

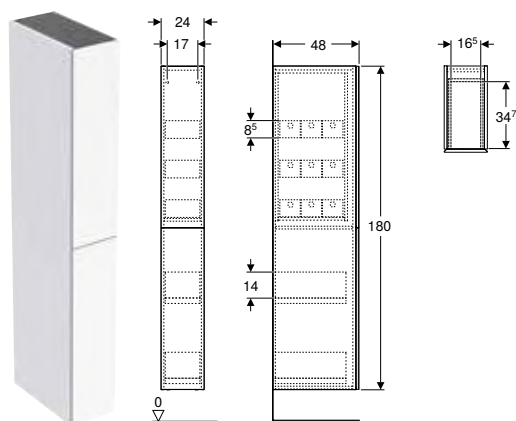

click & scan

Application purposes

- For Geberit ONE, Acanto and iCon series

Technical data

Product material	High-compressed three-layer chipboard
Drawer load max.	30 kg

Characteristics

- FSC™ C134279 certified
- Wall-hung
- With two drawers
- Wooden organiser boxes
- Drawer with soft closing
- Moisture-resistant
- Delivered preassembled

Scope of delivery

- Tall cabinet
- 9 organising boxes
- Fastening material

Art. no.	Colour / surface	H [cm]	T [cm]
B / width: 24 cm			
503.011.01.1	Body, Front: white / high-gloss coated	180	48
503.011.01.2	Body: white / high-gloss coated Front: white / glossy glass	180	48
503.011.01.3 *	Body, Front: white / matt coated	180	48
503.011.JH.1	Body, Front: oak / wood-textured melamine	180	48
503.011.JK.1	Body, Front: lava / matt coated	180	48
503.011.JK.2	Body: lava / matt coated Front: lava / glossy glass	180	48
503.011.JR.1 *	Body, Front: hickory / wood-textured melamine	180	48

* Order-based production


Can be combined with

- Geberit internal storage shelf → p. 1041
- Geberit organising box → p. 1041

Accessories

- Geberit internal storage shelf → p. 1041
- Geberit organising box → p. 1041
- Geberit power socket element with mains plug → p. 506

Geberit iCon low cabinet with two drawers

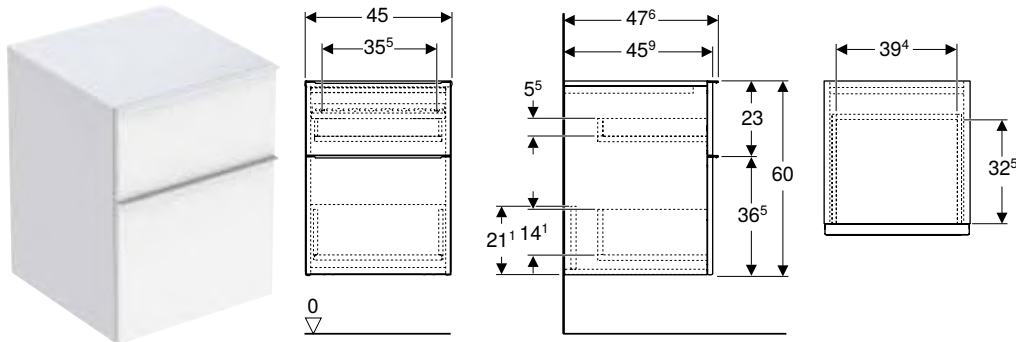

click & scan

Technical data

Product material	High-compressed three-layer chipboard
Drawer load max.	20 kg

Scope of delivery

- Low cabinet
- Fastening material

Characteristics

- FSC™ C134279 certified
- Wall-hung
- With two drawers
- Opening with handle
- Exchangeable handle
- Drawer with soft closing
- Moisture-resistant
- Delivered preassembled

Art. no.	Colour / surface	H [cm]	T [cm]
B / width: 45 cm			
502.315.01.1	Body, Front: white / high-gloss coated Handle: white / matt powder-coated	60	47.6
502.315.01.2	Body, Front: white / high-gloss coated Handle: chrome / glossy	60	47.6
502.315.01.3 *	Body, Front: white / matt coated Handle: white / matt powder-coated	60	47.6
502.315.JH.1	Body, Front: oak / wood-textured melamine Handle: lava / matt powder-coated	60	47.6
502.315.JK.1	Body, Front: lava / matt coated Handle: lava / matt powder-coated	60	47.6
502.315.JR.1 *	Body, Front: hickory / wood-textured melamine Handle: lava / matt powder-coated	60	47.6

* Order-based production


Can be combined with

- Geberit iCon cabinet for washbasin, with one drawer → p. 614
- Geberit iCon cabinet for washbasin, with two drawers → p. 616
- Geberit iCon cabinet for double washbasin, with two drawers → p. 619
- Geberit iCon cabinet for double washbasin, with four drawers → p. 620
- Geberit magnetic board with storage boxes → p. 576

Accessories

- Accessory overview – Geberit iCon bathroom furniture → p. 260

Geberit iCon side element

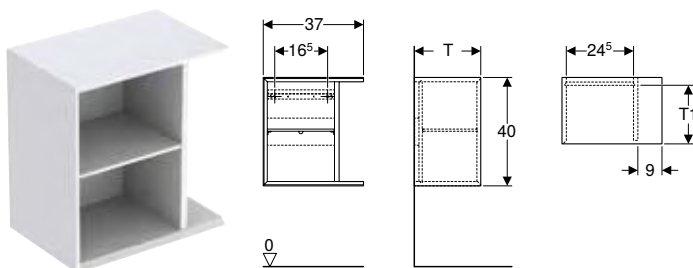

click & scan

Technical data

Product material	High-compressed three-layer chipboard
------------------	---------------------------------------

Scope of delivery

- Side cabinet
- Fastening material

Characteristics

- FSC™ C134279 certified
- Wall-hung
- With one movable shelf
- Moisture-resistant
- Delivered preassembled

Art. no.	Colour / surface	B [cm]	H [cm]	T1 [cm]
T / depth: 24.5 cm				
502.324.01.1	white / high-gloss coated	37	40	21
502.324.01.3 *	white / matt coated	37	40	21
502.324.JH.1	oak / wood-textured melamine	37	40	21
502.324.JK.1	lava / matt coated	37	40	21
502.324.JL.1 *	sand grey / high-gloss coated	37	40	21
502.324.JR.1 *	hickory / wood-textured melamine	37	40	21
T / depth: 27.3 cm				
502.325.01.1	white / high-gloss coated	37	40	24
502.325.01.3 *	white / matt coated	37	40	24
502.325.JH.1	oak / wood-textured melamine	37	40	24
502.325.JK.1	lava / matt coated	37	40	24
502.325.JL.1 *	sand grey / high-gloss coated	37	40	24
502.325.JR.1 *	hickory / wood-textured melamine	37	40	24

* Order-based production


Can be combined with

- Geberit iCon cabinet for handrinse basin, with one door → p. 612
- Geberit iCon cabinet for handrinse basin, with one drawer → p. 613



- Side element with depth 24.5 cm only for Geberit iCon cabinet for handrinse basin, with one door
- Side element with depth 27.3 cm only for Geberit iCon cabinet for handrinse basin, with one drawer

Geberit high-level cabinet, square, with one door

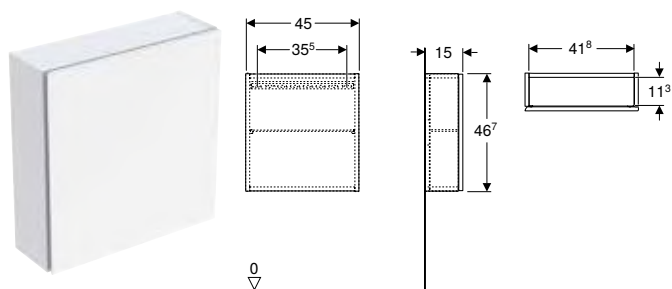

Application purposes

- For Geberit ONE, Acanto and iCon series

Technical data

Product material	High-compressed three-layer chipboard
------------------	---------------------------------------

Scope of delivery

- High-level cabinet
- Glass shelf
- Fastening material


Characteristics

- FSC™ C134279 certified
- Wall-hung
- With one door
- Door with soft closing
- Opening with recessed handle or push-to-open mechanism
- Movable glass shelf
- Hinge side left or right
- Moisture-resistant
- Delivered preassembled

Art. no.	Colour / surface	H [cm]	T [cm]
B / width: 45 cm			
502.319.01.1	Body, Front: white / high-gloss coated	46.7	15
502.319.01.2	Body: white / high-gloss coated Front: white / glossy glass	46.7	15
502.319.01.3 *	Body, Front: white / matt coated	46.7	15
502.319.JH.1	Body, Front: oak / wood-textured melamine	46.7	15
502.319.JK.1	Body, Front: lava / matt coated	46.7	15
502.319.JK.2	Body: lava / matt coated Front: lava / glossy glass	46.7	15
502.319.JL.1 *	Body, Front: sand grey / high-gloss coated	46.7	15
502.319.JR.1 *	Body, Front: hickory / wood-textured melamine	46.7	15

* Order-based production

Geberit high-level cabinet, rectangular, with one door

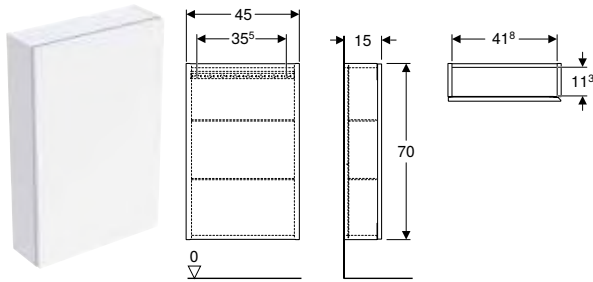

click & scan

Application purposes

- For Geberit ONE, Acanto and iCon series

Technical data

Product material	High-compressed three-layer chipboard
------------------	---------------------------------------

Scope of delivery

- High-level cabinet
- 2 glass shelves
- Fastening material


Characteristics

- FSC™ C134279 certified
- Wall-hung
- With one door
- Door with soft closing
- Opening with recessed handle or push-to-open mechanism
- With two adjustable glass shelves
- Hinge side left or right
- Moisture-resistant
- Delivered preassembled

Art. no.	Colour / surface	H [cm]	T [cm]
B / width: 45 cm			
502.318.01.1	Body, Front: white / high-gloss coated	70	15
502.318.01.2	Body: white / high-gloss coated Front: white / glossy glass	70	15
502.318.01.3 *	Body, Front: white / matt coated	70	15
502.318.JH.1	Body, Front: oak / wood-textured melamine	70	15
502.318.JK.1	Body, Front: lava / matt coated	70	15
502.318.JK.2	Body: lava / matt coated Front: lava / glossy glass	70	15
502.318.JL.1 *	Body, Front: sand grey / high-gloss coated	70	15
502.318.JR.1 *	Body, Front: hickory / wood-textured melamine	70	15

* Order-based production

Geberit shelf unit, rectangular

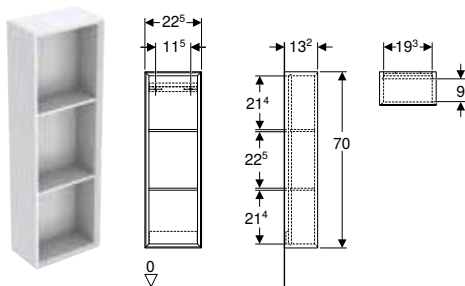

click & scan

Application purposes

- For Geberit ONE, Acanto and iCon series

Technical data

Product material	High-compressed three-layer chipboard
------------------	---------------------------------------

Scope of delivery

- High-level cabinet
- Fastening material


Characteristics

- FSC™ C134279 certified
- Wall-hung
- Hidden fastening
- With two fixed shelves
- Moisture-resistant
- Delivered preassembled

Art. no.	Colour / surface	H [cm]	T [cm]
B / width: 22.5 cm			
502.320.01.1	white / high-gloss coated	70	13.2
502.320.01.3 *	white / matt coated	70	13.2
502.320.JH.1	oak / wood-textured melamine	70	13.2
502.320.JK.1	lava / matt coated	70	13.2
502.320.JL.1 *	sand grey / high-gloss coated	70	13.2
502.320.JR.1 *	hickory / wood-textured melamine	70	13.2

* Order-based production

Geberit shelf unit, square

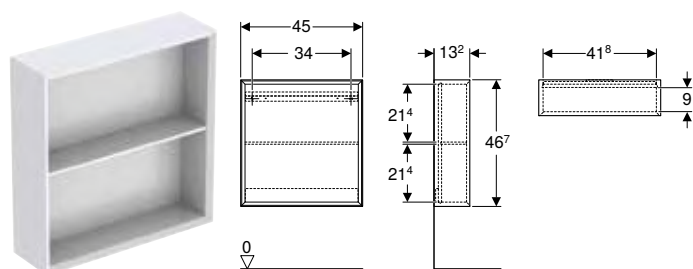

click & scan

Application purposes

- For Geberit ONE, iCon, Acanto and VariForm series

Technical data

Product material	High-compressed three-layer chipboard
------------------	---------------------------------------

Scope of delivery

- High-level cabinet
- Fastening material


Characteristics

- FSC™ C134279 certified
- Wall-hung
- With one fixed shelf
- Hidden fastening
- Moisture-resistant
- Delivered preassembled

Art. no.	Colour / surface	H [cm]	T [cm]
B / width: 45 cm			
502.323.01.1	white / high-gloss coated	46.7	13.2
502.323.01.3 *	white / matt coated	46.7	13.2
502.323.JH.1	oak / wood-textured melamine	46.7	13.2
502.323.JK.1	lava / matt coated	46.7	13.2
502.323.JL.1 *	sand grey / high-gloss coated	46.7	13.2
502.323.JR.1 *	hickory / wood-textured melamine	46.7	13.2

* Order-based production

Geberit wall box, rectangular

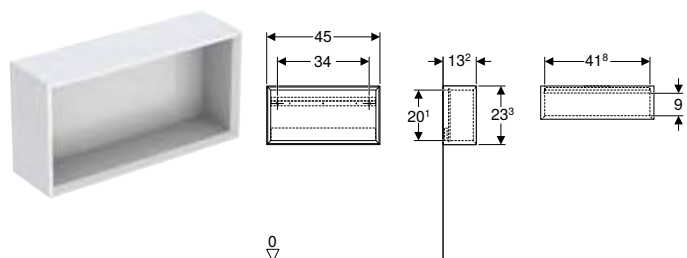

click & scan

Application purposes

- For Geberit ONE, Acanto and iCon series

Technical data

Product material	High-compressed three-layer chipboard
------------------	---------------------------------------

Scope of delivery

- High-level cabinet
- Fastening material


Characteristics

- FSC™ C134279 certified
- Wall-hung
- Hidden fastening
- Moisture-resistant
- Delivered preassembled

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]
502.322.01.1	white / high-gloss coated	45	23.3	13.2
502.322.01.3 *	white / matt coated	45	23.3	13.2
502.322.JH.1	oak / wood-textured melamine	45	23.3	13.2
502.322.JK.1	lava / matt coated	45	23.3	13.2
502.322.JL.1 *	sand grey / high-gloss coated	45	23.3	13.2
502.322.JR.1 *	hickory / wood-textured melamine	45	23.3	13.2

* Order-based production

Geberit wall box, square

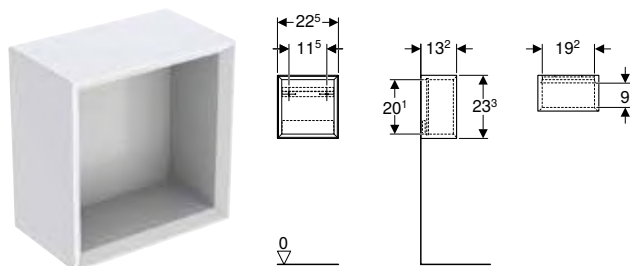

click & scan

Application purposes

- For Geberit ONE, Acanto and iCon series

Technical data

Product material	High-compressed three-layer chipboard
------------------	---------------------------------------

Characteristics

- FSC™ C134279 certified
- Wall-hung
- Hidden fastening
- Moisture-resistant
- Delivered preassembled

Scope of delivery


- High-level cabinet
- Fastening material

Art. no.	Colour / surface	H [cm]	T [cm]
B / width: 22.5 cm			
502.321.01.1	white / high-gloss coated	23.3	13.2
502.321.01.3 *	white / matt coated	23.3	13.2
502.321.JH.1	oak / wood-textured melamine	23.3	13.2
502.321.JK.1	lava / matt coated	23.3	13.2
502.321.JL.1 *	sand grey / high-gloss coated	23.3	13.2
502.321.JR.1 *	hickory / wood-textured melamine	23.3	13.2

* Order-based production

Additional furniture

Geberit wall shelf

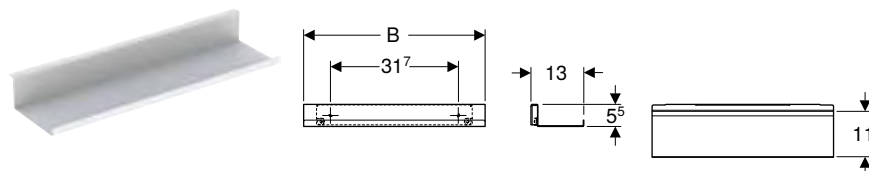

click & scan

Technical data

Product material	Steel
------------------	-------

Scope of delivery

- Wall shelf
- Fastening material


Characteristics

- Wall-hung
- Hidden fastening

Art. no.	Colour / surface	H [cm]	T [cm]
B / width: 45 cm			
502.326.01.3	white / matt powder-coated	5.5	13
502.326.JK.1	lava / matt powder-coated	5.5	13
502.326.JL.1	sand grey / matt powder-coated	5.5	13
B / width: 67.5 cm			
502.327.01.3	white / matt powder-coated	5.5	13
502.327.JK.1	lava / matt powder-coated	5.5	13
502.327.JL.1	sand grey / matt powder-coated	5.5	13

Accessories

Geberit towel rail for bathroom furniture



click & scan

Application purposes

- For mounting on a washbasin cabinet
- For Geberit ONE, Acanto and iCon series

Scope of delivery


- Towel rail
- Fastening material

Technical data

Product material	Aluminium
------------------	-----------

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]
503.012.01.1	white / matt powder-coated	40	0.8	7.2
503.012.14.1	black matt / matt powder-coated	40	0.8	7.2
503.012.21.1	chrome / glossy	40	0.8	7.2
503.012.JK.1	lava / matt powder-coated	40	0.8	7.2

Geberit towel rail for bathroom furniture

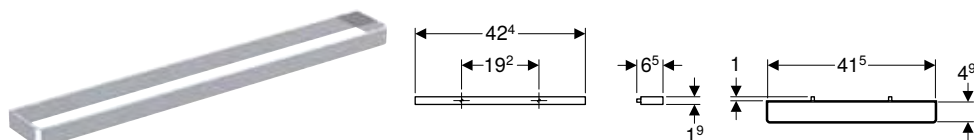

click & scan

Application purposes

- For mounting on a washbasin cabinet

Characteristics

- Right-angled corner

Technical data



Product material	Steel
------------------	-------

Scope of delivery

- Towel rail
- Fastening material

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]
502.328.00.1	chrome / glossy	42.4	1.9	4.9
502.328.01.3	white / matt powder-coated	42.4	1.9	4.9
502.328.14.1	black matt / matt powder-coated	42.4	1.9	4.9
502.328.JK.1	lava / matt powder-coated	42.4	1.9	4.9
502.328.JL.1	sand grey / matt powder-coated	42.4	1.9	4.9

Geberit handle



click & scan

Application purposes

- For Acanto and iCon series

Technical data

Product material	Aluminium
------------------	-----------

Characteristics


- Suitable for all Acanto and iCon washbasin cabinets with handle
- Fastening with screw

Scope of delivery

- Handle
- Fastening material

Art. no.	Colour / surface	B1 [cm]	H [cm]	T [cm]
B / width: 36.7 cm				
502.356.00.1	chrome / glossy	25.6	1.9	3.3
502.356.01.1	white / matt powder-coated	25.6	1.9	3.3
502.356.14.1	black matt / matt powder-coated	25.6	1.9	3.3
502.356.JK.1	lava / matt powder-coated	25.6	1.9	3.3
502.356.JL.1	sand grey / matt powder-coated	25.6	1.9	3.3
B / width: 44.7 cm				
502.357.00.1	chrome / glossy	32	1.9	3.3
502.357.01.1	white / matt powder-coated	32	1.9	3.3
502.357.14.1	black matt / matt powder-coated	32	1.9	3.3
502.357.JK.1	lava / matt powder-coated	32	1.9	3.3
502.357.JL.1	sand grey / matt powder-coated	32	1.9	3.3
B / width: 51.7 cm				
502.358.00.1	chrome / glossy	38.4	1.9	3.3
502.358.01.1	white / matt powder-coated	38.4	1.9	3.3
502.358.14.1	black matt / matt powder-coated	38.4	1.9	3.3
502.358.JK.1	lava / matt powder-coated	38.4	1.9	3.3
502.358.JL.1	sand grey / matt powder-coated	38.4	1.9	3.3
B / width: 58.9 cm				
502.359.00.1	chrome / glossy	44.8	1.9	3.3
502.359.01.1	white / matt powder-coated	44.8	1.9	3.3
502.359.14.1	black matt / matt powder-coated	44.8	1.9	3.3
502.359.JK.1	lava / matt powder-coated	44.8	1.9	3.3
502.359.JL.1	sand grey / matt powder-coated	44.8	1.9	3.3
B / width: 73.7 cm				
502.360.00.1	chrome / glossy	64.4	1.9	3.3
502.360.01.1	white / matt powder-coated	64.4	1.9	3.3
502.360.14.1	black matt / matt powder-coated	64.4	1.9	3.3
502.360.JK.1	lava / matt powder-coated	64.4	1.9	3.3
502.360.JL.1	sand grey / matt powder-coated	64.4	1.9	3.3
B / width: 88.5 cm				
502.361.00.1	chrome / glossy	76.8	1.9	3.3
502.361.01.1	white / matt powder-coated	76.8	1.9	3.3
502.361.14.1	black matt / matt powder-coated	76.8	1.9	3.3
502.361.JK.1	lava / matt powder-coated	76.8	1.9	3.3
502.361.JL.1	sand grey / matt powder-coated	76.8	1.9	3.3
B / width: 118.1 cm				
502.362.00.1	chrome / glossy	89.6	1.9	3.3
502.362.01.1	white / matt powder-coated	89.6	1.9	3.3
502.362.14.1	black matt / matt powder-coated	89.6	1.9	3.3
502.362.JK.1	lava / matt powder-coated	89.6	1.9	3.3
502.362.JL.1	sand grey / matt powder-coated	89.6	1.9	3.3

Geberit light strip for drawer, left and right, length 35 cm



click & scan

Application purposes

- For Geberit ONE, Acanto and iCon series

Technical data

Operating voltage	7.5 V DC
Product material	Plastic
Light source energy efficiency class	E
Light colour	3500 K

Characteristics

- Period of use, 3–6 months
- Rechargeable with Micro-USB cable

Scope of delivery


- Light strip left and right
- Fastening material
- USB cable

Art. no.	L [cm]	Protection class	Power consumption [W]
502.031.00.1	35	III	≤ 1

Accessories

- Accessory overview – Geberit iCon bathroom furniture → p. 607
- Accessory overview – Geberit ONE bathroom furniture → p. 481
- Accessory overview – Geberit Acanto bathroom furniture → p. 559

Geberit power socket element with mains plug

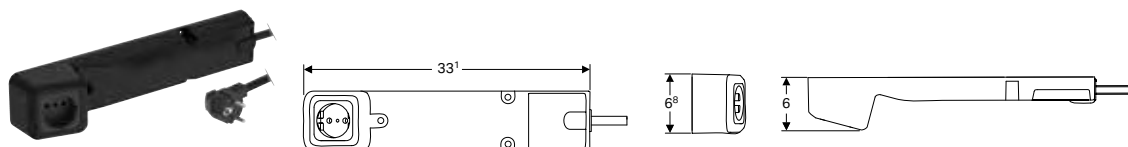

click & scan

Application purposes

- For Geberit ONE, Acanto and iCon series


Technical data

Degree of protection	IP20
Nominal voltage	230 V AC
Mains frequency	50 Hz


Scope of delivery

- Power socket element with mains plug
- Fastening material

Art. no.	Plug type	Power socket
505.090.00.2	CEE 7/7	CEE 7/4

-  The prerequisite for installing the Geberit ONE power socket element is an existing mains connection in the area behind the washbasin cabinet

Geberit set of narrow feet

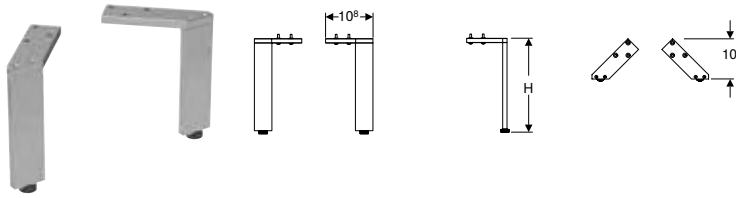

click & scan

Technical data

Product material	Aluminium
------------------	-----------

Scope of delivery

- Set of 2 pieces
- Fastening material

Characteristics

- Height adjustable for compensating floor unevenness

Art. no.	Colour / surface	H [cm]
500.367.00.1	chrome / glossy	15–15.8
500.658.00.2	chrome / glossy	26–26.8
500.657.00.2	chrome / glossy	30–30.8

Geberit set of drawer inserts for top drawer



click & scan

Application purposes

- For Geberit ONE, Acanto and iCon series

Scope of delivery

- Drawer insert
- Cover

Technical data

Product material	Bamboo
------------------	--------





Art. no.	Washbasin, width [cm]
502.349.00.1	60
502.350.00.1	75
502.351.00.1	90
502.352.00.1	105
502.353.00.1	120
502.354.00.1	135

WCs

Assortment overview – Geberit iCon WCs and WC seats

Geberit International Sales, version: December 2025







White

Geberit iCon WC seat, EasyMount hinges	With soft-closing mechanism, quick-release hinges	501.660.01.1		→ p. 645
	Without soft-closing mechanism	574120000		→ p. 646
Geberit iCon WC seat	With soft-closing mechanism	574130000		→ p. 646
	With soft-closing mechanism, quick-release hinges	500.670.01.1		→ p. 646
Geberit iCon WC seat, slim design	With soft-closing mechanism	574950000		→ p. 645
	With soft-closing mechanism, quick-release hinges	500.835.01.1		→ p. 645
Geberit iCon WC seat, square design	With soft-closing mechanism	571910000		→ p. 646
	With soft-closing mechanism, quick-release hinges	500.837.01.1		→ p. 646

✓ Compatible

Accessory overview – Geberit iCon WC ceramic appliance in combination with connection pipes






Geberit International Sales, version: December 2025

White				Geberit iCon floor-standing WC, wash-down, back-to-wall, shrouded, Rimfree	Geberit iCon floor-standing WC for close-coupled exposed cistern, washdown, shrouded, Rimfree
				502.382.00.1	200460000
					
				→ p. 643	→ p. 644
Geberit P-bend set for floor-standing WC	131.081.11.1		→ p. 921	X = 160-185 mm	X = 160-245 mm
Geberit connection set for floor-standing WC	131.082.16.1		→ p. 921	X = 70-95 mm	X = 70-140 mm
Geberit connection bend 90° set with extension	152.647.00.1			X = 60-85 mm	X = 60-125 mm
Geberit connection bend 90°	152.610.11.1			X = 115 mm	X = 75 mm

	Geberit iCon wall-hung WC, washdown, shrouded, Rimfree	Geberit iCon wall-hung WC, washdown, small projection, shrouded, Rimfree	Geberit iCon Square wall-hung WC, washdown, shrouded, Rimfree	Geberit iCon floor-standing WC, back-to-wall, shrouded, TurboFlush	Geberit iCon floor-standing WC, washdown, back-to-wall, shrouded, Rimfree	Geberit iCon floor-standing WC for close-coupled exposed cistern, washdown, shrouded, Rimfree	Geberit iCon floor-standing WC, square, washdown, back-to-wall, shrouded, Rimfree
	501.661.00.1	502.380.00.1	201950000	503.081.00.1	502.382.00.1	200460000	211910000
							
	→ p. 639	→ p. 640	→ p. 641	→ p. 642	→ p. 643	→ p. 644	→ p. 644
	✓	✓		✓	✓	✓	
	✓	✓		✓	✓	✓	
	✓	✓		✓	✓	✓	
	✓	✓		✓	✓	✓	
	✓	✓		✓	✓	✓	
	✓	✓		✓	✓	✓	
			✓				✓
			✓				✓

Accessory overview – Geberit iCon Square WC ceramic appliance in combination with connection pipes

Geberit International Sales, version: December 2025

White				Geberit iCon floor-standing WC, square, washdown, back-to-wall, shrouded, Rimfree
				211910000  → p. 644
Geberit P-bend set for floor-standing WC	131.081.11.1		→ p. 921	X = 150-165 mm
Geberit connection set for floor-standing WC	131.082.16.1		→ p. 921	
Geberit connection bend 90° set with extension	152.647.00.1			
Geberit connection bend 90°	152.610.11.1			X = 77 mm


Accessory overview – Geberit iCon WC ceramic appliance TurboFlush in combination with connection pipes

Geberit International Sales, December 2025

				In combination with concealed cistern		In combination with Geberit Monolith
				Geberit iCon floor-standing WC, back-to-wall, shrouded, TurboFlush		
White				503.081.00.1	503.081.00.1	503.081.00.1
				→ p. 642	→ p. 642	→ p. 642
Geberit straight connector set for WC	131.083.16.1		→ p. 920		Y = 210 mm	

Wall-hung WCs

Geberit iCon wall-hung WC set, washdown, shrouded, TurboFlush, with WC seat

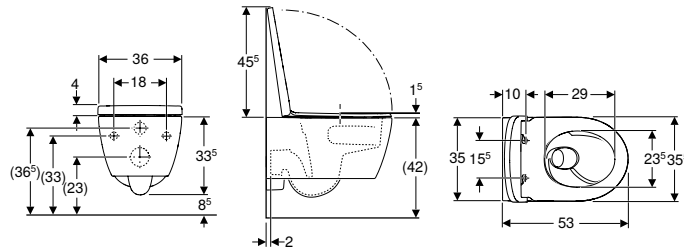

Application purposes

- For concealed cisterns
- For pressure flushing valves

Technical data

Product material	Vitreous china
------------------	----------------

Scope of delivery

- WC ceramic appliance
- WC seat
- Fastening material

Characteristics


- Wall-hung
- Washdown WC
- Rimless WC ceramic appliance featuring TurboFlush flush technology
- Easy fastening with Easy Fast Fixing (type EFF3)
- Type 1, full flush volume 6 / 5 / 4 l, in accordance with EN 997
- Quick-release hinges, lockable
- Type 2 in accordance with EN 997
- 4 l flush
- Shrouded
- Hidden fastening
- WC seat made of Duroplast
- Overlapping WC lid
- WC seat with EasyMount hinges

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]	QuickRelease function	Soft-closing mechanism	Fastening	Hinge material
503.045.00.1	white	35.5	33.5	53	Yes, with lockable QuickRelease hinges	yes	from above	Stainless steel / plastic

Can be combined with

- Geberit iCon wall-hung bidet, shrouded → p. 648

Geberit iCon set of wall-hung WC, washdown, shrouded, TurboFlush, with WC seat

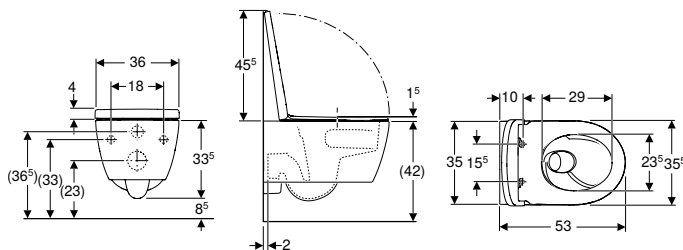

click & scan

Application purposes

- For concealed cisterns
- For pressure flushing valves

Technical data

Product material	Vitreous china
------------------	----------------

Scope of delivery

- WC ceramic appliance
- WC seat
- Fastening material

Characteristics


- Wall-hung
- Washdown WC
- Rimless WC ceramic appliance featuring TurboFlush flush technology
- Easy fastening with Easy Fast Fixing (type EFF3)
- Type 1, full flush volume 6 / 5 / 4 l, in accordance with EN 997
- Quick-release hinges, lockable
- Type 2 in accordance with EN 997
- 4 l flush
- Shrouded
- Hidden fastening
- WC seat made of Duroplast
- Overlapping WC lid
- WC seat with EasyMount hinges

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]	QuickRelease function	Soft-closing mechanism	Fastening	Hinge material
503.046.00.1	white	35.5	33.5	53	Yes, with lockable QuickRelease hinges		yes from above	
503.046.JT.1	white / matt	35.5	33.5	53	Yes, with lockable QuickRelease hinges		yes from above	Stainless steel / plastic

Can be combined with

- Geberit iCon wall-hung bidet, shrouded → p. 648

Geberit iCon wall-hung WC set, washdown, small projection, shrouded, TurboFlush, with WC seat

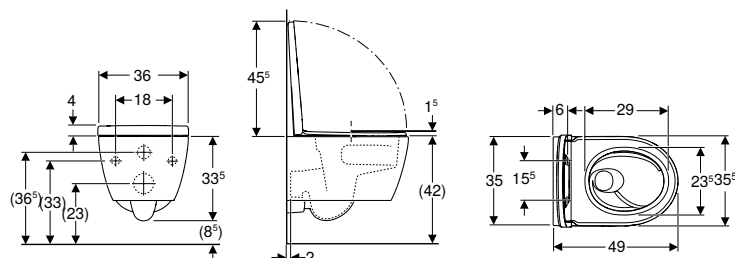

click & scan

Application purposes

- For concealed cisterns
- Suitable for installation in small bathrooms and guest WCs
- For pressure flushing valves

Technical data

Product material	Vitreous china
------------------	----------------

Scope of delivery


- WC ceramic appliance
- WC seat
- Fastening material

Characteristics

- Wall-hung
- Washdown WC
- Rimless WC ceramic appliance featuring TurboFlush flush technology
- Easy fastening with Easy Fast Fixing (type EFF3)
- Type 1, full flush volume 6 / 5 / 4 l, in accordance with EN 997
- Quick-release hinges, lockable
- Type 2 in accordance with EN 997
- 4 l flush
- Shrouded
- Hidden fastening
- Small projection
- WC seat made of Duroplast
- Overlapping WC lid
- WC seat with EasyMount hinges

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]	QuickRelease function	Soft-closing mechanism	Fastening
503.048.00.1	white	35.5	33.5	49	Yes, with lockable QuickRelease hinges		yes from above

Geberit iCon set of wall-hung WC, washdown, small projection, shrouded, TurboFlush, with WC seat

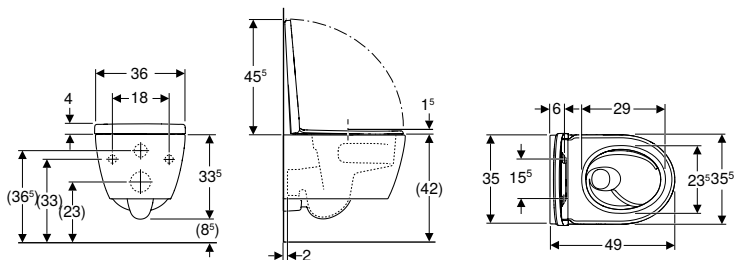

click & scan

Application purposes

- For concealed cisterns
- Suitable for installation in small bathrooms and guest WCs
- For pressure flushing valves

Technical data

Product material	Vitreous china
------------------	----------------

Scope of delivery


- WC ceramic appliance
- WC seat
- Fastening material

Characteristics

- Wall-hung
- Washdown WC
- Rimless WC ceramic appliance featuring TurboFlush flush technology
- Easy fastening with Easy Fast Fixing (type EFF3)
- Type 1, full flush volume 6 / 5 / 4 l, in accordance with EN 997
- Quick-release hinges, lockable
- Type 2 in accordance with EN 997
- 4 l flush
- Shrouded
- Hidden fastening
- Small projection
- WC seat made of Duroplast
- Overlapping WC lid
- WC seat with EasyMount hinges

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]	QuickRelease function	Soft-closing mechanism	Fastening
503.049.JT.1	white / Matt	35.5	33.5	49	Yes, with lockable QuickRelease hinges		yes from above

Geberit iCon wall-hung WC set, washdown, shrouded, Rimfree, with WC seat

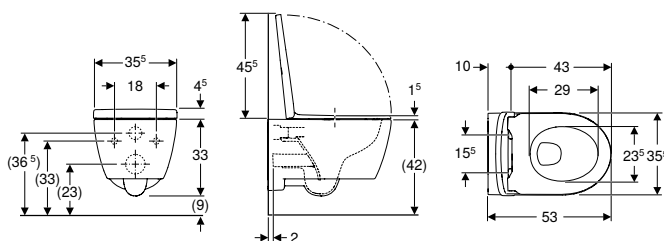

click & scan

Application purposes

- For concealed cisterns
- For pressure flushing valves

Technical data

Product material	Vitreous china
------------------	----------------

Scope of delivery

- WC ceramic appliance
- WC seat
- Fastening material

Characteristics


- Wall-hung
- Washdown WC
- Rimless WC ceramic appliance featuring Rimfree flush technology
- Easy fastening with Easy Fast Fixing (type EFF3)
- Type 1, full flush volume 6 / 5 / 4 l, in accordance with EN 997
- Quick-release hinges, lockable
- Type 2 in accordance with EN 997
- 4 l flush
- Shrouded
- Hidden fastening
- WC seat made of Duroplast
- Overlapping WC lid
- WC seat with EasyMount hinges

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]	QuickRelease function	Soft-closing mechanism	Fastening	Hinge material
501.664.00.1	white	35.5	33	53	Yes, with lockable QuickRelease hinges	yes	from above	Stainless steel / plastic

Can be combined with

- Geberit iCon wall-hung bidet, shrouded → p. 648

Geberit iCon wall-hung WC, washdown, shrouded, Rimfree

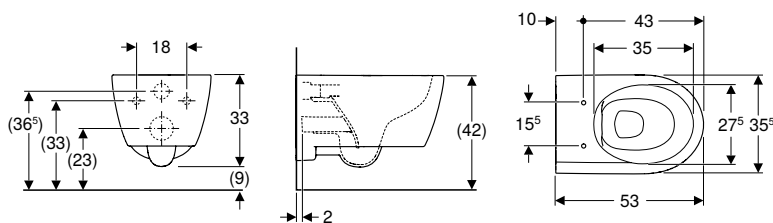

Application purposes

- For concealed cisterns
- For pressure flushing valves

Technical data

Product material	Vitreous china
------------------	----------------

Scope of delivery

- Fastening material

Characteristics

- Wall-hung
- Washdown WC
- Rimless WC ceramic appliance featuring Rimfree flush technology
- Easy fastening with Easy Fast Fixing (type EFF3)
- Type 1, full flush volume 6 / 5 / 4 l, in accordance with EN 997
- Type 2 in accordance with EN 997
- 4 l flush
- Shrouded
- Hidden fastening

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]
501.661.00.1	white	35.5	33	53


To order additionally

- WC seat

Can be combined with

- Geberit iCon WC seat, EasyMount hinges → p. 645
- Geberit iCon WC seat → p. 646
- Geberit iCon WC seat, slim design → p. 645
- Geberit iCon wall-hung bidet, shrouded → p. 648
- Geberit AquaClean Tuma Comfort WC enhancement solution → p. 876
- Geberit AquaClean Tuma Classic WC enhancement solution → p. 878

Geberit iCon wall-hung WC set, washdown, shrouded, Rimfree, with WC seat

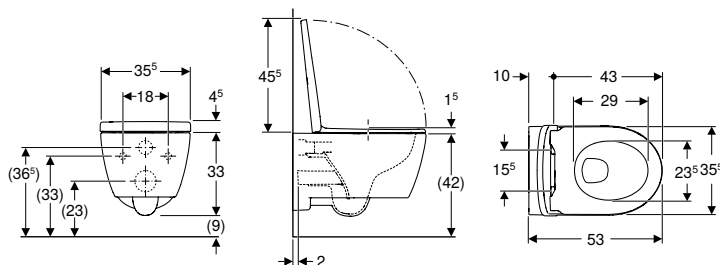

Application purposes

- For concealed cisterns
- For pressure flushing valves

Technical data

Product material	Vitreous china
------------------	----------------

Scope of delivery

- WC ceramic appliance
- WC seat
- Fastening material

Characteristics


- Wall-hung
- Washdown WC
- Rimless WC ceramic appliance featuring Rimfree flush technology
- Easy fastening with Easy Fast Fixing (type EFF3)
- Type 1, full flush volume 6 / 5 / 4 l, in accordance with EN 997
- Quick-release hinges, lockable
- Type 2 in accordance with EN 997
- 4 l flush
- Shrouded
- Hidden fastening
- WC seat made of Duroplast
- Overlapping WC lid
- WC seat with EasyMount hinges

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]	QuickRelease function	Soft-closing mechanism	Fastening
501.663.JT.1	white / matt	35.5	33	53	Yes, with lockable QuickRelease hinges	yes	from above

Can be combined with

- Geberit iCon wall-hung bidet, shrouded → p. 648

Geberit iCon wall-hung WC set, washdown, small projection, shrouded, Rimfree, with WC seat

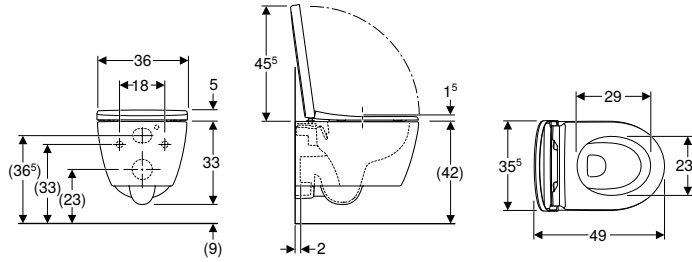

click & scan

Application purposes

- For concealed cisterns
- Suitable for installation in small bathrooms and guest WCs

Technical data

Product material	Vitreous china
------------------	----------------

Scope of delivery


- WC ceramic appliance
- WC seat
- Fastening material

Characteristics

- Wall-hung
- Washdown WC
- Rimless WC ceramic appliance featuring Rimfree flush technology
- Easy fastening with Easy Fast Fixing (type EFF3)
- Type 1, full flush volume 6 / 5 / 4 l, in accordance with EN 997
- Quick-release hinges, lockable
- Type 2 in accordance with EN 997
- 4 l flush
- Shrouded
- Hidden fastening
- Small projection
- WC seat made of Duroplast
- Overlapping WC lid
- WC seat with EasyMount hinges

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]	QuickRelease function	Soft-closing mechanism	Fastening	Hinge material
502.381.00.1	white	35.5	33	49	Yes, with lockable QuickRelease hinges	yes	from above	Stainless steel / plastic
502.381.JT.1	white / matt	35.5	33	49	Yes, with lockable QuickRelease hinges	yes	from above	Stainless steel / plastic

Geberit iCon wall-hung WC, washdown, small projection, shrouded, Rimfree

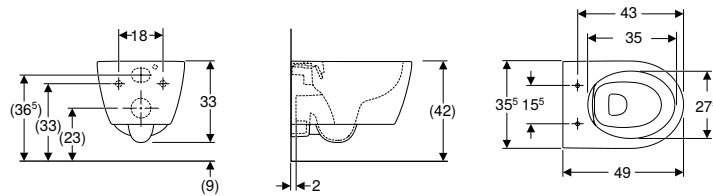

click & scan

Application purposes

- For concealed cisterns
- Suitable for installation in small bathrooms and guest WCs

Technical data

Product material	Vitreous china
------------------	----------------

Scope of delivery

- Fastening material

Characteristics

- Wall-hung
- Washdown WC
- Rimless WC ceramic appliance featuring Rimfree flush technology
- Easy fastening with Easy Fast Fixing (type EFF3)
- Type 1, full flush volume 6 / 5 / 4 l, in accordance with EN 997
- Type 2 in accordance with EN 997
- 4 l flush
- Shrouded
- Hidden fastening
- Small projection

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]
502.380.00.1	white	35.5	33	49


To order additionally

- WC seat

Can be combined with

- Geberit iCon WC seat, EasyMount hinges → p. 645
- Geberit iCon WC seat, slim design → p. 645
- Geberit iCon WC seat → p. 646

Geberit iCon Square wall-hung WC, washdown, shrouded, Rimfree

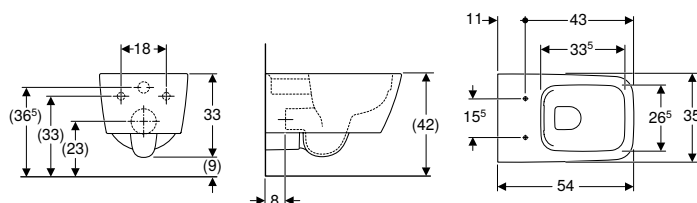

click & scan

Application purposes

- For concealed cisterns
- For pressure flushing valves

Technical data

Product material	Vitreous china
------------------	----------------

Scope of delivery

- Fastening material

Characteristics

- Wall-hung
- Washdown WC
- Rimless WC ceramic appliance featuring Rimfree flush technology
- Easy fastening with Easy Fast Fixing (type EFF3)
- Type 1, full flush volume 6 / 5 l, in accordance with EN 997
- Type 2 in accordance with EN 997
- Flushes with 4.5 l
- Shrouded
- Hidden fastening

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]
201950000	PO white	35	33	54

PO: Phase out as of December 2026

To order additionally

- WC seat

Can be combined with

- Geberit iCon WC seat, square design → p. 646
- Geberit iCon wall-hung bidet, square, shrouded → p. 648


Accessories

- Geberit straight connector set for WC → p. 920



- Depending on the installation type, 1 Geberit connection set for wall-hung WC is required for mounting

Geberit iCon wall-hung WC, washdown, shrouded

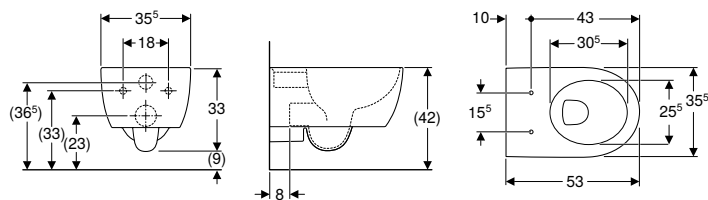

click & scan

Application purposes

- For concealed cisterns
- For pressure flushing valves

Technical data

Product material	Vitreous china
------------------	----------------

Scope of delivery

- Fastening material

Characteristics

- Wall-hung
- Washdown WC
- Easy fastening with Easy Fast Fixing (type EFF3)
- With flush rim
- Type 1, full flush volume 6 / 5 l, in accordance with EN 997
- Type 2 in accordance with EN 997
- Flushes with 4.5 l
- Shrouded
- Hidden fastening

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]
204000000	white	35.5	33	53

To order additionally

- WC seat

Can be combined with

- Geberit iCon WC seat → p. 646
- Geberit iCon WC seat, slim design → p. 645
- Geberit iCon WC seat, EasyMount hinges → p. 645

Accessories


- Geberit straight connector set for WC → p. 920



- Depending on the installation type, 1 Geberit connection set for wall-hung WC is required for mounting

Floor-standing WCs

Geberit iCon floor-standing WC, back-to-wall, shrouded, TurboFlush

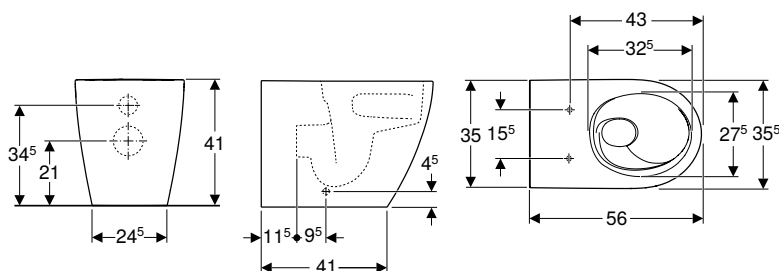

click & scan

Application purposes

- For concealed cisterns
- For pressure flushing valves

Technical data

Product material	Vitreous china
------------------	----------------

Scope of delivery

- WC ceramic appliance
- Fastening material

Characteristics

- Floor-standing
- Back-to-wall
- Washdown WC
- Rimless WC ceramic appliance featuring TurboFlush flush technology
- Type 1, full flush volume 6 / 5 / 4 l, in accordance with EN 997
- Horizontal or vertical outlet
- Type 2 in accordance with EN 997
- Flushes with 4.5 l
- 4 l flush
- Shrouded
- Hidden fastening

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]
503.081.00.1	white	35.5	41	56

To order additionally

- WC seat


Can be combined with

- Geberit iCon WC seat, EasyMount hinges → p. 645
- Geberit iCon WC seat, slim design → p. 645
- Geberit iCon WC seat → p. 646
- Geberit AquaClean Tuma Comfort WC enhancement solution → p. 876
- Geberit AquaClean Tuma Classic WC enhancement solution → p. 878

Accessories

- Accessory overview – Geberit iCon WC ceramic appliance TurboFlush in combination with connection pipes → p. 636

Geberit iCon floor-standing WC, washdown, back-to-wall, shrouded, Rimfree

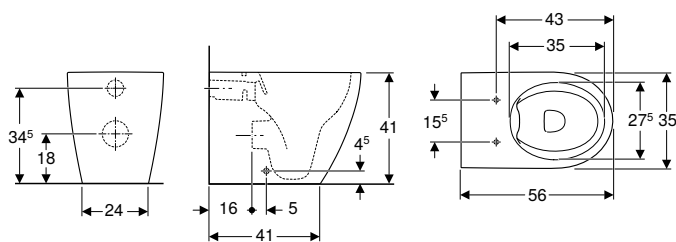

Geberit iCon

Application purposes

- For concealed cisterns

Technical data

Product material	Vitreous china
------------------	----------------

Scope of delivery

- Fastening material

Characteristics

- Floor-standing
- Back-to-wall
- Washdown WC
- Rimless WC ceramic appliance featuring Rimfree flush technology
- Type 1, full flush volume 6 / 5 / 4 l, in accordance with EN 997
- Horizontal or vertical outlet
- Type 2 in accordance with EN 997
- Flushes with 4.5 l
- 4 l flush
- Shrouded
- Hidden fastening

Art. no.	Colour / surface	B	H	T
		[cm]	[cm]	[cm]
502.382.00.1	white	35	41	56

To order additionally

- WC seat


Can be combined with

- Geberit iCon WC seat, EasyMount hinges → p. 645
- Geberit iCon WC seat, slim design → p. 645
- Geberit iCon WC seat → p. 646
- Geberit AquaClean Tuma Comfort WC enhancement solution → p. 876
- Geberit AquaClean Tuma Classic WC enhancement solution → p. 878

Accessories

- Accessory overview – Geberit iCon WC ceramic appliance in combination with connection pipes → p. 634

Geberit iCon floor-standing WC for close-coupled exposed cistern, washdown, shrouded, Rimfree

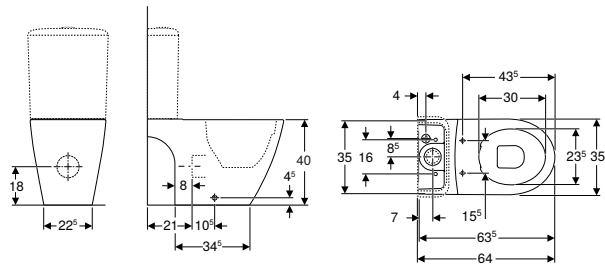

click & scan

Application purposes

- For close-coupled exposed cistern

Technical data

Product material	Vitreous china
------------------	----------------

Characteristics

- Floor-standing
- Washdown WC
- Rimless WC ceramic appliance featuring Rimfree flush technology
- Type 1, full flush volume 6 l, in accordance with EN 997
- Multidirectional outlet
- Shrouded
- Hidden fastening

Scope of delivery

- WC ceramic appliance
- Fastening material

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]
200460000	white	35.5	40	63.5

To order additionally

- Cistern
- WC seat


Can be combined with

- Geberit iCon exposed cistern, close-coupled, dual flush, lateral or bottom water supply connection → p. 647
- Geberit iCon exposed cistern, close-coupled, dual flush, bottom water supply connection → p. 646
- Geberit iCon WC seat → p. 646
- Geberit iCon WC seat, slim design → p. 645
- Geberit iCon WC seat, EasyMount hinges → p. 645

Accessories

- Accessory overview – Geberit iCon WC ceramic appliance in combination with connection pipes → p. 634

Geberit iCon floor-standing WC, square, washdown, back-to-wall, shrouded, Rimfree

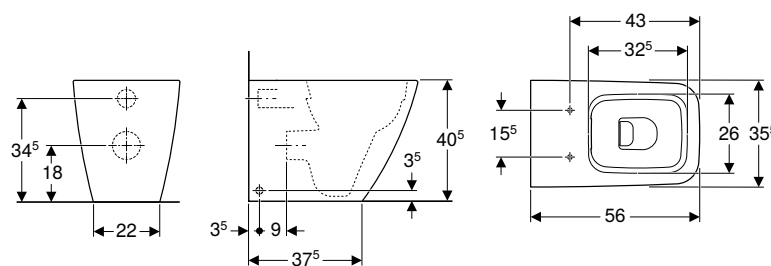

click & scan

Application purposes

- For concealed cisterns
- For pressure flushing valves

Technical data

Product material	Vitreous china
------------------	----------------

Scope of delivery

- Fastening material

Characteristics

- Floor-standing
- Back-to-wall
- Washdown WC
- Rimless WC ceramic appliance featuring Rimfree flush technology
- Type 1, full flush volume 6 / 5 / 4 l, in accordance with EN 997
- Horizontal or vertical outlet
- Flushes with 4.5 l
- 4 l flush
- Shrouded
- Hidden fastening

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]
211910000	white	35.5	40.5	56

To order additionally

- WC seat

Can be combined with


- Geberit iCon WC seat, square design → p. 646

Accessories

- Accessory overview – Geberit iCon Square WC ceramic appliance in combination with connection pipes → p. 635

WC seats

Geberit iCon WC seat, EasyMount hinges

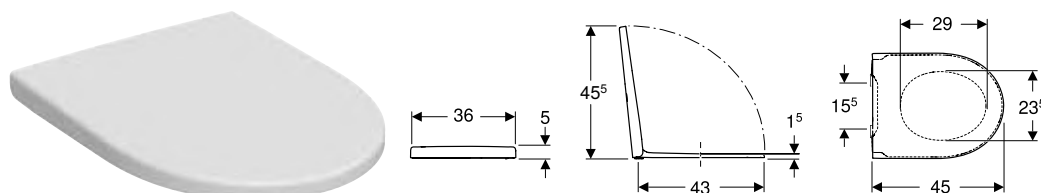

click & scan

Technical data

Product material	Duroplast
Fastening distance	15.5 cm

Scope of delivery

- WC seat

Characteristics


- WC seat made of Duroplast
- Overlapping WC lid
- WC seat with EasyMount hinges
- Quick-release hinges, lockable

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]	QuickRelease function	Soft-closing mechanism	Fastening	Hinge material
245.464.JT.1	white / matt	36	5	45	Yes, with lockable QuickRelease hinges	yes	from above	Stainless steel / plastic
501.660.01.1	white / glossy	36	5	45	Yes, with lockable QuickRelease hinges	yes	from above	Stainless steel / plastic

Can be combined with

- Geberit iCon wall-hung WC, washdown, shrouded, Rimfree → p. 639
- Geberit iCon floor-standing WC, washdown, back-to-wall, shrouded, Rimfree → p. 643
- Geberit iCon floor-standing WC, back-to-wall, shrouded, TurboFlush → p. 642
- Geberit iCon wall-hung WC, washdown, small projection, shrouded, Rimfree → p. 640
- Geberit iCon wall-hung WC, washdown, shrouded → p. 642
- Geberit iCon floor-standing WC for close-coupled exposed cistern, washdown, shrouded, Rimfree → p. 644

Geberit iCon WC seat, slim design

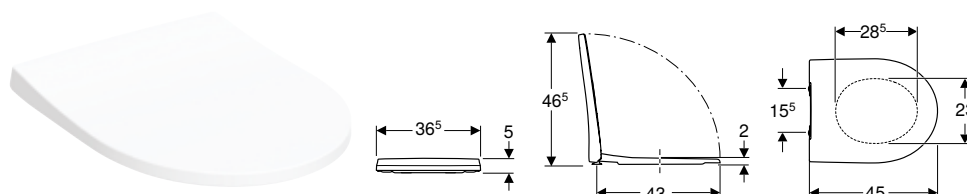

click & scan

Technical data

Product material	Duroplast
Fastening distance	15.5 cm

Characteristics

- Narrow design
- Overlapping WC lid
- Antibacterial

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]	QuickRelease function	Soft-closing mechanism	Fastening	Hinge material
500.835.01.1	white / glossy	36.5	5	45	Yes, with QuickRelease hinges	yes	from above	Brass chrome-plated
574950000	white / glossy	36.5	5	45	no	yes	from above	Brass chrome-plated

Can be combined with


- Geberit iCon wall-hung WC, washdown, shrouded, Rimfree → p. 639
- Geberit iCon wall-hung WC, washdown, shrouded → p. 642
- Geberit iCon wall-hung WC, washdown, small projection, shrouded, Rimfree → p. 640
- Geberit iCon floor-standing WC, washdown, back-to-wall, shrouded, Rimfree → p. 643
- Geberit iCon floor-standing WC, back-to-wall, shrouded, TurboFlush → p. 642
- Geberit iCon floor-standing WC for close-coupled exposed cistern, washdown, shrouded, Rimfree → p. 644

Geberit iCon

Exposed cisterns

Exposed cisterns for WCs, made of sanitary ceramic

Geberit iCon WC seat

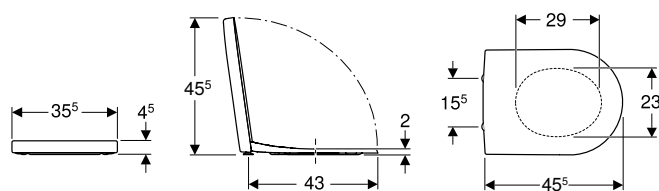

click & scan

Technical data

Product material	Duroplast
Fastening distance	15.5 cm

Characteristics


- Overlapping WC lid

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]	QuickRelease function	Soft-closing mechanism	Fastening	Hinge material
500.670.01.1	white / glossy	35.5	4.5	45.5	Yes, with QuickRelease hinges	yes	from above	Brass chrome-plated
574130000	white / glossy	35.5	4.5	45.5	no	yes	from above	Brass chrome-plated
574120000	white / glossy	35.5	4.5	45.5	no	no	from above	Stainless steel

Can be combined with

- Geberit iCon wall-hung WC, washdown, shrouded, Rimfree → p. 639
- Geberit iCon wall-hung WC, washdown, shrouded → p. 642
- Geberit iCon wall-hung WC, washdown, small projection, shrouded, Rimfree → p. 640
- Geberit iCon floor-standing WC, washdown, back-to-wall, shrouded, Rimfree → p. 643
- Geberit iCon floor-standing WC, back-to-wall, shrouded, TurboFlush → p. 642
- Geberit iCon floor-standing WC for close-coupled exposed cistern, washdown, shrouded, Rimfree → p. 644

Geberit iCon Square WC seat

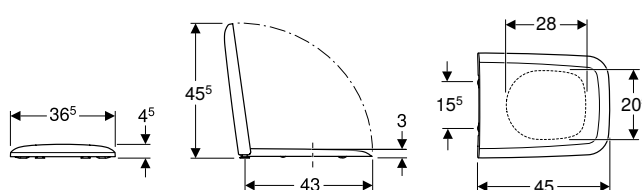

click & scan

Technical data

Product material	Duroplast
Fastening distance	15.5 cm

Characteristics

- Overlapping WC lid

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]	QuickRelease function	Soft-closing mechanism	Fastening	Hinge material
500.837.01.1	white / glossy	36.5	4.5	45	Yes, with QuickRelease hinges	yes	from above	Brass chrome-plated
571910000	white / glossy	36.5	4.5	45	no	yes	from above	Brass chrome-plated


Can be combined with

- Geberit iCon Square wall-hung WC, washdown, shrouded, Rimfree → p. 641
- Geberit iCon floor-standing WC, square, washdown, back-to-wall, shrouded, Rimfree → p. 644

Exposed cisterns

Exposed cisterns for WCs, made of sanitary ceramic

Geberit iCon exposed cistern, close-coupled, dual flush, bottom water supply connection

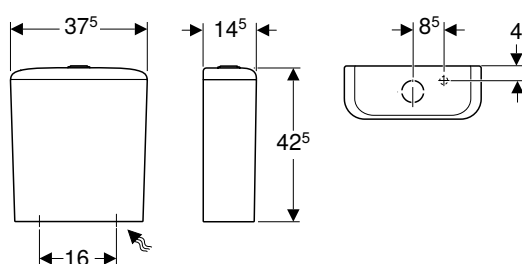

click & scan

Application purposes

- For water supply connections 1/2"
- For close-coupled installation

Characteristics

- Dual flush
- Water supply connection on the bottom right

Technical data

Flush volume, factory setting	6 l / 4 l
Flush volume small, adjustment range	3 l / 4 l
Product material	Vitreous china

Scope of delivery


- Mechanism

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]
500.409.01.1	white	37.5	42.5	14.5

Can be combined with

- Geberit iCon floor-standing WC for close-coupled exposed cistern, washdown, shrouded, Rimfree → p. 644

Geberit iCon exposed cistern, close-coupled, dual flush, lateral or bottom water supply connection

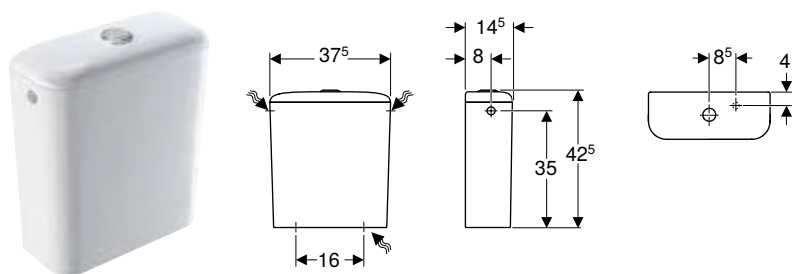

Application purposes

- For water supply connections 3/8"
- For close-coupled installation

Characteristics

- Dual flush
- Water supply connection on the left/right or bottom
- Type 1, full flush volume 6 l, in accordance with EN 997

Technical data

Flush volume, factory setting	6 l / 3 l
Flush volume small, adjustment range	3 l / 4 l
Product material	Vitreous china

Scope of delivery


- Mechanism

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]
229420000	white	37.5	42.5	14.5

Can be combined with

- Geberit iCon floor-standing WC for close-coupled exposed cistern, washdown, shrouded, Rimfree → p. 644

Geberit iCon Square exposed cistern, close-coupled, dual flush, lateral or bottom water supply connection

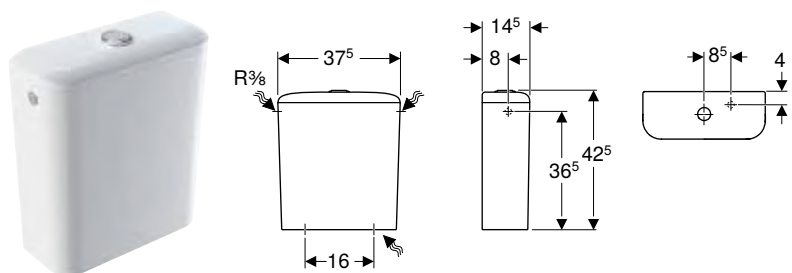

Application purposes

- For water supply connections 3/8"
- For close-coupled installation

Characteristics

- Dual flush
- Water supply connection on the left/right or bottom
- Type 1, full flush volume 6 l, in accordance with EN 997

Technical data

Flush volume, factory setting	6 l / 3 l
Flush volume small, adjustment range	3 l / 4 l
Product material	Vitreous china

Scope of delivery


- Mechanism

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]
228950000	white	37.5	42.5	14.5

Bidets

Wall-hung bidets

Geberit iCon wall-hung bidet, shrouded

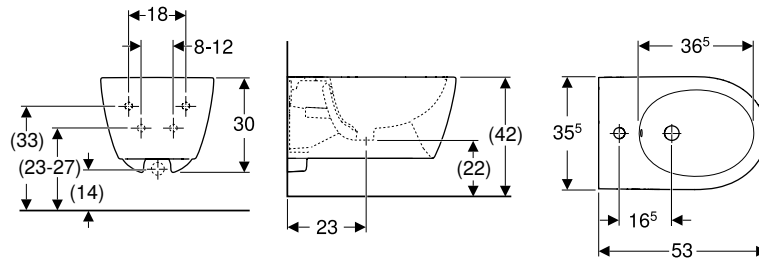

click & scan

Application purposes

- For single-hole taps with flexible hoses

Technical data

Product material	Vitreous china
------------------	----------------

Characteristics

- Wall-hung
- Hidden water supply connection
- Easy fastening with Easy Fast Fixing (type EFF3)
- Shrouded
- Hidden fastening

Scope of delivery


- Fastening material

Art. no.	Colour / surface	Overflow	B [cm]	H [cm]	T [cm]
501.898.00.1	white	visible, symmetrical	35.5	30	53
501.898.JT.1	white / matt	visible, symmetrical	35.5	30	53

Can be combined with

- Geberit iCon wall-hung WC set, washdown, shrouded, Rimfree, with WC seat → p. 639
- Geberit iCon wall-hung WC set, washdown, shrouded, Rimfree, with WC seat → p. 638
- Geberit iCon wall-hung WC set, washdown, shrouded, TurboFlush, with WC seat → p. 636
- Geberit iCon set of wall-hung WC, washdown, shrouded, TurboFlush, with WC seat → p. 637
- Geberit iCon wall-hung WC, washdown, shrouded, Rimfree → p. 639

Geberit iCon Square wall-hung bidet, shrouded

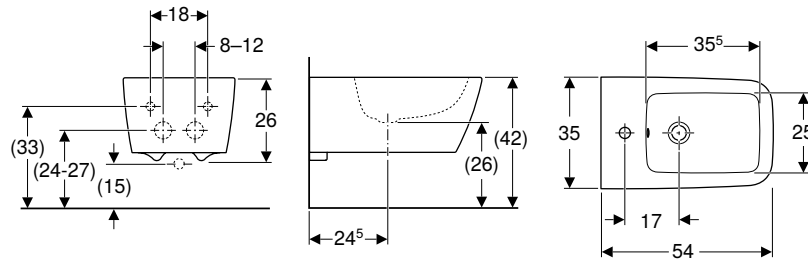

click & scan

Application purposes

- For single-hole taps with flexible hoses

Technical data

Product material	Vitreous china
------------------	----------------

Characteristics

- Wall-hung
- Hidden water supply connection
- Easy fastening with Easy Fast Fixing (type EFF3)
- Shrouded
- Hidden fastening

Scope of delivery

- Fastening material

Art. no.	Colour / surface	Overflow	B [cm]	H [cm]	T [cm]
231910000	PO white	visible, symmetrical	35	26	54

PO: Phase out as of December 2026

To order additionally


- Extended drain for trap

Can be combined with

- Geberit iCon Square wall-hung WC, washdown, shrouded, Rimfree → p. 641

Floor-standing bidets

Geberit iCon floor-standing bidet, back-to-wall, shrouded

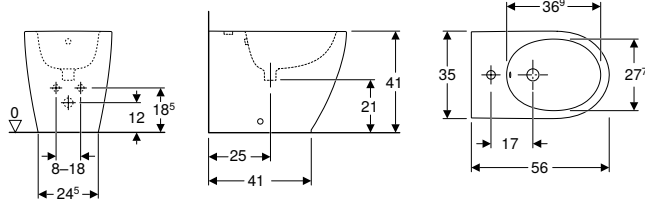

click & scan

Technical data

Product material	Vitreous china
------------------	----------------

Scope of delivery


- Fastening material

Characteristics

- Floor-standing
- Back-to-wall
- Hidden water supply connection
- Shrouded
- Hidden fastening

Art. no.	Colour / surface	Overflow	B [cm]	H [cm]	T [cm]
502.384.00.1	white	visible, symmetrical	35	41	56

Geberit iCon Square floor-standing bidet, back-to-wall, shrouded

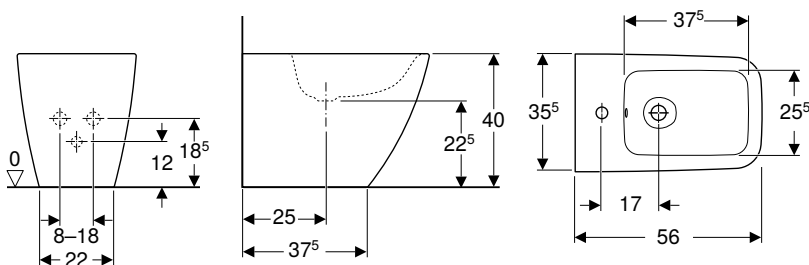

click & scan

Technical data

Product material	Vitreous china
------------------	----------------

Scope of delivery

- Fastening material

Characteristics

- Floor-standing
- Back-to-wall
- Hidden water supply connection
- Shrouded
- Hidden fastening

Art. no.	Colour / surface	Overflow	B [cm]	H [cm]	T [cm]
231950000	white	visible, symmetrical	35.5	40	56



Geberit Aniara


Washbasins.....	652
Handrinse basins.....	652
Washbasins.....	653
Lay-on washbasins.....	654
Vanity basins.....	655
Bathroom furniture.....	656
Washbasin cabinets.....	656
Side cabinets.....	658
Washtops.....	660
WCs.....	661
Wall-hung WCs.....	661
WC seats.....	662
Bidets.....	663
Wall-hung bidets.....	663

Washbasins

Handrinse basins

New

Geberit Aniara handrinse basin

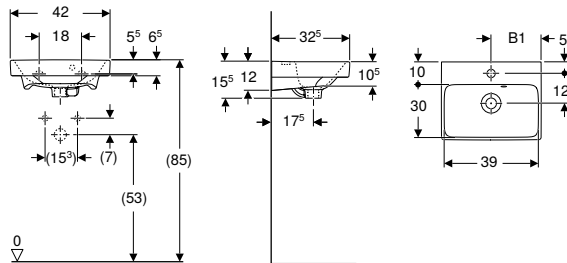

click & scan

Technical data

Product material	Fine fireclay
------------------	---------------

Scope of delivery

- Handrinse basin

Characteristics


- Can be installed with a washbasin cabinet

Art. no.	Colour / surface	Tap hole	Overflow	B	B1	H	T
				[cm]	[cm]	[cm]	[cm]
510.061.00.1	white	centred	visible, symmetrical	42	21	15.5	32.5
510.061.00.5	white	without	visible, symmetrical	42		15.5	32.5

Available as of April 2026

New

Geberit Aniara handrinse basin, asymmetrical

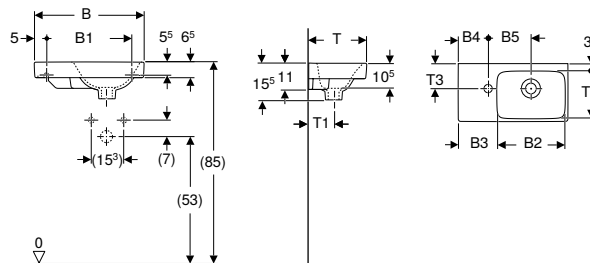

click & scan

Technical data

Product material	Fine fireclay
------------------	---------------

Scope of delivery

- Handrinse basin

Characteristics

- Can be installed with a washbasin cabinet

Art. no.	Colour / surface	Tap hole	Overflow	B	B1	B2	B3	B4	B5	H	T	T1	T2	T3	Shelf space
				[cm]	[cm]	[cm]	[cm]	[cm]	[cm]	[cm]	[cm]	[cm]	[cm]	[cm]	
510.062.00.1	white	left	without	38.5	28	25.5	11.5	6	18	15.5	29	11.5	24	11.5	left
510.063.00.1	white	right	without	38.5	28	25.5	11.5	6	18	15.5	29	11.5	24	11.5	right
510.064.00.1	white	left	without	46	36	28	16.5	12	19	15.5	24.5	10.5	19	10.5	left
510.065.00.1	white	right	without	46	36	28	16.5	12	19	15.5	24.5	10.5	19	10.5	right

Available as of April 2026


Can be combined with

- Geberit Aniara cabinet for handrinse basin, with one door → p. 656

Washbasins

New

Geberit Aniara washbasin

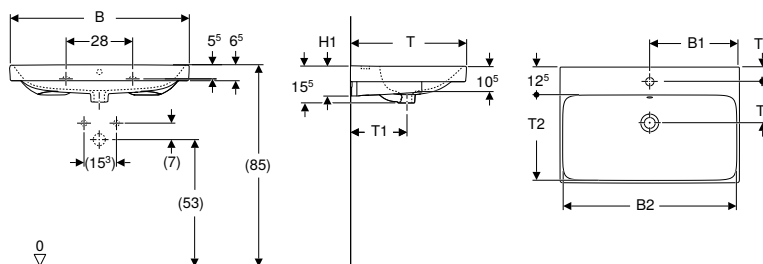

Technical data

Product material	Fine fireclay
------------------	---------------

Scope of delivery

- Washbasin

Characteristics

- Can be installed with a washbasin cabinet

Art. no.	Colour / surface	Tap hole	Overflow	B	B1	B2	H	H1	T	T1	T2	T3	T4
				[cm]	[cm]	[cm]	[cm]	[cm]	[cm]	[cm]	[cm]	[cm]	[cm]
B / width: 530 mm													
510.050.00.1	white	centred	visible, symmetrical	53	26.5	49.5	15.5	12.5	42.5	21	29	6	15
510.050.00.3	white	centred	without	53	26.5	49.5	15.5	12.5	42.5	21	29	6	15
510.050.00.5	white	without	visible, symmetrical	53		49.5	15.5	12.5	42.5	21	29		
510.050.00.7	white	without	without	53		49.5	15.5	12.5	42.5	21	29		
B / width: 605 mm													
510.051.00.1	white	centred	visible, symmetrical	60.5	30	57	15.5	12.5	48.5	23.5	35	6	17.5
510.051.00.3	white	centred	without	60.5	30	57	15.5	12.5	48.5	23.5	35	6	17.5
510.051.00.5	white	without	visible, symmetrical	60.5		57	15.5	12.5	48.5	23.5	35		
510.051.00.7	white	without	without	60.5		57	15.5	12.5	48.5	23.5	35		
B / width: 755 mm													
510.052.00.1	white	centred	visible, symmetrical	75.5	37.5	72	15.5	12.5	48.5	23.5	35	6	17.5
510.052.00.5	white	without	visible, symmetrical	75.5		72	15.5	12.5	48.5	23.5	35		
B / width: 905 mm													
510.053.00.1	white	centred	visible, symmetrical	90.5	45	87.5	15.5	15	48.5	23.5	35	6.5	17
510.053.00.5	white	without	visible, symmetrical	90.5		87.5	15.5	15	48.5	23.5	35		
B / width: 1200 mm													
510.054.00.1	white	centred	visible, symmetrical	120	60	118.5	15.5	15	48.5	23.5	35	6.5	17
510.054.00.5	white	without	visible, symmetrical	120		118.5	15.5	15	48.5	23.5			
510.055.00.1	white	left and right	visible, symmetrical	120	45	118.5	15.5	15	48.5	23.5	35	6.5	17

Available as of April 2026

Can be combined with

- Geberit Aniara cabinet for washbasin, with two drawers → p. 657


Accessories

- Geberit dip tube trap for washbasin, horizontal outlet
- Geberit dip tube trap for washbasin, space-saving model, horizontal outlet

Lay-on washbasins

New

Geberit Aniara lay-on washbasin, round

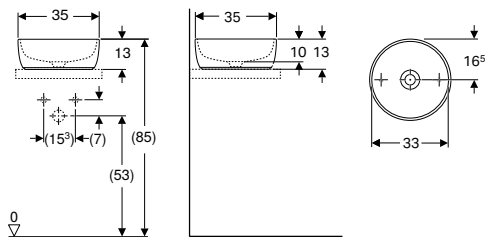

click & scan

Technical data

Product material	Fine stoneware
------------------	----------------

Scope of delivery

- Lay-on washbasin
- Fastening material

Art. no.	Colour / surface	Tap hole	Overflow	B [cm]	H [cm]	T [cm]
510.056.00.1	white	without	without	35	13	35


Available as of December 2026

Can be combined with

- Geberit Aniara cabinet for washbasin, with two drawers → p. 657

New

Geberit Aniara lay-on washbasin, elliptic

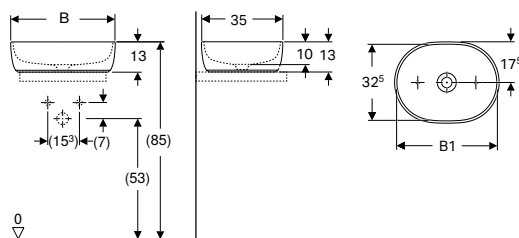

click & scan

Technical data

Product material	Fine stoneware
------------------	----------------

Scope of delivery

- Lay-on washbasin
- Fastening material

Art. no.	Colour / surface	Tap hole	Overflow	B [cm]	B1 [cm]	H [cm]	T [cm]
510.057.00.1	white	without	without	45	42.5	13	35
510.058.00.1	white	without	without	55	52.5	13	35


Available as of December 2026

Can be combined with

- Geberit Aniara cabinet for washbasin, with two drawers → p. 657

New

Geberit Aniara lay-on washbasin, square

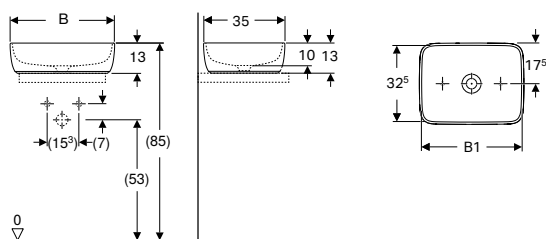

click & scan

Technical data

Product material	Fine stoneware
------------------	----------------

Scope of delivery

- Lay-on washbasin
- Fastening material

Art. no.	Colour / surface	Tap hole	Overflow	B [cm]	B1 [cm]	H [cm]	T [cm]
510.059.00.1	white	without	without	45	42.5	13	35
510.060.00.1	white	without	without	55	52.5	13	35

Available as of December 2026


Can be combined with

- Geberit Aniara cabinet for washbasin, with two drawers → p. 657

Vanity basins

New

Geberit Aniara vanity basin

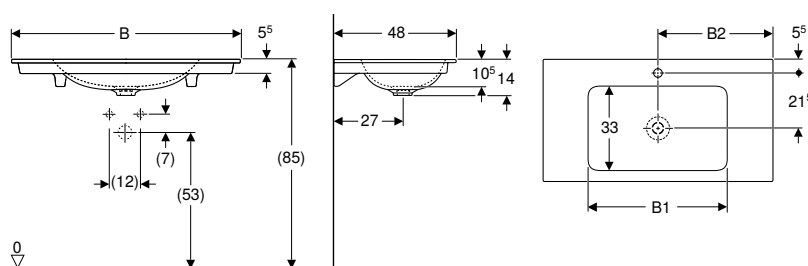

click & scan

Application purposes

- For mounting on washbasin cabinets

Technical data

Product material	Fine fireclay
------------------	---------------

Characteristics

- Vertical outlet
- Slim rim

Scope of delivery

- Vanity basin

Art. no.	Colour / surface	Tap hole	Overflow	B [cm]	B1 [cm]	B2 [cm]	Cabinet width [cm]	H [cm]	T [cm]	Shelf space
505.110.01.1	white	centred	without	60	50.5	30	60	14	48	on both sides
505.111.01.1	white	without	without	60	50.5	30	60	14	48	on both sides
505.110.01.2	white	centred	without	75	55	37.5	75	14	48	on both sides
505.111.01.2	white	without	without	75	55	37.5	75	14	48	on both sides
505.110.01.3	white	centred	without	90	55	45	90	14	48	on both sides
505.111.01.3	white	without	without	90	55	45	90	14	48	on both sides
505.110.01.5	white	centred	without	119	60	59.5	120	14	48	on both sides
505.111.01.5	white	without	without	119	60	59.5	120	14	48	on both sides

Available as of April 2026

To order additionally

- Geberit washbasin connector and trap, space-saving model

Can be combined with

- Geberit Aniara cabinet for washbasin, with two drawers → p. 657

Accessories


- Geberit dip tube trap for washbasin, space-saving model, horizontal outlet

Bathroom furniture

Washbasin cabinets

New

Geberit Aniara cabinet for handrinse basin, with one door

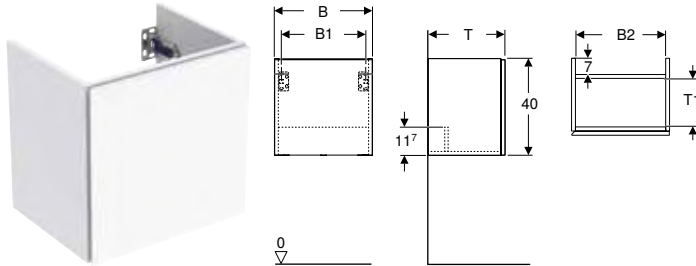

click & scan

Technical data

Product material	High-compressed three-layer chipboard
------------------	---------------------------------------

Scope of delivery

- Cabinet for handrinse basin
- Fastening material

Characteristics

- Wood from sustainable forestry with certified origin
- Wall-hung
- With one door
- Door with soft closing
- Hinge side left or right
- Opening with recessed handle
- Moisture-resistant
- Delivered preassembled

Art. no.	Colour / surface	B [cm]	B1 [cm]	B2 [cm]	H [cm]	T [cm]	T1 [cm]	Door
510.071.01.1	white / silk-glossy	37	31.6	33.6	40	27.7	17.3	
510.071.00.2	rusty red / silk-matt	37	31.6	33.6	40	27.7	17.3	
510.071.00.3	white / silk-matt	37	31.6	33.6	40	27.7	17.3	
510.071.JH.1	oak / wood-textured melamine	37	31.6	33.6	40	27.7	17.3	
510.071.JK.1	lava / silk-matt	37	31.6	33.6	40	27.7	17.3	
510.072.JK.1	lava / silk-matt	40.5	35.1	37.3	40	31.8	21.4	left- or right-hand hinge
510.072.JH.1	oak / wood-textured melamine	40.5	35.1	37.3	40	31.8	21.4	left- or right-hand hinge
510.072.01.1	white / silk-glossy	40.5	35.1	37.3	40	31.8	21.4	left- or right-hand hinge
510.072.00.2	rusty red / silk-matt	40.5	35.1	37.3	40	31.8	21.4	left- or right-hand hinge
510.072.00.3	white / silk-matt	40.5	35.1	37.3	40	31.8	21.4	left- or right-hand hinge
510.073.01.1	white / silk-glossy	44.7	39.3	41.5	40	23.1	12.7	left- or right-hand hinge
510.073.00.2	rusty red / silk-matt	44.7	39.3	41.5	40	23.1	12.7	left- or right-hand hinge
510.073.00.3	white / silk-matt	44.7	39.3	41.5	40	23.1	12.7	left- or right-hand hinge
510.073.JH.1	oak / wood-textured melamine	44.7	39.3	41.5	40	23.1	12.7	left- or right-hand hinge
510.073.JK.1	lava / silk-matt	44.7	39.3	41.5	40	23.1	12.7	left- or right-hand hinge


Available as of April 2026

Can be combined with

- Geberit Aniara handrinse basin → p. 652
- Geberit Aniara handrinse basin, asymmetrical → p. 652

New

Geberit Aniara cabinet for washbasin, with two drawers

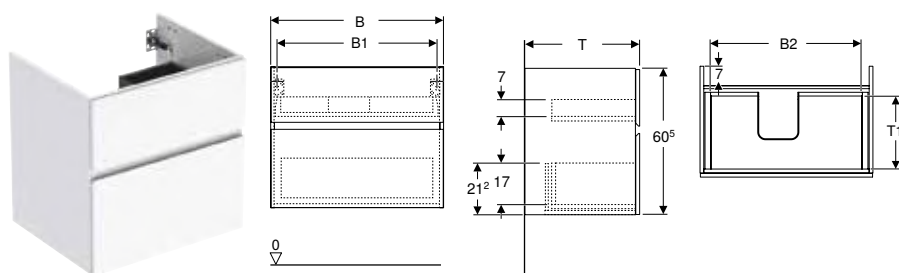

click & scan

Technical data

Product material	High-compressed three-layer chipboard
Drawer load max.	20 kg

Scope of delivery

- Cabinet for washbasin
- Fastening material

Characteristics

- Wood from sustainable forestry with certified origin
- Wall-hung
- With two drawers
- Opening with recessed handle
- Drawer with soft closing
- Enlarged service space
- Drawer with trap cutout
- Moisture-resistant
- Delivered preassembled

Art. no.	Colour / surface	B [cm]	B1 [cm]	B2 [cm]	H [cm]	T [cm]	T1 [cm]
510.066.01.1	white / silk-glossy	51	45.6	42	60.5	41	28.1
510.066.00.2	rusty red / silk-matt	51	45.6	42	60.5	41	28.1
510.066.00.3	white / silk-matt	51	45.6	42	60.5	41	28.1
510.066.JH.1	oak / wood-textured melamine	51	45.6	42	60.5	41	28.1
510.066.JK.1	lava / silk-matt	51	45.6	42	60.5	41	28.1
510.067.01.1	white / silk-glossy	59.2	53.8	50.2	60.5	47.5	33.1
510.067.00.2	rusty red / silk-matt	59.2	53.8	50.2	60.5	47.5	33.1
510.067.00.3	white / silk-matt	59.2	53.8	50.2	60.5	47.5	33.1
510.067.JK.1	lava / silk-matt	59.2	53.8	50.2	60.5	47.5	33.1
510.067.JH.1	oak / wood-textured melamine	59.2	53.8	50.2	60.5	47.5	33.1
510.068.01.1	white / silk-glossy	74	68.6	65	60.5	47.5	33.1
510.068.00.2	rusty red / silk-matt	74	68.6	65	60.5	47.5	33.1
510.068.00.3	white / silk-matt	74	68.6	65	60.5	47.5	33.1
510.068.JH.1	oak / wood-textured melamine	74	68.6	65	60.5	47.5	33.1
510.068.JK.1	lava / silk-matt	74	68.6	65	60.5	47.5	33.1
510.069.01.1	white / silk-glossy	88.8	83.4	79.8	60.5	47.5	33.1
510.069.00.2	rusty red / silk-matt	88.8	83.4	79.8	60.5	47.5	33.1
510.069.00.3	white / silk-matt	88.8	83.4	79.8	60.5	47.5	33.1
510.069.JH.1	oak / wood-textured melamine	88.8	83.4	79.8	60.5	47.5	33.1
510.069.JK.1	lava / silk-matt	88.8	83.4	79.8	60.5	47.5	33.1
510.070.01.1	white / silk-glossy	118.4	113	109.4	60.5	47.5	33.1
510.070.00.2	rusty red / silk-matt	118.4	113	109.4	60.5	47.5	33.1
510.070.00.3	white / silk-matt	118.4	113	109.4	60.5	47.5	33.1
510.070.JH.1	oak / wood-textured melamine	118.4	113	109.4	60.5	47.5	33.1
510.070.JK.1	lava / silk-matt	118.4	113	109.4	60.5	47.5	33.1

Available as of April 2026

Can be combined with

- Geberit Aniara washbasin → p. 653
- Geberit Aniara vanity basin → p. 655
- Geberit Aniara lay-on washbasin, round → p. 654
- Geberit Aniara lay-on washbasin, elliptic → p. 654
- Geberit Aniara lay-on washbasin, square → p. 655


Accessories

- Geberit towel rail for bathroom furniture → p. 505
- Geberit dip tube trap for washbasin, space-saving model, horizontal outlet

Side cabinets

New

Geberit Aniara side cabinet with one door

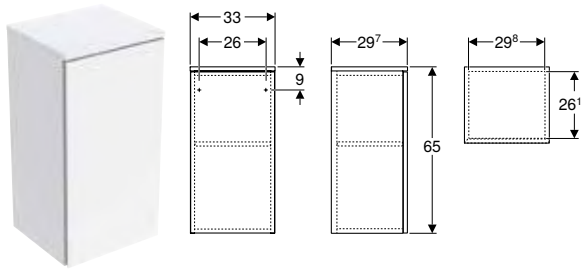

click & scan

Technical data

Product material	High-compressed three-layer chipboard
------------------	---------------------------------------

Scope of delivery

- Fastening material

Characteristics

- Wood from sustainable forestry with certified origin
- Wall-hung
- With one door
- Opening with handle
- With one movable shelf
- Door with soft closing
- Hinge side left or right
- Moisture-resistant
- Delivered preassembled

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]	Door
504.058.01.1	white / silk-glossy	33	65	29.7	left- or right-hand hinge
504.058.00.2	rusty red / silk-matt	33	65	29.7	left- or right-hand hinge
504.058.00.3	white / matt	33	65	29.7	left- or right-hand hinge
504.058.JH.1	oak / silk-matt	33	65	29.7	left- or right-hand hinge
504.058.JK.1	lava / silk-matt	33	65	29.7	left- or right-hand hinge


Available as of April 2026



- Side cabinet and medium cabinet can be combined with each other

New

Geberit Aniara medium cabinet with one door

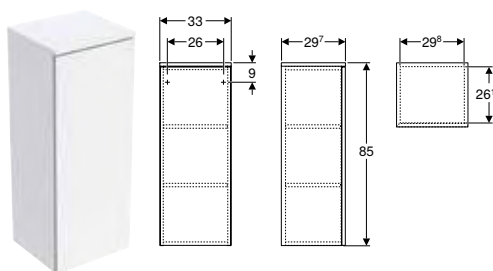

click & scan

Technical data

Product material	High-compressed three-layer chipboard
------------------	---------------------------------------

Scope of delivery

- Fastening material

Characteristics

- Wood from sustainable forestry with certified origin
- Wall-hung
- With one door
- Door with soft closing
- Opening with handle
- With two movable shelves
- Hinge side left or right
- Moisture-resistant
- Delivered preassembled

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]	Door
504.059.01.1	white / silk-glossy	33	85	29.7	left- or right-hand hinge
504.059.00.2	rusty red / silk-matt	33	85	29.7	left- or right-hand hinge
504.059.00.3	white / matt	33	85	29.7	left- or right-hand hinge
504.059.JH.1	oak / silk-matt	33	85	29.7	left- or right-hand hinge
504.059.JK.1	lava / silk-matt	33	85	29.7	left- or right-hand hinge

Available as of April 2026




- Side cabinet and medium cabinet can be combined with each other

Washtops

New

Geberit Aniara washtop

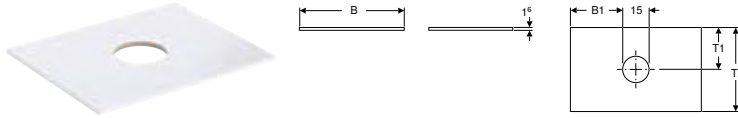

click & scan

Technical data

Product material	High-compressed three-layer chipboard
------------------	---------------------------------------

Scope of delivery

- Washtop
- Fastening material

Characteristics

- Wood from sustainable forestry with certified origin

Art. no.	Colour / surface	Section	B [cm]	B1 [cm]	H [cm]	T [cm]	T1 [cm]
510.074.01.1	white / silk-glossy	centred	51.4	18.2	1.6	41.3	20.7
510.074.00.3	white / silk-matt	centred	51.4	18.2	1.6	41.3	20.7
510.074.JH.1	oak / wood-textured melamine	centred	51.4	18.2	1.6	41.3	20.7
510.074.JK.1	lava / silk-matt	centred	51.4	18.2	1.6	41.3	20.7
510.074.00.2	rusty red / silk-matt	centred	51.4	18.2	1.6	41.3	20.7
510.075.01.1	white / silk-glossy	centred	59.6	22.3	1.6	47.8	23.9
510.075.00.3	white / silk-matt	centred	59.6	22.3	1.6	47.8	23.9
510.075.JH.1	oak / wood-textured melamine	centred	59.6	22.3	1.6	47.8	23.9
510.075.JK.1	lava / silk-matt	centred	59.6	22.3	1.6	47.8	23.9
510.075.00.2	rusty red / silk-matt	centred	59.6	22.3	1.6	47.8	23.9
510.076.01.1	white / silk-glossy	centred	74.4	29.7	1.6	47.8	23.9
510.076.00.3	white / silk-matt	centred	74.4	29.7	1.6	47.8	23.9
510.076.JH.1	oak / wood-textured melamine	centred	74.4	29.7	1.6	47.8	23.9
510.076.JK.1	lava / silk-matt	centred	74.4	29.7	1.6	47.8	23.9
510.076.00.2	rusty red / silk-matt	centred	74.4	29.7	1.6	47.8	23.9
510.077.01.1	white / silk-glossy	centred	89.2	37.1	1.6	47.8	23.9
510.077.00.3	white / silk-matt	centred	89.2	37.1	1.6	47.8	23.9
510.077.JH.1	oak / wood-textured melamine	centred	89.2	37.1	1.6	47.8	23.9
510.077.JK.1	lava / silk-matt	centred	89.2	37.1	1.6	47.8	23.9
510.077.00.2	rusty red / silk-matt	centred	89.2	37.1	1.6	47.8	23.9
510.078.01.1	white / silk-glossy	left and right	118.8	22.9	1.6	47.8	23.9
510.078.00.3	white / silk-matt	left and right	118.8	22.9	1.6	47.8	23.9
510.078.JH.1	oak / wood-textured melamine	left and right	118.8	22.9	1.6	47.8	23.9
510.078.JK.1	lava / silk-matt	left and right	118.8	22.9	1.6	47.8	23.9
510.078.00.2	rusty red / silk-matt	left and right	118.8	22.9	1.6	47.8	23.9

Available as of April 2026

To order additionally


- Geberit Aniara lay-on washbasin, elliptic → p. 654
- Geberit Aniara lay-on washbasin, square → p. 655
- Geberit Aniara lay-on washbasin, round → p. 654

WCs

Wall-hung WCs

New

Geberit Aniara wall-hung WC, washdown, shrouded, Rimfree

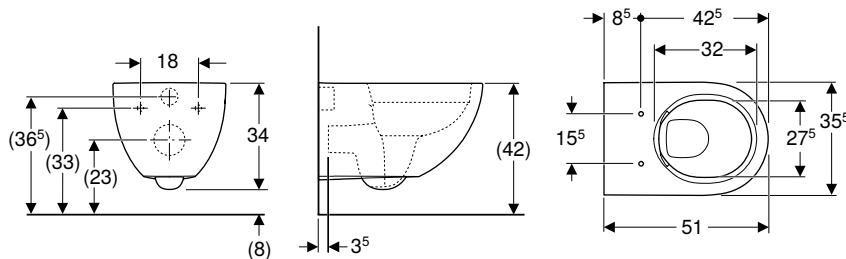

click & scan

Application purposes

- For concealed cisterns
- For pressure flushing valves

Technical data

Product material	Vitreous china
------------------	----------------

Scope of delivery

- WC ceramic appliance
- Fastening material

Characteristics

- Wall-hung
- Washdown WC
- Rimless WC ceramic appliance featuring Rimfree flush technology
- Easy fastening with Easy Fast Fixing (type EFF3)
- Type 1, full flush volume 6 / 5 / 4 l, in accordance with EN 997
- Type 2 in accordance with EN 997
- 4 l flush
- Shrouded
- Hidden fastening

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]
504.055.00.1	white	35.5	34	51

Available as of April 2026

To order additionally


- WC seat

Can be combined with

- Geberit Aniara wall-hung bidet, shrouded → p. 663
- Geberit Aniara WC seat → p. 662

New

Geberit Aniara wall-hung WC set, washdown, Rimfree, with WC seat

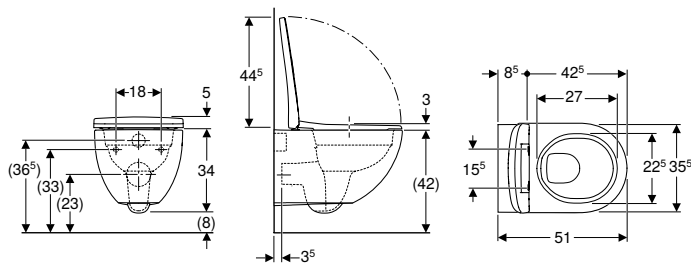

click & scan

Application purposes

- For concealed cisterns
- For pressure flushing valves

Technical data

Product material	Vitreous china
------------------	----------------

Scope of delivery

- WC ceramic appliance
- WC seat
- Fastening material

Characteristics

- Wall-hung
- Washdown WC
- Rimless WC ceramic appliance featuring Rimfree flush technology
- Easy fastening with Easy Fast Fixing (type EFF3)
- Type 1, full flush volume 6 / 5 / 4 l, in accordance with EN 997
- Type 2 in accordance with EN 997
- 4 l flush
- Shrouded
- Hidden fastening
- Overlapping WC lid
- Narrow design

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]	QuickRelease function	Soft-closing mechanism	Fastening	Hinge material
504.056.00.1	white	35.5	34	51	Yes, with QuickRelease hinges	yes	from above	Brass chrome-plated

Available as of April 2026


Can be combined with

- Geberit Aniara wall-hung bidet, shrouded → p. 663

WC seats

New

Geberit Aniara WC seat

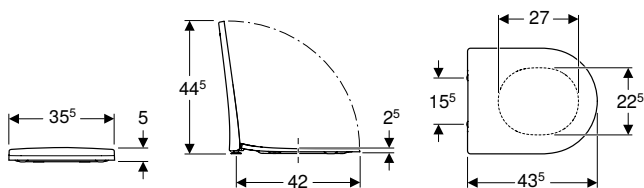

click & scan

Technical data

Product material	Duroplast
Fastening distance	15.5 cm

Scope of delivery

- WC seat

Characteristics

- Overlapping WC lid
- Narrow design
- Antibacterial

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]	QuickRelease function	Soft-closing mechanism	Fastening	Hinge material
504.051.01.1	white	35.5	5	43.5	no	no	from above	Brass chrome-plated
504.052.01.1	white	35.5	5	43.5	no	yes	from above	Brass chrome-plated
504.053.01.1	white	35.5	5	43.5	Yes, with QuickRelease hinges	yes	from above	Brass chrome-plated

Available as of April 2026

Can be combined with


- Geberit Aniara wall-hung WC, washdown, shrouded, Rimfree → p. 661

Bidets

Wall-hung bidets

New

Geberit Aniara wall-hung bidet, shrouded

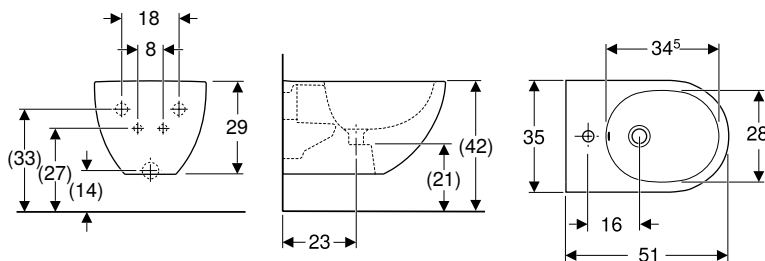

click & scan

Application purposes

- For single-hole taps with flexible hoses

Technical data

Product material	Vitreous china
------------------	----------------

Characteristics

- Wall-hung
- Hidden water supply connection
- Easy fastening with Easy Fast Fixing (type EFF3)
- Shrouded
- Hidden fastening

Scope of delivery

- Bidet ceramic appliance
- Fastening material

Art. no.	Colour / surface	Overflow	B [cm]	H [cm]	T [cm]
504.057.00.1	white	visible, symmetrical	35	29	51

Available as of April 2026

Can be combined with

- Geberit Aniara wall-hung WC, washdown, shrouded, Rimfree → p. 661
- Geberit Aniara wall-hung WC set, washdown, Rimfree, with WC seat → p. 662







Geberit Smyle

Washbasins	666
Assortment overview – Geberit Smyle washbasins and washbasin cabinets	667
Handrinse basins.....	668
Washbasins	669
Double washbasins.....	670
Pedestals	671
Bathroom furniture	672
Accessory overview – Geberit Smyle bathroom furniture	673
Washbasin cabinets.....	676
Side cabinets	680
Additional furniture.....	682
Accessories.....	683
WCs	685
Assortment overview – Geberit Smyle WCs and WC seats.....	685
Accessory overview – Geberit Smyle WC ceramic appliance in combination with connection pipes.....	685
Wall-hung WCs.....	686
Floor-standing WCs	689
WC seats.....	691
Exposed cisterns	692
Exposed cisterns for WCs, made of sanitary ceramic	692
Bidets	693
Wall-hung bidets	693
Floor-standing bidets	693
Urinals	694
For concealed controls.....	694
Waterless	695

Washbasins

Assortment overview – Geberit Smyle washbasins and washbasin cabinets


Geberit International Sales, version: December 2025

					Handrinse basins				
					Geberit Smyle handrinse basin, square design, asymmetrical overflow	Geberit Smyle handrinse basin, square design			
					45 cm	50 cm			
White, central tap hole, visible overflow					500.222.01.1	500.256.01.1			
White, without tap hole, visible overflow									
White, left and right tap hole, visible overflow									
									
					→ p. 668	→ p. 668			
Cabinets for handrinse basins									
Geberit Smyle cabinet for handrinse basin, square design, with one door	500.350.00.1		45 cm	White, door hinges right	→ p. 676	✓			
	500.350.JK.1			Lava, door hinges right		✓			
	500.350.JL.1			Sand grey, door hinges right		✓			
	500.350.JR.1			hickory, door hinges right		✓			
	500.351.00.1			White, door hinges left		✓			
	500.351.JK.1			Lava, door hinges left		✓			
	500.351.JL.1			Sand grey, door hinges left		✓			
	500.351.JR.1			hickory, door hinges left		✓			
	500.363.00.1	50 cm	White, door hinges right			✓			
	500.363.JK.1		Lava, door hinges right			✓			
	500.363.JL.1		Sand grey, door hinges right			✓			
	500.363.JR.1		hickory, door hinges right			✓			
	500.364.00.1		White, door hinges left			✓			
	500.364.JK.1		Lava, door hinges left			✓			
	500.364.JL.1		Sand grey, door hinges left			✓			
	500.364.JR.1		hickory, door hinges left			✓			
	Cabinets for washbasin								
	Geberit Smyle cabinet for washbasin, square design, with one door	500.365.00.1		55 cm		White, door hinges right	→ p. 677		
		500.365.JK.1				Lava, door hinges right			
		500.365.JL.1				Sand grey, door hinges right			
500.365.JR.1		hickory, door hinges right							
500.366.00.1		White, door hinges left							
500.366.JK.1		Lava, door hinges left							
500.366.JL.1		Sand grey, door hinges left							
500.366.JR.1		hickory, door hinges left							
Geberit Smyle cabinet for washbasin, square design, with two drawers	500.352.00.1		60 cm	white	→ p. 678				
	500.352.JK.1			lava					
	500.352.JL.1			sand grey					
	500.352.JR.1			hickory					
	500.353.00.1		75 cm	white					
	500.353.JK.1			lava					
	500.353.JL.1			sand grey					
	500.353.JR.1			hickory					
	500.354.00.1		90 cm	white					
	500.354.JK.1			lava					
	500.354.JL.1			sand grey					
	500.354.JR.1			hickory					
	500.355.00.1		120 cm	white					
	500.355.JK.1			lava					
	500.355.JL.1			sand grey					
	500.355.JR.1			hickory					
Cabinets for double washbasin									
Geberit Smyle cabinet for double washbasin, square design, with two drawers	500.356.00.1		120 cm	white	→ p. 679				
	500.356.JK.1			lava					
	500.356.JL.1			sand grey					
	500.356.JR.1			hickory					

✓ Compatible

Handrinse basins

Geberit Smyle handrinse basin, square design, asymmetrical overflow

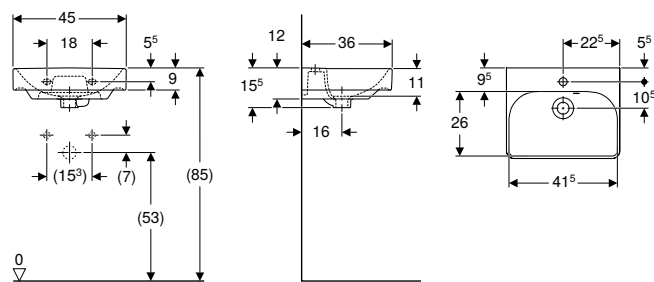

click & scan

Technical data

Product material	Vitreous china
------------------	----------------

Characteristics

- Can be installed with a washbasin cabinet
- Asymmetrical overflow

Art. no.	Colour / surface	Tap hole	Overflow	Cabinet width	H	T
				[cm]	[cm]	[cm]

B / width: 45 cm

500.222.01.1	white	centred	visible, asymmetrical	44.2	15.5	36
--------------	-------	---------	-----------------------	------	------	----


Can be combined with

- Geberit Smyle cabinet for handrinse basin, square design, with one door → p. 676
- Geberit Smyle half pedestal for handrinse basins → p. 671
- Geberit Selnova Square full pedestal → p. 703

Accessories

- Geberit washbasin drain, space-saving model, slim design, with external waste plug with push actuation
- Geberit dip tube trap for washbasin, horizontal outlet
- Geberit dip tube trap for washbasin, space-saving model, horizontal outlet
- Geberit fastening material for handrinse basin → p. 1035

Geberit Smyle handrinse basin, square design

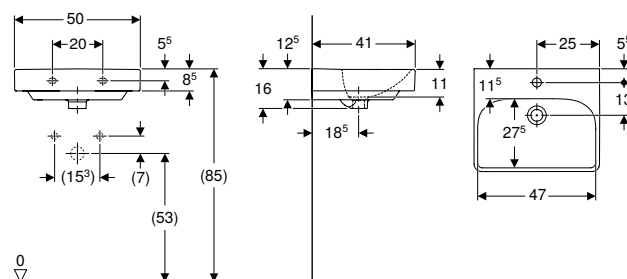

click & scan

Technical data

Product material	Vitreous china
------------------	----------------

Characteristics

- Can be installed with a washbasin cabinet
- Can be combined with half pedestal
- Can be combined with full pedestal

Art. no.	Colour / surface	Tap hole	Overflow	Cabinet width	H	T
				[cm]	[cm]	[cm]

B / width: 50 cm

500.256.01.1	white	centred	visible, symmetrical	49.2	16	41
--------------	-------	---------	----------------------	------	----	----

Can be combined with


- Geberit Smyle cabinet for handrinse basin, square design, with one door → p. 676
- Geberit Smyle half pedestal → p. 671
- Geberit Selnova Square full pedestal → p. 703

Accessories

- Geberit dip tube trap for washbasin, horizontal outlet
- Geberit dip tube trap for washbasin, space-saving model, horizontal outlet
- Geberit fastening material for handrinse basin → p. 1035

Washbasins

Geberit Smyle washbasin

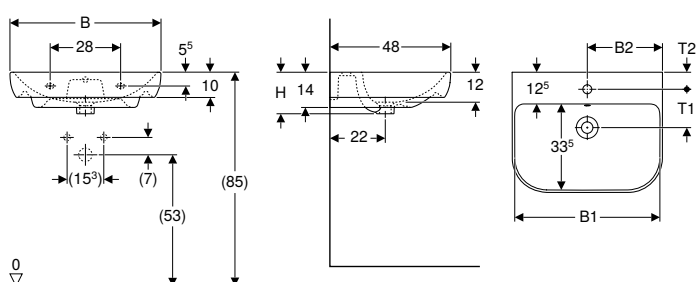

click & scan

Technical data

Product material	Vitreous china
------------------	----------------

Characteristics

- Can be combined with half pedestal
- Can be combined with full pedestal

Art. no.	Colour / surface	Tap hole	Overflow	B1 [cm]	B2 [cm]	H [cm]	T [cm]	T1 [cm]	T2 [cm]
B / width: 55 cm									
500.227.01.1	white	centred	visible, symmetrical	51.5	27.5	16.5	48	15.5	6.5
B / width: 60 cm									
500.228.01.1	white	centred	visible, symmetrical	56.8	30	16.5	48	15	7
B / width: 65 cm									
500.230.01.1	white	centred	visible, symmetrical	61.8	32.5	16.5	48	15.5	6.5
B / width: 70 cm									
500.248.01.1	white	centred	visible, symmetrical	66.8	35	16.5	48	15	7


Can be combined with

- Geberit Selnova full pedestal → p. 733
- Geberit Smyle half pedestal → p. 671

Accessories

- Geberit dip tube trap for washbasin, horizontal outlet
- Geberit fastening material for washbasin → p. 1035

Geberit Smyle washbasin, square design

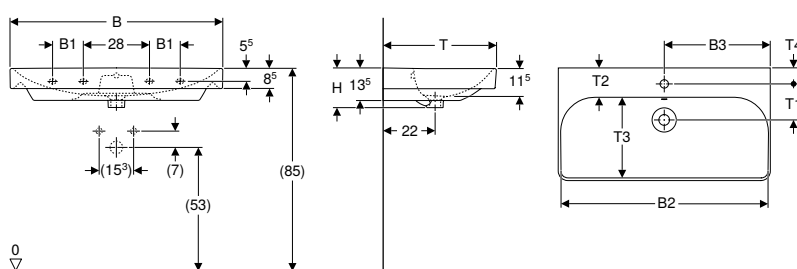

Technical data

Product material	Vitreous china
------------------	----------------

Characteristics

- Can be installed with a washbasin cabinet

Art. no.	Colour / surface	Tap hole	Overflow	B1 [cm]	B2 [cm]	B3 [cm]	Cabinet width [cm]	H [cm]	T [cm]	T1 [cm]	T2 [cm]	T3 [cm]	T4 [cm]	Fastening points
B / width: 55 cm														
500.259.01.1	white	centred	visible, symmetrical		51.8	27.5	53.6	17	44	15	12.5	27.5	7	2
B / width: 60 cm														
500.229.01.1	white	centred	visible, symmetrical		56.8	30	58.4	16.5	48	15.5	12.5	33.5	6.5	2
B / width: 75 cm														
500.249.01.1	white	centred	visible, symmetrical		71.5	37.5	73.4	16.5	48	15	12.5	33.5	6.5	2
B / width: 90 cm														
500.251.01.1	white	centred	visible, symmetrical	13	86.8	45	88.4	16.5	48	15	12.5	33.5	7	4
500.250.01.1	white	without	visible, symmetrical	13	86.8		88.4	16.5	48		12.5	33.5		4
500.252.01.1	white	left and right	visible, symmetrical	13	86.8	45	88.4	16.5	48	15	12.5	33.5	7	4
B / width: 120 cm														
500.253.01.1	white	left and right	visible, symmetrical	28	116.8	31.5	118.4	16.5	48	15.5	13	33.5	7	4
500.226.01.1	white	centred	visible, symmetrical	28	116.8	60	118.4	16.5	48	15.5	13	33.5	7	4
500.225.01.1	white	without	visible, symmetrical	28	116.8		118.4	16.5	48		13	33.5		4

Can be combined with


- Geberit Smyle cabinet for washbasin, square design, with one door → p. 677
- Geberit Smyle cabinet for washbasin, square design, with two drawers → p. 678
- Geberit Smyle half pedestal → p. 671
- Geberit Selnova full pedestal → p. 733
- Geberit Selnova Square full pedestal → p. 703

Accessories

- Geberit washbasin drain, space-saving model, slim design, with external waste plug with push actuation
- Geberit dip tube trap for washbasin, horizontal outlet
- Geberit dip tube trap for washbasin, space-saving model, horizontal outlet
- Geberit fastening material for washbasin → p. 1035

Double washbasins

Geberit Smyle double washbasin, square design

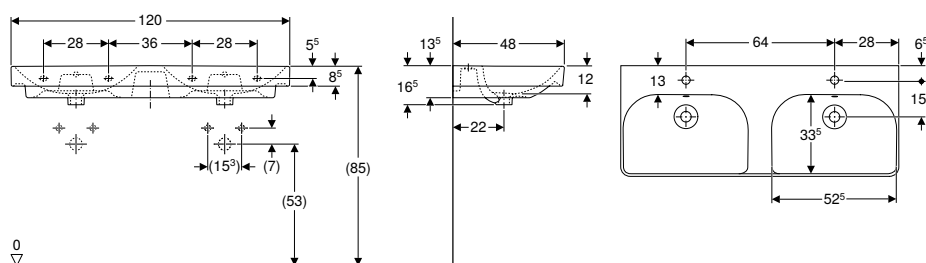

Technical data

Product material	Vitreous china
------------------	----------------

Characteristics

- Can be installed with a washbasin cabinet
- Can be combined with half pedestal

Art. no.	Colour / surface	Tap hole	Overflow	Cabinet width [cm]	H [cm]	T [cm]
B / width: 120 cm						
500.223.01.1	white	centred	visible, symmetrical	118.4	16.5	48
500.224.01.1	white	without	visible, symmetrical	118.4	16.5	48

Can be combined with


- Geberit Smyle cabinet for double washbasin, square design, with two drawers → p. 679
- Geberit Smyle half pedestal → p. 671

Accessories

- Geberit dip tube trap for washbasin, horizontal outlet
- Geberit dip tube trap for washbasin, space-saving model, horizontal outlet
- Geberit fastening material for washbasin → p. 1035

Pedestals

Geberit Smyle half pedestal for handrinse basins

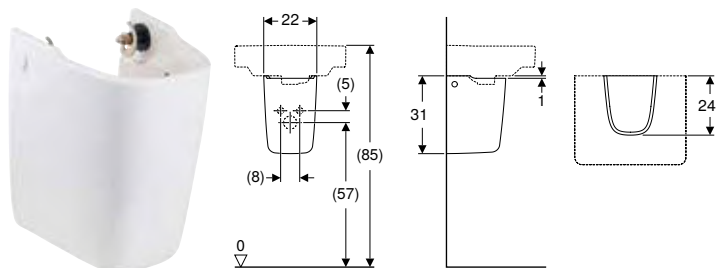

click & scan

Application purposes

- For handrinse basins

Technical data

Product material	Vitreous china
------------------	----------------

Characteristics

- Easy fastening with Geberit fastening material Kerafix, for half pedestals

Scope of delivery


- Fastening material

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]
500.575.01.1	white	22	31	24

Can be combined with

- Geberit Smyle handrinse basin, square design, asymmetrical overflow → p. 668

Geberit Smyle half pedestal

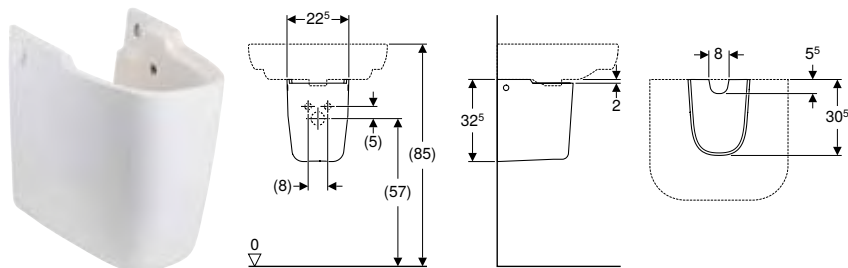

click & scan

Application purposes

- For washbasins with a width of 55 cm or more

Technical data

Product material	Vitreous china
------------------	----------------

Scope of delivery

- Fastening material

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]
500.576.01.1	white	22.5	32.5	30.5





Can be combined with

- Geberit Smyle washbasin, square design → p. 670
- Geberit Smyle washbasin → p. 669
- Geberit Smyle double washbasin, square design → p. 670
- Geberit Smyle handrinse basin, square design → p. 668










Bathroom furniture

Accessory overview – Geberit Smyle bathroom furniture

Geberit International Sales, December 2025

					Geberit set of narrow feet	Geberit towel rail for bathroom furniture	Geberit towel rail for bathroom furniture, with right-angled corner	Geberit towel rail for bathroom furniture, with radius corner	
					500.367.00.1	502.328.00.1 502.328.01.3 502.328.JK.1 502.328.JL.1	510040000	510140000	
									
Washbasin, width					→ p. 579	→ p. 505	→ p. 1039	→ p. 1040	
Cabinets for handrinse basins									
Geberit Smyle cabinet for handrinse basin, square design, with one door	500.350.00.1	45 cm	White, door hinges right	→ p. 676	✓				
	500.350.JK.1	45 cm	Lava, door hinges right	→ p. 676	✓				
	500.350.JL.1	45 cm	Sand grey, door hinges right	→ p. 676	✓				
	500.350.JR.1	45 cm	hickory, door hinges right	→ p. 676	✓				
	500.351.00.1	45 cm	White, door hinges left	→ p. 676	✓				
	500.351.JK.1	45 cm	Lava, door hinges left	→ p. 676	✓				
	500.351.JL.1	45 cm	Sand grey, door hinges left	→ p. 676	✓				
	500.351.JR.1	45 cm	hickory, door hinges left	→ p. 676	✓				
	500.363.00.1	50 cm	White, door hinges right	→ p. 676	✓				
	500.363.JK.1	50 cm	Lava, door hinges right	→ p. 676	✓				
	500.363.JL.1	50 cm	Sand grey, door hinges right	→ p. 676	✓				
	500.363.JR.1	50 cm	hickory, door hinges right	→ p. 676	✓				
	500.364.00.1	50 cm	White, door hinges left	→ p. 676	✓				
	500.364.JK.1	50 cm	Lava, door hinges left	→ p. 676	✓				
	500.364.JL.1	50 cm	Sand grey, door hinges left	→ p. 676	✓				
	500.364.JR.1	50 cm	hickory, door hinges left	→ p. 676	✓				
Cabinets for washbasin									
Geberit Smyle cabinet for washbasin, square design, with one door	500.365.00.1	55 cm	White, door hinges right	→ p. 677	✓		✓	✓	
	500.365.JK.1	55 cm	Lava, door hinges right	→ p. 677	✓		✓	✓	
	500.365.JL.1	55 cm	Sand grey, door hinges right	→ p. 677	✓		✓	✓	
	500.365.JR.1	55 cm	hickory, door hinges right	→ p. 677	✓		✓	✓	
	500.366.00.1	55 cm	White, door hinges left	→ p. 677	✓		✓	✓	
	500.366.JK.1	55 cm	Lava, door hinges left	→ p. 677	✓		✓	✓	
	500.366.JL.1	55 cm	Sand grey, door hinges left	→ p. 677	✓		✓	✓	
	500.366.JR.1	55 cm	hickory, door hinges left	→ p. 677	✓		✓	✓	
Geberit Smyle cabinet for washbasin, square design, with two drawers	500.352.00.1	60 cm	white	→ p. 678	✓	✓	✓	✓	
	500.352.JK.1	60 cm	lava	→ p. 678	✓	✓	✓	✓	
	500.352.JL.1	60 cm	sand grey	→ p. 678	✓	✓	✓	✓	
	500.352.JR.1	60 cm	hickory	→ p. 678	✓	✓	✓	✓	
	500.353.00.1	75 cm	white	→ p. 678	✓	✓	✓	✓	
	500.353.JK.1	75 cm	lava	→ p. 678	✓	✓	✓	✓	
	500.353.JL.1	75 cm	sand grey	→ p. 678	✓	✓	✓	✓	
	500.353.JR.1	75 cm	hickory	→ p. 678	✓	✓	✓	✓	
	500.354.00.1	90 cm	white	→ p. 678	✓	✓	✓	✓	
	500.354.JK.1	90 cm	lava	→ p. 678	✓	✓	✓	✓	
	500.354.JL.1	90 cm	sand grey	→ p. 678	✓	✓	✓	✓	
	500.354.JR.1	90 cm	hickory	→ p. 678	✓	✓	✓	✓	
	500.355.00.1	120 cm	white	→ p. 678	✓	✓	✓	✓	
	500.355.JK.1	120 cm	lava	→ p. 678	✓	✓	✓	✓	
	500.355.JL.1	120 cm	sand grey	→ p. 678	✓	✓	✓	✓	
	500.355.JR.1	120 cm	hickory	→ p. 678	✓	✓	✓	✓	

Geberit International Sales, December 2025

						Geberit set of narrow feet	Geberit towel rail for bathroom furniture	Geberit towel rail for bathroom furniture, with right-angled corner	Geberit towel rail for bathroom furniture, with radius corner	
						500.367.00.1	502.328.00.1 502.328.01.3 502.328.JK.1 502.328.JL.1 502.328.14.1	510040000	510140000	
										
Washbasin, width						→ p. 579	→ p. 505	→ p. 1039	→ p. 1040	
Cabinets for double washbasin										
Geberit Smyle cabinet for double washbasin, square design, with two drawers	500.356.00.1		120 cm	white	→ p. 679	✓	✓	✓	✓	
	500.356.JK.1		120 cm	lava	→ p. 679	✓	✓	✓	✓	
	500.356.JL.1		120 cm	sand grey	→ p. 679	✓	✓	✓	✓	
	500.356.JR.1		120 cm	hickory	→ p. 679	✓	✓	✓	✓	
Side cabinets										
Geberit Smyle medium cabinet with one door and internal mirror	500.361.00.1			white	→ p. 680	✓				
	500.361.JK.1			lava	→ p. 680	✓				
	500.361.JL.1			sand grey	→ p. 680	✓				
	500.361.JR.1			hickory	→ p. 680	✓				
Geberit Smyle low cabinet with one door	500.359.00.1			White, door hinges right	→ p. 681	✓				
	500.359.JK.1			Lava, door hinges right	→ p. 681	✓				
	500.359.JL.1			Sand grey, door hinges right	→ p. 681	✓				
	500.359.JR.1			hickory, door hinges right	→ p. 681	✓				
	500.360.00.1			White, door hinges left	→ p. 681	✓				
	500.360.JK.1			Lava, door hinges left	→ p. 681	✓				
	500.360.JL.1			Sand grey, door hinges left	→ p. 681	✓				
	500.360.JR.1			hickory, door hinges left	→ p. 681	✓				
Geberit Smyle low cabinet with two drawers	500.357.00.1			white	→ p. 681	✓	✓	✓	✓	
	500.357.JK.1			lava	→ p. 681	✓	✓	✓	✓	
	500.357.JL.1			sand grey	→ p. 681	✓	✓	✓	✓	
	500.357.JR.1			hickory	→ p. 681	✓	✓	✓	✓	
Geberit Smyle low cabinet, open	500.358.00.1			white	→ p. 682	✓				
	500.358.JK.1			lava	→ p. 682	✓				
	500.358.JL.1			sand grey	→ p. 682	✓				
	500.358.JR.1			hickory	→ p. 682	✓				

✓ Compatible

¹⁾ Maximum number of drawer inserts per cabinet = 2








²⁾ Maximum number of drawer inserts per cabinet = 4

³⁾ Maximum number of drawer inserts per cabinet = 6

⁴⁾ Maximum number of drawer inserts per cabinet = 5


⁵⁾ Maximum number of drawer inserts per cabinet = 3

⁶⁾ Maximum number of drawer inserts per cabinet = 1

Geberit drawer insert, T-partition, for top drawer	Geberit drawer insert, H-partition, for top drawer	Geberit drawer insert, H-partition, for bottom drawer	Geberit magnetic holder	Geberit magnifying mirror	Geberit light strip for drawer				Geberit double light strip for drawer
500.678.00.1	500.677.00.1	500.676.00.1	510010000	510100000	501410000	501535000	501635000	501825000	501470000
									
→ p. 683	→ p. 684		→ p. 516		→ p. 1038				
✓ ⁴⁾	✓ ⁴⁾	✓ ⁴⁾	✓						✓
✓ ⁴⁾	✓ ⁴⁾	✓ ⁴⁾	✓						✓
✓ ⁴⁾	✓ ⁴⁾	✓ ⁴⁾	✓						✓
✓ ⁴⁾	✓ ⁴⁾	✓ ⁴⁾	✓						✓
			✓	✓					
			✓	✓					
			✓	✓					
			✓	✓					
			✓	✓					
			✓	✓					
			✓	✓					
			✓	✓					
			✓	✓					
			✓	✓					
			✓	✓					
			✓	✓					
✓ ¹⁾	✓ ¹⁾	✓ ⁶⁾	✓		✓				
✓ ¹⁾	✓ ¹⁾	✓ ⁶⁾	✓		✓				
✓ ¹⁾	✓ ¹⁾	✓ ⁶⁾	✓		✓				
✓ ¹⁾	✓ ¹⁾	✓ ⁶⁾	✓		✓				
			✓						
			✓						
			✓						
			✓						

Washbasin cabinets

Geberit Smyle cabinet for handrinse basin, square design, with one door

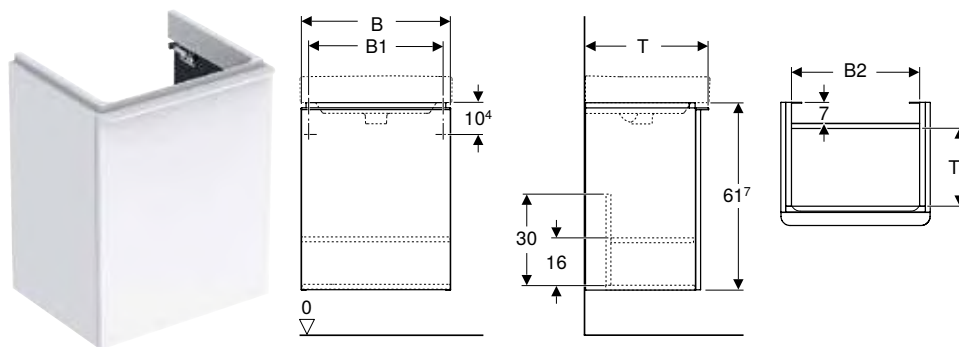

click & scan

Technical data

Product material	High-compressed three-layer chipboard
------------------	---------------------------------------

Scope of delivery

- Cabinet for handrinse basin
- Fastening material

Characteristics

- FSC™ C134279 certified
- Wall-hung
- With one door
- Opening with handle
- Door with soft closing
- Can be subdivided for service room
- With one movable shelf
- Moisture-resistant
- Delivered preassembled

Art. no.	Colour / surface	B [cm]	B1 [cm]	B2 [cm]	H [cm]	T [cm]	T1 [cm]	Door
Washbasin width: 45 cm								
500.351.00.1	Body, Front: white / high-gloss coated Handle: white / matt powder-coated	44.2	39.3	37.2	61.7	35.6	22.6	left-hand hinge
500.351.JK.1 *	Body, Front: lava / matt coated Handle: lava / matt powder-coated	44.2	39.3	37.2	61.7	35.6	22.6	left-hand hinge
500.351.JL.1 *	Body, Front: sand grey / high-gloss coated Handle: sand grey / matt powder-coated	44.2	39.3	37.2	61.7	35.6	22.6	left-hand hinge
500.351.JR.1	Body, Front: hickory / wood-textured melamine Handle: lava / matt powder-coated	44.2	39.3	37.2	61.7	35.6	22.6	left-hand hinge
500.350.00.1	Body, Front: white / high-gloss coated Handle: white / matt powder-coated	44.2	39.3	37.2	61.7	35.6	22.6	right-hand hinge
500.350.JK.1 *	Body, Front: lava / matt coated Handle: lava / matt powder-coated	44.2	39.3	37.2	61.7	35.6	22.6	right-hand hinge
500.350.JL.1 *	Body, Front: sand grey / high-gloss coated Handle: sand grey / matt powder-coated	44.2	39.3	37.2	61.7	35.6	22.6	right-hand hinge
500.350.JR.1	Body, Front: hickory / wood-textured melamine Handle: lava / matt powder-coated	44.2	39.3	37.2	61.7	35.6	22.6	right-hand hinge
Washbasin width: 50 cm								
500.364.00.1	Body, Front: white / high-gloss coated Handle: white / matt powder-coated	49.2	42.2	42.2	61.7	40.6	27.6	left-hand hinge
500.364.JK.1 *	Body, Front: lava / matt coated Handle: lava / matt powder-coated	49.2	42.2	42.2	61.7	40.6	27.6	left-hand hinge
500.364.JL.1 *	Body, Front: sand grey / high-gloss coated Handle: sand grey / matt powder-coated	49.2	42.2	42.2	61.7	40.6	27.6	left-hand hinge
500.364.JR.1	Body, Front: hickory / wood-textured melamine Handle: lava / matt powder-coated	49.2	42.2	42.2	61.7	40.6	27.6	left-hand hinge
500.363.00.1	Body, Front: white / high-gloss coated Handle: white / matt powder-coated	49.2	42.2	42.2	61.7	40.6	27.6	right-hand hinge
500.363.JK.1 *	Body, Front: lava / matt coated Handle: lava / matt powder-coated	49.2	42.2	42.2	61.7	40.6	27.6	right-hand hinge
500.363.JL.1 *	Body, Front: sand grey / high-gloss coated Handle: sand grey / matt powder-coated	49.2	42.2	42.2	61.7	40.6	27.6	right-hand hinge
500.363.JR.1	Body, Front: hickory / wood-textured melamine Handle: lava / matt powder-coated	49.2	42.2	42.2	61.7	40.6	27.6	right-hand hinge

* Order-based production


Can be combined with

- Geberit Option Basic illuminated mirror, square design, lighting at the top → p. 815
- Geberit Smyle handrinse basin, square design → p. 668
- Geberit Smyle handrinse basin, square design, asymmetrical overflow → p. 668
- Geberit Option illuminated mirror, square design, lighting at the top → p. 815

Accessories

- Accessory overview – Geberit Smyle bathroom furniture → p. 673

Geberit Smyle cabinet for washbasin, square design, with one door

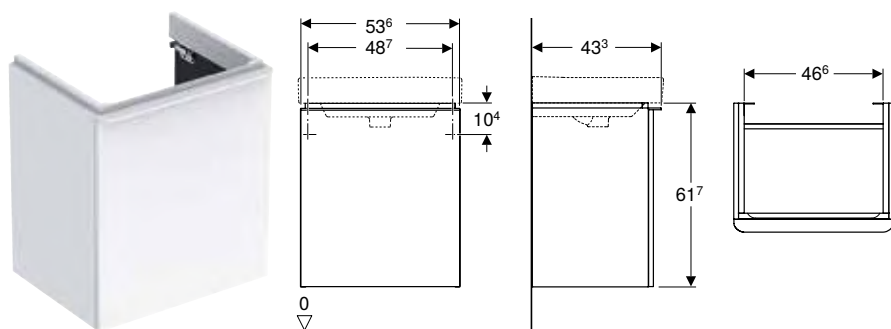

click & scan

Technical data

Product material	High-compressed three-layer chipboard
------------------	---------------------------------------

Scope of delivery

- Cabinet for washbasin
- Fastening material

Characteristics

- FSC™ C134279 certified
- Wall-hung
- With one door
- Opening with handle
- Door with soft closing
- With one movable shelf
- Moisture-resistant
- Delivered preassembled

Art. no.	Colour / surface	B [cm]	Washbasin, width [cm]	H [cm]	T [cm]
Door: left-hand hinge					
500.366.00.1	Body, Front: white / high-gloss coated Handle: white / matt powder-coated	53.6	55	61.7	43.3
500.366.JK.1 *	Body, Front: lava / matt coated Handle: lava / matt powder-coated	53.6	55	61.7	43.3
500.366.JL.1 *	Body, Front: sand grey / high-gloss coated Handle: sand grey / matt powder-coated	53.6	55	61.7	43.3
500.366.JR.1	Body, Front: hickory / wood-textured melamine Handle: lava / matt powder-coated	53.6	55	61.7	43.3
Door: right-hand hinge					
500.365.00.1	Body, Front: white / high-gloss coated Handle: white / matt powder-coated	53.6	55	61.7	43.3
500.365.JK.1 *	Body, Front: lava / matt coated Handle: lava / matt powder-coated	53.6	55	61.7	43.3
500.365.JL.1 *	Body, Front: sand grey / high-gloss coated Handle: sand grey / matt powder-coated	53.6	55	61.7	43.3
500.365.JR.1	Body, Front: hickory / wood-textured melamine Handle: lava / matt powder-coated	53.6	55	61.7	43.3

* Order-based production


Can be combined with

- Geberit Option Basic illuminated mirror, square design, lighting at the top → p. 815
- Geberit Smyle washbasin, square design → p. 670
- Geberit Option illuminated mirror, square design, lighting at the top → p. 815

Accessories

- Accessory overview – Geberit Smyle bathroom furniture → p. 673

Geberit Smyle cabinet for washbasin, square design, with two drawers

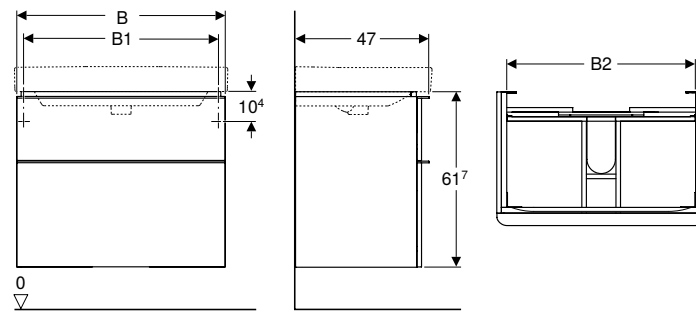

click & scan

Technical data

Product material	High-compressed three-layer chipboard
Drawer load max.	20 kg

Scope of delivery

- Cabinet for washbasin
- Fastening material

Characteristics

- FSC™ C134279 certified
- Wall-hung
- With two drawers
- Opening with handle
- Drawer with soft closing
- Moisture-resistant
- Drawer frame made of metal
- Delivered preassembled

Art. no.	Colour / surface	B [cm]	B1 [cm]	B2 [cm]	H [cm]	T [cm]
Washbasin width: 60 cm						
500.352.00.1	Body, Front: white / high-gloss coated Handle: white / matt powder-coated	58.4	53.5	51.4	61.7	47
500.352.JK.1 *	Body, Front: lava / matt coated Handle: lava / matt powder-coated	58.4	53.5	51.4	61.7	47
500.352.JL.1 *	Body, Front: sand grey / high-gloss coated Handle: sand grey / matt powder-coated	58.4	53.5	51.4	61.7	47
500.352.JR.1	Body, Front: hickory / wood-textured melamine Handle: lava / matt powder-coated	58.4	53.5	51.4	61.7	47
Washbasin width: 75 cm						
500.353.00.1	Body, Front: white / high-gloss coated Handle: white / matt powder-coated	73.4	68.5	66.4	61.7	47
500.353.JK.1 *	Body, Front: lava / matt coated Handle: lava / matt powder-coated	73.4	68.5	66.4	61.7	47
500.353.JL.1 *	Body, Front: sand grey / high-gloss coated Handle: sand grey / matt powder-coated	73.4	68.5	66.4	61.7	47
500.353.JR.1	Body, Front: hickory / wood-textured melamine Handle: lava / matt powder-coated	73.4	68.5	66.4	61.7	47
Washbasin width: 90 cm						
500.354.00.1	Body, Front: white / high-gloss coated Handle: white / matt powder-coated	88.4	83.5	81.4	61.7	47
500.354.JK.1 *	Body, Front: lava / matt coated Handle: lava / matt powder-coated	88.4	83.5	81.4	61.7	47
500.354.JL.1 *	Body, Front: sand grey / high-gloss coated Handle: sand grey / matt powder-coated	88.4	83.5	81.4	61.7	47
500.354.JR.1	Body, Front: hickory / wood-textured melamine Handle: lava / matt powder-coated	88.4	83.5	81.4	61.7	47
Washbasin width: 120 cm						
500.355.00.1	Body, Front: white / high-gloss coated Handle: white / matt powder-coated	118.4	113.5	111.4	61.7	47
500.355.JK.1 *	Body, Front: lava / matt coated Handle: lava / matt powder-coated	118.4	113.5	111.4	61.7	47
500.355.JL.1 *	Body, Front: sand grey / high-gloss coated Handle: sand grey / matt powder-coated	118.4	113.5	111.4	61.7	47
500.355.JR.1	Body, Front: hickory / wood-textured melamine Handle: lava / matt powder-coated	118.4	113.5	111.4	61.7	47

* Order-based production




Can be combined with

- Geberit Option Basic illuminated mirror, square design, lighting at the top → p. 815
- Geberit Smyle washbasin, square design → p. 670
- Geberit Smyle low cabinet with two drawers → p. 681
- Geberit Option illuminated mirror, square design, lighting at the top → p. 815
- Geberit Option mirror cabinet with lighting and two doors → p. 819
- Geberit Option mirror cabinet with lighting and three doors → p. 820

Accessories

- Accessory overview – Geberit Smyle bathroom furniture → p. 673

Geberit Smyle cabinet for double washbasin, square design, with two drawers

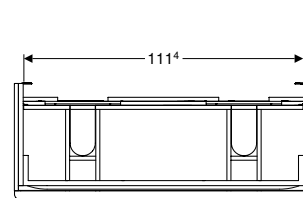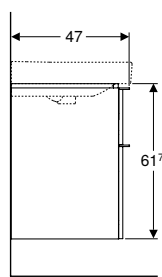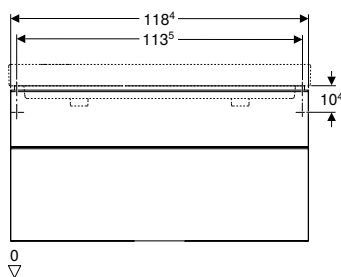

Technical data

Product material	High-compressed three-layer chipboard
Drawer load max.	20 kg

Scope of delivery

- Cabinet for double washbasin
- Fastening material

Characteristics

- FSC™ C134279 certified
- Wall-hung
- With two drawers
- Opening with handle
- Drawer with soft closing
- Moisture-resistant
- Drawer frame made of metal
- Delivered preassembled

Art. no.	Colour / surface	B	H	T
		[cm]	[cm]	[cm]

Washbasin width: 120 cm

500.356.00.1	Body, Front: white / high-gloss coated Handle: white / matt powder-coated	118.4	61.7	47
500.356.JK.1 *	Body, Front: lava / matt coated Handle: lava / matt powder-coated	118.4	61.7	47
500.356.JL.1 *	Body, Front: sand grey / high-gloss coated Handle: sand grey / matt powder-coated	118.4	61.7	47
500.356.JR.1	Body, Front: hickory / wood-textured melamine Handle: lava / matt powder-coated	118.4	61.7	47

* Order-based production

Can be combined with


- Geberit Smyle double washbasin, square design → p. 670
- Geberit Smyle low cabinet with two drawers → p. 681
- Geberit Option illuminated mirror, square design, lighting on both sides → p. 816
- Geberit Option mirror cabinet with lighting and three doors → p. 820

Accessories

- Accessory overview – Geberit Smyle bathroom furniture → p. 673

Side cabinets

Geberit Smyle medium cabinet with one door and internal mirror

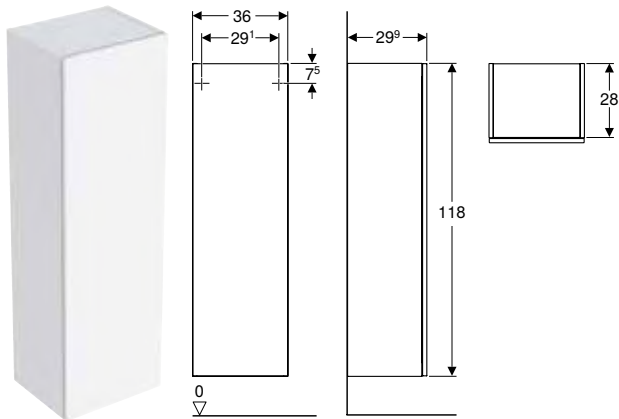

click & scan

Technical data

Product material	High-compressed three-layer chipboard
------------------	---------------------------------------

Scope of delivery

- Side cabinet
- 3 glass shelves
- Fastening material

Characteristics

- FSC™ C134279 certified
- Wall-hung
- Can be connected with low cabinet to form a tall cabinet
- With one door
- Door with soft closing
- Opening with push-to-open mechanism
- Movable glass shelves
- Hinge side left or right
- Mirror on inside of door
- Moisture-resistant
- Delivered preassembled

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]
500.361.00.1	white / high-gloss coated	36	118	29.9
500.361.JK.1 *	lava / matt coated	36	118	29.9
500.361.JL.1 *	sand grey / high-gloss coated	36	118	29.9
500.361.JR.1	hickory / wood-textured melamine	36	118	29.9

* Order-based production


Can be combined with

- Geberit Smyle low cabinet, open → p. 682
- Geberit Smyle low cabinet with one door → p. 680

Accessories

- Accessory overview – Geberit Smyle bathroom furniture → p. 673

Geberit Smyle low cabinet with one door

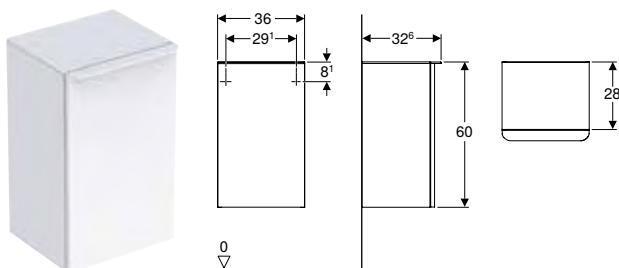

click & scan

Technical data

Product material	High-compressed three-layer chipboard
------------------	---------------------------------------

Scope of delivery

- Low cabinet
- Fastening material

Characteristics

- FSC™ C134279 certified
- Wall-hung
- Can be connected with medium cabinet to form a tall cabinet
- With one door
- Opening with handle
- Door with soft closing
- With one movable shelf
- Moisture-resistant
- Cover plate made of glass
- Delivered preassembled

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]
Door: left-hand hinge				
500.360.00.1	Body, Front: white / high-gloss coated Handle: white / matt powder-coated	36	60	32.6
500.360.JK.1 *	Body, Front: lava / matt coated Handle: lava / matt powder-coated	36	60	32.6
500.360.JL.1 *	Body, Front: sand grey / high-gloss coated Handle: sand grey / matt powder-coated	36	60	32.6
500.360.JR.1	Body, Front: hickory / wood-textured melamine Handle: lava / matt powder-coated	36	60	32.6
Door: right-hand hinge				
500.359.00.1	Body, Front: white / high-gloss coated Handle: white / matt powder-coated	36	60	32.6
500.359.JK.1 *	Body, Front: lava / matt coated Handle: lava / matt powder-coated	36	60	32.6
500.359.JL.1 *	Body, Front: sand grey / high-gloss coated Handle: sand grey / matt powder-coated	36	60	32.6
500.359.JR.1	Body, Front: hickory / wood-textured melamine Handle: lava / matt powder-coated	36	60	32.6

* Order-based production


Can be combined with

- Geberit Smyle medium cabinet with one door and internal mirror → p. 680

Accessories

- Accessory overview – Geberit Smyle bathroom furniture → p. 673

Geberit Smyle low cabinet with two drawers

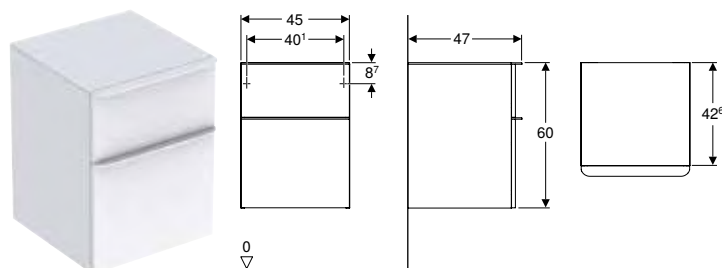

click & scan

Technical data

Product material	High-compressed three-layer chipboard
Drawer load max.	20 kg

Scope of delivery

- Low cabinet
- Fastening material

Characteristics

- FSC™ C134279 certified
- Wall-hung
- Can be connected with washbasin cabinet
- With two drawers
- Opening with handle
- Drawer with soft closing
- Moisture-resistant
- Drawer frame made of metal
- Cover plate made of glass
- Delivered preassembled

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]
500.357.00.1	Body, Front: white / high-gloss coated Handle: white / matt powder-coated	45	60	47
500.357.JK.1 *	Body, Front: lava / matt coated Handle: lava / matt powder-coated	45	60	47
500.357.JL.1 *	Body, Front: sand grey / high-gloss coated Handle: sand grey / matt powder-coated	45	60	47
500.357.JR.1	Body, Front: hickory / wood-textured melamine Handle: lava / matt powder-coated	45	60	47

* Order-based production


Can be combined with

- Geberit Smyle cabinet for washbasin, square design, with two drawers → p. 678
- Geberit Smyle cabinet for double washbasin, square design, with two drawers → p. 679
- Geberit magnetic board with storage boxes → p. 576

Accessories

- Accessory overview – Geberit Smyle bathroom furniture → p. 673

Geberit Smyle low cabinet, open

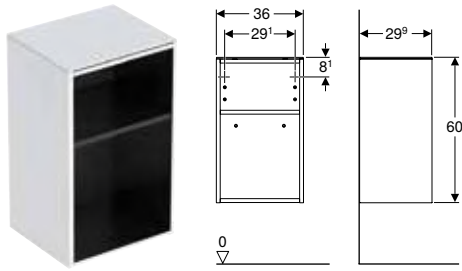

click & scan

Technical data

Product material	High-compressed three-layer chipboard
------------------	---------------------------------------

Scope of delivery

- Low cabinet
- Fastening material

Characteristics

- FSC™ C134279 certified
- Wall-hung
- Can be connected with medium cabinet to form a tall cabinet
- With one movable shelf
- Moisture-resistant
- Cover plate made of glass
- Delivered preassembled

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]
500.358.00.1	white / high-gloss coated	36	60	29.9
500.358.JK.1 *	lava / matt coated	36	60	29.9
500.358.JL.1 *	sand grey / high-gloss coated	36	60	29.9
500.358.JR.1	hickory / wood-textured melamine	36	60	29.9

* Order-based production

Can be combined with


- Geberit Smyle medium cabinet with one door and internal mirror → p. 680

Accessories

- Accessory overview – Geberit Smyle bathroom furniture → p. 673

Additional furniture

Geberit Smyle wall shelf, square design

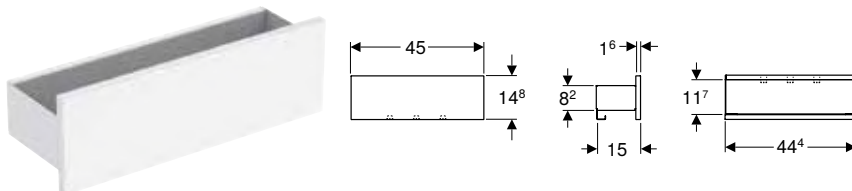

click & scan

Technical data

Product material	High-compressed three-layer chipboard
------------------	---------------------------------------

Scope of delivery

- Wall shelf
- Fastening material

Characteristics


- FSC™ C134279 certified
- Wall-hung
- With three towel hooks
- Moisture-resistant
- Delivered preassembled

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]
500.362.00.1	Body: white / matt coated Front: white / high-gloss coated	45	14.8	15
500.362.JK.1 *	Body, Front: lava / matt coated	45	14.8	15
500.362.JL.1 *	Body: sand grey / matt powder-coated Front: sand grey / high-gloss coated	45	14.8	15
500.362.JR.1	Body: lava / matt powder-coated Front: hickory / wood-textured melamine	45	14.8	15

* Order-based production

Accessories

Geberit towel rail for bathroom furniture

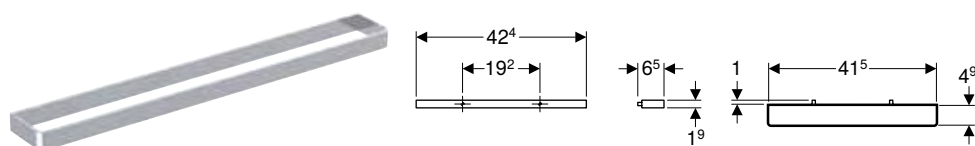

click & scan

Application purposes

- For mounting on a washbasin cabinet

Technical data

Product material	Steel
------------------	-------

Characteristics


- Right-angled corner

Scope of delivery

- Towel rail
- Fastening material

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]
502.328.00.1	chrome / glossy	42.4	1.9	4.9
502.328.01.3	white / matt powder-coated	42.4	1.9	4.9
502.328.14.1	black matt / matt powder-coated	42.4	1.9	4.9
502.328.JK.1	lava / matt powder-coated	42.4	1.9	4.9
502.328.JL.1	sand grey / matt powder-coated	42.4	1.9	4.9

Geberit set of narrow feet

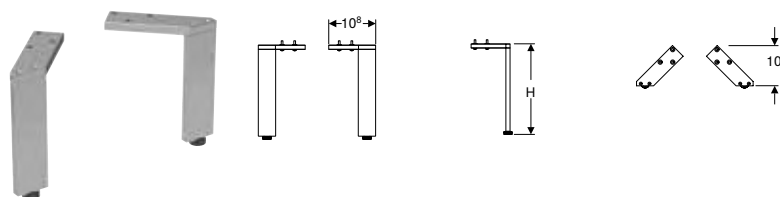

click & scan

Technical data

Product material	Aluminium
------------------	-----------

Scope of delivery


- Set of 2 pieces
- Fastening material

Characteristics

- Height adjustable for compensating floor unevenness

Art. no.	Colour / surface	H [cm]
500.367.00.1	chrome / glossy	15–15.8
500.658.00.2	chrome / glossy	26–26.8
500.657.00.2	chrome / glossy	30–30.8

Geberit drawer insert, T-partition, for top drawer

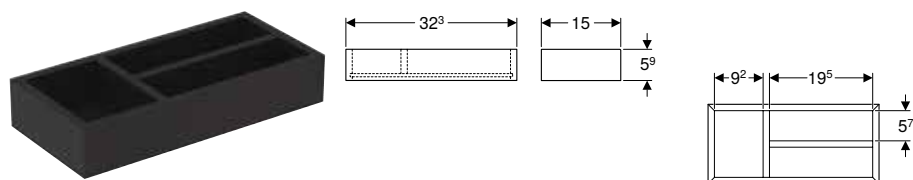

click & scan

Technical data

Product material	High-compressed three-layer chipboard
------------------	---------------------------------------

Scope of delivery


- Drawer insert

Characteristics

- FSC™ C134279 certified
- T-partition

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]
500.678.00.1	lava / textured melamine	32.3	5.9	15

Geberit drawer insert, H-partition, for top drawer

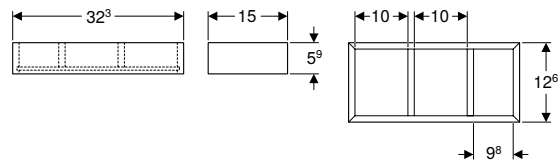

click & scan

Technical data

Product material	High-compressed three-layer chipboard
------------------	---------------------------------------

Scope of delivery


- Drawer insert

Characteristics

- FSC™ C134279 certified
- H-partition

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]
500.677.00.1	lava / textured melamine	32.3	5.9	15

Geberit drawer insert, H-partition, for bottom drawer

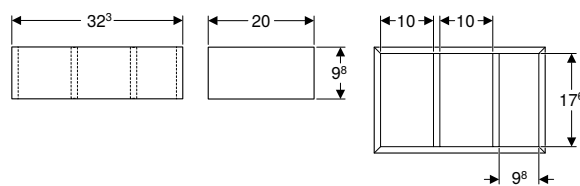

click & scan

Technical data

Product material	High-compressed three-layer chipboard
------------------	---------------------------------------

Scope of delivery

- Drawer insert

Characteristics







- FSC™ C134279 certified
- H-partition

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]
500.676.00.1	lava / textured melamine	32.3	9.8	20

WCs

Assortment overview – Geberit Smyle WCs and WC seats







Geberit International Sales, version: December 2025

					Geberit Smyle wall-hung WC, square, washdown, shrouded, Rimfree	Geberit Smyle wall-hung WC, square, washdown, small projec- tion, shrouded, Rimfree
				White	500.208.01.1	500.379.01.1
						
					→ p. 688	→ p. 688
Geberit Smyle WC seat, square, slim design, sandwich shape	Without soft-closing mechanism	500.239.01.1		→ p. 691	✓	✓
	With soft-closing mechanism, quick-release hinges	500.688.01.1		→ p. 691	✓	✓
Geberit Smyle WC seat, square, slim design	Without soft-closing mechanism	500.238.01.1		→ p. 691	✓	✓
	With soft-closing mechanism, quick-release hinges	500.687.01.1		→ p. 691	✓	✓

✓ Compatible

Accessory overview – Geberit Smyle WC ceramic appliance in combination with connection pipes


Geberit International Sales, version: December 2025

				Geberit Smyle	Geberit Smyle Square
				Geberit Smyle floor-standing WC for close-coupled exposed cis- tern, washdown, semi-shrouded, Rimfree	Geberit Smyle floor-standing WC, square, washdown, back-to-wall, shrouded, Rimfree
White				500.212.01.1	500.840.00.1
					
				→ p. 690	→ p. 689
Geberit P-bend set for floor-standing WC	131.081.11.1		→ p. 921	X = 160-245 mm	
Geberit connection set for floor-standing WC	131.082.16.1		→ p. 921	X = 70-140 mm	
Geberit connection bend 90° set with extension	152.647.00.1			X = 60-125 mm	
Geberit connection bend 90°	152.610.11.1			X = 255 mm	X = 55 mm

Wall-hung WCs

New

Geberit Smyle set of wall-hung WC, washdown, square, shrouded, TurboFlush, with WC seat, sandwich shape

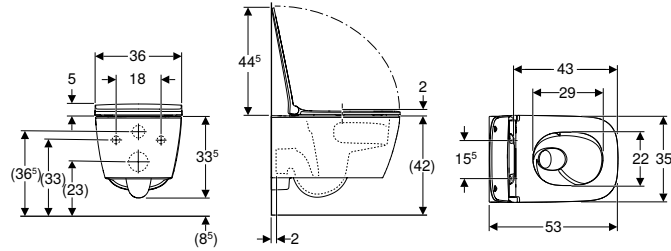

click & scan

Application purposes

- For concealed cisterns
- For pressure flushing valves

Technical data

Product material	Vitreous china
------------------	----------------

Scope of delivery

- WC ceramic appliance
- WC seat
- Fastening material


Characteristics

- Wall-hung
- Washdown WC
- Rimless WC ceramic appliance featuring TurboFlush flush technology
- Easy fastening with Easy Fast Fixing (type EFF3)
- Type 1, full flush volume 6 / 5 / 4 l, in accordance with EN 997
- Quick-release hinges, lockable
- 4 l flush
- Shrouded
- Hidden fastening
- Square design
- WC seat made of Duroplast
- Sandwich shape
- WC seat with EasyMount hinges

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]	QuickRelease function	Soft-closing mechanism	Fastening	Hinge material
503.171.00.1	white	35.5	33.5	53	Yes, with lockable QuickRelease hinges	yes	from above	Stainless steel / plastic

Available as of April 2026

Geberit Smyle set of wall-hung WC, square, washdown, shrouded, Rimfree, with WC seat, overlapping lid

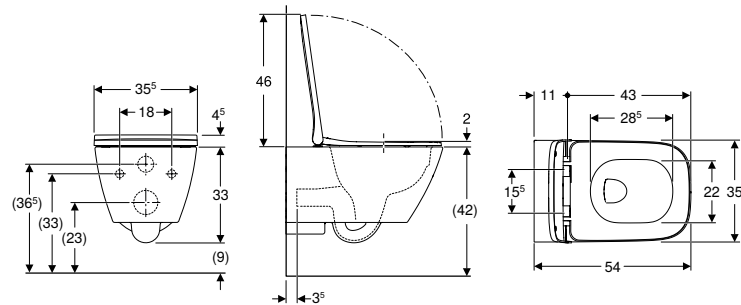

click & scan

Application purposes

- For concealed cisterns
- For pressure flushing valves

Technical data

Product material	Vitreous china
------------------	----------------

Scope of delivery


- WC ceramic appliance
- WC seat
- Fastening material

Characteristics

- Wall-hung
- Washdown WC
- Rimless WC ceramic appliance featuring Rimfree flush technology
- Easy fastening with Easy Fast Fixing (type EFF3)
- Type 1, full flush volume 6 / 5 / 4 l, in accordance with EN 997
- 4 l flush
- Shrouded
- Hidden fastening
- WC seat made of Duroplast, antibacterial
- Overlapping WC lid

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]	QuickRelease function	Soft-closing mechanism	Fastening	Hinge material
500.683.00.2	white	35.5	37.5	54	Yes, with QuickRelease hinges	yes	from above	Brass chrome-plated

Geberit Smyle set of wall-hung WC, square, washdown, shrouded, Rimfree, with WC seat, overlapping lid

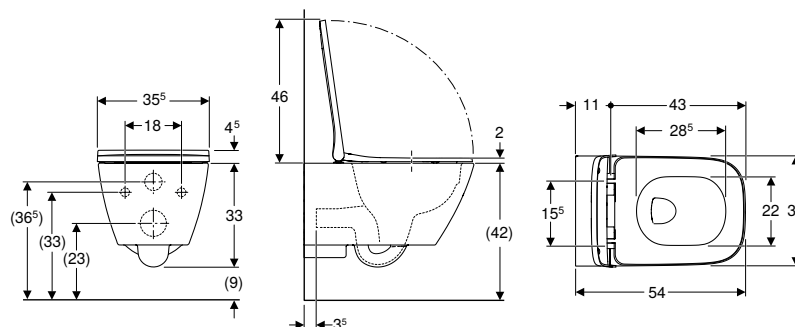

click & scan

Application purposes

- For concealed cisterns
- For pressure flushing valves

Technical data

Product material	Vitreous china
------------------	----------------

Scope of delivery


- WC ceramic appliance
- WC seat
- Fastening material

Characteristics

- Wall-hung
- Washdown WC
- Rimless WC ceramic appliance featuring Rimfree flush technology
- Easy fastening with Easy Fast Fixing (type EFF3)
- Type 1, full flush volume 6 / 5 / 4 l, in accordance with EN 997
- 4 l flush
- Shrouded
- Hidden fastening
- WC seat made of Duroplast, antibacterial
- Overlapping WC lid
- Narrow design

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]	QuickRelease function	Soft-closing mechanism	Fastening	Hinge material
500.683.01.1	white	35.5	33	54	Yes, with QuickRelease hinges	yes	from above	Brass chrome-plated

Geberit Smyle set of wall-hung WC, square, washdown, shrouded, Rimfree, with WC seat, sandwich shape

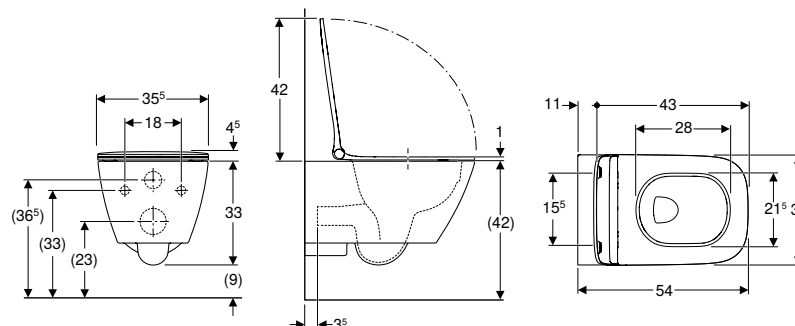

click & scan

Application purposes

- For concealed cisterns
- For pressure flushing valves

Technical data

Product material	Vitreous china
------------------	----------------

Scope of delivery


- WC ceramic appliance
- WC seat
- Fastening material

Characteristics

- Wall-hung
- Washdown WC
- Rimless WC ceramic appliance featuring Rimfree flush technology
- Easy fastening with Easy Fast Fixing (type EFF3)
- Type 1, full flush volume 6 / 5 / 4 l, in accordance with EN 997
- 4 l flush
- Shrouded
- Hidden fastening
- WC seat made of Duroplast, antibacterial
- Sandwich shape
- Narrow design

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]	QuickRelease function	Soft-closing mechanism	Fastening	Hinge material
500.685.01.1	white	35.5	33	54	Yes, with QuickRelease hinges	yes	from above	Brass chrome-plated

Geberit Smyle wall-hung WC, square, washdown, shrouded, Rimfree

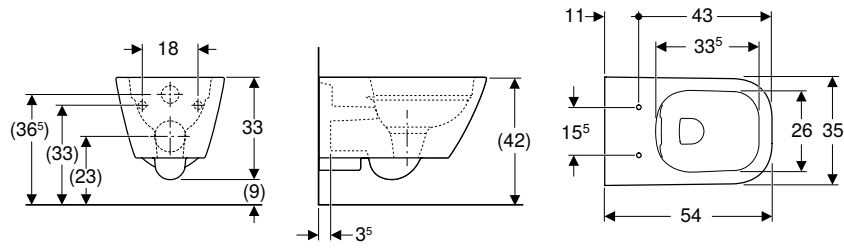

click & scan

Application purposes

- For concealed cisterns
- For pressure flushing valves

Technical data

Product material	Vitreous china
------------------	----------------

Scope of delivery

- Fastening material

Characteristics

- Wall-hung
- Washdown WC
- Rimless WC ceramic appliance featuring Rimfree flush technology
- Easy fastening with Easy Fast Fixing (type EFF3)
- Type 1, full flush volume 6 / 5 / 4 l, in accordance with EN 997
- 4 l flush
- Shrouded
- Hidden fastening

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]
500.208.01.1	white	35	33	54


To order additionally

- WC seat

Can be combined with

- Geberit Smyle WC seat, square, slim design, sandwich shape → p. 691
- Geberit Smyle WC seat, square, slim design → p. 691

Geberit Smyle wall-hung WC, square, washdown, small projection, shrouded, Rimfree

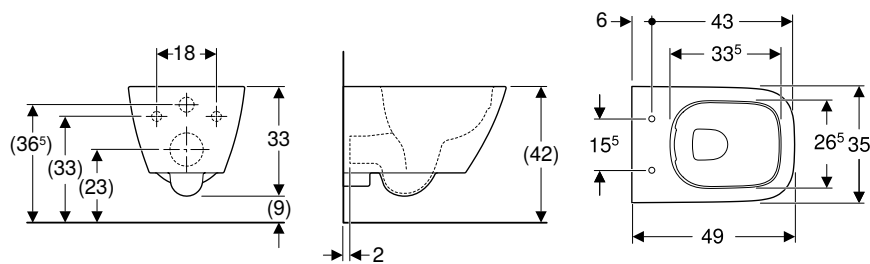

click & scan

Application purposes

- For concealed cisterns
- For pressure flushing valves
- Suitable for installation in small bathrooms and guest WCs

Technical data

Product material	Vitreous china
------------------	----------------

Scope of delivery

- Fastening material

Characteristics

- Wall-hung
- Washdown WC
- Rimless WC ceramic appliance featuring Rimfree flush technology
- Easy fastening with Easy Fast Fixing (type EFF3)
- Type 1, full flush volume 6 / 5 / 4 l, in accordance with EN 997
- 4 l flush
- Shrouded
- Hidden fastening
- Small projection

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]
500.379.01.1	white	35	33	49

To order additionally


- WC seat

Can be combined with

- Geberit Smyle WC seat, square, slim design, sandwich shape → p. 691
- Geberit Smyle WC seat, square, slim design → p. 691

Floor-standing WCs

Geberit Smyle floor-standing WC, square, washdown, back-to-wall, shrouded, Rimfree

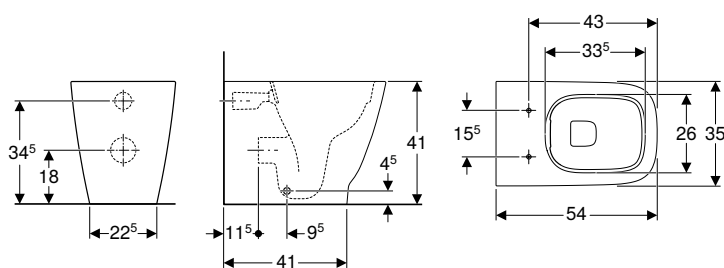

click & scan

Application purposes

- For concealed cisterns

Technical data

Product material	Vitreous china
------------------	----------------

Scope of delivery

- Fastening material

Characteristics

- Floor-standing
- Back-to-wall
- Washdown WC
- Rimless WC ceramic appliance featuring Rimfree flush technology
- Type 1, full flush volume 6 / 5 / 4 l, in accordance with EN 997
- Horizontal or vertical outlet
- Type 2 in accordance with EN 997
- Flushes with 4.5 l
- 4 l flush
- Shrouded
- Hidden fastening

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]
500.840.00.1	white	35	41	54

To order additionally

- WC seat


Can be combined with

- Geberit Smyle WC seat, square, slim design → p. 691
- Geberit Smyle WC seat, square, slim design, sandwich shape → p. 691

Accessories

- Accessory overview – Geberit Smyle WC ceramic appliance in combination with connection pipes → p. 685

Geberit Smyle floor-standing WC for close-coupled exposed cistern, washdown, semi-shrouded, Rimfree

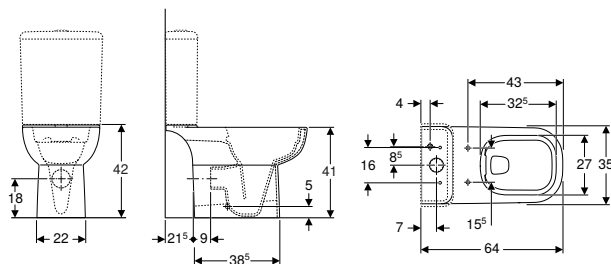

click & scan

Application purposes

- For close-coupled exposed cistern

Technical data

Product material	Vitreous china
------------------	----------------

Scope of delivery

- WC ceramic appliance
- Fastening material

Characteristics

- Floor-standing
- Fastening with screw
- Washdown WC
- Rimless WC ceramic appliance featuring Rimfree flush technology
- Type 1, full flush volume 6 l, in accordance with EN 997
- Type 2 in accordance with EN 997
- Multidirectional outlet
- Semi-shrouded
- Hidden fastening

Art. no.	Colour / surface	B	H	T
		[cm]	[cm]	[cm]
500.212.01.1	P white	35	41	64

P: Phase out

To order additionally

- Cistern
- WC seat

Can be combined with

- Geberit Smyle WC seat, rounded edge → p. 691
- Geberit Smyle exposed cistern, close-coupled, square design, dual flush, bottom water supply connection → p. 692
- Geberit Smyle exposed cistern, close-coupled, square design, dual flush, lateral water supply connection → p. 692

Accessories


- Accessory overview – Geberit Smyle WC ceramic appliance in combination with connection pipes → p. 685



- Replaced by art. no. 200460000

WC seats

Geberit Smyle WC seat, square, slim design

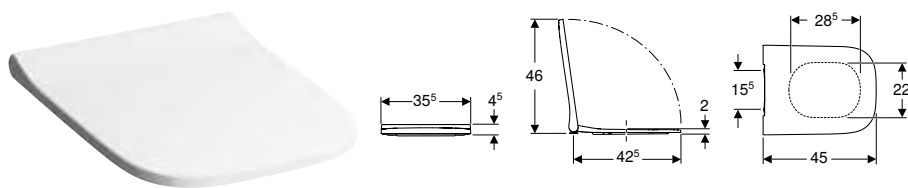

click & scan

Technical data

Product material	Duroplast
Fastening distance	15.5 cm

Characteristics


- Antibacterial
- Narrow design
- Overlapping WC lid

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]	QuickRelease function	Soft-closing mechanism	Fastening	Hinge material
500.687.01.1	white / glossy	35.5	4.5	45	Yes, with QuickRelease hinges	yes	from above	Brass chrome-plated
500.238.01.1	white / glossy	35.5	4.5	45	no	no	from above	Brass chrome-plated

Can be combined with

- Geberit Smyle floor-standing WC, square, washdown, back-to-wall, shrouded, Rimfree → p. 689
- Geberit Smyle wall-hung WC, square, washdown, small projection, shrouded, Rimfree → p. 688
- Geberit Smyle wall-hung WC, square, washdown, shrouded, Rimfree → p. 688

Geberit Smyle WC seat, square, slim design, sandwich shape

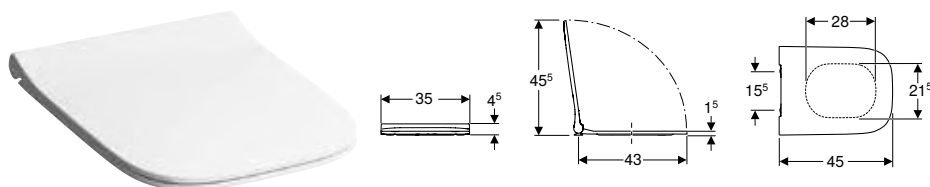

click & scan

Technical data

Product material	Duroplast
Fastening distance	15.5 cm

Characteristics


- Narrow design
- Sandwich shape
- Antibacterial

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]	QuickRelease function	Soft-closing mechanism	Fastening	Hinge material
500.688.01.1	white / glossy	35	4.5	45	Yes, with QuickRelease hinges	yes	from above	Brass chrome-plated
500.239.01.1	white / glossy	35	4.5	45	no	no	from above	Brass chrome-plated

Can be combined with

- Geberit Smyle wall-hung WC, square, washdown, small projection, shrouded, Rimfree → p. 688
- Geberit Smyle wall-hung WC, square, washdown, shrouded, Rimfree → p. 688
- Geberit Smyle floor-standing WC, square, washdown, back-to-wall, shrouded, Rimfree → p. 689

Geberit Smyle WC seat, rounded edge

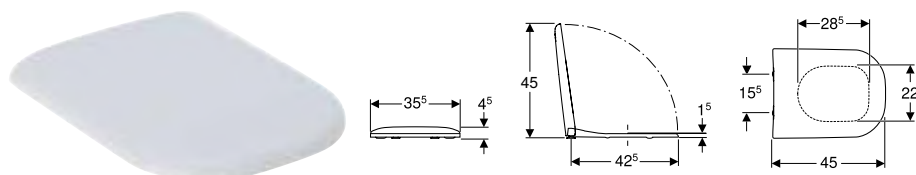

click & scan

Technical data

Product material	Duroplast
Fastening distance	15.5 cm

Characteristics

- Overlapping WC lid

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]	QuickRelease function	Soft-closing mechanism	Fastening	Hinge material
500.235.01.1	white / glossy	35.5	4.5	45	no	no	from above	Brass chrome-plated


Can be combined with

- Geberit Smyle floor-standing WC for close-coupled exposed cistern, washdown, semi-shrouded, Rimfree → p. 690

Exposed cisterns

Exposed cisterns for WCs, made of sanitary ceramic

Geberit Smyle exposed cistern, close-coupled, square design, dual flush, lateral water supply connection

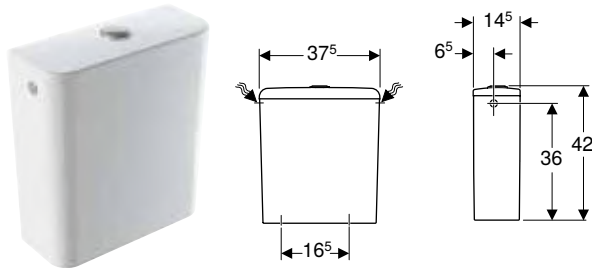

click & scan

Application purposes

- For close-coupled installation
- For water supply connections 3/8"

Technical data

Flush volume, factory setting	6 l / 3 l
Flush volume large, adjustment range	4 l / 6 l
Flush volume small, adjustment range	2.6 l / 4 l
Product material	Vitreous china

Characteristics

- Dual flush
- Water supply connection on the left/right

Scope of delivery


- Mechanism

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]
500.221.01.1	white	37.5	42	14.5

Can be combined with

- Geberit Smyle floor-standing WC for close-coupled exposed cistern, washdown, semi-shrouded, Rimfree → p. 690

Geberit Smyle exposed cistern, close-coupled, square design, dual flush, bottom water supply connection

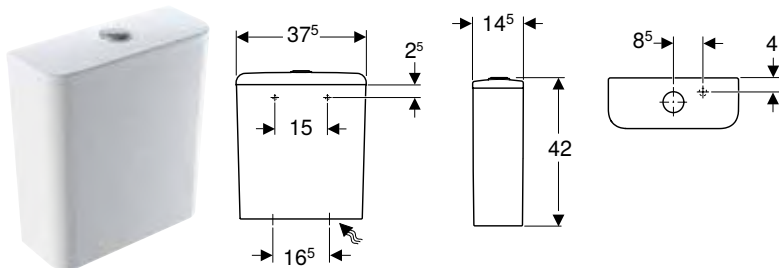

click & scan

Application purposes

- For close-coupled installation

Technical data

Flush volume, factory setting	4 l / 2.6 l
Flush volume large, adjustment range	4 l / 6 l
Flush volume small, adjustment range	2.6 l / 4 l
Product material	Vitreous china

Characteristics

- Dual flush
- Water supply connection on the bottom right

Scope of delivery

- Mechanism

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]
500.214.01.1	white	37.5	42	14.5

To order additionally

- Fastening material for rear wall


Can be combined with

- Geberit Smyle floor-standing WC for close-coupled exposed cistern, washdown, semi-shrouded, Rimfree → p. 690

Bidets

Wall-hung bidets

Geberit Smyle wall-hung bidet, square, shrouded

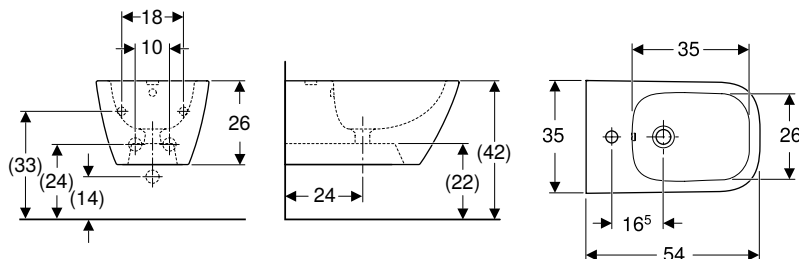

click & scan

Application purposes

- For single-hole taps with flexible hoses

Technical data

Product material	Vitreous china
------------------	----------------

Characteristics

- Wall-hung
- Hidden water supply connection
- Easy fastening with Easy Fast Fixing (type EFF3)
- Shrouded
- Hidden fastening


Scope of delivery

- Fastening material

Art. no.	Colour / surface	Overflow	B [cm]	H [cm]	T [cm]
500.209.01.1	white	visible, symmetrical	35	26	54

Floor-standing bidets

Geberit Smyle floor-standing bidet, square, back-to-wall, shrouded

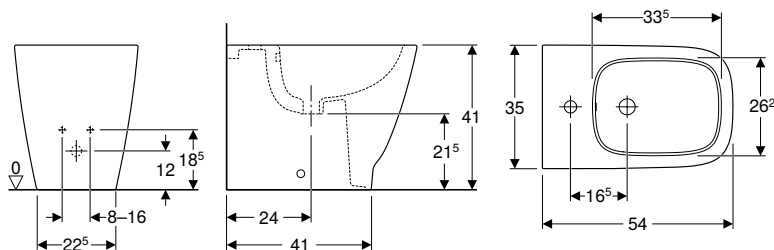

click & scan

Technical data

Product material	Vitreous china
------------------	----------------

Scope of delivery

- Fastening material

Characteristics


- Floor-standing
- Back-to-wall
- Hidden water supply connection
- Shrouded
- Hidden fastening

Art. no.	Colour / surface	Overflow	B [cm]	H [cm]	T [cm]
500.841.00.1	white	visible, symmetrical	35	34.5	54

Urinals

For concealed controls

Geberit Smyle urinal, inlet from the rear, outlet to the rear

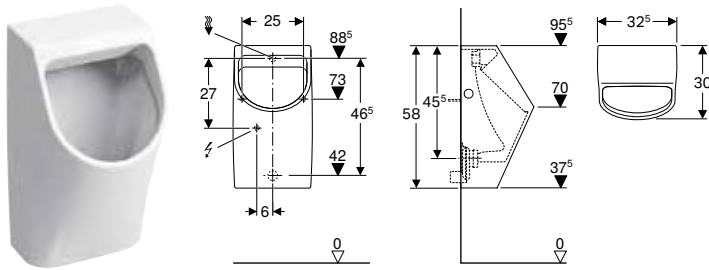

click & scan

Application purposes

- For operating with automatic, water-saving flush
- For operation with manual or automatic flush actuation
- For concealed urinal flush controls
- For concealed urinal flush controls, hidden
- For exposed urinal flush controls, hidden

Technical data

Flush volume small, adjustment range	1 l
Product material	Vitreous china

Characteristics

- Wall-hung
- With flush rim
- Hidden trap
- Hidden fastening
- Fulfils requirements in accordance with EN 13407

Scope of delivery

- Urinal ceramic
- Fastening material for urinal

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]	Outlet
500.254.01.1	white	32.5	58	30	to the rear

Accessories


- Geberit flush bend extension for urinal, with sleeve
- Geberit inlet connection piece for urinals → p. 973
- Geberit urinal trap, horizontal outlet
- Geberit urinal trap d40, horizontal outlet



- Urinal trap not included in scope of delivery
- Electrical connection required for urinal flush controls with mains operation

Waterless

Geberit Smyle urinal, waterless, outlet to the rear

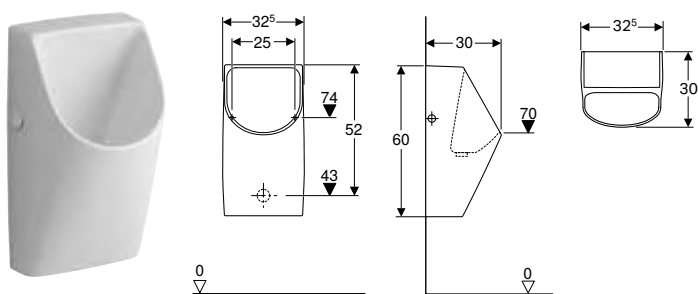

click & scan

Application purposes

- For operating without water

Technical data

Product material	Vitreous china
------------------	----------------

Characteristics

- Wall-hung
- Hidden drain
- Hidden fastening
- Easy fastening with Geberit fastening material Kerafix, for urinal
- Rimless

Scope of delivery

- Drain assembly
- Fastening material

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]	Outlet
500.255.01.1	white	32.5	60	30	to the rear


















Geberit Selnova Square

Assortment overview – Geberit Selnova Square washbasins and washbasin cabinets.....	699
Washbasins.....	700
Handrinse basins.....	700
Washbasins.....	701
Semirecessed washbasins.....	702
Countertop washbasins.....	702
Vanity basins.....	703
Pedestals.....	703
Bathroom furniture.....	706
Accessory overview – Geberit Selnova Square bathroom furniture.....	707
Washbasin cabinets.....	708
Side cabinets.....	710
Washtops.....	711
Mirror cabinets.....	712
Accessories.....	713
WCs.....	715
Accessory overview – Geberit Selnova Square WC ceramic appliance in combination with connection pipes.....	715
Assortment overview – Geberit Selnova Square WCs and WC seats.....	717
Wall-hung WCs.....	718
Floor-standing WCs.....	720
WC seats.....	722
Exposed Cisterns.....	723
Exposed cisterns for WCs, made of sanitary ceramic.....	723
Bidets.....	725
Wall-hung bidets.....	725
Floor-standing bidets.....	726

Assortment overview – Geberit Selnova Square washbasins and washbasin cabinets

Geberit International Sales, version: December 2025


				Handrinse basins				
				Geberit Selnova Square handrinse basin with asymmetrical overflow	Geberit Selnova Square handrinse basin	Geberit Selnova Square handrinse basin		
				36 cm	45 cm	50 cm		
White, central tap hole, visible overflow				500.316.01.1	500.322.01.1	500.310.01.1		
White, without tap hole, visible overflow						500.301.01.1		
								
				→ p. 700	→ p. 700	→ p. 700		
Cabinets for handrinse basins								
Geberit Selnova Square cabinet for handrinse basin, with one door	502.730.00.1		36 cm	white	→ p. 708	✓		
	502.734.00.1		45 cm	white	→ p. 708		✓	
	502.738.00.1		50 cm	white	→ p. 708			✓
Cabinets for vanity basin								
Geberit Selnova Square cabinet for vanity basin, slim rim, with one door	501.216.00.1		55 cm	white	→ p. 709			
	501.220.00.1		60 cm	white	→ p. 709			
Geberit Selnova Square cabinet for vanity basin, slim rim, with two doors	501.224.00.1		80 cm	white	→ p. 709			
	501.228.00.1		100 cm	white	→ p. 709			
Washtops, width 60 cm								
Geberit Selnova Square washtop for countertop washbasin	502.860.00.1		55 cm	white	→ p. 711			
✓ Compatible								

Washbasins			Vanity basins				Countertop washbasins
Geberit Selnova Square washbasin	Geberit Selnova Square washbasin	Geberit Selnova Square washbasin	Geberit Selnova Square vanity basin	Geberit Selnova Square vanity basin	Geberit Selnova Square vanity basin	Geberit Selnova Square vanity basin	Geberit VariForm countertop washbasin, oval, with tap hole bench
55 cm	60 cm	65 cm	55 cm	60 cm	80 cm	100 cm	
500.290.01.1	500.300.01.1	500.299.01.1	500.993.00.1	500.994.00.1	500.995.00.1	500.997.00.1	500.720.01.2
500.291.01.1							
							
→ p. 701	→ p. 701	→ p. 701	→ p. 703	→ p. 703	→ p. 703	→ p. 703	→ p. 799
			✓				
				✓			✓
					✓		✓
						✓	
							✓

Washbasins

Handrinse basins

Geberit Selnova Square handrinse basin with asymmetrical overflow

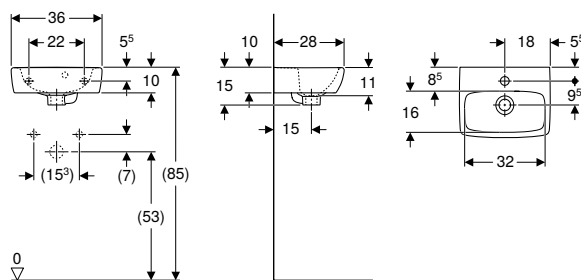

click & scan

Technical data

Product material	Vitreous china
------------------	----------------

Scope of delivery

- Handrinse basin

Characteristics

- Asymmetrical overflow
- Can be combined with full pedestal

Art. no.	Colour / surface	Tap hole	Overflow	H [cm]	T [cm]
----------	------------------	----------	----------	-----------	-----------

B / width: 36 cm

500.316.01.1	white	centred	visible, asymmetrical	15	28
--------------	-------	---------	-----------------------	----	----


Can be combined with

- Geberit Selnova Square cabinet for handrinse basin, with one door → p. 708
- Geberit Selnova Square full pedestal → p. 703

Accessories

- Geberit dip tube trap for washbasin, horizontal outlet
- Geberit fastening material for handrinse basin → p. 1035

Geberit Selnova Square handrinse basin

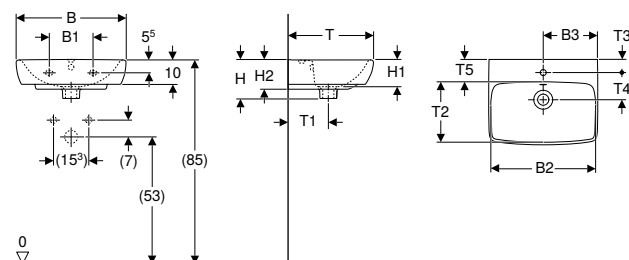

click & scan

Technical data

Product material	Vitreous china
------------------	----------------

Scope of delivery

- Handrinse basin

Characteristics

- Can be combined with half pedestal
- Can be combined with full pedestal
- Can be installed with a washbasin cabinet

Art. no.	Colour / surface	Tap hole	Overflow	B1 [cm]	B2 [cm]	B3 [cm]	Cabinet width [cm]	H [cm]	H1 [cm]	H2 [cm]	T [cm]	T1 [cm]	T2 [cm]	T3 [cm]	T4 [cm]	T5 [cm]
----------	------------------	----------	----------	------------	------------	------------	-----------------------	-----------	------------	------------	-----------	------------	------------	------------	------------	------------

B / width: 45 cm

500.322.01.1	white	centred	visible, symmetrical	18	40	22.5	38.6	16	11	12	35	18	21.5	5.5	12.5	9
--------------	-------	---------	----------------------	----	----	------	------	----	----	----	----	----	------	-----	------	---

B / width: 50 cm

500.310.01.1	white	centred	visible, symmetrical	23	44.5	25	41.8	17	12	13.5	42	20	27.5	6.5	13.5	11
--------------	-------	---------	----------------------	----	------	----	------	----	----	------	----	----	------	-----	------	----


500.301.01.1	white	without	visible, symmetrical	23	44.5		41.8	17	12	13.5	42	20	27.5			11
--------------	-------	---------	----------------------	----	------	--	------	----	----	------	----	----	------	--	--	----

Can be combined with

- Geberit Selnova Square cabinet for handrinse basin, with one door → p. 708
- Geberit Selnova half pedestal → p. 733
- Geberit Selnova Square full pedestal → p. 703
- Geberit Selnova full pedestal → p. 733

Semirecessed washbasins

Geberit Selnova Square semirecessed washbasin

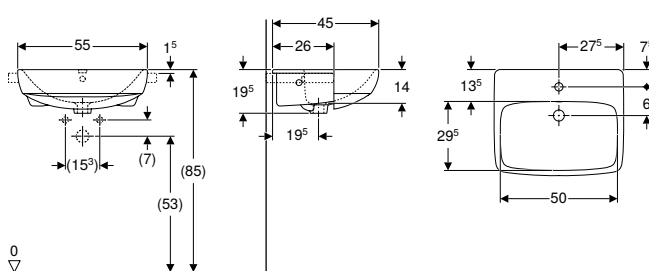

click & scan

Application purposes

- For mounting in washtops

Technical data

Product material	Vitreous china
------------------	----------------

Scope of delivery

- Semi-recessed washbasin
- Fastening material

Art. no.	Colour / surface	Tap hole	Overflow	H	T
				[cm]	[cm]

B / width: 55 cm


500.313.01.1	white	centred	visible, symmetrical	19.5	45
--------------	-------	---------	----------------------	------	----

Accessories

- Geberit dip tube trap for washbasin, horizontal outlet

Countertop washbasins

Geberit Selnova Square countertop washbasin

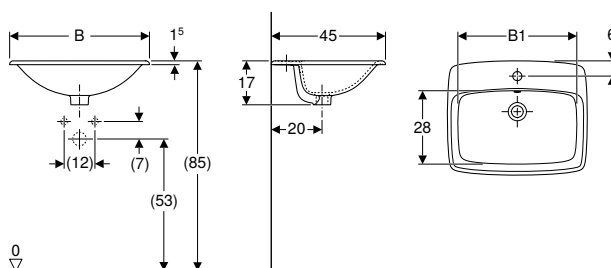

click & scan

Application purposes

- For mounting in washtops from above

Technical data

Product material	Vitreous china
------------------	----------------

Scope of delivery

- Countertop washbasins

Art. no.	Colour / surface	Tap hole	Overflow	B1	H	T
				[cm]	[cm]	[cm]

B / width: 55 cm

500.306.01.1	white	centred	visible, symmetrical	46	17	45
--------------	-------	---------	----------------------	----	----	----

B / width: 60 cm


500.307.01.1	white	centred	visible, symmetrical	50	17	45
--------------	-------	---------	----------------------	----	----	----

Accessories

- Geberit dip tube trap for washbasin, horizontal outlet

Vanity basins

Geberit Selnova Square vanity basin

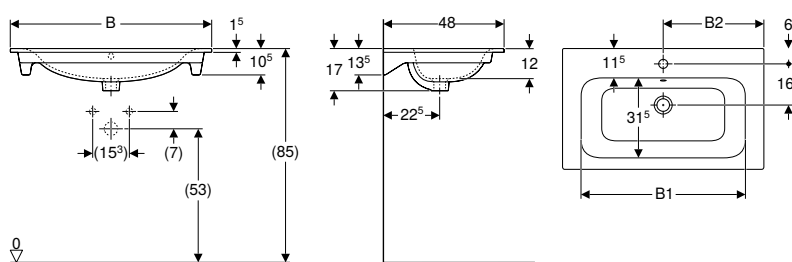

click & scan

Application purposes

- For mounting on washbasin cabinets

Characteristics

- Slim rim

Technical data

Product material	Fine fireclay
------------------	---------------


Art. no.	Colour / surface	Tap hole	Overflow	B1 [cm]	B2 [cm]	Cabinet width [cm]	H [cm]	T [cm]
B / width: 55 cm								
500.993.00.1	white	centred	visible, symmetrical	49	27.5	53.8	17	48
B / width: 60 cm								
500.994.00.1	white	centred	visible, symmetrical	54	30	58.8	17	48
B / width: 80 cm								
500.995.00.1	white	centred	visible, symmetrical	74	40	78.8	17	48
B / width: 100 cm								
500.997.00.1	white	centred	visible, symmetrical	94	50	98.8	17	48

Can be combined with

- Geberit Selnova Square cabinet for vanity basin, slim rim, with one door → p. 708
- Geberit Selnova Square cabinet for vanity basin, slim rim, with two doors → p. 709

Pedestals

Geberit Selnova Square full pedestal

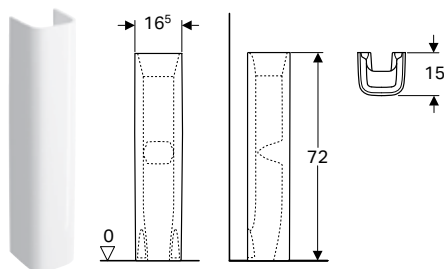

click & scan

Technical data

Product material	Vitreous china
------------------	----------------

Scope of delivery


- Full pedestal

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]
500.342.01.1	white	16.5	72	15

Can be combined with

- Geberit Selnova Compact handrinse basin, small projection, with shelf surface → p. 764
- Geberit Smyle handrinse basin, square design, asymmetrical overflow → p. 668
- Geberit Smyle washbasin, square design → p. 670
- Geberit Selnova Square handrinse basin with asymmetrical overflow → p. 700
- Geberit Selnova Square handrinse basin → p. 700
- Geberit Smyle handrinse basin, square design → p. 668

Geberit Selnova Square half pedestal for handrinse basin

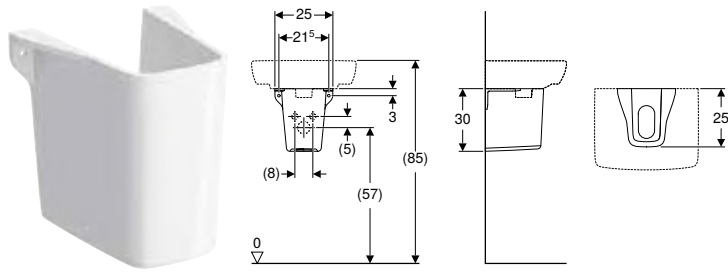

Application purposes

- For handrinse basins

Scope of delivery

- Half pedestal

Technical data

Product material	Vitreous china
------------------	----------------

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]
500.328.01.1	white	25	30	25









To order additionally

- Fastening material










Bathroom furniture

Accessory overview – Geberit Selnova Square bathroom furniture

Geberit International Sales, version: December 2025


Article number	Geberit Selnova Square set of narrow feet	Geberit set of narrow feet	Geberit towel rail for bathroom furniture, with right-angled corner	Geberit towel rail for bathroom furniture, with radius corner	Geberit towel rail for bathroom furniture				
	500.199.21.1	500.367.00.1	510040000	510140000	502.328.00.1	502.328.01.3	502.328. JK.1	502.328. JL.1	502.328.14.1
									
Washbasin, width	→ p. 713	→ p. 579	→ p. 1039	→ p. 1040	→ p. 505				
Side cabinets									
Geberit Selnova Square low cabinet with one door 501.272.00.1 	white	→ p. 710	✓						
Geberit Selnova Square medium cabinet with one door 501.276.00.1 	white	→ p. 711	✓						
Mirror cabinets									
Geberit Selnova Square mirror cabinet with two doors and two glass shelves 501.264.00.1 	white	→ p. 712							
Geberit Selnova Square mirror cabinet with two doors and four glass shelves 501.268.00.1	white	→ p. 712							

✓ Compatible

Geberit magnetic holder	Geberit magnifying mirror	Geberit light strip for drawer				Geberit double light strip for drawer	Geberit lamp for mirror cabinet	Geberit drawer insert	Geberit drawer insert with H-partition	Geberit drawer insert with asymmetrical H-partition	Geberit insert for trap cutout
510010000	510100000	501410000	501535000	501635000	501825000	501550000	501.280.00.1	503.193.00.1	503.194.00.1	503.201.00.1	503.200.00.1
											
→ p. 516		→ p. 1038					→ p. 713	→ p. 707			
✓											
✓											
✓	✓						✓				
✓	✓						✓				

Washbasin cabinets

Geberit Selnova Square cabinet for handrinse basin, with one door

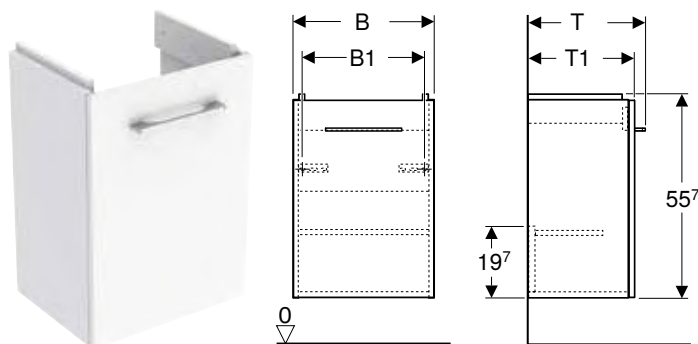

click & scan

Technical data

Product material	High-compressed three-layer chipboard
------------------	---------------------------------------

Scope of delivery

- Cabinet for handrinse basin
- Fastening material
- Handle

Characteristics

- FSC™ C134279 certified
- Wall-hung
- With one door
- Opening with handle
- Door with soft closing
- With one fixed shelf
- Hinge side left or right
- Moisture-resistant
- Delivered preassembled

Art. no.	Colour / surface	B [cm]	B1 [cm]	B2 [cm]	H [cm]	T [cm]	T1 [cm]	T2 [cm]
Washbasin width: 36 cm								
502.730.00.1	PO white / high-gloss coated	32.3	25.9	29.1	55.7	25.3	22.4	18.9
Washbasin width: 45 cm								
502.734.00.1	PO white / high-gloss coated	38.6	32.2	35.4	55.7	32.1	29.2	25.7
Washbasin width: 50 cm								
502.738.00.1	PO white / high-gloss coated	44	37.6	40.8	55.7	38.2	35.3	31.8

PO: Phase out as of January 2026


Can be combined with

- Geberit Selnova Square handrinse basin → p. 700
- Geberit Selnova Square handrinse basin with asymmetrical overflow → p. 700
- Geberit Selnova Square medium cabinet with one door → p. 711
- Geberit Selnova Square low cabinet with one door → p. 710

Accessories

- Accessory overview – Geberit Selnova Square bathroom furniture → p. 707

Geberit Selnova Square cabinet for vanity basin, slim rim, with one door

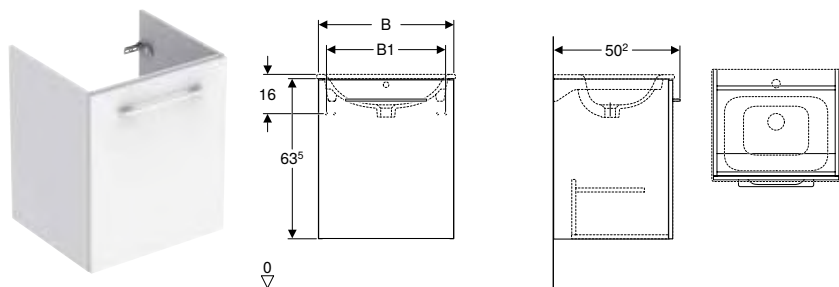

click & scan

Technical data

Product material	High-compressed three-layer chipboard
------------------	---------------------------------------

Scope of delivery

- Cabinet for vanity basin
- Handle
- Fastening material

Characteristics

- FSC™ C134279 certified
- Wall-hung
- With one door
- Opening with handle
- With one fixed shelf
- Door with soft closing
- Hinge side left or right
- Moisture-resistant
- Delivered preassembled

Art. no.	Colour / surface	B [cm]	B1 [cm]	H [cm]	T [cm]
Washbasin width: 55 cm					
501.216.00.1	PO white / high-gloss coated	53.8	47	63.5	50.2
Washbasin width: 60 cm					
501.220.00.1	PO white / high-gloss coated	58.8	52	63.5	50.2

PO: Phase out as of January 2026


Can be combined with

- Geberit Selnova Square vanity basin → p. 703
- Geberit Selnova Square mirror cabinet with two doors and two glass shelves → p. 712
- Geberit Selnova Square low cabinet with one door → p. 710
- Geberit Selnova Square medium cabinet with one door → p. 711
- Geberit Selnova Square washtop for countertop washbasin → p. 711

Accessories

- Geberit Selnova Square set of narrow feet → p. 713
- Geberit towel rail for bathroom furniture, with radius corner → p. 1040
- Geberit towel rail for bathroom furniture, with right-angled corner → p. 1039
- Geberit magnetic holder → p. 516

Geberit Selnova Square cabinet for vanity basin, slim rim, with two doors

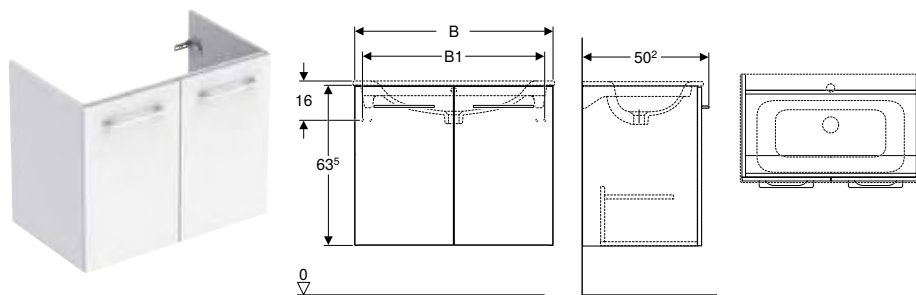

Technical data

Product material	High-compressed three-layer chipboard
------------------	---------------------------------------

Scope of delivery

- Cabinet for vanity basin
- Handle
- Fastening material

Characteristics

- FSC™ C134279 certified
- Wall-hung
- With two doors
- Opening with handle
- With one fixed shelf
- Door with soft closing
- Moisture-resistant
- Delivered preassembled

Art. no.	Colour / surface	B [cm]	B1 [cm]	H [cm]	T [cm]
Washbasin width: 80 cm					
501.224.00.1	PO white / high-gloss coated	78.8	72	63.5	50.2
Washbasin width: 100 cm					
501.228.00.1	PO white / high-gloss coated	98.8	92	63.5	50.2

PO: Phase out as of January 2026

Can be combined with


- Geberit Selnova Square vanity basin → p. 703
- Geberit Selnova Square mirror cabinet with two doors and two glass shelves → p. 712
- Geberit Selnova Square low cabinet with one door → p. 710
- Geberit Selnova Square medium cabinet with one door → p. 711
- Geberit Selnova Square washtop for countertop washbasin → p. 711

Accessories

- Geberit Selnova Square set of narrow feet → p. 713
- Geberit towel rail for bathroom furniture, with radius corner → p. 1040
- Geberit towel rail for bathroom furniture, with right-angled corner → p. 1039
- Geberit magnetic holder → p. 516

Side cabinets

Geberit Selnova Square low cabinet with one door

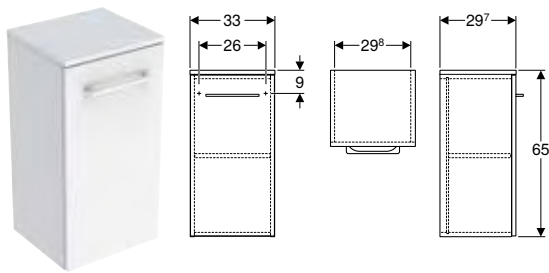

click & scan

Technical data

Product material	High-compressed three-layer chipboard
------------------	---------------------------------------

Scope of delivery

- Fastening material
- Handle

Characteristics

- FSC™ C134279 certified
- Wall-hung
- With one door
- Opening with handle
- With one movable shelf
- Door with soft closing
- Hinge side left or right
- Moisture-resistant
- Delivered preassembled

Art. no.	Colour / surface	B	H	T
		[cm]	[cm]	[cm]
501.272.00.1	PO white / high-gloss coated	33	65	29.7

PO: Phase out as of January 2026


Can be combined with

- Geberit Selnova Square medium cabinet with one door → p. 711
- Geberit Selnova Square cabinet for handrinse basin, with one door → p. 708
- Geberit Selnova Square cabinet for vanity basin, slim rim, with one door → p. 708
- Geberit Selnova Square cabinet for vanity basin, slim rim, with two doors → p. 709
- Geberit Selnova Square mirror cabinet with two doors and two glass shelves → p. 712

Accessories

- Accessory overview – Geberit Selnova Square bathroom furniture → p. 707

Geberit Selnova Square medium cabinet with one door

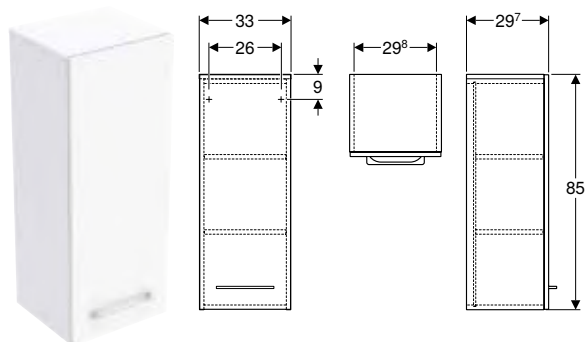

click & scan

Technical data

Product material	High-compressed three-layer chipboard
------------------	---------------------------------------

Scope of delivery

- Handle
- Fastening material

Characteristics

- FSC™ C134279 certified
- Wall-hung
- With one door
- Door with soft closing
- Opening with handle
- With two movable shelves
- Hinge side left or right
- Moisture-resistant
- Delivered preassembled

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]
501.276.00.1	PO white / high-gloss coated	33	85	29.7

PO: Phase out as of January 2026

Can be combined with


- Geberit Selnova Square cabinet for handrinse basin, with one door → p. 708
- Geberit Selnova Square low cabinet with one door → p. 710
- Geberit Selnova Square cabinet for vanity basin, slim rim, with one door → p. 708
- Geberit Selnova Square cabinet for vanity basin, slim rim, with two doors → p. 709
- Geberit Selnova Square mirror cabinet with two doors and two glass shelves → p. 712

Accessories

- Accessory overview – Geberit Selnova Square bathroom furniture → p. 707

Washtops

Geberit Selnova Square washtop for countertop washbasin

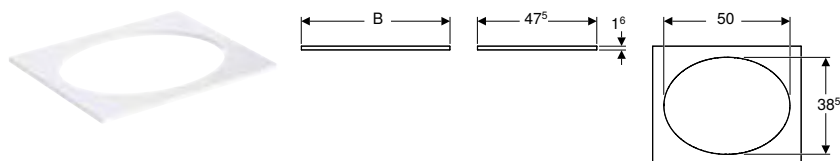

click & scan

Technical data

Product material	High-compressed three-layer chipboard
------------------	---------------------------------------

Characteristics

- FSC™ C134279 certified
- Washtop with cutout
- Moisture-resistant

Scope of delivery

- Washtop
- Fastening material


Art. no.	Colour / surface	B Washbasin, width [cm]	Washbasin, width [cm]	H [cm]	T [cm]
502.860.00.1	white / high-gloss coated	59.1	55	1.6	47.5

Can be combined with

- Geberit Selnova Square cabinet for vanity basin, slim rim, with one door → p. 708
- Geberit VariForm countertop washbasin, oval, with tap hole bench → p. 799
- Geberit Selnova Square cabinet for vanity basin, slim rim, with two doors → p. 709

Mirror cabinets

Geberit Selnova Square mirror cabinet with two doors and two glass shelves

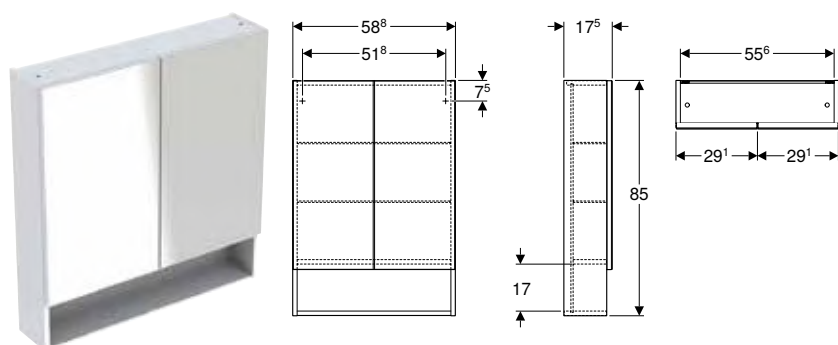

click & scan

Technical data

Lamp	without
Product material	High-compressed three-layer chipboard

Scope of delivery

- 2 glass shelves
- Mirror cabinet
- Fastening material

Characteristics

- FSC™ C134279 certified
- Wall-hung
- With two doors
- Doors mirrored on the outside
- Door with soft closing
- With open shelf surface
- With two adjustable glass shelves
- Delivered preassembled

Art. no.	Colour / surface	H [cm]	T [cm]	Number of power sockets
----------	------------------	-----------	-----------	----------------------------

B / width: 58.8 cm

501.264.00.1	white / high-gloss coated	85	17.5	0
--------------	---------------------------	----	------	---


Can be combined with

- Geberit Selnova Square cabinet for vanity basin, slim rim, with one door → p. 708
- Geberit Selnova Square cabinet for vanity basin, slim rim, with two doors → p. 709
- Geberit Selnova Square low cabinet with one door → p. 710
- Geberit Selnova Square medium cabinet with one door → p. 711

Accessories

- Accessory overview – Geberit Selnova Square bathroom furniture → p. 707

Geberit Selnova Square mirror cabinet with two doors and four glass shelves

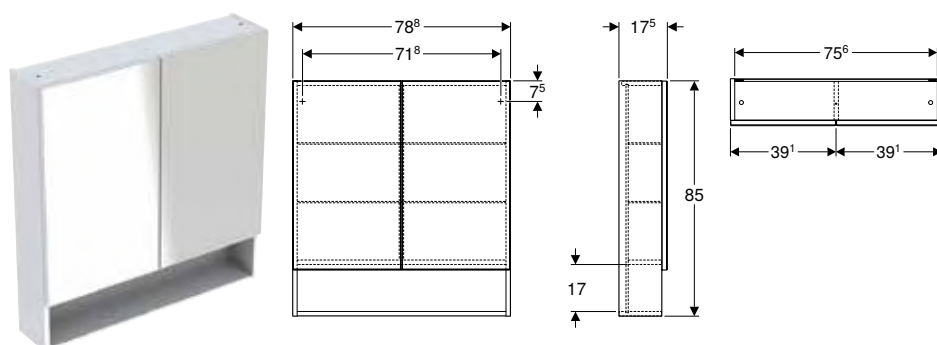

click & scan

Technical data

Lamp	without
Product material	High-compressed three-layer chipboard

Scope of delivery

- 4 glass shelves
- Mirror cabinet
- Fastening material

Characteristics


- FSC™ C134279 certified
- Wall-hung
- With two doors
- Doors mirrored on the outside
- Door with soft closing
- With open shelf surface
- With four movable glass shelves
- Delivered preassembled

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]	Number of power sockets
----------	------------------	-----------	-----------	-----------	----------------------------

501.268.00.1	white / high-gloss coated	78.8	85	17.5	0
--------------	---------------------------	------	----	------	---

Accessories

Geberit Selnova Square set of narrow feet

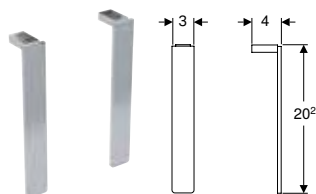

click & scan

Technical data

Product material	Aluminium
------------------	-----------


Scope of delivery

- Set of 2 pieces

Art. no. Colour / surface

500.199.21.1 chrome / glossy

Geberit lamp for mirror cabinet

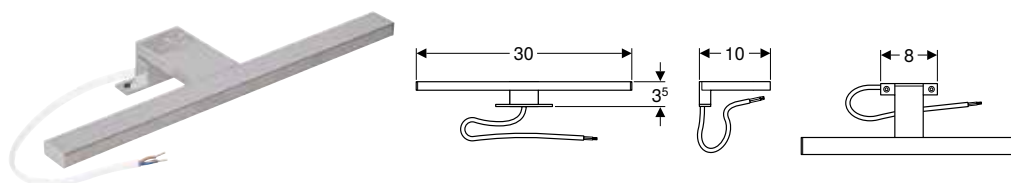

click & scan

Technical data

Degree of protection	IP44
Nominal voltage	220–240 V AC
Mains frequency	50 Hz / 60 Hz
Operating voltage	24 V DC
Light source energy efficiency class	E
Light colour	4000 K

Scope of delivery

- Lamp
- Junction box

Art. no. Colour / surface

501.280.00.1 chrome / glossy

Protection class


II

Power consumption

[W]

6

Geberit drawer insert, T-partition, for top drawer

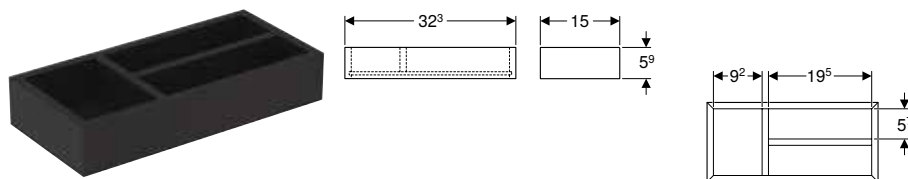

click & scan

Technical data

Product material	High-compressed three-layer chipboard
------------------	---------------------------------------

Scope of delivery

- Drawer insert

Characteristics

- FSC™ C134279 certified
- T-partition

Art. no. Colour / surface

500.678.00.1 lava / textured melamine

B
[cm]

32.3


H
[cm]

5.9

T
[cm]

15

Geberit drawer insert, H-partition, for top drawer

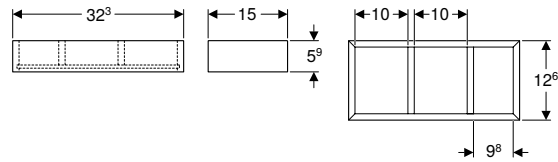

click & scan

Technical data

Product material	High-compressed three-layer chipboard
------------------	---------------------------------------

Scope of delivery


- Drawer insert

Characteristics

- FSC™ C134279 certified
- H-partition

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]
500.677.00.1	lava / textured melamine	32.3	5.9	15

Geberit drawer insert, H-partition, for bottom drawer

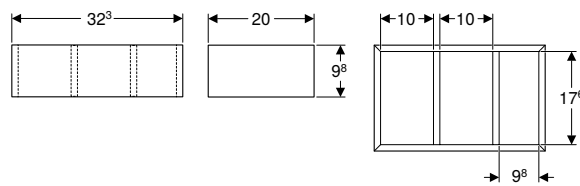

click & scan

Technical data

Product material	High-compressed three-layer chipboard
------------------	---------------------------------------

Scope of delivery

- Drawer insert

Characteristics








- FSC™ C134279 certified
- H-partition

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]
500.676.00.1	lava / textured melamine	32.3	9.8	20

WCs

Accessory overview – Geberit Selnova Square WC ceramic appliance in combination with connection pipes

Geberit International Sales, version: December 2025







				Geberit Selnova Square floor-standing WC, square, washdown, back-to-wall, horizontal or vertical outlet, semi-shrouded, Rimfree	Geberit Selnova Square floor-standing WC for close-coupled exposed cistern, washdown, back-to-wall, horizontal or vertical outlet, semi-shrouded, Rimfree	Geberit Selnova Square floor-standing WC for close-coupled exposed cistern, washdown, horizontal outlet, semi-shrouded, Rimfree
White				500.153.01.1	500.489.01.1	500.152.01.1
						
				→ p. 720	→ p. 720	→ p. 721
Geberit P-bend set for floor-standing WC	131.081.11.1		→ p. 921	X = 160 mm	X = 165-265 mm	
Geberit connection set for floor-standing WC	131.082.16.1		→ p. 921		X = 70-150 mm	
Geberit connection bend 90° set with extension	152.647.00.1				X = 60-125 mm	
Geberit connection bend 90°	152.610.11.1			X = 65 mm	X = 185 mm	X = 85 mm

Assortment overview – Geberit Selnova Square WCs and WC seats

Geberit International Sales, version: December 2025


					White
Geberit Selnova Square WC seat, fastening from below	Without soft-closing mechanism	white	500.332.01.1		→ p. 722
Geberit Selnova Square WC seat, slim design, fastening from above	Without soft-closing mechanism	white	500.338.01.1		→ p. 722
	With soft-closing mechanism	white	500.334.01.1		→ p. 722
	With soft-closing mechanism, quick-release hinges	white	500.336.01.1		→ p. 722
Geberit Selnova Square WC seat, fastening from above	Without soft-closing mechanism	white	501.555.01.1		→ p. 723
	With soft-closing mechanism	white	501.556.01.1		→ p. 723
	With soft-closing mechanism, quick-release hinges	white	501.557.01.1		→ p. 723

✓ Compatible

	Geberit Selnova Square wall-hung WC, Premium, square, washdown, semi-shrouded, Rimfree	Geberit Selnova Square wall-hung WC, square, washdown, Rimfree	Geberit Selnova Square wall-hung WC, square, washdown	Geberit Selnova Square floor-standing WC, square, washdown, back-to-wall, horizontal or vertical outlet, semi-shrouded, Rimfree	Geberit Selnova Square floor-standing WC for close-coupled exposed cistern, washdown, back-to-wall, horizontal or vertical outlet, semi-shrouded, Rimfree	Geberit Selnova Square floor-standing WC for close-coupled exposed cistern, washdown, horizontal outlet, semi-shrouded, Rimfree
	501.546.01.1	500.275.01.1	500.270.01.1	500.153.01.1	500.489.01.1	500.152.01.1
						
	→ p. 718	→ p. 719	→ p. 719	→ p. 720	→ p. 720	→ p. 721
		✓	✓	✓		✓
		✓	✓	✓	✓	✓
		✓	✓	✓	✓	✓
		✓	✓	✓	✓	✓
	✓					
	✓					
	✓					

Wall-hung WCs

Geberit Selnova Square wall-hung WC, Premium, square, washdown, semi-shrouded, Rimfree

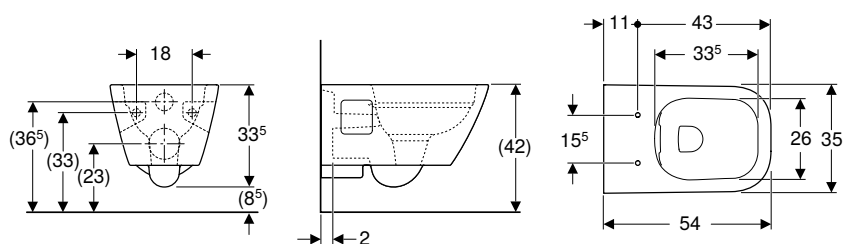

click & scan

Application purposes

- For concealed cisterns
- For pressure flushing valves

Technical data

Product material	Vitreous china
------------------	----------------

Characteristics

- Wall-hung
- Washdown WC
- Rimless WC ceramic appliance featuring Rimfree flush technology
- Type 1, full flush volume 6 / 5 / 4 l, in accordance with EN 997
- 4 l flush
- Semi-shrouded

Scope of delivery

- WC ceramic appliance

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]
501.546.01.1	white	35	33.5	54


To order additionally

- WC seat

Can be combined with

- Geberit Selnova Square WC seat, fastening from above → p. 723

Geberit Selnova Square set of wall-hung WC, square, washdown, Rimfree, with WC seat

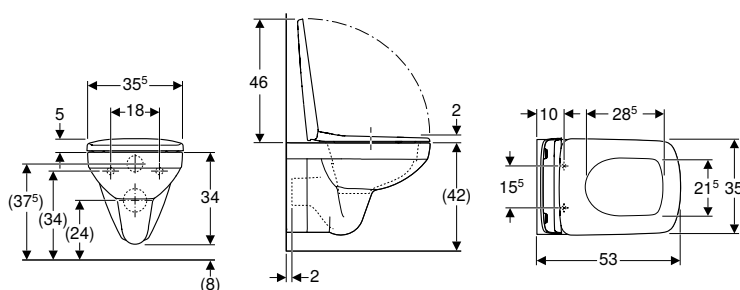

click & scan

Application purposes

- For concealed cisterns
- For pressure flushing valves

Technical data

Product material	Vitreous china
------------------	----------------

Scope of delivery


- WC ceramic appliance
- WC seat

Characteristics

- Wall-hung
- Washdown WC
- Rimless WC ceramic appliance featuring Rimfree flush technology
- Square design
- Type 1, full flush volume 6 / 4 l, in accordance with EN 997
- Type 2 in accordance with EN 997
- 4 l flush
- Overlapping WC lid
- Antibacterial
- Lid made of Duroplast

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]	QuickRelease function	Soft-closing mechanism	Fastening	Hinge material
501.961.00.1	WC ceramic appliance: white	35.5	39	53	Yes, with QuickRelease hinges	yes	from above	Brass chrome-plated

Geberit Selnova Square wall-hung WC, square, washdown, Rimfree

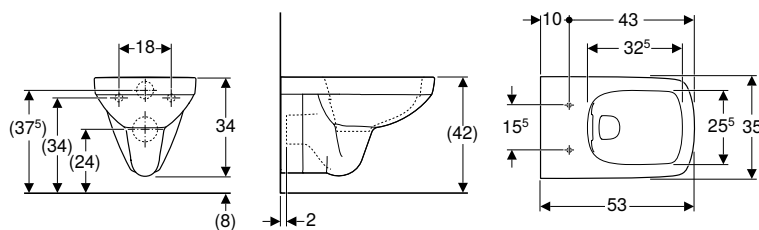

Application purposes

- For concealed cisterns
- For pressure flushing valves

Technical data

Product material	Vitreous china
------------------	----------------

Characteristics

- Wall-hung
- Washdown WC
- Rimless WC ceramic appliance featuring Rimfree flush technology
- Type 1, full flush volume 6 / 4 l, in accordance with EN 997
- Type 2 in accordance with EN 997
- 4 l flush

Scope of delivery

- WC ceramic appliance

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]
500.275.01.1	white	35	34	53


To order additionally

- WC seat

Can be combined with

- Geberit Selnova Square WC seat, fastening from below → p. 722
- Geberit Selnova Square WC seat, slim design, fastening from above → p. 722

Geberit Selnova Square wall-hung WC, square, washdown

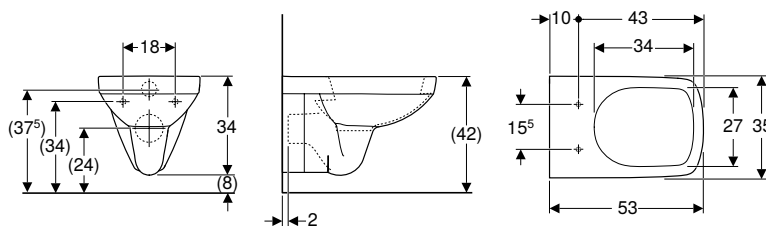

Application purposes

- For concealed cisterns
- For pressure flushing valves

Technical data

Product material	Vitreous china
------------------	----------------

Characteristics

- Wall-hung
- Washdown WC
- With flush rim
- Type 1, full flush volume 6 / 4 l, in accordance with EN 997
- Type 2 in accordance with EN 997
- 4 l flush

Scope of delivery

- WC ceramic appliance

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]
500.270.01.1	white	35	34	53

To order additionally


- WC seat

Can be combined with

- Geberit Selnova Square WC seat, fastening from below → p. 722
- Geberit Selnova Square WC seat, slim design, fastening from above → p. 722

Floor-standing WCs

Geberit Selnova Square floor-standing WC, square, washdown, back-to-wall, horizontal or vertical outlet, semi-shrouded, Rimfree

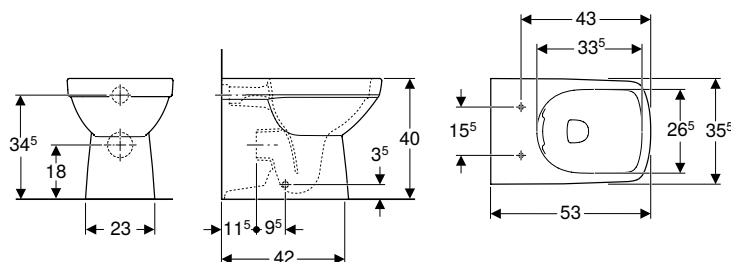

click & scan

Technical data

Product material	Vitreous china
------------------	----------------

Scope of delivery

- WC ceramic appliance
- Fastening material

Characteristics

- Floor-standing
- Back-to-wall
- Washdown WC
- Rimless WC ceramic appliance featuring Rimfree flush technology
- Horizontal or vertical outlet
- Type 1, full flush volume 6 / 4 l, in accordance with EN 997
- Type 2 in accordance with EN 997
- 4 l flush
- Semi-shrouded

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]
500.153.01.1	white	35.5	40	53

To order additionally

- WC seat


Can be combined with

- Geberit Selnova Square WC seat, fastening from below → p. 722
- Geberit Selnova Square WC seat, slim design, fastening from above → p. 722

Accessories

- Accessory overview – Geberit Selnova Square WC ceramic appliance in combination with connection pipes → p. 715

Geberit Selnova Square floor-standing WC for close-coupled exposed cistern, washdown, back-to-wall, horizontal or vertical outlet, semi-shrouded, Rimfree

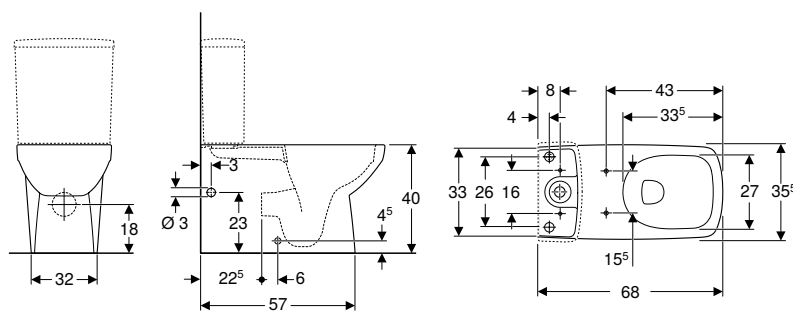

click & scan

Application purposes

- For close-coupled exposed cistern

Technical data

Product material	Vitreous china
------------------	----------------

Scope of delivery

- WC ceramic appliance
- Fastening material

Characteristics

- Floor-standing
- Washdown WC
- Rimless WC ceramic appliance featuring Rimfree flush technology
- Horizontal or vertical outlet
- Opening on the right-hand side for access to the stop valve
- Type 1, full flush volume 6 l, in accordance with EN 997
- Type 2 in accordance with EN 997
- Semi-shrouded
- Hidden fastening

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]
500.489.01.1	white	35.5	40	68

To order additionally

- Cistern
- WC seat


Can be combined with

- Geberit Selnova Square exposed cistern, close-coupled, dual flush, lateral water supply connection, for WC Rimfree → p. 724
- Geberit Selnova Square exposed cistern, close-coupled, dual flush, bottom water supply connection → p. 724
- Geberit Selnova Square WC seat, slim design, fastening from above → p. 722

Accessories

- Accessory overview – Geberit Selnova Square WC ceramic appliance in combination with connection pipes → p. 715

Geberit Selnova Square floor-standing WC for close-coupled exposed cistern, washdown, horizontal outlet, semi-shrouded, Rimfree

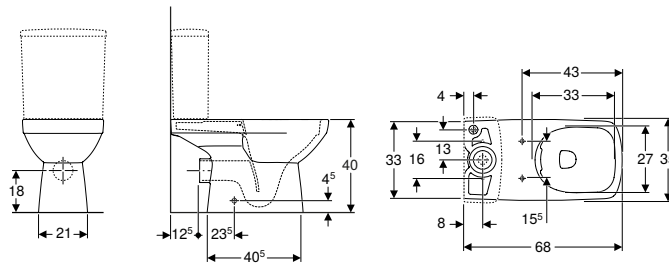

Application purposes

- For close-coupled exposed cistern

Technical data

Product material	Vitreous china
------------------	----------------

Scope of delivery

- WC ceramic appliance
- Fastening material

Characteristics

- Floor-standing
- Washdown WC
- Rimless WC ceramic appliance featuring Rimfree flush technology
- Type 1, full flush volume 6 l, in accordance with EN 997
- Type 2 in accordance with EN 997
- 4 l flush
- Horizontal outlet
- Semi-shrouded

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]
500.152.01.1	white	35	40	68

To order additionally

- Cistern
- WC seat

Can be combined with


- Geberit Selnova Square exposed cistern, close-coupled, dual flush, bottom water supply connection → p. 724
- Geberit Selnova Square exposed cistern, close-coupled, dual flush, lateral water supply connection → p. 723
- Geberit Selnova Square WC seat, fastening from below → p. 722
- Geberit Selnova Square WC seat, slim design, fastening from above → p. 722

Accessories

- Accessory overview – Geberit Selnova Square WC ceramic appliance in combination with connection pipes → p. 715

WC seats

Geberit Selnova Square WC seat, fastening from below

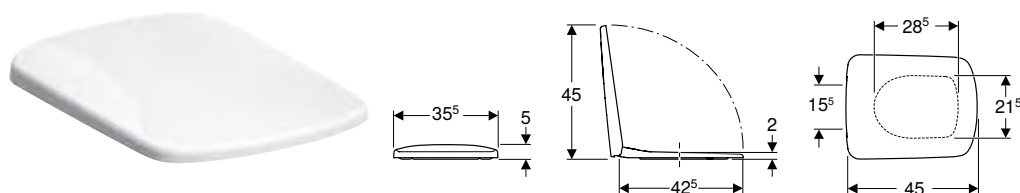

click & scan

Technical data

Product material	Duroplast
Fastening distance	15.5 cm

Scope of delivery

- WC seat

Characteristics


- Hinges made of metal
- Square design
- Overlapping WC lid

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]	QuickRelease function	Soft-closing mechanism	Fastening	Hinge material
500.332.01.1	white / glossy	35.5	4.5	45	no	no	from below	Stainless steel

Can be combined with

- Geberit Selnova Square wall-hung WC, square, washdown, Rimfree → p. 719
- Geberit Selnova Square wall-hung WC, square, washdown → p. 719
- Geberit Selnova Square floor-standing WC, square, washdown, back-to-wall, horizontal or vertical outlet, semi-shrouded, Rimfree → p. 720
- Geberit Selnova Square floor-standing WC for close-coupled exposed cistern, washdown, horizontal outlet, semi-shrouded, Rimfree → p. 721

Geberit Selnova Square WC seat, slim design, fastening from above

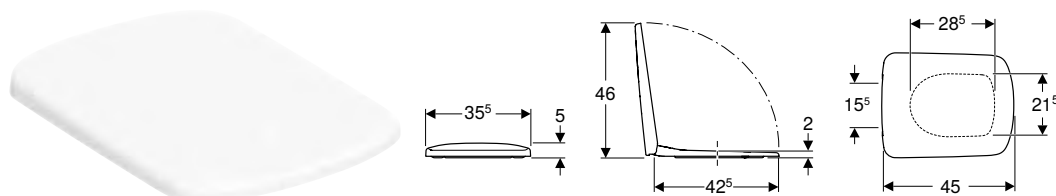

click & scan

Technical data

Product material	Duroplast
Fastening distance	15.5 cm

Scope of delivery

- WC seat

Characteristics


- Hinges made of metal
- Square design
- Overlapping WC lid

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]	QuickRelease function	Soft-closing mechanism	Fastening	Hinge material
500.334.01.1	white / glossy	35.5	4.5	45	no	yes	from above	Brass chrome-plated
500.336.01.1	white / glossy	35.5	4.5	45	Yes, with QuickRelease hinges	yes	from above	Brass chrome-plated
500.338.01.1	white / glossy	35.5	4.5	45	no	no	from above	Stainless steel

Can be combined with

- Geberit Selnova Compact wall-hung WC, washdown, small projection, square design → p. 765
- Geberit Selnova Square wall-hung WC, square, washdown, Rimfree → p. 719
- Geberit Selnova Square wall-hung WC, square, washdown → p. 719
- Geberit Selnova Square floor-standing WC, square, washdown, back-to-wall, horizontal or vertical outlet, semi-shrouded, Rimfree → p. 720
- Geberit Selnova Square floor-standing WC for close-coupled exposed cistern, washdown, back-to-wall, horizontal or vertical outlet, semi-shrouded, Rimfree → p. 720
- Geberit Selnova Square floor-standing WC for close-coupled exposed cistern, washdown, horizontal outlet, semi-shrouded, Rimfree → p. 721

Geberit Selnova Square WC seat, fastening from above

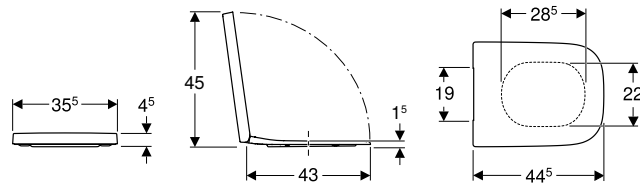

click & scan

Technical data

Product material	Duroplast
Fastening distance	15.5 cm

Scope of delivery

- WC seat

Characteristics

- Hinges made of metal
- Square design
- Overlapping WC lid

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]	QuickRelease function	Soft-closing mechanism	Fastening	Hinge material
501.555.01.1	white / glossy	35.5	4.5	44.5	no	no	from above	Stainless steel
501.556.01.1	white / glossy	35.5	4.5	44.5	no	yes	from above	Brass chrome-plated
501.557.01.1	white / glossy	35.5	4.5	44.5	Yes, with QuickRelease hinges	yes	from above	Brass chrome-plated


Can be combined with

- Geberit Selnova Square wall-hung WC, Premium, square, washdown, semi-shrouded, Rimfree → p. 718

Exposed Cisterns

Exposed cisterns for WCs, made of sanitary ceramic

Geberit Selnova Square exposed cistern, close-coupled, dual flush, lateral water supply connection

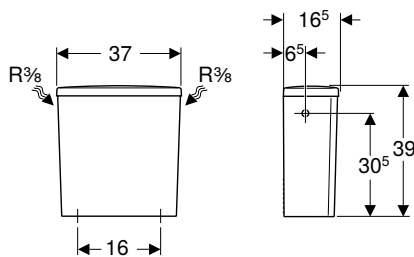

click & scan

Application purposes

- For close-coupled installation
- For water supply connections 3/8"

Technical data

Flush volume, factory setting	6 l / 3 l
Flush volume large, adjustment range	6 l
Flush volume small, adjustment range	3 l
Product material	Vitreous china

Characteristics

- Dual flush
- Type 1, full flush volume 6 l, in accordance with EN 997
- Water supply connection on the left/right

Scope of delivery


- Exposed cistern, close-coupled
- Mechanism

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]
500.267.01.1	white	37	39	16.5

Can be combined with

- Geberit Selnova Comfort floor-standing WC for close-coupled exposed cistern, washdown, horizontal outlet, raised → p. 774
- Geberit Selnova floor-standing WC for close-coupled exposed cistern, washdown, horizontal outlet, semi-shrouded → p. 748
- Geberit Selnova floor-standing WC for close-coupled exposed cistern, washdown, vertical outlet → p. 750
- Geberit Selnova floor-standing WC for close-coupled exposed cistern, washdown, horizontal outlet → p. 750
- Geberit Selnova floor-standing WC for close-coupled exposed cistern, washdown, horizontal outlet, Rimfree → p. 749
- Geberit Selnova floor-standing WC for close-coupled exposed cistern, washdown, horizontal outlet, semi-shrouded, Rimfree → p. 746
- Geberit Selnova floor-standing WC for close-coupled exposed cistern, washdown, vertical outlet, semi-shrouded → p. 748
- Geberit Selnova Square floor-standing WC for close-coupled exposed cistern, washdown, horizontal outlet, semi-shrouded, Rimfree → p. 721

Geberit Selnova Square exposed cistern, close-coupled, dual flush, bottom water supply connection

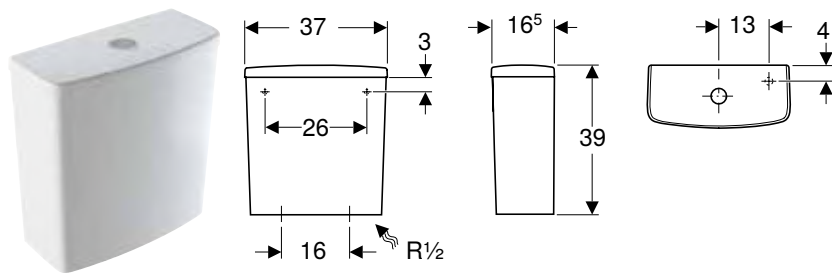

click & scan

Application purposes

- For close-coupled installation
- For water supply connections 1/2"

Technical data

Flush volume, factory setting	4 l / 2.6 l
Flush volume large, adjustment range	4 l / 6 l
Flush volume small, adjustment range	2.6 l / 4 l
Product material	Vitreous china

Characteristics

- Dual flush
- Water supply connection on the bottom right

Scope of delivery

- Exposed cistern, close-coupled
- Mechanism

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]
500.266.01.1	white	37	39	16.5


To order additionally

- Fastening material for rear wall

Can be combined with

- Geberit Selnova Comfort floor-standing WC for close-coupled exposed cistern, washdown, horizontal outlet, raised → p. 774
- Geberit Selnova Square floor-standing WC for close-coupled exposed cistern, washdown, back-to-wall, horizontal or vertical outlet, semi-shrouded, Rimfree → p. 720
- Geberit Selnova floor-standing WC for close-coupled exposed cistern, washdown, horizontal outlet, semi-shrouded → p. 748
- Geberit Selnova floor-standing WC for close-coupled exposed cistern, washdown, vertical outlet → p. 750
- Geberit Selnova floor-standing WC for close-coupled exposed cistern, washdown, horizontal outlet → p. 750
- Geberit Selnova floor-standing WC for close-coupled exposed cistern, washdown, horizontal outlet, Rimfree → p. 749
- Geberit Selnova floor-standing WC for close-coupled exposed cistern, washdown, horizontal outlet, semi-shrouded, Rimfree → p. 746
- Geberit Selnova floor-standing WC for close-coupled exposed cistern, washdown, vertical outlet, semi-shrouded → p. 748
- Geberit Selnova Square floor-standing WC for close-coupled exposed cistern, washdown, horizontal outlet, semi-shrouded, Rimfree → p. 721

Geberit Selnova Square exposed cistern, close-coupled, dual flush, lateral water supply connection, for WC Rimfree

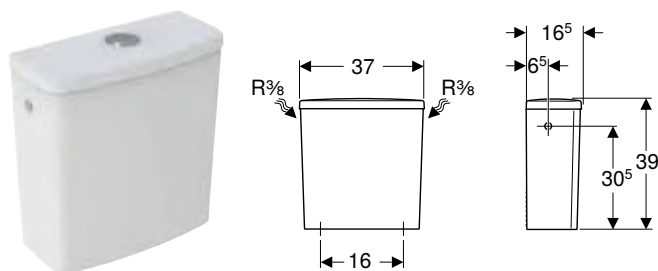

click & scan

Application purposes

- For close-coupled installation
- For water supply connections 3/8"

Technical data

Flush volume, factory setting	6 l / 3 l
Flush volume large, adjustment range	6 l
Flush volume small, adjustment range	3 l
Product material	Vitreous china

Characteristics

- Dual flush
- Type 1, full flush volume 6 l, in accordance with EN 997
- Water supply connection on the left/right

Scope of delivery

- Exposed cistern, close-coupled
- Mechanism

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]
501.578.01.1	white	37	39	16.5


Can be combined with

- Geberit Selnova Square floor-standing WC for close-coupled exposed cistern, washdown, back-to-wall, horizontal or vertical outlet, semi-shrouded, Rimfree → p. 720

Bidets

Wall-hung bidets

Geberit Selnova Square wall-hung bidet

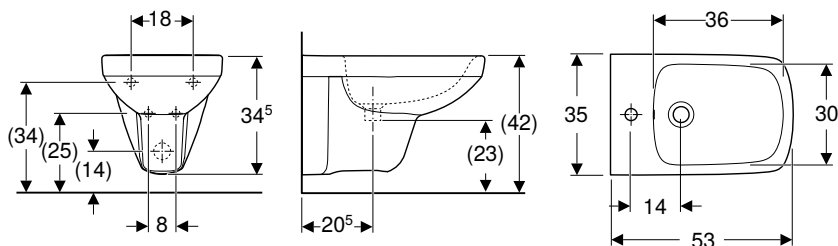

click & scan

Technical data


Product material	Vitreous china
------------------	----------------

Characteristics

- Wall-hung

Art. no.	Colour / surface	Overflow	B [cm]	H [cm]	T [cm]
500.271.01.1	white	visible, symmetrical	35	35.5	53

Geberit Selnova Square Premium wall-hung bidet, semi-shrouded

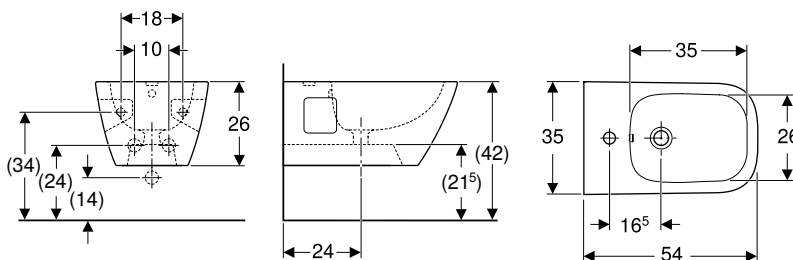

click & scan

Application purposes

- For single-hole taps with flexible hoses

Technical data

Product material	Vitreous china
------------------	----------------


Characteristics

- Wall-hung
- Hidden water supply connection
- Semi-shrouded

Art. no.	Colour / surface	Overflow	B [cm]	H [cm]	T [cm]
501.547.01.1	white	visible, symmetrical	35	26	54

Floor-standing bidets

Geberit Selnova Square Premium floor-standing bidet, back-to-wall, semi-shrouded

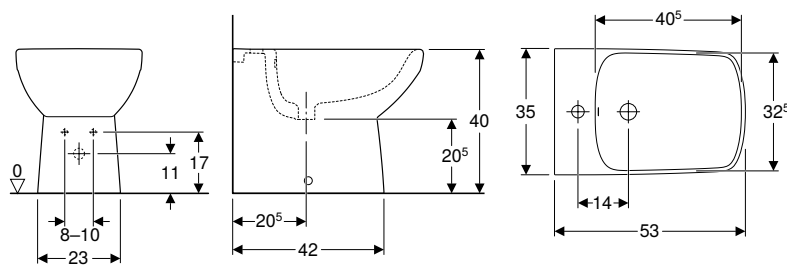

click & scan

Technical data

Product material	Vitreous china
------------------	----------------

Scope of delivery

- Fastening material

Characteristics

- Back-to-wall
- Floor-standing
- Hidden water supply connection
- Semi-shrouded
- Hidden fastening

Art. no.	Colour / surface	Overflow	B [cm]	H [cm]	T [cm]
500.483.01.1	white	visible, symmetrical	35	40	53

To order additionally

- P-trap




Geberit Selnova

Washbasins.....	730
Handrinse basins.....	730
Corner handrinse basins	731
Washbasins	732
Semirecessed washbasins	732
Pedestals	733
WCs	734
Wall-hung WCs.....	734
Accessory overview – Geberit Selnova WC ceramic appliance in combination with connection pipes.....	735
Assortment overview – Geberit Selnova wall-hung WCs and WC seats.....	735
Wall-hung WCs, raised	741
Floor-standing WCs	742
Assortment overview – Geberit Selnova floor-standing WCs and WC seats	743
WC seats.....	751
Exposed Cisterns.....	753
Exposed cisterns for WCs, made of sanitary ceramic	753
Bidets.....	754
Wall-hung bidets	754
Floor-standing bidets	755
Urinals.....	756
Flush operation	756

Washbasins

Handrinse basins

Geberit Selnova handrinse basin

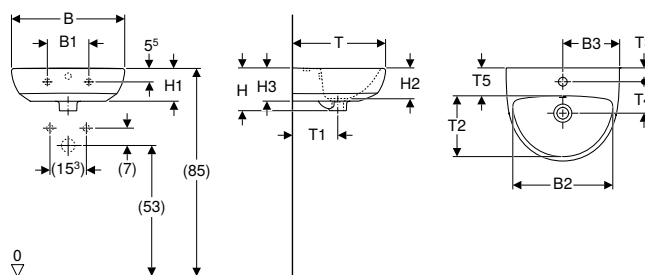

click & scan

Technical data

Product material	Vitreous china
------------------	----------------

Scope of delivery

- Handrinse basin

Characteristics

- Can be combined with half pedestal
- Can be combined with full pedestal

Art. no.	Colour / surface	Tap hole	Overflow	B1 [cm]	B2 [cm]	B3 [cm]	H [cm]	H1 [cm]	H2 [cm]	H3 [cm]	T [cm]	T1 [cm]	T2 [cm]	T3 [cm]	T4 [cm]	T5 [cm]
----------	------------------	----------	----------	------------	------------	------------	-----------	------------	------------	------------	-----------	------------	------------	------------	------------	------------

B / width: 45 cm

500.324.01.1	white	centred	visible, symmetrical	16.5	39.5	22.5	17	13	12	13	37	18	24	5.5	12.5	10.5
--------------	-------	---------	----------------------	------	------	------	----	----	----	----	----	----	----	-----	------	------

B / width: 50 cm

500.295.01.1	white	centred	visible, symmetrical	23	43	25	18	14	13	14	41	19.5	26	6.5	13	11
500.294.01.1	white	without	visible, symmetrical	23	43		18	14	13	14	41	19.5	26			11

Can be combined with

- Geberit Selnova half pedestal → p. 733
- Geberit Selnova full pedestal → p. 733


Accessories

- Geberit dip tube trap for washbasin, horizontal outlet
- Geberit fastening material for handrinse basin → p. 1035



- Geberit Selnova half pedestal only for handrinse basins 50 cm

Geberit Selnova handrinse basin with asymmetrical overflow

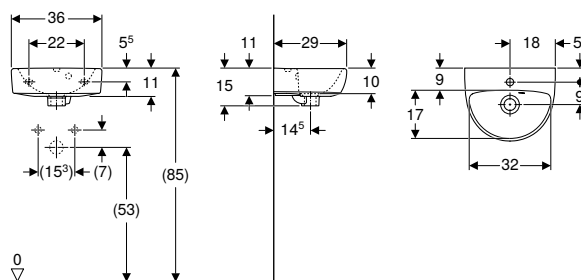

click & scan

Technical data

Product material	Vitreous china
------------------	----------------

Scope of delivery

- Handrinse basin

Characteristics

- Asymmetrical overflow

Art. no.	Colour / surface	Tap hole	Overflow	H [cm]	T [cm]
----------	------------------	----------	----------	-----------	-----------

B / width: 36 cm


500.320.01.1	white	centred	visible, asymmetrical	15	29
--------------	-------	---------	-----------------------	----	----

Accessories

- Geberit dip tube trap for washbasin, horizontal outlet
- Geberit fastening material for handrinse basin → p. 1035

Corner handrinse basins

Geberit Selnova corner handrinse basin

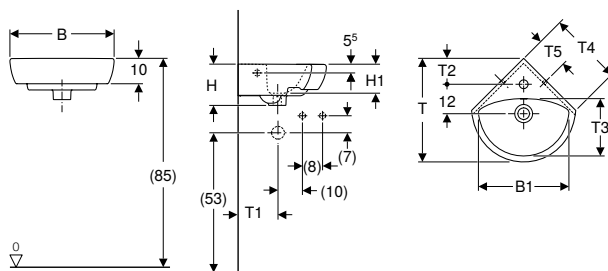

click & scan

Application purposes

- For corner installation

Characteristics

- Can be combined with full pedestal

Technical data

Product material	Vitreous china
------------------	----------------

Scope of delivery

- Corner handrinse basins

Art. no.	Colour / surface	Tap hole	Overflow	B1	H	H1	T	T1	T2	T3	T4	T5
				[cm]	[cm]	[cm]	[cm]	[cm]	[cm]	[cm]	[cm]	[cm]

B / width: 41.5 cm

500.326.01.1	white	centred	visible, symmetrical	36	16.5	11.5	41	15.5	10	22.5	34	10
--------------	-------	---------	----------------------	----	------	------	----	------	----	------	----	----

B / width: 59 cm

500.327.01.1	white	centred	visible, symmetrical	53	18	13	56	20	16.5	31.5	52.5	16.5
--------------	-------	---------	----------------------	----	----	----	----	----	------	------	------	------

Can be combined with

- Geberit Selnova full pedestal → p. 733

Accessories




- Geberit dip tube trap for washbasin, horizontal outlet
- Geberit fastening material for handrinse basin → p. 1035



- Geberit Selnova full pedestal only for corner handrinse basins 59 cm

Washbasins

Geberit Selnova washbasin

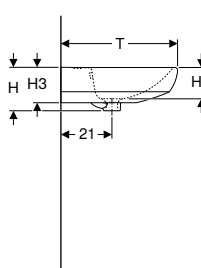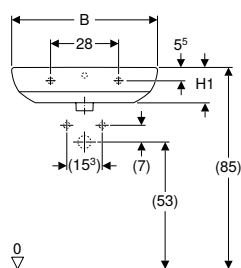

Technical data

Product material	Vitreous china
------------------	----------------

Scope of delivery

- Washbasin

Characteristics

- Can be combined with half pedestal
- Can be combined with full pedestal

Art. no.	Colour / surface	Tap hole	Overflow	B1	B2	H	H1	H2	H3	T	T1	T2	T3	T4
				[cm]	[cm]	[cm]	[cm]	[cm]	[cm]	[cm]	[cm]	[cm]	[cm]	[cm]

B / width: 55 cm

500.315.01.1	white	centred	visible, symmetrical	47.5	27.5	17.5	14.5	13	14.5	44	29	6.5	14.5	11.5
500.304.01.1	white	without	visible, symmetrical	47.5		17.5	14.5	12	14.5	44	29			11.5

B / width: 60 cm

500.305.01.1	white	centred	visible, symmetrical	53.5	30	17.5	14.5	12	14.5	48	33	6.5	14.5	11.5
--------------	-------	---------	----------------------	------	----	------	------	----	------	----	----	-----	------	------

B / width: 65 cm

500.297.01.1	white	centred	visible, symmetrical	58	32.5	18.5	15	13.5	15	50	35	6.5	14.5	12
--------------	-------	---------	----------------------	----	------	------	----	------	----	----	----	-----	------	----

Can be combined with




- Geberit Selnova half pedestal → p. 733
- Geberit Selnova full pedestal → p. 733

Accessories

- Geberit waste outlet with free outlet and valve cover
- Geberit dip tube trap for washbasin, horizontal outlet
- Geberit fastening material for washbasin → p. 1035

Semirecessed washbasins

Geberit Selnova semirecessed washbasin

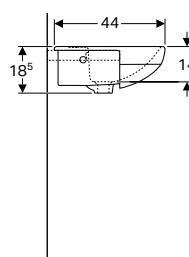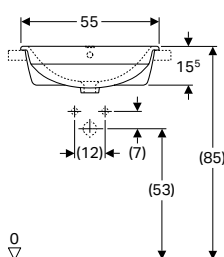

Application purposes

- For mounting in washtops

Technical data

Product material	Vitreous china
------------------	----------------

Art. no.	Colour / surface	Tap hole	Overflow	H	T
				[cm]	[cm]

B / width: 55 cm

500.311.01.1	white	centred	visible, symmetrical	18.5	44
--------------	-------	---------	----------------------	------	----

Accessories


- Geberit dip tube trap for washbasin, horizontal outlet

Scope of delivery

- Semi-recessed washbasin
- Fastening material

Pedestals

Geberit Selnova full pedestal

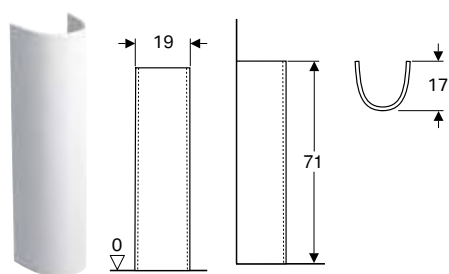

click & scan

Technical data

Product material	Vitreous china
------------------	----------------

Scope of delivery


- Full pedestal

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]
500.341.01.1	white	19	71	17

Can be combined with

- Geberit Smyle washbasin, square design → p. 670
- Geberit Smyle washbasin → p. 669
- Geberit Selnova handrinse basin → p. 730
- Geberit Selnova washbasin → p. 732
- Geberit Selnova Square washbasin → p. 701
- Geberit Selnova corner handrinse basin → p. 731
- Geberit Selnova Square handrinse basin → p. 700

Geberit Selnova half pedestal

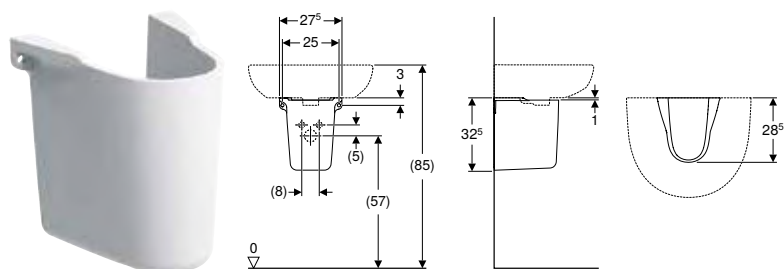

click & scan

Technical data

Product material	Vitreous china
------------------	----------------

Scope of delivery

- Half pedestal

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]
500.329.01.1	white	27.5	32.5	28.5







Can be combined with

- Geberit Selnova Square washbasin → p. 701
- Geberit Selnova handrinse basin → p. 730
- Geberit Selnova washbasin → p. 732
- Geberit Selnova Square handrinse basin → p. 700

WCs

Accessory overview – Geberit Selnova WC ceramic appliance in combination with connection pipes




Geberit International Sales, version: December 2025

				Geberit Selnova floor-standing WC, washdown, back-to-wall, horizontal or vertical outlet, semi-shrouded, Rimfree	Geberit Selnova floor-standing WC for close-coupled exposed cistern, washdown, horizontal outlet	
White				500.393.01.1	500.282.01.1	
						
				→ p. 744	→ p. 750	
Geberit P-bend set for floor-standing WC	131.081.11.1		→ p. 921			
Geberit connection set for floor-standing WC	131.082.16.1		→ p. 921		X = 70-80 mm	
Geberit connection bend 90° set with extension	152.647.00.1					
Geberit connection bend 90°	152.610.11.1			X = 65 mm	X = 100 mm	






Wall-hung WCs

Assortment overview – Geberit Selnova wall-hung WCs and WC seats

Geberit International Sales, December 2025

White					
Geberit Selnova					
Geberit Selnova WC seat with hinges made of plastic, fastening from below	Without soft-closing mechanism	white	500.330.01.1		→ p. 751
Geberit Selnova WC seat, fastening from below	Without soft-closing mechanism	white	500.331.01.1		→ p. 752
Geberit Selnova WC seat, fastening from above	Without soft-closing mechanism	white	500.337.01.1		→ p. 752
	With soft-closing mechanism	white	500.333.01.1		→ p. 752
	With soft-closing mechanism, quick-release hinges	white	500.335.01.1		→ p. 752


✓ Compatible

Geberit Selnova floor-standing WC set with close-coupled exposed cistern, horizontal outlet, semi-shrouded, with WC seat	Geberit Selnova floor-standing WC for close-coupled exposed cistern, washdown, horizontal outlet, semi-shrouded	Geberit Selnova floor-standing WC set with close-coupled exposed cistern, horizontal outlet, semi-shrouded, Rimfree, with WC seat	Geberit Selnova floor-standing WC for close-coupled exposed cistern, washdown, horizontal outlet, semi-shrouded, Rimfree	Geberit Selnova floor-standing WC for close-coupled exposed cistern, washdown, horizontal outlet, Rimfree
501.754.00.1	500.287.01.1	501.753.00.1	500.285.01.1	500.283.01.1
				
→ p. 747	→ p. 748	→ p. 746	→ p. 746	→ p. 749
X = 65 mm	X = 65 mm	X = 70 mm	X = 70 mm	X = 75 mm

Geberit Selnova wall-hung WC, Premium, washdown, shrouded, Rimfree	Geberit Selnova wall-hung WC, washdown, semi-shrouded, TurboFlush	Geberit Selnova wall-hung WC, Premium, washdown, semi-shrouded, Rimfree	Geberit Selnova wall-hung WC, washdown, Rimfree	Geberit Selnova wall-hung WC, washdown	Geberit Selnova wall-hung WC, Premium, washdown, raised, shrouded, Rimfree
502.035.00.1	503.159.00.1	501.545.01.1	500.265.01.1	500.260.01.1	500.694.01.2
					
→ p. 738	→ p. 736	→ p. 738	→ p. 739	→ p. 740	→ p. 741
			✓	✓	
			✓	✓	
✓	✓	✓	✓	✓	✓
✓	✓	✓	✓	✓	✓
✓	✓	✓	✓	✓	✓

New

Geberit Selnova set of wall-hung WC, washdown, semi-shrouded, TurboFlush, with WC seat

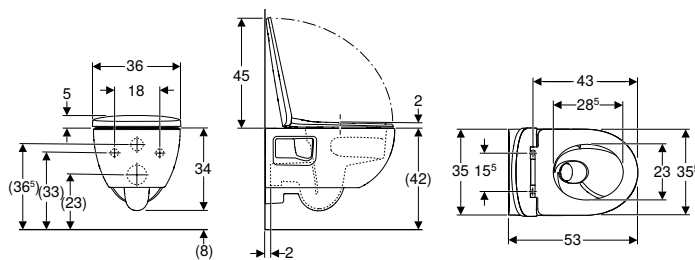

click & scan

Application purposes

- For concealed cisterns

Technical data

Product material	Vitreous china
------------------	----------------

Scope of delivery

- WC ceramic appliance
- WC seat

Characteristics


- Wall-hung
- Washdown WC
- Rimless WC ceramic appliance featuring TurboFlush flush technology
- Visible fastening
- Type 1, full flush volume 6 / 5 / 4 l, in accordance with EN 997
- 4 l flush
- WC seat made of Duroplast
- Overlapping WC lid

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]	QuickRelease function	Soft-closing mechanism	Hinge material
503.160.00.1	white	35.5	34	53	Yes, with QuickRelease hinges	yes	Brass chrome-plated

Available as of April 2026

New

Geberit Selnova wall-hung WC, washdown, semi-shrouded, TurboFlush

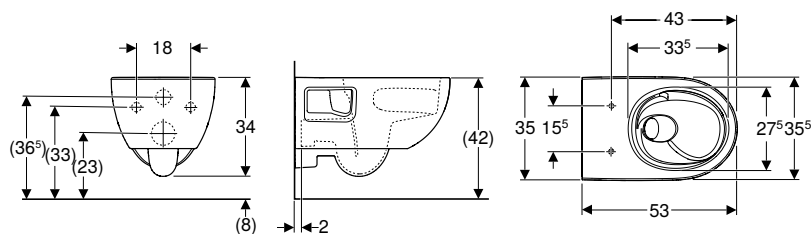

click & scan

Application purposes

- For concealed cisterns

Technical data

Product material	Vitreous china
------------------	----------------

Scope of delivery

- WC ceramic appliance

Characteristics

- Wall-hung
- Washdown WC
- Rimless WC ceramic appliance featuring TurboFlush flush technology
- Visible fastening
- Type 1, full flush volume 6 / 5 / 4 l, in accordance with EN 997
- 4 l flush


Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]
503.159.00.1	white	35.5	34	53

Available as of April 2026

Can be combined with

- Geberit Selnova WC seat, fastening from above → p. 752

Geberit Selnova set of wall-hung WC, Premium, washdown, shrouded, Rimfree, with WC seat

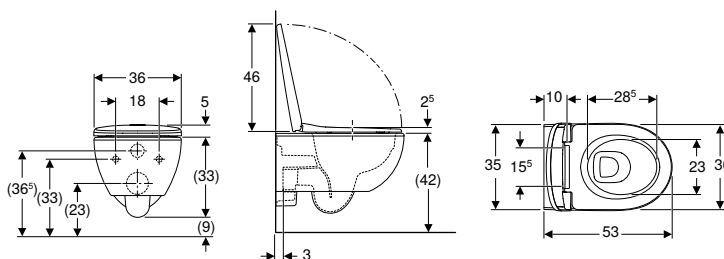

click & scan

Application purposes

- For concealed cisterns
- For pressure flushing valves

Technical data

Product material	Vitreous china
------------------	----------------

Characteristics


- Wall-hung
- Washdown WC
- Rimless WC ceramic appliance featuring Rimfree flush technology
- Easy fastening with Easy Fast Fixing (type EFF3)
- Type 1, full flush volume 6 / 5 / 4 l, in accordance with EN 997
- Shrouded
- WC seat made of Duroplast
- 4 l flush
- Overlapping WC lid

Scope of delivery

- WC ceramic appliance
- WC seat
- Fastening material

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]	QuickRelease function	Soft-closing mechanism	Fastening	Hinge material
503.023.00.1	white	36	38	53	Yes, with QuickRelease hinges		yes from above	Stainless steel

Geberit Selnova set of wall-hung WC, Premium, washdown, shrouded, Rimfree, with WC seat

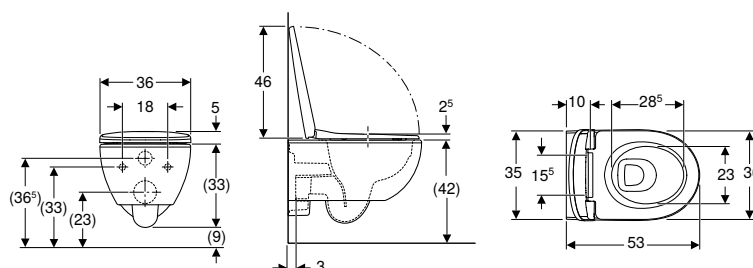

click & scan

Application purposes

- For concealed cisterns
- For pressure flushing valves

Technical data

Product material	Vitreous china
------------------	----------------

Characteristics




- Wall-hung
- Washdown WC
- Rimless WC ceramic appliance featuring Rimfree flush technology
- Easy fastening with Easy Fast Fixing (type EFF3)
- Type 1, full flush volume 6 / 5 / 4 l, in accordance with EN 997
- 4 l flush
- Shrouded
- WC seat made of Duroplast
- Overlapping WC lid

Scope of delivery

- WC ceramic appliance
- WC seat
- Fastening material

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]	QuickRelease function	Soft-closing mechanism	Fastening	Hinge material
502.793.00.1	white	36	38	53	Yes, with QuickRelease hinges		yes from above	Stainless steel

Geberit Selnova wall-hung WC, Premium, washdown, shrouded, Rimfree

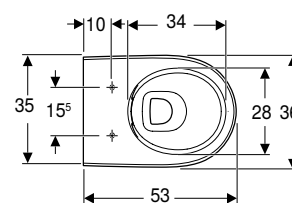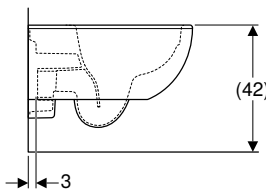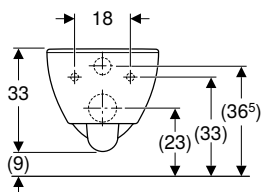

click & scan

Application purposes

- For concealed cisterns
- For pressure flushing valves

Technical data

Product material	Vitreous china
------------------	----------------

Characteristics

- Wall-hung
- Washdown WC
- Rimless WC ceramic appliance featuring Rimfree flush technology
- Easy fastening with Easy Fast Fixing (type EFF3)
- Type 1, full flush volume 6 / 5 / 4 l, in accordance with EN 997
- 4 l flush
- Shrouded

Scope of delivery

- WC ceramic appliance
- Fastening material

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]
502.035.00.1	white	36	33	53




To order additionally

- WC seat

Can be combined with

- Geberit Selnova WC seat, fastening from above → p. 752
- Geberit AquaClean Tuma Comfort WC enhancement solution → p. 876
- Geberit AquaClean Tuma Classic WC enhancement solution → p. 878

Geberit Selnova wall-hung WC, Premium, washdown, semi-shrouded, Rimfree

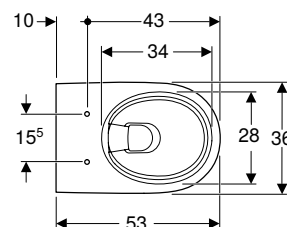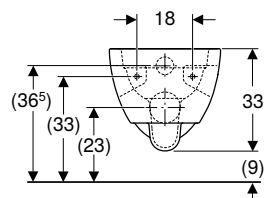

click & scan

Application purposes

- For concealed cisterns
- For pressure flushing valves

Technical data

Product material	Vitreous china
------------------	----------------

Characteristics

- Wall-hung
- Washdown WC
- Rimless WC ceramic appliance featuring Rimfree flush technology
- Type 1, full flush volume 6 / 5 l, in accordance with EN 997
- Flushes with 4.5 l
- Semi-shrouded

Scope of delivery

- WC ceramic appliance

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]
501.545.01.1	white	36	33	53


To order additionally

- WC seat

Can be combined with

- Geberit Selnova WC seat, fastening from above → p. 752
- Geberit AquaClean Tuma Comfort WC enhancement solution → p. 876
- Geberit AquaClean Tuma Classic WC enhancement solution → p. 878

Geberit Selnova set of wall-hung WC, washdown, Rimfree, with WC seat

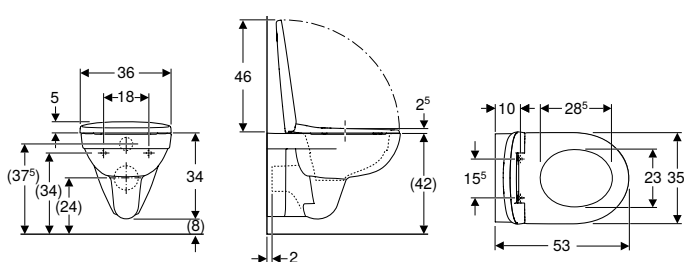

click & scan

Application purposes

- For concealed cisterns
- For pressure flushing valves

Technical data

Product material	Vitreous china
------------------	----------------

Characteristics


- Wall-hung
- Washdown WC
- Rimless WC ceramic appliance featuring Rimfree flush technology
- Type 1, full flush volume 6 / 4 l, in accordance with EN 997
- Type 2 in accordance with EN 997
- WC seat made of Duroplast
- Overlapping WC lid

Scope of delivery

- WC ceramic appliance
- WC seat

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]	QuickRelease function	Soft-closing mechanism	Fastening	Hinge material
501.751.00.1	white	36	39	53	Yes, with QuickRelease hinges	yes	from above	Brass chrome-plated

Geberit Selnova wall-hung WC, washdown, Rimfree

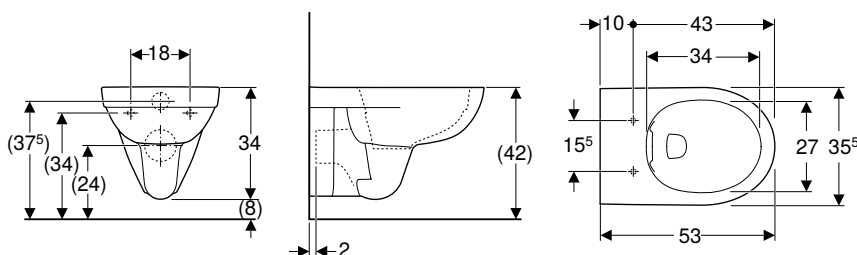

click & scan

Application purposes

- For concealed cisterns
- For pressure flushing valves

Technical data

Product material	Vitreous china
------------------	----------------

Characteristics

- Wall-hung
- Washdown WC
- Rimless WC ceramic appliance featuring Rimfree flush technology
- 4 l flush
- Type 1, full flush volume 6 / 4 l, in accordance with EN 997
- Type 2 in accordance with EN 997

Scope of delivery

- WC ceramic appliance

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]
500.265.01.1	white	35.5	34	53


To order additionally

- WC seat

Can be combined with

- Geberit Selnova WC seat, fastening from below → p. 752
- Geberit Selnova WC seat with hinges made of plastic, fastening from below → p. 751
- Geberit Selnova WC seat, fastening from above → p. 752
- Geberit AquaClean Tuma Classic WC enhancement solution → p. 878

Geberit Selnova set of wall-hung WC, washdown, with WC seat

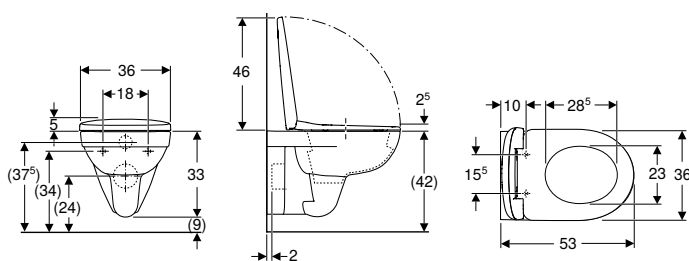

click & scan

Application purposes

- For concealed cisterns
- For pressure flushing valves

Technical data

Product material	Vitreous china
------------------	----------------

Characteristics


- Wall-hung
- Washdown WC
- With flush rim
- Type 1, full flush volume 6 / 4 l, in accordance with EN 997
- Type 2 in accordance with EN 997
- 4 l flush
- WC seat made of Duroplast
- Overlapping WC lid

Scope of delivery

- WC ceramic appliance
- WC seat

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]	QuickRelease function	Soft-closing mechanism	Fastening	Hinge material
501.752.00.1	white	36	38	53	no	no	from below	Stainless steel

Geberit Selnova wall-hung WC, washdown

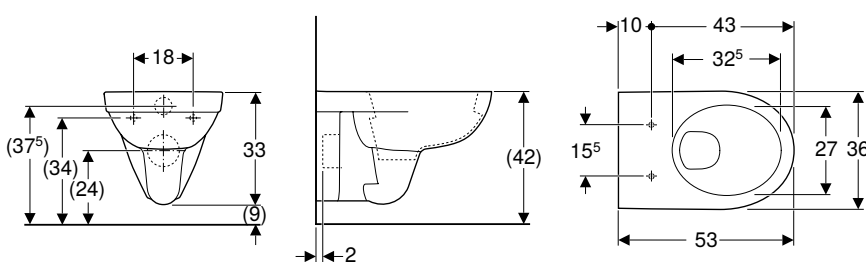

click & scan

Application purposes

- For concealed cisterns
- For pressure flushing valves

Technical data

Product material	Vitreous china
------------------	----------------

Characteristics

- Wall-hung
- Washdown WC
- With flush rim
- Type 1, full flush volume 6 / 4 l, in accordance with EN 997
- Type 2 in accordance with EN 997
- 4 l flush

Scope of delivery

- WC ceramic appliance

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]
500.260.01.1	white	36	33	53

To order additionally


- WC seat

Can be combined with

- Geberit Selnova WC seat with hinges made of plastic, fastening from below → p. 751
- Geberit Selnova WC seat, fastening from above → p. 752
- Geberit Selnova WC seat, fastening from below → p. 752
- Geberit AquaClean Tuma Comfort WC enhancement solution → p. 876
- Geberit AquaClean Tuma Classic WC enhancement solution → p. 878

Wall-hung WCs, raised

Geberit Selnova wall-hung WC, Premium, washdown, raised, shrouded, Rimfree

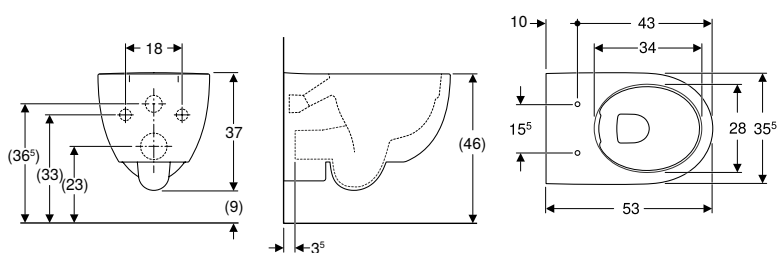

click & scan

Application purposes

- For concealed cisterns
- For pressure flushing valves

Technical data

Product material	Vitreous china
------------------	----------------

Characteristics

- Washdown WC
- Wall-hung
- Rimless WC ceramic appliance featuring Rimfree flush technology
- Easy fastening with Easy Fast Fixing (type EFF3)
- Type 1, full flush volume 6 / 5 / 4 l, in accordance with EN 997
- Shrouded
- Raised ceramic upper edge 46 cm at standard fastening height

Scope of delivery

- Fastening material

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]
500.694.01.2	white	35.5	37	53

To order additionally

- WC seat

Can be combined with

- Geberit Selnova WC seat, fastening from above → p. 752
- Geberit AquaClean Tuma Comfort WC enhancement solution → p. 876
- Geberit AquaClean Tuma Classic WC enhancement solution → p. 878









- Depending on the installation type, a Geberit connection set for wall-hung WC, length 30 cm is required for mounting

Floor-standing WCs


Assortment overview – Geberit Selnova floor-standing WCs and WC seats

Geberit International Sales, December 2025

						Geberit Selnova floor-standing WC, washdown, horizontal outlet, semi-shrouded, Rimfree	Geberit Selnova floor-standing WC, washdown, back-to-wall, horizontal or vertical outlet, semi-shrouded, Rimfree	Geberit Selnova floor-standing WC, washdown, back-to-wall, horizontal outlet, semi-shrouded	
White						500.480.01.1	500.393.01.1	500.286.01.1	
									
						→ p. 744	→ p. 744	→ p. 745	
Geberit Selnova WC seat with hinges made of plastic, fastening from below	Without soft-closing mechanism	white	500.330.01.1		→ p. 751	✓		✓	
Geberit Selnova WC seat, fastening from below	Without soft-closing mechanism	white	500.331.01.1		→ p. 752	✓		✓	
Geberit Selnova WC seat, fastening from above	Without soft-closing mechanism	white	500.337.01.1		→ p. 752	✓	✓	✓	
	With soft-closing mechanism	white	500.333.01.1		→ p. 752	✓	✓	✓	
	With soft-closing mechanism, quick-release hinges	white	500.335.01.1		→ p. 752	✓	✓	✓	
✓ Compatible									

	Geberit Selnova floor-standing WC for close-coupled exposed cistern, washdown, horizontal outlet, semi-shrouded, Rimfree	Geberit Selnova floor-standing WC for close-coupled exposed cistern, washdown, horizontal outlet, Rimfree	Geberit Selnova floor-standing WC for close-coupled exposed cistern, washdown, horizontal outlet, semi-shrouded	Geberit Selnova floor-standing WC for close-coupled exposed cistern, washdown, vertical outlet, semi-shrouded	Geberit Selnova floor-standing WC for close-coupled exposed cistern, washdown, horizontal outlet	Geberit Selnova floor-standing WC for close-coupled exposed cistern, washdown, vertical outlet
	500.285.01.1	500.283.01.1	500.287.01.1	500.151.01.1	500.282.01.1	500.281.01.1
						
	→ p. 746	→ p. 749	→ p. 748	→ p. 748	→ p. 750	→ p. 750
✓	✓	✓	✓	✓	✓	✓
✓	✓	✓	✓	✓	✓	✓
✓	✓	✓	✓	✓	✓	✓
✓	✓	✓	✓	✓	✓	✓
✓	✓	✓	✓	✓	✓	✓

Geberit Selnova floor-standing WC, washdown, horizontal outlet, semi-shrouded, Rimfree

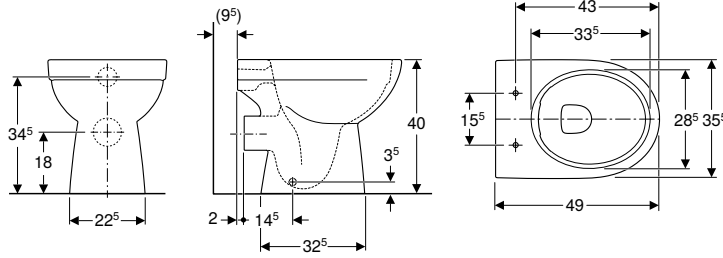

click & scan

Application purposes

- For exposed and concealed cisterns
- For pressure flushing valves

Technical data

Product material	Vitreous china
------------------	----------------

Characteristics

- Floor-standing
- Washdown WC
- Rimless WC ceramic appliance featuring Rimfree flush technology
- Flushes with 4.5 l
- Type 1, full flush volume 6 / 5 l, in accordance with EN 997
- Horizontal outlet
- Semi-shrouded

Scope of delivery

- WC ceramic appliance
- Fastening material

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]
500.480.01.1	P white	35.5	40	49

P: Phase out


To order additionally

- WC seat

Can be combined with

- Geberit Selnova WC seat, fastening from below → p. 752
- Geberit Selnova WC seat, fastening from above → p. 752
- Geberit Selnova WC seat with hinges made of plastic, fastening from below → p. 751

Geberit Selnova floor-standing WC, washdown, back-to-wall, horizontal or vertical outlet, semi-shrouded, Rimfree

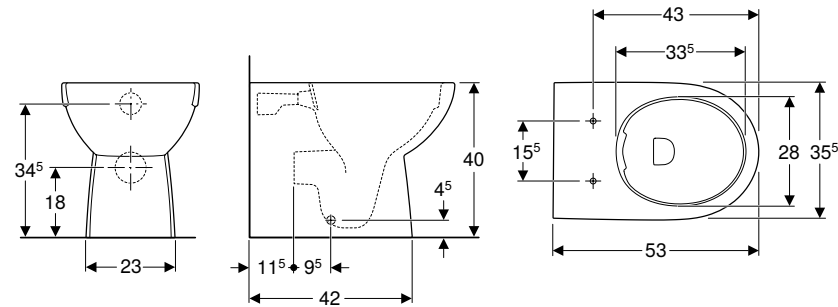

click & scan

Technical data

Product material	Vitreous china
------------------	----------------

Scope of delivery

- WC ceramic appliance
- Fastening material

Characteristics

- Back-to-wall
- Washdown WC
- Floor-standing
- Rimless WC ceramic appliance featuring Rimfree flush technology
- Type 1, full flush volume 6 / 5 / 4 l, in accordance with EN 997
- Horizontal or vertical outlet
- Type 2 in accordance with EN 997
- 4 l flush
- Semi-shrouded
- Hidden fastening

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]
500.393.01.1	white	35.5	40	53

To order additionally

- WC seat


Can be combined with

- Geberit Selnova WC seat, fastening from above → p. 752
- Geberit AquaClean Tuma Comfort WC enhancement solution → p. 876
- Geberit AquaClean Tuma Classic WC enhancement solution → p. 878

Accessories

- Accessory overview – Geberit Selnova WC ceramic appliance in combination with connection pipes → p. 735

Geberit Selnova floor-standing WC, washdown, back-to-wall, horizontal outlet, semi-shrouded

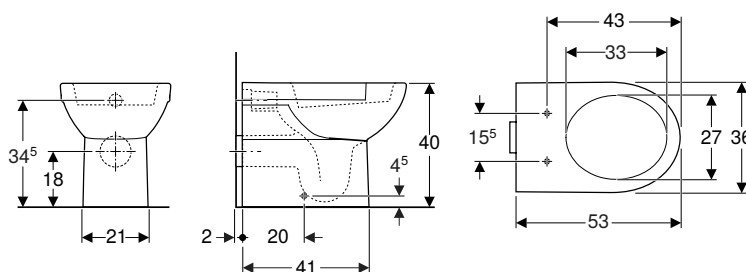

Application purposes

- For concealed cisterns

Technical data

Product material	Vitreous china
------------------	----------------

Characteristics

- Floor-standing
- Washdown WC
- With flush rim
- Type 2 in accordance with EN 997
- Type 1, full flush volume 6 l, in accordance with EN 997
- Horizontal outlet
- Semi-shrouded

Scope of delivery

- WC ceramic appliance
- Fastening material

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]
500.286.01.1	white	35.5	40	53


To order additionally

- WC seat

Can be combined with

- Geberit Selnova WC seat with hinges made of plastic, fastening from below → p. 751
- Geberit Selnova WC seat, fastening from above → p. 752
- Geberit Selnova WC seat, fastening from below → p. 752
- Geberit AquaClean Tuma Comfort WC enhancement solution → p. 876
- Geberit AquaClean Tuma Classic WC enhancement solution → p. 878

Geberit Selnova floor-standing WC set with close-coupled exposed cistern, horizontal outlet, semi-shrouded, Rimfree, with WC seat

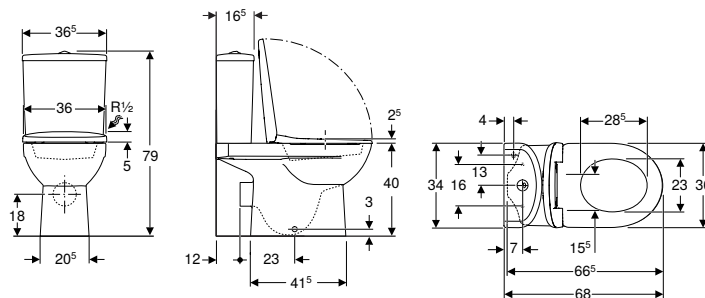

Technical data

Flush volume, factory setting	4 l / 2.6 l
Flush volume large, adjustment range	4 l / 6 l
Flush volume small, adjustment range	2.6 l / 4 l
Product material	Vitreous china

Scope of delivery

- WC ceramic appliance
- Exposed cistern, close-coupled
- WC seat
- Mechanism
- Fastening material

Characteristics


- Floor-standing
- Dual flush
- Washdown WC
- Rimless WC ceramic appliance featuring Rimfree flush technology
- Type 1, full flush volume 6 l, in accordance with EN 997
- Type 2 in accordance with EN 997
- Horizontal outlet
- Water supply connection on the bottom right
- Semi-shrouded
- WC seat made of Duroplast
- Overlapping WC lid

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]	QuickRelease function	Soft-closing mechanism	Fastening	Hinge material
501.753.00.1	white	36.5	79	68	Yes, with QuickRelease hinges	yes	from above	Brass chrome-plated

Accessories

- Accessory overview – Geberit Selnova WC ceramic appliance in combination with connection pipes → p. 735

Geberit Selnova floor-standing WC for close-coupled exposed cistern, washdown, horizontal outlet, semi-shrouded, Rimfree

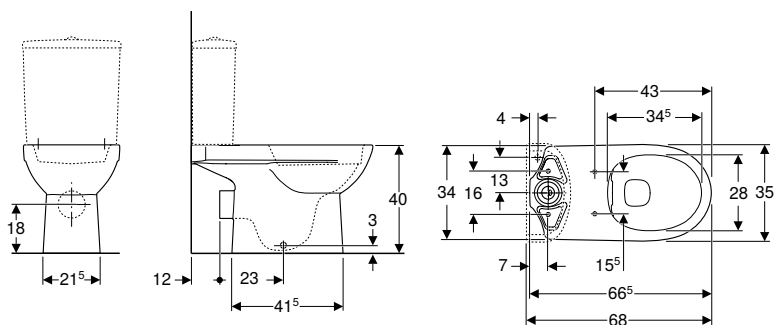

Application purposes

- For close-coupled exposed cistern

Technical data

Product material	Vitreous china
------------------	----------------

Characteristics

- Floor-standing
- Washdown WC
- Rimless WC ceramic appliance featuring Rimfree flush technology
- Type 1, full flush volume 6 l, in accordance with EN 997
- Type 2 in accordance with EN 997
- Horizontal outlet
- Semi-shrouded

Scope of delivery

- WC ceramic appliance
- Fastening material

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]
500.285.01.1	white	35.5	40	66.5

To order additionally

- Cistern
- WC seat


Can be combined with

- Geberit Selnova Square exposed cistern, close-coupled, dual flush, bottom water supply connection → p. 724
- Geberit Selnova Square exposed cistern, close-coupled, dual flush, lateral water supply connection → p. 723
- Geberit Selnova exposed cistern, close-coupled, dual flush, bottom water supply connection → p. 753
- Geberit Selnova exposed cistern, close-coupled, dual flush, lateral water supply connection → p. 754
- Geberit Selnova WC seat with hinges made of plastic, fastening from below → p. 751
- Geberit Selnova WC seat, fastening from below → p. 752
- Geberit Selnova WC seat, fastening from above → p. 752
- Geberit AquaClean Tuma Comfort WC enhancement solution → p. 876
- Geberit AquaClean Tuma Classic WC enhancement solution → p. 878

Accessories

- Accessory overview – Geberit Selnova WC ceramic appliance in combination with connection pipes → p. 735

Geberit Selnova floor-standing WC set with close-coupled exposed cistern, horizontal outlet, semi-shrouded, with WC seat

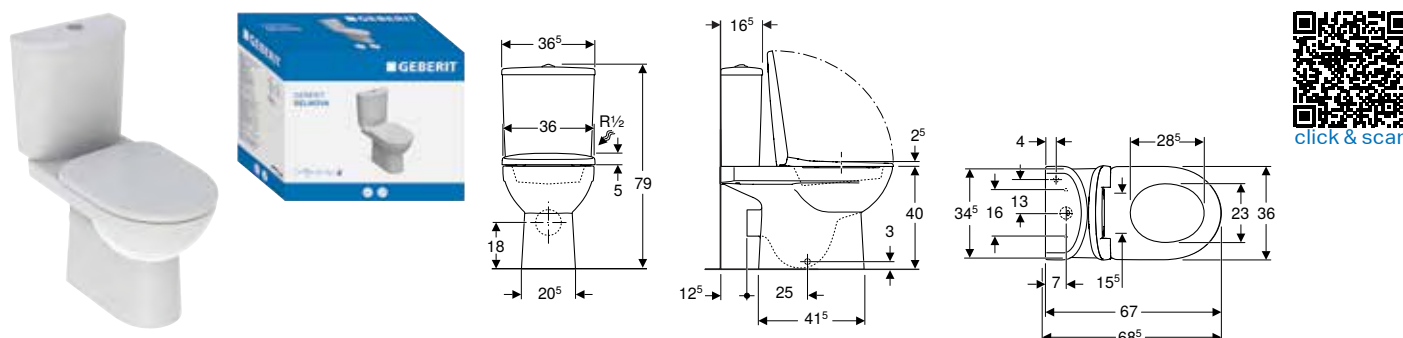

Technical data

Flush volume, factory setting	4 l / 2.6 l
Flush volume large, adjustment range	4 l / 6 l
Flush volume small, adjustment range	2.6 l / 4 l
Product material	Vitreous china

Scope of delivery

- WC ceramic appliance
- Exposed cistern, close-coupled
- WC seat
- Mechanism
- Fastening material

Characteristics


- Floor-standing
- Dual flush
- Washdown WC
- With flush rim
- Type 1, full flush volume 6 l, in accordance with EN 997
- Type 2 in accordance with EN 997
- Horizontal outlet
- Water supply connection on the bottom right
- Semi-shrouded
- WC seat made of Duroplast
- Overlapping WC lid

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]	QuickRelease function	Soft-closing mechanism	Fastening	Hinge material
501.754.00.1	white	36.5	79	68.5	no	no	from below	Stainless steel

Accessories

- Accessory overview – Geberit Selnova WC ceramic appliance in combination with connection pipes → p. 735

Geberit Selnova floor-standing WC for close-coupled exposed cistern, washdown, horizontal outlet, semi-shrouded

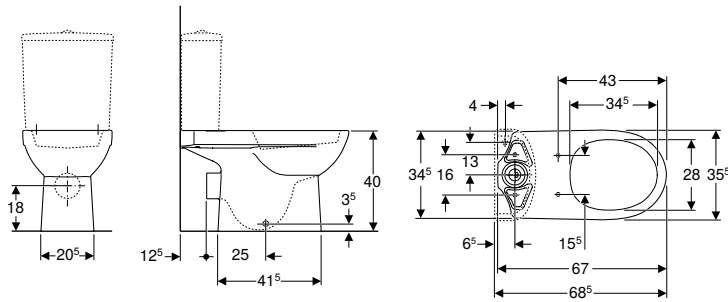

click & scan

Application purposes

- For close-coupled exposed cistern

Technical data

Product material	Vitreous china
------------------	----------------

Characteristics

- Floor-standing
- Washdown WC
- With flush rim
- Type 1, full flush volume 6 l, in accordance with EN 997
- Type 2 in accordance with EN 997
- Horizontal outlet
- Semi-shrouded

Scope of delivery

- WC ceramic appliance
- Fastening material

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]
500.287.01.1	white	35.5	40	67

To order additionally

- Cistern
- WC seat


Can be combined with

- Geberit Selnova Square exposed cistern, close-coupled, dual flush, bottom water supply connection → p. 724
- Geberit Selnova Square exposed cistern, close-coupled, dual flush, lateral water supply connection → p. 723
- Geberit Selnova exposed cistern, close-coupled, dual flush, bottom water supply connection → p. 753
- Geberit Selnova exposed cistern, close-coupled, dual flush, lateral water supply connection → p. 754
- Geberit Selnova WC seat with hinges made of plastic, fastening from below → p. 751
- Geberit Selnova WC seat, fastening from above → p. 752
- Geberit Selnova WC seat, fastening from below → p. 752
- Geberit AquaClean Tuma Comfort WC enhancement solution → p. 876
- Geberit AquaClean Tuma Classic WC enhancement solution → p. 878

Accessories

- Accessory overview – Geberit Selnova WC ceramic appliance in combination with connection pipes → p. 735

Geberit Selnova floor-standing WC for close-coupled exposed cistern, washdown, vertical outlet, semi-shrouded

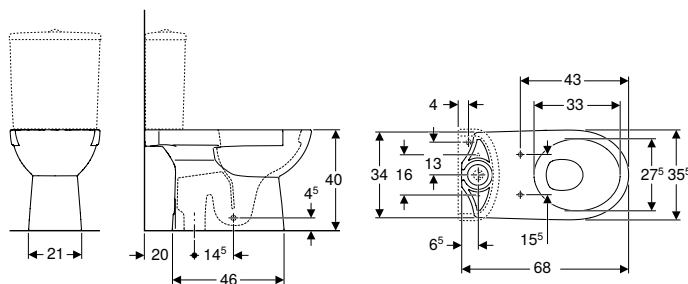

click & scan

Application purposes

- For close-coupled exposed cistern

Characteristics

- Floor-standing
- Washdown WC
- With flush rim
- Vertical outlet
- Type 1, full flush volume 6 l, in accordance with EN 997
- Type 2 in accordance with EN 997
- Semi-shrouded

Technical data

Product material	Vitreous china
------------------	----------------

Scope of delivery

- WC ceramic appliance
- Fastening material

Art. no.	Colour / surface	B	H	T
		[cm]	[cm]	[cm]
500.151.01.1	white	35.5	40	68


To order additionally

- Cistern
- WC seat

Can be combined with

- Geberit Selnova Square exposed cistern, close-coupled, dual flush, bottom water supply connection → p. 724
- Geberit Selnova Square exposed cistern, close-coupled, dual flush, lateral water supply connection → p. 723
- Geberit Selnova exposed cistern, close-coupled, dual flush, bottom water supply connection → p. 753
- Geberit Selnova exposed cistern, close-coupled, dual flush, lateral water supply connection → p. 754
- Geberit Selnova WC seat with hinges made of plastic, fastening from below → p. 751
- Geberit Selnova WC seat, fastening from above → p. 752
- Geberit Selnova WC seat, fastening from below → p. 752

Geberit Selnova floor-standing WC for close-coupled exposed cistern, washdown, horizontal outlet, Rimfree

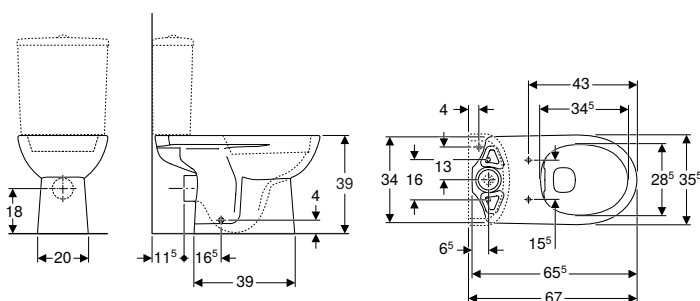

Application purposes

- For close-coupled exposed cistern

Technical data

Product material	Vitreous china
------------------	----------------

Characteristics

- Floor-standing
- Washdown WC
- Rimless WC ceramic appliance featuring Rimfree flush technology
- Type 1, full flush volume 6 l, in accordance with EN 997
- Type 2 in accordance with EN 997
- Horizontal outlet

Scope of delivery

- WC ceramic appliance

Art. no.	Colour / surface	B	H	T
		[cm]	[cm]	[cm]
500.283.01.1	P white	35.5	39	65.5

P: Phase out

To order additionally

- Cistern
- WC seat
- Fastening material


Can be combined with

- Geberit Selnova Square exposed cistern, close-coupled, dual flush, bottom water supply connection → p. 724
- Geberit Selnova Square exposed cistern, close-coupled, dual flush, lateral water supply connection → p. 723
- Geberit Selnova exposed cistern, close-coupled, dual flush, bottom water supply connection → p. 753
- Geberit Selnova exposed cistern, close-coupled, dual flush, lateral water supply connection → p. 754
- Geberit Selnova WC seat with hinges made of plastic, fastening from below → p. 751
- Geberit Selnova WC seat, fastening from below → p. 752
- Geberit Selnova WC seat, fastening from above → p. 752

Accessories

- Accessory overview – Geberit Selnova WC ceramic appliance in combination with connection pipes → p. 735

Geberit Selnova floor-standing WC for close-coupled exposed cistern, washdown, horizontal outlet

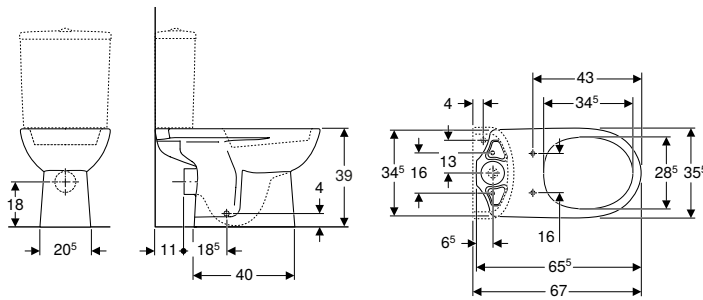

click & scan

Application purposes

- For close-coupled exposed cistern

Technical data

Product material	Vitreous china
------------------	----------------

Characteristics

- Floor-standing
- Washdown WC
- With flush rim
- Type 1, full flush volume 6 l, in accordance with EN 997
- Type 2 in accordance with EN 997
- Horizontal outlet

Scope of delivery

- WC ceramic appliance

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]
500.282.01.1	white	35.5	39	65.5

To order additionally

- Cistern
- WC seat
- Fastening material


Can be combined with

- Geberit Selnova Square exposed cistern, close-coupled, dual flush, bottom water supply connection → p. 724
- Geberit Selnova Square exposed cistern, close-coupled, dual flush, lateral water supply connection → p. 723
- Geberit Selnova exposed cistern, close-coupled, dual flush, bottom water supply connection → p. 753
- Geberit Selnova exposed cistern, close-coupled, dual flush, lateral water supply connection → p. 754
- Geberit Selnova WC seat with hinges made of plastic, fastening from below → p. 751
- Geberit Selnova WC seat, fastening from below → p. 752
- Geberit Selnova WC seat, fastening from above → p. 752

Accessories

- Accessory overview – Geberit Selnova WC ceramic appliance in combination with connection pipes → p. 735

Geberit Selnova floor-standing WC for close-coupled exposed cistern, washdown, vertical outlet

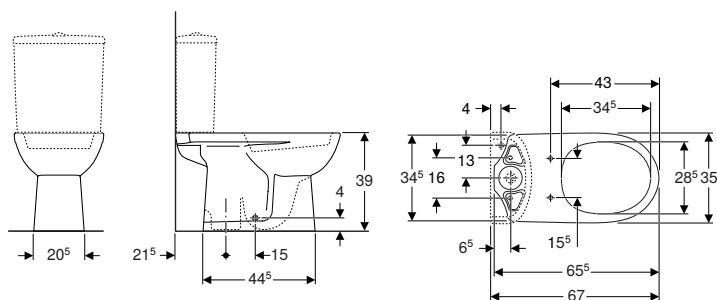

click & scan

Application purposes

- For close-coupled exposed cistern

Technical data

Product material	Vitreous china
------------------	----------------

Characteristics

- Floor-standing
- Washdown WC
- With flush rim
- Vertical outlet
- Type 1, full flush volume 6 l, in accordance with EN 997
- Type 2 in accordance with EN 997

Scope of delivery

- WC ceramic appliance

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]
500.281.01.1	white	35.5	39	65.5

To order additionally


- Cistern
- WC seat
- Fastening material

Can be combined with

- Geberit Selnova Square exposed cistern, close-coupled, dual flush, bottom water supply connection → p. 724
- Geberit Selnova Square exposed cistern, close-coupled, dual flush, lateral water supply connection → p. 723
- Geberit Selnova exposed cistern, close-coupled, dual flush, bottom water supply connection → p. 753
- Geberit Selnova exposed cistern, close-coupled, dual flush, lateral water supply connection → p. 754
- Geberit Selnova WC seat with hinges made of plastic, fastening from below → p. 751
- Geberit Selnova WC seat, fastening from below → p. 752
- Geberit Selnova WC seat, fastening from above → p. 752

WC seats

Geberit Selnova WC seat with hinges made of plastic, fastening from below

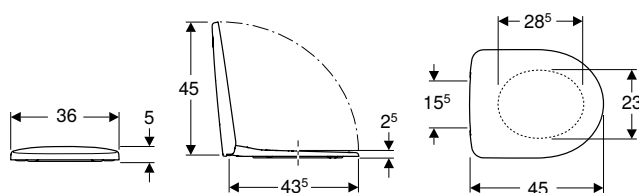

Technical data

Product material	Duroplast
Fastening distance	15.5 cm

Scope of delivery

- WC seat

Characteristics


- Overlapping WC lid
- Hinges made of plastic

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]	QuickRelease function	Soft-closing mechanism	Fastening	Hinge material
500.330.01.1	white / plastic	36	5	45	no	no	from below	Plastic

Can be combined with

- Geberit Selnova wall-hung WC, washdown, Rimfree → p. 739
- Geberit Selnova wall-hung WC, washdown → p. 740
- Geberit Selnova floor-standing WC, washdown, back-to-wall, horizontal outlet, semi-shrouded → p. 745
- Geberit Selnova floor-standing WC, washdown, horizontal outlet, semi-shrouded, Rimfree → p. 744
- Geberit Selnova floor-standing WC for close-coupled exposed cistern, washdown, horizontal outlet, semi-shrouded, Rimfree → p. 746
- Geberit Selnova floor-standing WC for close-coupled exposed cistern, washdown, horizontal outlet, semi-shrouded → p. 748
- Geberit Selnova floor-standing WC for close-coupled exposed cistern, washdown, vertical outlet, semi-shrouded → p. 748
- Geberit Selnova floor-standing WC for close-coupled exposed cistern, washdown, horizontal outlet, Rimfree → p. 749
- Geberit Selnova floor-standing WC for close-coupled exposed cistern, washdown, horizontal outlet → p. 750
- Geberit Selnova floor-standing WC for close-coupled exposed cistern, washdown, vertical outlet → p. 750

Geberit Selnova WC seat, fastening from below

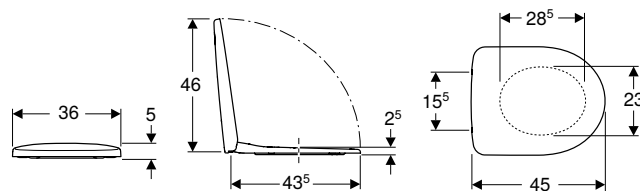

click & scan

Technical data

Product material	Duroplast
Fastening distance	15.5 cm

Scope of delivery

- WC seat

Characteristics


- Overlapping WC lid
- Hinges made of metal

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]	QuickRelease function	Soft-closing mechanism	Fastening	Hinge material
500.331.01.1	white / glossy	36	5	45	no	no	from below	Metal

Can be combined with

- Geberit Selnova wall-hung WC, washdown, Rimfree → p. 739
- Geberit Selnova wall-hung WC, washdown → p. 740
- Geberit Selnova floor-standing WC, washdown, back-to-wall, horizontal outlet, semi-shrouded → p. 745
- Geberit Selnova floor-standing WC, washdown, horizontal outlet, semi-shrouded, Rimfree → p. 744
- Geberit Selnova floor-standing WC for close-coupled exposed cistern, washdown, horizontal outlet, semi-shrouded, Rimfree → p. 746
- Geberit Selnova floor-standing WC for close-coupled exposed cistern, washdown, horizontal outlet, semi-shrouded → p. 748
- Geberit Selnova floor-standing WC for close-coupled exposed cistern, washdown, vertical outlet, semi-shrouded → p. 748
- Geberit Selnova floor-standing WC for close-coupled exposed cistern, washdown, horizontal outlet, Rimfree → p. 749
- Geberit Selnova floor-standing WC for close-coupled exposed cistern, washdown, horizontal outlet → p. 750
- Geberit Selnova floor-standing WC for close-coupled exposed cistern, washdown, vertical outlet → p. 750

Geberit Selnova WC seat, fastening from above

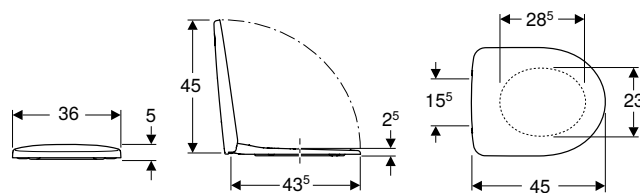

click & scan

Technical data

Product material	Duroplast
Fastening distance	15.5 cm

Scope of delivery

- WC seat

Characteristics

- Overlapping WC lid
- Hinges made of metal

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]	QuickRelease function	Soft-closing mechanism	Fastening	Hinge material
500.333.01.1	white / glossy	36	5	45	no	yes	from above	Brass chrome-plated
500.335.01.1	white / glossy	36	5	45	Yes, with QuickRelease hinges	yes	from above	Brass chrome-plated
500.337.01.1	white / glossy	36	5	45	no	no	from above	Stainless steel


Can be combined with

- Geberit Selnova Compact wall-hung WC, washdown, small projection, Rimfree → p. 765
- Geberit Selnova wall-hung WC, Premium, washdown, shrouded, Rimfree → p. 738
- Geberit Selnova wall-hung WC, Premium, washdown, raised, shrouded, Rimfree → p. 741
- Geberit Selnova wall-hung WC, Premium, washdown, semi-shrouded, Rimfree → p. 738
- Geberit Selnova wall-hung WC, washdown, Rimfree → p. 739
- Geberit Selnova wall-hung WC, washdown → p. 740
- Geberit Selnova floor-standing WC, washdown, back-to-wall, horizontal or vertical outlet, semi-shrouded, Rimfree → p. 744
- Geberit Selnova floor-standing WC, washdown, back-to-wall, horizontal outlet, semi-shrouded → p. 745
- Geberit Selnova floor-standing WC, washdown, horizontal outlet, semi-shrouded, Rimfree → p. 744
- Geberit Selnova floor-standing WC for close-coupled exposed cistern, washdown, horizontal outlet, semi-shrouded → p. 748
- Geberit Selnova floor-standing WC for close-coupled exposed cistern, washdown, horizontal outlet, semi-shrouded, Rimfree → p. 746
- Geberit Selnova floor-standing WC for close-coupled exposed cistern, washdown, horizontal outlet, Rimfree → p. 749
- Geberit Selnova floor-standing WC for close-coupled exposed cistern, washdown, vertical outlet, semi-shrouded → p. 748
- Geberit Selnova floor-standing WC for close-coupled exposed cistern, washdown, horizontal outlet → p. 750
- Geberit Selnova floor-standing WC for close-coupled exposed cistern, washdown, vertical outlet → p. 750

Exposed Cisterns

Exposed cisterns for WCs, made of sanitary ceramic

Geberit Selnova exposed cistern, close-coupled, dual flush, bottom water supply connection

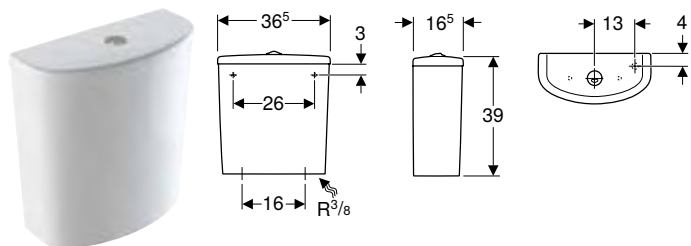

click & scan

Application purposes

- For close-coupled installation
- For water supply connections 3/8"

Characteristics

- Dual flush
- Water supply connection on the bottom

Technical data

Flush volume, factory setting	4 l / 2.6 l
Flush volume large, adjustment range	4 l / 6 l
Flush volume small, adjustment range	2.6 l / 4 l
Product material	Vitreous china

Scope of delivery

- Exposed cistern, close-coupled
- Mechanism

Art. no.	Colour / surface	B	H	T
		[cm]	[cm]	[cm]
500.268.01.1	white	36.5	39	16.5


To order additionally

- Fastening material for rear wall

Can be combined with

- Geberit Selnova Comfort floor-standing WC for close-coupled exposed cistern, washdown, horizontal outlet, raised → p. 774
- Geberit Selnova floor-standing WC for close-coupled exposed cistern, washdown, horizontal outlet, semi-shrouded → p. 748
- Geberit Selnova floor-standing WC for close-coupled exposed cistern, washdown, vertical outlet → p. 750
- Geberit Selnova floor-standing WC for close-coupled exposed cistern, washdown, horizontal outlet → p. 750
- Geberit Selnova floor-standing WC for close-coupled exposed cistern, washdown, horizontal outlet, Rimfree → p. 749
- Geberit Selnova floor-standing WC for close-coupled exposed cistern, washdown, horizontal outlet, semi-shrouded, Rimfree → p. 746
- Geberit Selnova floor-standing WC for close-coupled exposed cistern, washdown, vertical outlet, semi-shrouded → p. 748

Geberit Selnova exposed cistern, close-coupled, dual flush, lateral water supply connection

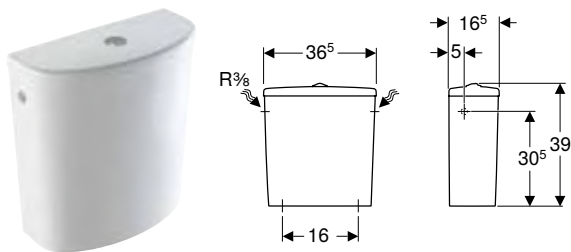

click & scan

Application purposes

- For close-coupled installation
- For water supply connections 3/8"

Characteristics

- Dual flush
- Water supply connection on the left/right

Technical data

Flush volume, factory setting	6 l / 3 l
Flush volume large, adjustment range	6 l
Flush volume small, adjustment range	3 l
Product material	Vitreous china

Scope of delivery

- Exposed cistern, close-coupled
- Mechanism

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]
500.269.01.1	white	36.5	39	16.5


Can be combined with

- Geberit Selnova Comfort floor-standing WC for close-coupled exposed cistern, washdown, horizontal outlet, raised → p. 774
- Geberit Selnova floor-standing WC for close-coupled exposed cistern, washdown, horizontal outlet, semi-shrouded → p. 748
- Geberit Selnova floor-standing WC for close-coupled exposed cistern, washdown, vertical outlet → p. 750
- Geberit Selnova floor-standing WC for close-coupled exposed cistern, washdown, horizontal outlet → p. 750
- Geberit Selnova floor-standing WC for close-coupled exposed cistern, washdown, horizontal outlet, Rimfree → p. 749
- Geberit Selnova floor-standing WC for close-coupled exposed cistern, washdown, horizontal outlet, semi-shrouded, Rimfree → p. 746
- Geberit Selnova floor-standing WC for close-coupled exposed cistern, washdown, vertical outlet, semi-shrouded → p. 748

Bidets

Wall-hung bidets

Geberit Selnova wall-hung bidet

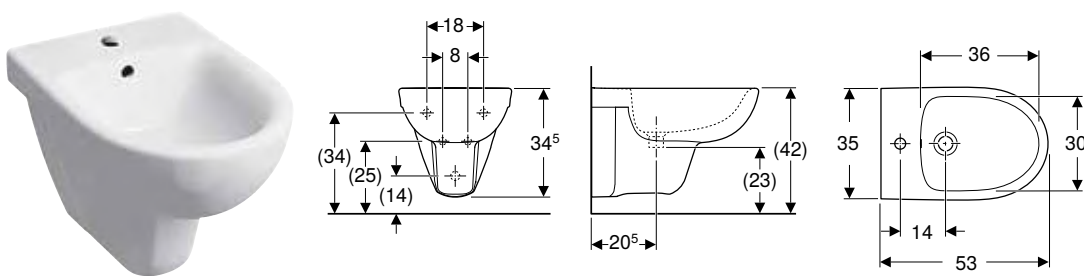

click & scan

Technical data

Product material	Vitreous china
------------------	----------------


Characteristics

- Wall-hung
- Hidden water supply connection

Art. no.	Colour / surface	Overflow	B [cm]	H [cm]	T [cm]
500.264.01.1	white	visible, symmetrical	35	34.5	53

Floor-standing bidets

Geberit Selnova floor-standing bidet, semi-shrouded

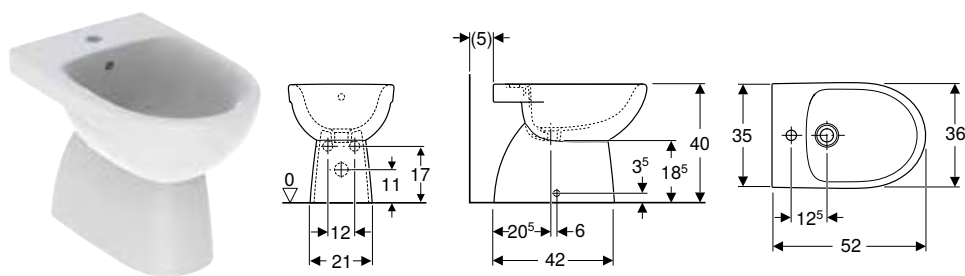

click & scan

Technical data

Product material	Vitreous china
------------------	----------------

Scope of delivery


- Fastening material

Characteristics

- Floor-standing
- Freestanding
- Hidden fastening
- Semi-shrouded

Art. no.	Colour / surface	Overflow	B [cm]	H [cm]	T [cm]
500.288.01.1	white	visible, symmetrical	36	40	52

Geberit Selnova floor-standing bidet, back-to-wall, semi-shrouded

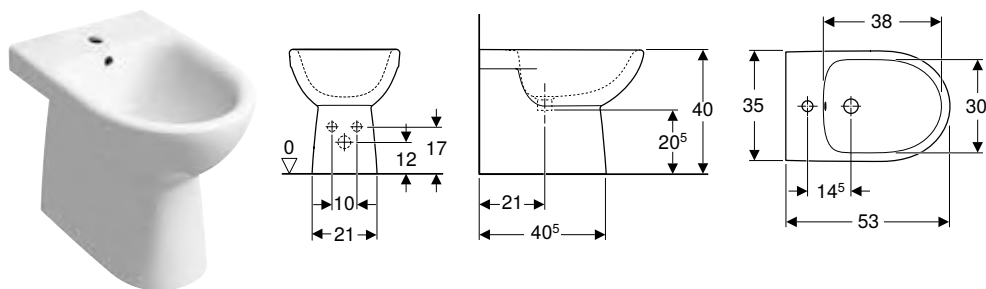

click & scan

Technical data

Product material	Vitreous china
------------------	----------------

Scope of delivery

- Fastening material

Characteristics


- Floor-standing
- Back-to-wall
- Hidden water supply connection
- Hidden fastening
- Semi-shrouded

Art. no.	Colour / surface	Overflow	B [cm]	H [cm]	T [cm]
500.289.01.1	white	visible, symmetrical	35	40	53

Urinals

Flush operation

Geberit Selnova S urinal, inlet from the rear, outlet to the rear or downwards

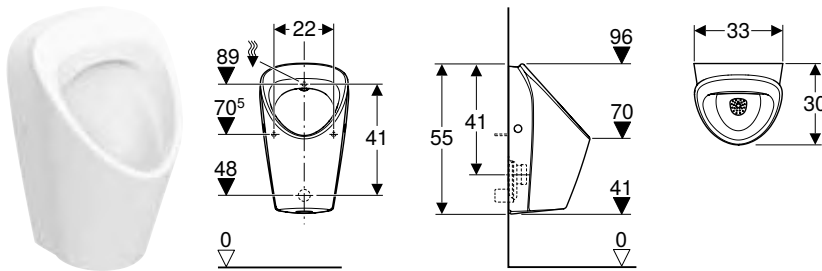

click & scan

Application purposes

- For operating with automatic, water-saving flush
- For operation with manual or automatic flush actuation
- For concealed urinal flush controls
- For concealed urinal flush controls, hidden
- For exposed urinal flush controls, hidden

Technical data

Flush volume small, adjustment range	0.5 l
Product material	Vitreous china

Characteristics

- Rimless
- Flushing out of urinal ceramic with 0.5 l per flush guaranteed, while compliant with EN13407
- Flush guide can be replaced without removing the sanitary ceramic
- Concealed flush guide
- Hidden trap
- Wall-hung
- Hidden fastening

Scope of delivery


- Urinal ceramic
- Fastening material for urinal
- Drain strainer
- Flush guide

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]	Outlet
503.105.00.1	white	33	55	30	to the rear or downwards

Accessories

- Geberit flush bend extension for urinal, with sleeve
- Geberit inlet connection piece for urinals → p. 973
- Geberit urinal trap, horizontal outlet
- Geberit urinal trap, vertical outlet
- Geberit urinal division, plastic → p. 967
- Geberit urinal division, glass → p. 968
- Geberit urinal division, sanitary ceramic → p. 968

Geberit Selnova M urinal, inlet from the rear, outlet to the rear or downwards

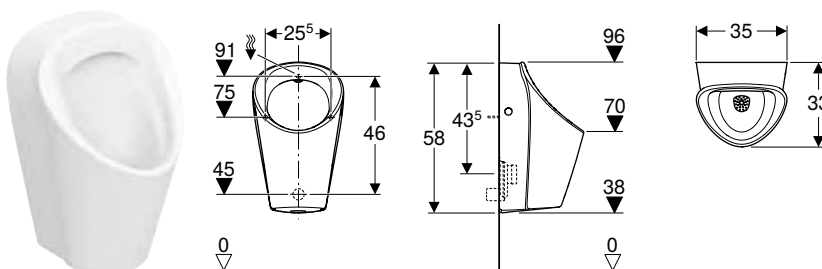

click & scan

Application purposes

- For operating with automatic, water-saving flush
- For operation with manual or automatic flush actuation
- For concealed urinal flush controls
- For concealed urinal flush controls, hidden
- For exposed urinal flush controls, hidden

Characteristics

- Rimless
- Flushing out of urinal ceramic with 0.5 l per flush guaranteed, while compliant with EN13407
- Flush guide can be replaced without removing the sanitary ceramic
- Concealed flush guide
- Hidden trap
- Wall-hung
- Hidden fastening

Technical data

Flush volume small, adjustment range	0.5 l
Product material	Vitreous china

Scope of delivery


- Urinal ceramic
- Fastening material for urinal
- Drain strainer
- Flush guide

Art. no.	B [cm]	H [cm]	T [cm]	Outlet
503.125.00.1	35	58	33	to the rear or downwards

Accessories

- Geberit flush bend extension for urinal, with sleeve
- Geberit inlet connection piece for urinals → p. 973
- Geberit urinal trap, horizontal outlet
- Geberit urinal trap, vertical outlet
- Geberit urinal division, glass → p. 968
- Geberit urinal division, plastic → p. 967
- Geberit urinal division, sanitary ceramic → p. 968

Geberit Selnova L urinal, inlet from the rear, outlet to the rear or downwards

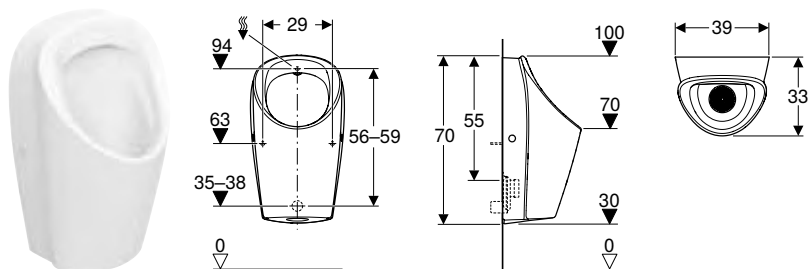

Application purposes

- For operating with automatic, water-saving flush
- For operation with manual or automatic flush actuation
- For alternative operation with hybrid trap
- For concealed urinal flush controls
- For concealed urinal flush controls, hidden
- For exposed urinal flush controls, hidden

Characteristics

- Rimless
- Flushing out of urinal ceramic with 0.5 l per flush guaranteed, while compliant with EN13407
- Flush guide can be replaced without removing the sanitary ceramic
- Concealed flush guide
- Hidden trap
- Wall-hung
- Hidden fastening

Technical data

Flush volume small, adjustment range	0.5 l
Product material	Vitreous china

Scope of delivery

- Urinal ceramic
- Fastening material for urinal
- Drain strainer
- Drain assembly
- Flush guide

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]	Outlet
503.135.00.1	white	39	70	33	to the rear or downwards


Can be combined with

- Geberit fastening material for urinal renovation → p. 974

Accessories

- Geberit drain strainer for trap adapter d140 → p. 971
- Geberit flush bend extension for urinal, with sleeve
- Geberit inlet connection piece for urinals → p. 973
- Geberit urinal trap, horizontal outlet
- Geberit urinal trap, vertical outlet
- Geberit urinal division, plastic → p. 967
- Geberit urinal division, glass → p. 968
- Geberit urinal division, sanitary ceramic → p. 968

Geberit Selnova urinal, inlet from the top, outlet to the rear or downwards

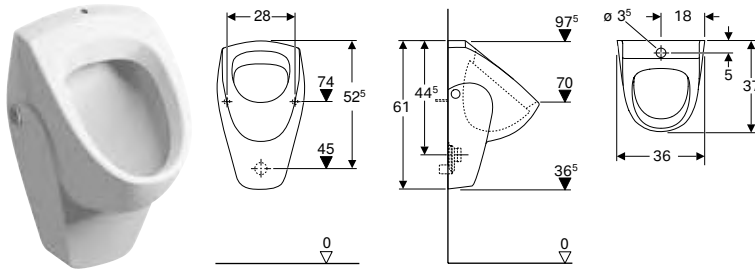

Application purposes

- For operating with automatic, water-saving flush
- For exposed urinal flush controls

Technical data

Flush volume small, adjustment range	1 l
Product material	Vitreous china

Characteristics

- Wall-hung
- With flush rim
- Hidden trap
- Hidden fastening
- Fulfils requirements in accordance with EN 13407

Scope of delivery

- Urinal ceramic

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]	Outlet
500.343.01.1	white	36	61	37	to the rear or downwards

To order additionally

- Geberit fastening material for urinal, Kerafix → p. 973


Accessories

- Geberit pressure flushing valve for urinal with electronic flush actuation, battery operation, for surface mounting
- Geberit urinal trap d40, horizontal outlet
- Geberit urinal trap, horizontal outlet
- Geberit urinal trap, vertical outlet



- Urinal trap not included in scope of delivery

Geberit Selnova urinal, inlet from the rear, outlet to the rear

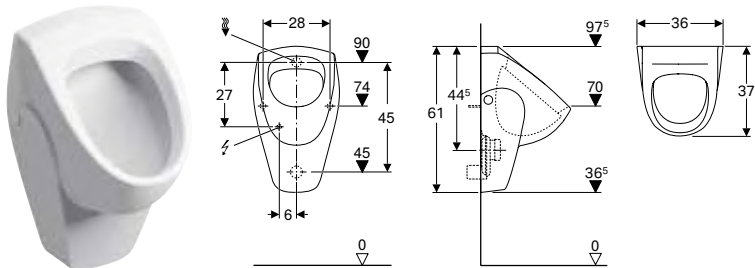

Application purposes

- For operating with automatic, water-saving flush
- For operation with manual or automatic flush actuation
- For concealed urinal flush controls
- For concealed urinal flush controls, hidden
- For exposed urinal flush controls, hidden

Technical data

Flush volume small, adjustment range	1 l
Product material	Vitreous china

Characteristics

- Wall-hung
- With flush rim
- Hidden trap
- Hidden fastening
- Fulfils requirements in accordance with EN 13407

Scope of delivery

- Urinal ceramic

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]	Outlet
500.344.01.1	white	36	61	37	to the rear

To order additionally

- Geberit fastening material for urinal, Kerafix → p. 973


Accessories

- Geberit flush bend extension for urinal, with sleeve
- Geberit inlet connection piece for urinals → p. 973
- Geberit urinal trap d40, horizontal outlet
- Geberit urinal trap, horizontal outlet



- Urinal trap not included in scope of delivery
- Electrical connection required for urinal flush controls with mains operation

Geberit Selnova urinal, trigonal, inlet from the top, outlet to the rear or downwards

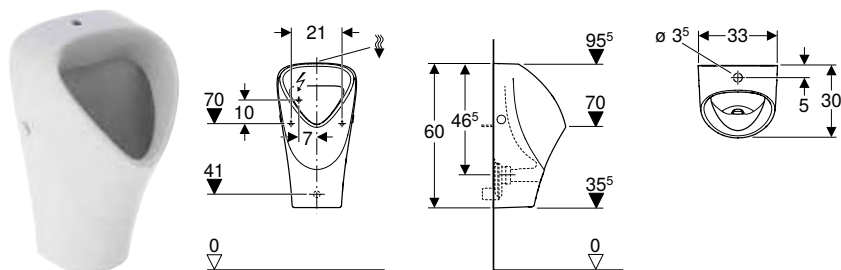

click & scan

Application purposes

- For operating with automatic, water-saving flush
- For exposed urinal flush controls

Technical data

Flush volume small, adjustment range	1 l
Product material	Vitreous china

Characteristics

- Wall-hung
- With flush rim
- Hidden trap
- Hidden fastening
- Fulfils requirements in accordance with EN 13407

Scope of delivery

- Urinal ceramic

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]	Outlet
501.676.00.1	white	33	60	30	to the rear

To order additionally

- Geberit fastening material for urinal, Kerafix → p. 973


Accessories

- Geberit pressure flushing valve for urinal with electronic flush actuation, battery operation, for surface mounting
- Geberit urinal trap, horizontal outlet
- Geberit urinal trap, vertical outlet
- Geberit urinal division, sanitary ceramic → p. 968
- Geberit urinal division, glass → p. 968



- Urinal trap not included in scope of delivery

Geberit Selnova urinal, trigonal, inlet from the rear, outlet to the rear or downwards

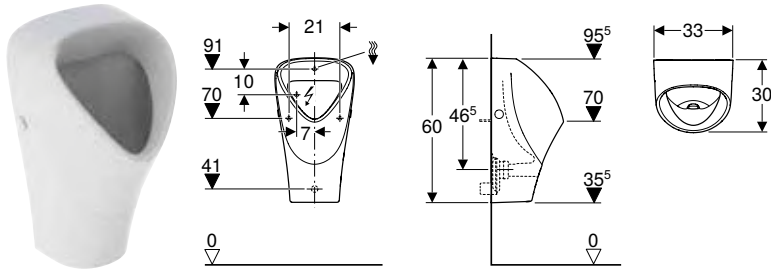

Application purposes

- For operating with automatic, water-saving flush
- For operation with manual or automatic flush actuation
- For concealed urinal flush controls
- For concealed urinal flush controls, hidden
- For exposed urinal flush controls, hidden

Characteristics

- Wall-hung
- With flush rim
- Hidden trap
- Hidden fastening
- Fulfils requirements in accordance with EN 13407

Technical data

Flush volume small, adjustment range	1 l
Product material	Vitreous china

Scope of delivery

- Urinal ceramic

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]	Outlet
501.666.00.1	white	33	60	30	to the rear

To order additionally

- Geberit fastening material for urinal, Kerafix → p. 973

Accessories

- Geberit flush bend extension for urinal, with sleeve
- Geberit inlet connection piece for urinals → p. 973
- Geberit urinal trap, horizontal outlet
- Geberit urinal trap, vertical outlet
- Geberit urinal division, glass → p. 968
- Geberit urinal division, sanitary ceramic → p. 968



- Trap not included in scope of delivery
- Electrical connection required for urinal flush controls with mains operation




Geberit Selnova Compact

Washbasins	764
Handrinse basins.....	764
Assortment overview – Geberit Selnova Compact WCs and WC seats.....	764
WCs	765
Wall-hung WCs.....	765

Washbasins

Handrinse basins

Geberit Selnova Compact handrinse basin, small projection, with shelf surface

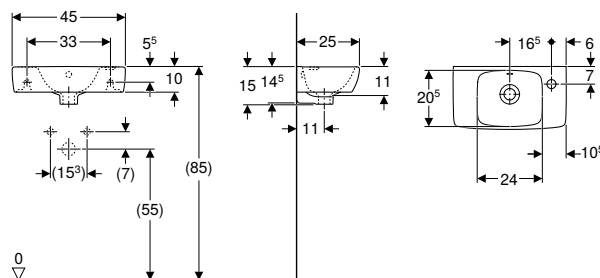

click & scan

Technical data

Product material	Vitreous china
------------------	----------------

Scope of delivery

- Handrinse basin

Characteristics

- Can be installed with a washbasin cabinet
- Asymmetrical
- Small projection
- Can be combined with half pedestal
- Can be combined with full pedestal
- With shelf surface

Art. no.	Colour / surface	Tap hole	Overflow	B	Cabinet width	H	T	Shelf space
				[cm]	[cm]	[cm]	[cm]	
500.318.01.1	white	right	visible, symmetrical	45	40.8	15	25	left
500.319.01.1	white	left	visible, symmetrical	45	40.8	15	25	right

Can be combined with

- Geberit Selnova Square full pedestal → p. 703

Accessories

- Geberit dip tube trap for washbasin, horizontal outlet
- Geberit dip tube trap for washbasin, space-saving model, horizontal outlet
- Geberit waste outlet with free outlet, screen
- Geberit fastening material for handrinse basin → p. 1035

Assortment overview – Geberit Selnova Compact WCs and WC seats

Geberit International Sales, version: December 2025


				Wall-hung WCs	
				Geberit Selnova Compact wall-hung WC, washdown, small projection, Rimfree	Geberit Selnova Compact wall-hung WC, washdown, small projection, square design
White				500.349.01.1	500.263.01.1
				→ p. 765	→ p. 765
Geberit Selnova WC seat, fastening from above	Without soft-closing mechanism	500.337.01.1	→ p. 752	✓	
	With soft-closing mechanism	500.333.01.1	→ p. 752	✓	
	With soft-closing mechanism, quick-release hinges	500.335.01.1	→ p. 752	✓	
Geberit Selnova Square WC seat, slim design, fastening from above	Without soft-closing mechanism	500.338.01.1	→ p. 722		✓
	With soft-closing mechanism	500.334.01.1	→ p. 722		✓
	With soft-closing mechanism	500.336.01.1	→ p. 722		✓

✓ Compatible

WCs

Wall-hung WCs

Geberit Selnova Compact wall-hung WC, washdown, small projection, Rimfree

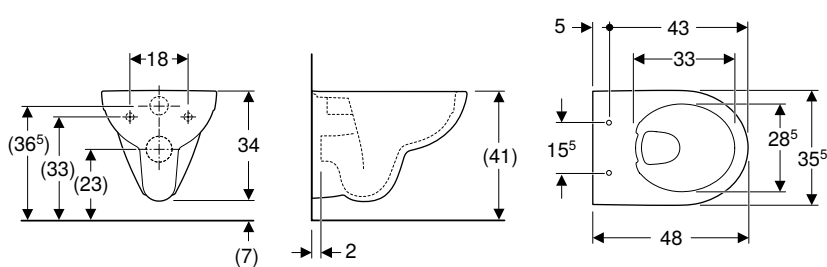

click & scan

Application purposes

- For concealed cisterns
- For pressure flushing valves
- Suitable for installation in small bathrooms and guest WCs

Technical data

Product material	Vitreous china
------------------	----------------

Characteristics

- Wall-hung
- Washdown WC
- Rimless WC ceramic appliance featuring Rimfree flush technology
- Type 1, full flush volume 6 / 5 / 4 l, in accordance with EN 997
- Type 2 in accordance with EN 997
- 4 l flush
- Small projection

Scope of delivery

- WC ceramic appliance

Art. no.	Colour / surface	B	H	T
		[cm]	[cm]	[cm]
500.349.01.1	white	35.5	34	48


To order additionally

- WC seat

Can be combined with

- Geberit Selnova WC seat, fastening from above → p. 752

Geberit Selnova Compact wall-hung WC, washdown, small projection, square design

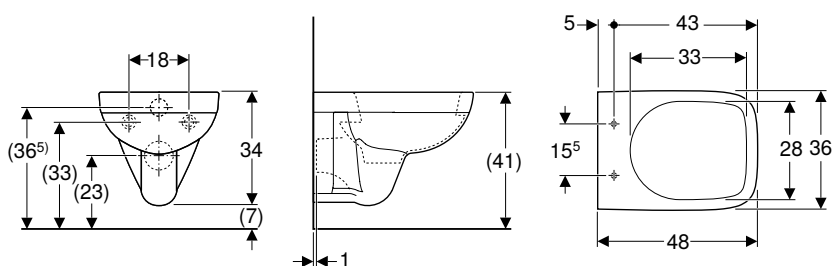

click & scan

Application purposes

- For concealed cisterns
- For pressure flushing valves
- Suitable for installation in small bathrooms and guest WCs

Technical data

Product material	Vitreous china
------------------	----------------

Characteristics

- Wall-hung
- Washdown WC
- With flush rim
- Type 1, full flush volume 6 / 4 l, in accordance with EN 997
- Type 2 in accordance with EN 997
- 4 l flush
- Small projection

Scope of delivery

- WC ceramic appliance

Art. no.	Colour / surface	B	H	T
		[cm]	[cm]	[cm]
500.263.01.1	white	36	34	48

To order additionally

- WC seat

Can be combined with

- Geberit Selnova Square WC seat, slim design, fastening from above → p. 722




Geberit Selnova Comfort

Washbasins.....	768
Washbasins, barrier-free	768
WCs	769
Accessory overview – Geberit Selnova Comfort WC ceramic appliance in combination with connection pipes.....	769
Assortment overview – Geberit Selnova Comfort WCs and WC seats.....	770
Wall-hung WCs.....	770
Floor-standing WCs, raised.....	774
WC seats, barrier-free	774
WC seat rings, barrier-free.....	776

Washbasins

Washbasins, barrier-free

Geberit Selnova Comfort washbasin, barrier-free

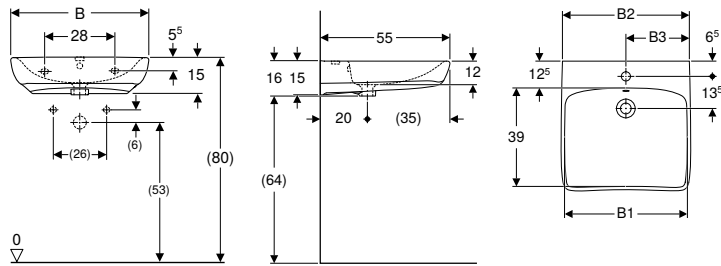

click & scan

Application purposes

- Suitable for use by wheelchair users

Technical data

Product material	Vitreous china
------------------	----------------

Characteristics

- Ergonomically shaped front
- Shallow bowl

Scope of delivery

- Washbasin

Art. no.	Colour / surface	Tap hole	Overflow	B1	B2	B3	H	T
				[cm]	[cm]	[cm]	[cm]	[cm]

B / width: 55 cm

500.302.01.1	white	centred	visible, symmetrical	48	54	27.5	16	55
500.187.01.1	white	centred	without	48	54	27.5	16	55


B / width: 65 cm

500.292.01.1	white	centred	visible, symmetrical	58	64	32.5	16	55
500.188.01.1	white	centred	without	58	64	32.5	16	55

Accessories

- Geberit concealed trap for washbasin, with in-wall cabinet, ready-to-fit set, screen valve and overflow pipe, horizontal outlet
- Geberit set of concealed trap for washbasin, horizontal outlet
- Geberit dip tube trap for washbasin, space-saving model, horizontal outlet
- Geberit waste outlet with free outlet and valve cover
- Geberit waste outlet with free outlet, screen
- Geberit waste outlet with overflow pipe, for washbasin
- Geberit dip tube trap for washbasin, horizontal outlet
- Geberit fastening material for washbasin → p. 1035

Geberit Selnova Comfort washbasin, square design, barrier-free

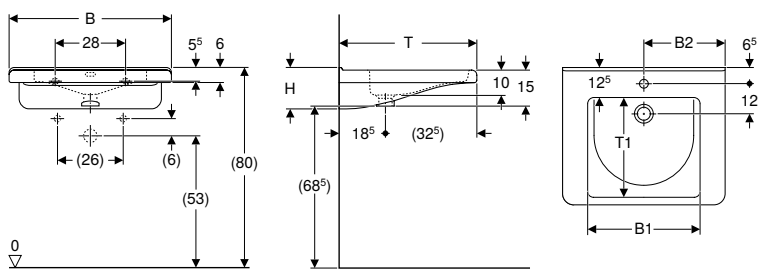

click & scan

Application purposes

- Suitable for use by wheelchair users

Technical data

Product material	Vitreous china
------------------	----------------

Scope of delivery

- Washbasin

Characteristics

- Square design
- Ergonomically shaped front
- Ergonomically shaped arm supports
- Integrated grip rail
- Shallow bowl
- Inner basin with two levels for partial filling
- Raised edge for fixing a mirror directly on top

Art. no.	Colour / surface	Tap hole	Overflow	B1	B2	H	T	T1
				[cm]	[cm]	[cm]	[cm]	[cm]

B / width: 55 cm

500.785.00.1	white	centred	visible, symmetrical	42	27.5	15.5	52.5	37.5
500.786.00.1	white	centred	without	42	27.5	15.5	52.5	37.5
500.787.01.1	white	without	without	42		15.5	52.5	37.5

Art. no.	Colour / surface	Tap hole	Overflow	B1 [cm]	B2 [cm]	H [cm]	T [cm]	T1 [cm]
B / width: 65 cm								
500.788.01.1	white	centred	visible, symmetrical	45	32.5	15.5	55	40
500.789.01.1	white	centred	without	45	32.5	15.5	55	40
500.790.01.1	white	without	without	45		15.5	55	40





Accessories

- Geberit set of concealed trap for washbasin, horizontal outlet
- Geberit concealed trap for washbasin, with in-wall cabinet, ready-to-fit set, screen valve and overflow pipe, horizontal outlet
- Geberit waste outlet with free outlet and valve cover
- Geberit waste outlet with free outlet, screen
- Geberit waste outlet with overflow pipe, for washbasin
- Geberit dip tube trap for washbasin, horizontal outlet
- Geberit fastening material for washbasin → p. 1035

WCs









Accessory overview – Geberit Selnova Comfort WC ceramic appliance in combination with connection pipes

Geberit International Sales, version: December 2025

White				Geberit Selnova Comfort floor-standing WC for close-coupled exposed cistern, washdown, horizontal outlet, raised
				500.284.01.1
				
				→ p. 774
Geberit connection set for floor-standing WC	131.082.16.1		→ p. 921	X = 70-85 mm
Geberit connection bend 90° set with extension	152.647.00.1			
Geberit connection bend 90°	152.610.11.1			X = 95 mm

Assortment overview – Geberit Selnova Comfort WCs and WC seats




Geberit International Sales, December 2025

					Wall-hung WCs			Floor-standing WCs, raised
					Geberit Selnova Comfort wall-hung WC, Premium, washdown, large projection, semi-shrouded, barrier-free, Rimfree	Geberit Selnova Comfort wall-hung WC, washdown, large projection, barrier-free, Rimfree	Geberit Selnova Comfort wall-hung WC, washdown, large projection, barrier-free	Geberit Selnova Comfort floor-standing WC for close-coupled exposed cistern, washdown, horizontal outlet, raised
White					500.693.01.2	500.262.01.1	500.261.01.1	500.284.01.1
								
					→ p. 770	→ p. 771	→ p. 772	→ p. 774
Geberit Selnova Comfort WC seat, barrier-free, antibacterial, fastening from below	Without soft-closing mechanism	white	500.133.00.1		→ p. 774	✓	✓	✓
Geberit Selnova Comfort WC seat, barrier-free, antibacterial, fastening from above	Without soft-closing mechanism	white	501.559.01.1		→ p. 775	✓	✓	✓
Geberit Selnova Comfort WC seat ring, D-shape, barrier-free, fastening from below	Without soft-closing mechanism	white	500.340.01.1		→ p. 776	✓	✓	✓
Geberit Selnova Comfort WC seat ring, barrier-free, antibacterial, fastening from above	Without soft-closing mechanism	white	501.558.01.1		→ p. 776	✓	✓	✓

✓ Compatible

Wall-hung WCs

Geberit Selnova Comfort wall-hung WC, Premium, washdown, large projection, semi-shrouded, barrier-free, Rimfree

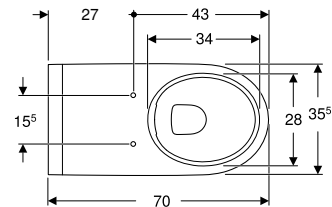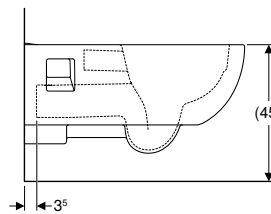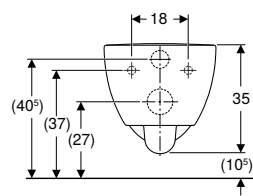

Application purposes

- For concealed cisterns
- For pressure flushing valves

Technical data

Product material	Vitreous china
------------------	----------------

Scope of delivery

- WC ceramic appliance
- Extended flush pipe

Characteristics

- Wall-hung
- Washdown WC
- Rimless WC ceramic appliance featuring Rimfree flush technology
- Barrier-free
- Type 1, full flush volume 6 / 5 / 4 l, in accordance with EN 997
- Type 2 in accordance with EN 997
- 4 l flush
- Semi-shrouded
- Large projection

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]
500.693.01.2	white	35.5	35	70


To order additionally

- WC seat

Can be combined with

- Geberit Selnova Comfort WC seat, barrier-free, antibacterial, fastening from above → p. 775
- Geberit Selnova Comfort WC seat ring, barrier-free, antibacterial, fastening from above → p. 776

Geberit Selnova Comfort wall-hung WC, washdown, large projection, barrier-free, Rimfree

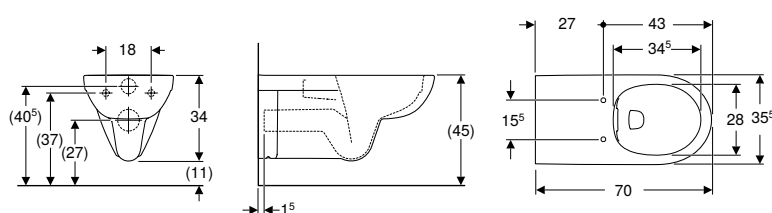

Application purposes

- For concealed cisterns
- For pressure flushing valves
- Suitable for use by wheelchair users

Technical data

Product material	Vitreous china
------------------	----------------

Characteristics

- Wall-hung
- Washdown WC
- Rimless WC ceramic appliance featuring Rimfree flush technology
- Barrier-free
- Type 1, full flush volume 6 / 4 l, in accordance with EN 997
- Type 2 in accordance with EN 997
- 4 l flush
- Large projection

Scope of delivery

- WC ceramic appliance

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]
500.262.01.1	white	35.5	34	70

To order additionally

- WC seat
- Extended flush pipe

Can be combined with

- Geberit Selnova Comfort WC seat, barrier-free, antibacterial, fastening from above → p. 775
- Geberit Selnova Comfort WC seat, barrier-free, antibacterial, fastening from below → p. 774
- Geberit Selnova Comfort WC seat ring, barrier-free, antibacterial, fastening from above → p. 776
- Geberit Selnova Comfort WC seat ring, D-shape, barrier-free, fastening from below → p. 776


Accessories

- Geberit connection set for wall-hung WC, length 30 cm



- Depending on the installation type, a Geberit connection set for wall-hung WC, length 30 cm is required for mounting

Geberit Selnova Comfort wall-hung WC, washdown, large projection, barrier-free

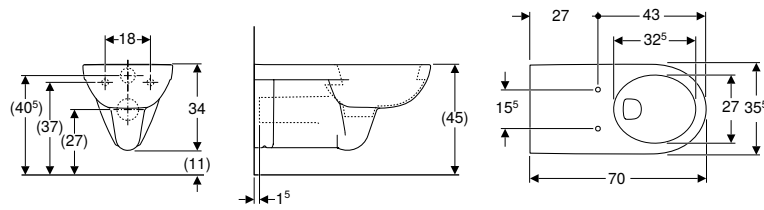

click & scan

Application purposes

- For concealed cisterns
- For pressure flushing valves
- Suitable for use by wheelchair users

Technical data

Product material	Vitreous china
------------------	----------------

Characteristics

- Wall-hung
- Washdown WC
- With flush rim
- Barrier-free
- Type 1, full flush volume 6 / 4 l, in accordance with EN 997
- Type 2 in accordance with EN 997
- 4 l flush
- Large projection

Scope of delivery

- WC ceramic appliance

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]
500.261.01.1	white	35.5	34	70

To order additionally

- WC seat


Can be combined with

- Geberit Selnova Comfort WC seat, barrier-free, antibacterial, fastening from above → p. 775
- Geberit Selnova Comfort WC seat, barrier-free, antibacterial, fastening from below → p. 774
- Geberit Selnova Comfort WC seat ring, barrier-free, antibacterial, fastening from above → p. 776
- Geberit Selnova Comfort WC seat ring, D-shape, barrier-free, fastening from below → p. 776



- Depending on the installation type, a Geberit connection set for wall-hung WC, length 30 cm is required for mounting

Geberit Selnova Comfort wall-hung WC, square, washdown, large projection, barrier-free, Rimfree

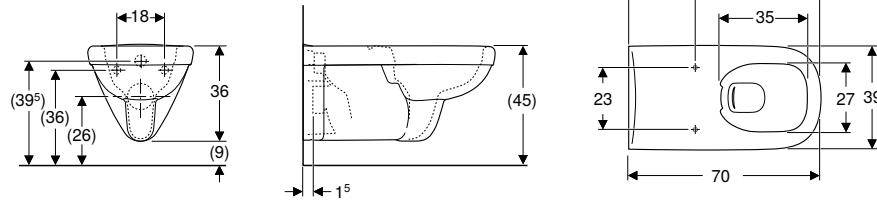

click & scan

Application purposes

- For concealed cisterns
- For pressure flushing valves

Technical data

Product material	Vitreous china
------------------	----------------

Scope of delivery

- WC ceramic appliance
- Extended flush pipe

Characteristics

- Wall-hung
- Washdown WC
- Rimless WC ceramic appliance featuring Rimfree flush technology
- Barrier-free
- Type 1, full flush volume 6 / 5 l, in accordance with EN 997
- Type 2 in accordance with EN 997
- Flushes with 4.5 l
- Large projection
- Ceramic chamfer to prevent WC seat sliding sideways
- Square design

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]
500.791.01.1	P white	39	36	70

P: Phase out

To order additionally

- WC seat


Can be combined with

- Geberit Selnova Comfort WC seat, square design, barrier-free, antibacterial, fastening from below → p. 775
- Geberit Selnova Comfort WC seat ring, square design, barrier-free, fastening from below → p. 777



- Replaced by art. no. 500.262.01.1

Geberit Selnova Comfort wall-hung WC, square, washout

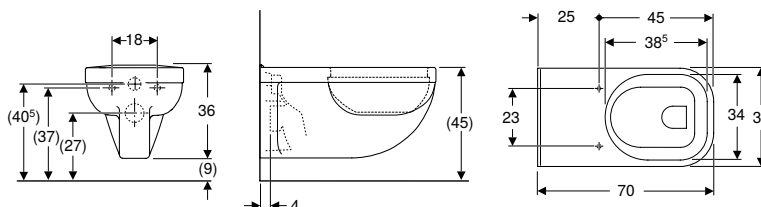

click & scan

Application purposes

- For concealed cisterns
- For pressure flushing valves

Technical data

Product material	Vitreous china
------------------	----------------

Scope of delivery

- WC ceramic appliance
- Fastening material

Characteristics

- Wall-hung
- Easy fastening with Easy Fast Fixing (type EFF3)
- Washout WC
- With flush rim
- Barrier-free
- Type 1, full flush volume 6 l, in accordance with EN 997
- Raised ceramic upper edge 41 cm at standard fastening height
- Floor clearance 7 cm
- Ceramic chamfer to prevent WC seat sliding sideways

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]
500.792.01.1	P white	39	36	70

P: Phase out

To order additionally


- WC seat

Can be combined with

- Geberit Selnova Comfort WC seat, square design, barrier-free, antibacterial, fastening from below → p. 775
- Geberit Selnova Comfort WC seat ring, square design, barrier-free, fastening from below → p. 777

Floor-standing WCs, raised

Geberit Selnova Comfort floor-standing WC for close-coupled exposed cistern, washdown, horizontal outlet, raised

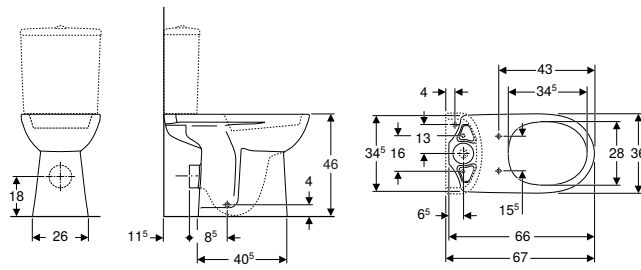

click & scan

Application purposes

- For close-coupled exposed cistern

Technical data

Product material	Vitreous china
------------------	----------------

Characteristics

- Floor-standing
- Washdown WC
- With flush rim
- Horizontal outlet
- Raised seat height

Scope of delivery

- WC ceramic appliance
- Fastening material

Art. no.	Colour / surface	B	H	T
		[cm]	[cm]	[cm]
500.284.01.1	white	36	46	66

To order additionally

- Cistern
- WC seat

Can be combined with


- Geberit Selnova Square exposed cistern, close-coupled, dual flush, bottom water supply connection → p. 724
- Geberit Selnova Square exposed cistern, close-coupled, dual flush, lateral water supply connection → p. 723
- Geberit Selnova exposed cistern, close-coupled, dual flush, lateral water supply connection → p. 754
- Geberit Selnova exposed cistern, close-coupled, dual flush, bottom water supply connection → p. 753
- Geberit Selnova Comfort WC seat, barrier-free, antibacterial, fastening from above → p. 775
- Geberit Selnova Comfort WC seat, barrier-free, antibacterial, fastening from below → p. 774
- Geberit Selnova Comfort WC seat ring, barrier-free, antibacterial, fastening from above → p. 776
- Geberit Selnova Comfort WC seat ring, D-shape, barrier-free, fastening from below → p. 776

Accessories

- Accessory overview – Geberit Selnova Comfort WC ceramic appliance in combination with connection pipes → p. 769

WC seats, barrier-free

Geberit Selnova Comfort WC seat, barrier-free, antibacterial, fastening from below

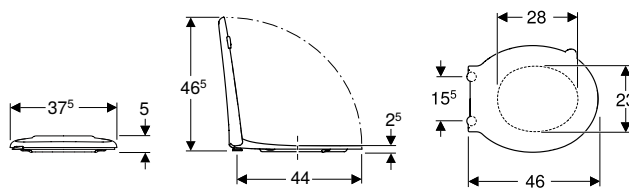

click & scan

Technical data

Product material	Duroplast
Fastening distance	15.5 cm

Scope of delivery

- WC seat

Characteristics


- Barrier-free
- Antibacterial
- With hinge bar made of stainless steel
- Overlapping WC lid

Art. no.	Colour / surface	B	H	T	QuickRelease function	Soft-closing mechanism	Fastening	Hinge material
		[cm]	[cm]	[cm]				
500.133.00.1	white	37.5	5	46	no	no	from below	Stainless steel

Can be combined with

- Geberit Selnova Comfort wall-hung WC, washdown, large projection, barrier-free, Rimfree → p. 771
- Geberit Selnova Comfort wall-hung WC, washdown, large projection, barrier-free → p. 772
- Geberit Selnova Comfort floor-standing WC for close-coupled exposed cistern, washdown, horizontal outlet, raised → p. 774

Geberit Selnova Comfort WC seat, barrier-free, antibacterial, fastening from above

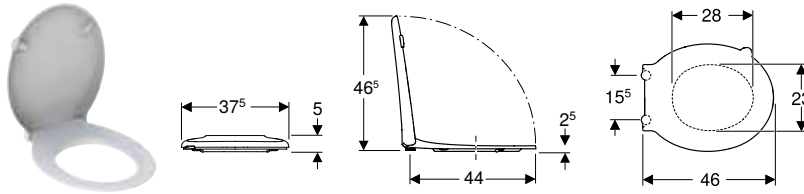

Technical data

Product material	Duroplast
Fastening distance	15.5 cm

Scope of delivery

- WC seat

Characteristics


- Barrier-free
- Antibacterial
- With hinge bar made of stainless steel
- Overlapping WC lid

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]	QuickRelease function	Soft-closing mechanism	Fastening	Hinge material
501.559.01.1	white	37.5	5	46	no	no	from above	Stainless steel

Can be combined with

- Geberit Selnova Comfort wall-hung WC, Premium, washdown, large projection, semi-shrouded, barrier-free, Rimfree → p. 770
- Geberit Selnova Comfort wall-hung WC, washdown, large projection, barrier-free, Rimfree → p. 771
- Geberit Selnova Comfort wall-hung WC, washdown, large projection, barrier-free → p. 772
- Geberit Selnova Comfort floor-standing WC for close-coupled exposed cistern, washdown, horizontal outlet, raised → p. 774

Geberit Selnova Comfort WC seat, square design, barrier-free, antibacterial, fastening from below

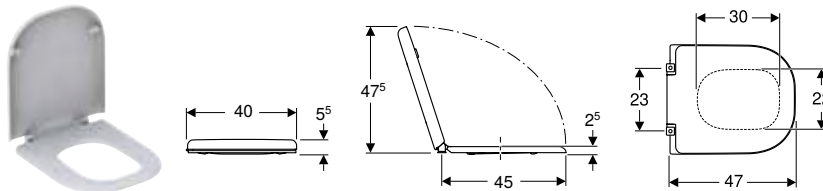

Technical data

Product material	Duroplast
Fastening distance	23 cm

Characteristics

- Barrier-free
- Antibacterial
- With hinge bar made of stainless steel
- Oblique buffers extend into the ceramic chamfer of the WC ceramic appliance and prevent the WC seat sliding sideways
- Overlapping WC lid
- Square design

Scope of delivery

- WC seat

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]	QuickRelease function	Soft-closing mechanism	Fastening	Hinge material
500.793.01.1	P white	40	5.5	47	no	no	from below	Stainless steel

P: Phase out

Can be combined with


- Geberit Selnova Comfort wall-hung WC, square, washdown, large projection, barrier-free, Rimfree → p. 772
- Geberit Selnova Comfort wall-hung WC, square, washout → p. 773



- Replaced by art. no. 572830000

WC seat rings, barrier-free

Geberit Selnova Comfort WC seat ring, D-shape, barrier-free, fastening from below

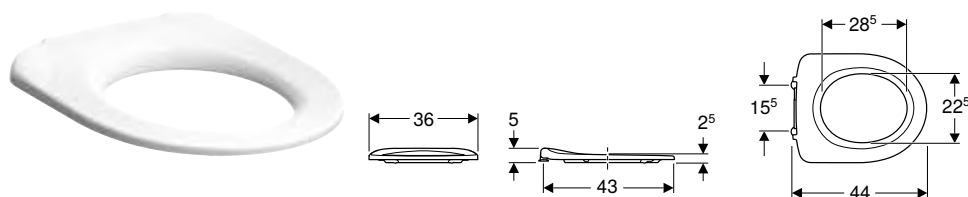

click & scan

Technical data

Product material	Duroplast
Fastening distance	15.5 cm

Scope of delivery

- WC seat ring

Characteristics


- Barrier-free
- With hinge bar

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]	QuickRelease function	Soft-closing mechanism	Fastening	Hinge material
500.340.01.1	white / plastic	36	5	44	no	no	from below	Stainless steel

Can be combined with

- Geberit Selnova Comfort wall-hung WC, washdown, large projection, barrier-free, Rimfree → p. 771
- Geberit Selnova Comfort wall-hung WC, washdown, large projection, barrier-free → p. 772
- Geberit Selnova Comfort floor-standing WC for close-coupled exposed cistern, washdown, horizontal outlet, raised → p. 774

Geberit Selnova Comfort WC seat ring, barrier-free, antibacterial, fastening from above

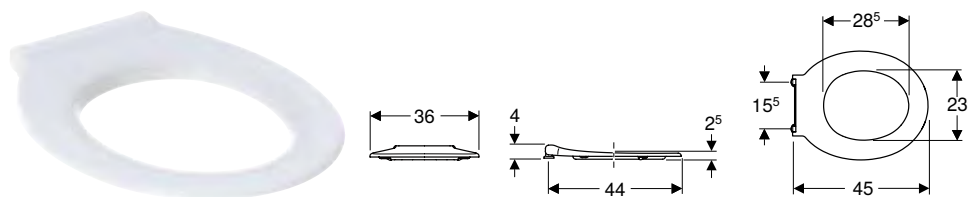

click & scan

Technical data

Product material	Duroplast
Fastening distance	15.5 cm

Scope of delivery

- WC seat ring

Characteristics


- Barrier-free
- Antibacterial
- With hinge bar made of stainless steel

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]	QuickRelease function	Soft-closing mechanism	Fastening	Hinge material
501.558.01.1	white	36	4	45	no	no	from above	Stainless steel

Can be combined with

- Geberit Selnova Comfort wall-hung WC, Premium, washdown, large projection, semi-shrouded, barrier-free, Rimfree → p. 770
- Geberit Selnova Comfort wall-hung WC, washdown, large projection, barrier-free, Rimfree → p. 771
- Geberit Selnova Comfort wall-hung WC, washdown, large projection, barrier-free → p. 772
- Geberit Selnova Comfort floor-standing WC for close-coupled exposed cistern, washdown, horizontal outlet, raised → p. 774

Geberit Selnova Comfort WC seat ring, square design, barrier-free, fastening from below

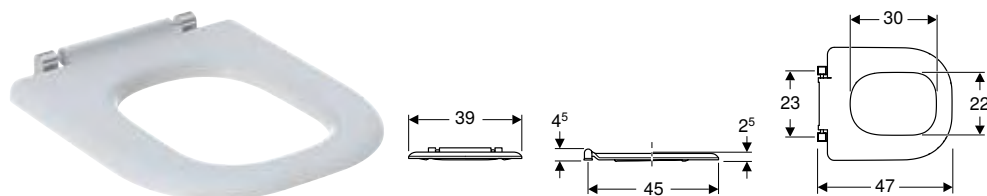

click & scan

Technical data

Product material	Duroplast
Fastening distance	23 cm

Characteristics

- Barrier-free
- Antibacterial
- With hinge bar made of stainless steel
- Oblique buffers extend into the ceramic chamfer of the WC ceramic appliance and prevent the WC seat sliding sideways
- Square design

Scope of delivery

- WC seat ring

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]	QuickRelease function	Soft-closing mechanism	Fastening	Hinge material
500.794.01.1	P white	39	4.5	47	no	no	from below	Stainless steel

P: Phase out

Can be combined with

- Geberit Selnova Comfort wall-hung WC, square, washdown, large projection, barrier-free, Rimfree → p. 772
- Geberit Selnova Comfort wall-hung WC, square, washout → p. 773



- Replaced by art. no. 572840000




Geberit Bastia

Washbasins.....	780
Handrinse basins.....	780
Washbasins.....	782
Semi-recessed washbasins.....	783
Full pedestal.....	784
WCs.....	785
Wall-hung WCs.....	785
Floor-standing WCs.....	786
WC seats.....	787
Exposed cisterns.....	788
Exposed cisterns for WCs, made of sanitary ceramic.....	788

Washbasins

Handrinse basins

Geberit Bastia handrinse basin with asymmetrical overflow

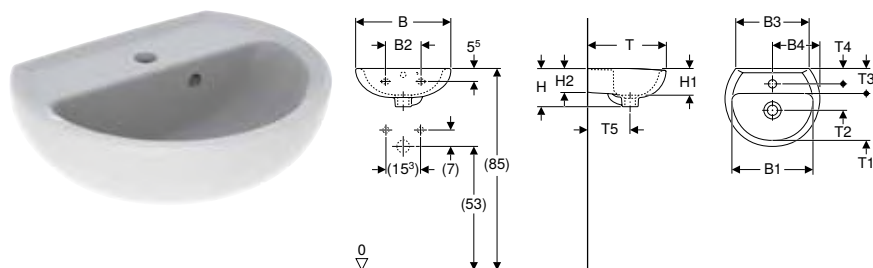

click & scan

Technical data

Product material	Vitreous china
------------------	----------------

Art. no.	Colour / surface	Tap hole	Overflow	B1	B2	B3	B4	H	H1	H2	T	T1	T2	T3	T4	T5
				[cm]	[cm]	[cm]	[cm]	[cm]	[cm]	[cm]	[cm]	[cm]	[cm]	[cm]	[cm]	[cm]

B / width: 40 cm

501.612.00.1	white	centred	visible, asymmetrical	34	15	30.5	20	15.5	13	11	33	20	11	10	6	17
--------------	-------	---------	-----------------------	----	----	------	----	------	----	----	----	----	----	----	---	----

B / width: 45 cm

501.603.00.1	N white	centred	visible, asymmetrical	39	18	34.5	22.5	17	12	13.5	37	23	12.5	11	5.5	18
--------------	---------	---------	-----------------------	----	----	------	------	----	----	------	----	----	------	----	-----	----

N: New, available as of January 2026

To order additionally

- Fastening material


Accessories

- Geberit dip tube trap for washbasin, horizontal outlet
- Geberit fastening material for handrinse basin → p. 1035



- Replacement for art. no. 00104500000

Geberit Bastia handrinse basin

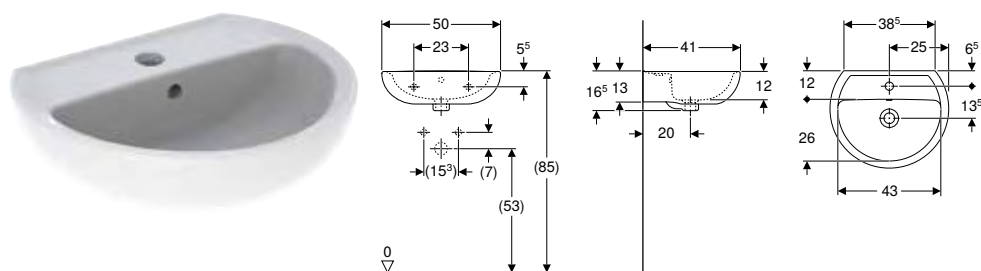

click & scan

Technical data

Product material	Vitreous china
------------------	----------------

Art. no.	Colour / surface	Tap hole	Overflow	H	T
				[cm]	[cm]

B / width: 50 cm

501.604.00.1	white	centred	visible, symmetrical	16.5	41
--------------	-------	---------	----------------------	------	----

To order additionally

- Fastening material


Can be combined with

- Geberit Bastia half pedestal → p. 784
- Geberit Bastia full pedestal → p. 784

Accessories

- Geberit dip tube trap for washbasin, horizontal outlet
- Geberit fastening material for handrinse basin → p. 1035

Geberit Bastia handrinse basin, square design, with asymmetrical overflow

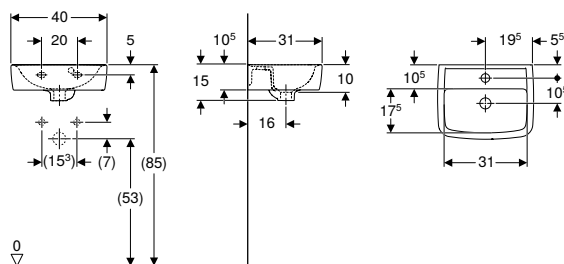

Technical data

Product material Vitreous china

Art. no.	Colour / surface	Tap hole	Overflow	H [cm]	T [cm]
----------	------------------	----------	----------	-----------	-----------

B / width: 40 cm

501.737.00.5	white	centred	visible, asymmetrical	15	31
--------------	-------	---------	-----------------------	----	----

To order additionally

- Fastening material


Can be combined with

- Geberit Bastia full pedestal → p. 784

Accessories

- Geberit dip tube trap for washbasin, horizontal outlet
- Geberit fastening material for handrinse basin → p. 1035

Geberit Bastia handrinse basin, square design

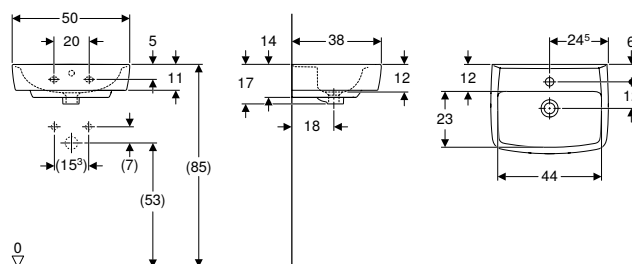

Technical data

Product material Vitreous china

Art. no.	Colour / surface	Tap hole	Overflow	B1 [cm]	H [cm]	H1 [cm]	T [cm]	T1 [cm]	T2 [cm]	T3 [cm]	T4 [cm]
----------	------------------	----------	----------	------------	-----------	------------	-----------	------------	------------	------------	------------

B / width: 50 cm

501.738.00.5	white	centred	visible, symmetrical	44	17	12	38	18	23	12	6
--------------	-------	---------	----------------------	----	----	----	----	----	----	----	---

To order additionally

- Fastening material

Can be combined with


- Geberit Bastia full pedestal → p. 784

Accessories

- Geberit dip tube trap for washbasin, horizontal outlet
- Geberit fastening material for handrinse basin → p. 1035

Washbasins

Geberit Bastia countertop washbasin with tap hole bench

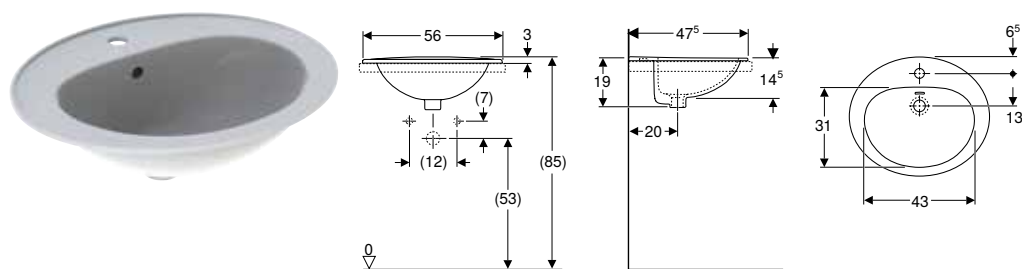

click & scan

Application purposes

- For mounting in washtops from above

Technical data

Product material	Vitreous china
------------------	----------------

Art. no.	Colour / surface	Tap hole	Overflow	H [cm]	T [cm]
----------	------------------	----------	----------	-----------	-----------


B / width: 56 cm

0016000000	white	centred	visible, symmetrical	19	47.5
------------	-------	---------	----------------------	----	------

Accessories

- Geberit dip tube trap for washbasin, horizontal outlet

Geberit Bastia washbasin

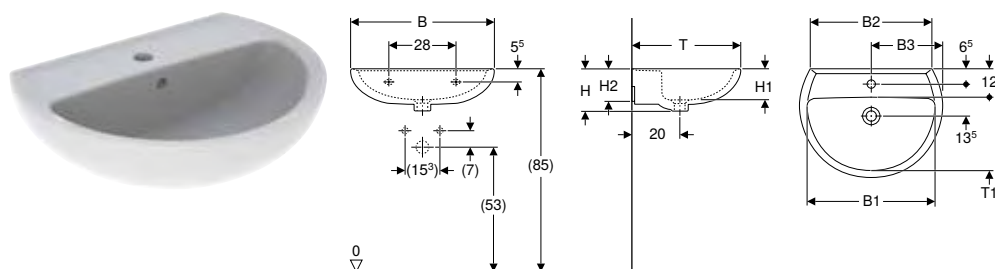

click & scan

Technical data

Product material	Vitreous china
------------------	----------------

Characteristics

- Can be combined with half pedestal
- Can be combined with full pedestal

Art. no.	Colour / surface	Tap hole	Overflow	B1 [cm]	B2 [cm]	B3 [cm]	H [cm]	H1 [cm]	H2 [cm]	T [cm]	T1 [cm]
----------	------------------	----------	----------	------------	------------	------------	-----------	------------	------------	-----------	------------

B / width: 55 cm

501.605.00.1	N white	centred	visible, symmetrical	48	47	27.5	17.5	13	13	42	26
--------------	---------	---------	----------------------	----	----	------	------	----	----	----	----

B / width: 60 cm

501.606.00.5	white	centred	visible, symmetrical	54	51	30	18	13	14	45.5	30
--------------	-------	---------	----------------------	----	----	----	----	----	----	------	----

N: New, available as of January 2026


Can be combined with

- Geberit Bastia full pedestal → p. 784
- Geberit Bastia half pedestal → p. 784

Accessories

- Geberit dip tube trap for washbasin, horizontal outlet
- Geberit fastening material for washbasin → p. 1035

Geberit Bastia washbasin, square design

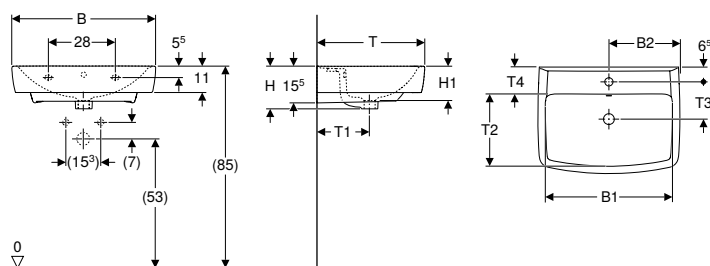

click & scan

Technical data

Product material	Vitreous china
------------------	----------------

Characteristics

- Can be combined with half pedestal
- Can be combined with full pedestal

Art. no.	Colour / surface	Tap hole	Overflow	B1	B2	H	H1	H3	T	T1	T2	T3	T4
				[cm]	[cm]	[cm]	[cm]	[cm]	[cm]	[cm]	[cm]	[cm]	[cm]

B / width: 60 cm

501.739.00.5	white	centred	visible, symmetrical	54	30	18	13	15.5	45	30	22	15.5	12
--------------	-------	---------	----------------------	----	----	----	----	------	----	----	----	------	----

Can be combined with


- Geberit Bastia half pedestal → p. 784

Accessories

- Geberit dip tube trap for washbasin, horizontal outlet
- Geberit fastening material for washbasin → p. 1035

Semi-recessed washbasins

Geberit Bastia semirecessed washbasin

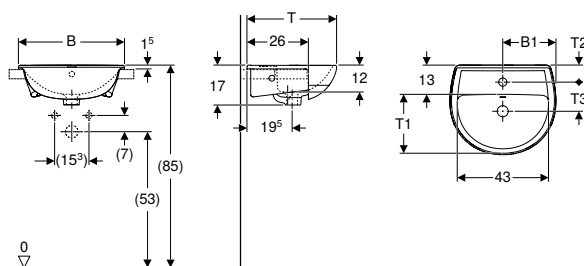

click & scan

Technical data

Product material	Vitreous china
------------------	----------------


Art. no.	Colour / surface	Tap hole	Overflow	B	B1	H	T	T1	T2	T3
				[cm]	[cm]	[cm]	[cm]	[cm]	[cm]	[cm]

502.772.00.1	white	centred	visible, symmetrical	45	22.5	17	38	25	7	12.5
--------------	-------	---------	----------------------	----	------	----	----	----	---	------

502.773.00.1	white	centred	visible, symmetrical	50	25	17	40	27	7	12.5
--------------	-------	---------	----------------------	----	----	----	----	----	---	------

Full pedestal

Geberit Bastia half pedestal

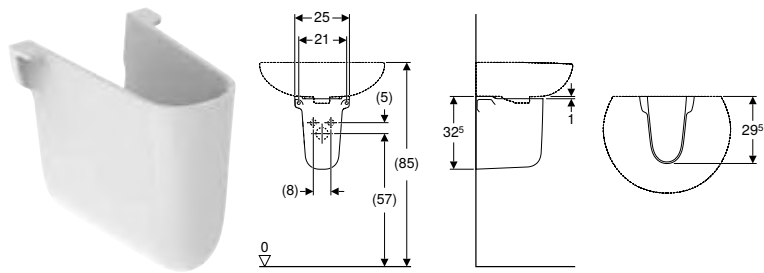

click & scan

Technical data

Product material	Vitreous china
------------------	----------------

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]
501.607.00.1	white	25	32.5	29.5


To order additionally

- Fastening material

Can be combined with

- Geberit Bastia handrinse basin → p. 780
- Geberit Bastia washbasin → p. 782
- Geberit Bastia washbasin, square design → p. 783

Geberit Bastia full pedestal

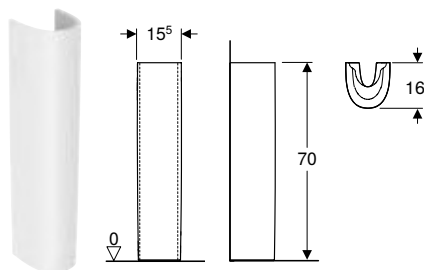

click & scan

Technical data

Product material	Vitreous china
------------------	----------------

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]
501.608.00.1	white	15.5	70	16

To order additionally

- Fastening material

Can be combined with




- Geberit Bastia washbasin → p. 782
- Geberit Bastia handrinse basin, square design, with asymmetrical overflow → p. 781
- Geberit Bastia handrinse basin, square design → p. 781
- Geberit Bastia handrinse basin → p. 780

WCs

Wall-hung WCs

New

Geberit Bastia wall-hung WC, washdown, Rimfree

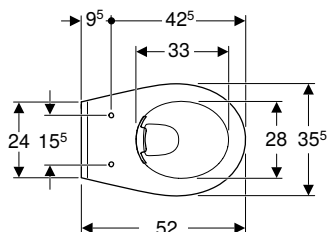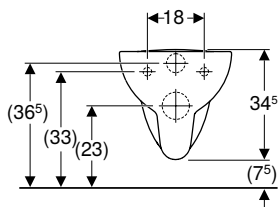

click & scan

Application purposes

- For concealed cisterns
- For pressure flushing valves

Characteristics

- Wall-hung
- Washdown WC
- Rimless WC ceramic appliance featuring Rimfree flush technology
- Type 1, full flush volume 6 / 5 l, in accordance with EN 997

Technical data

Product material	Vitreous china
------------------	----------------

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]
501.649.00.1	white	35.5	34.5	52

Available as of April 2026




To order additionally

- WC seat

Can be combined with

- Geberit Bastia WC seat, fastening from above → p. 787
- Geberit Bastia WC seat, fastening from below → p. 787

Geberit Bastia wall-hung WC, washdown

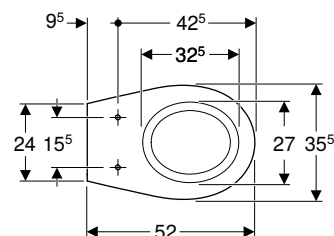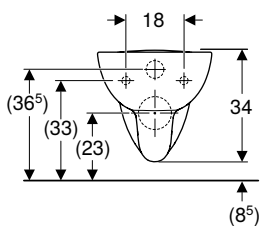

click & scan

Application purposes

- For concealed cisterns
- For pressure flushing valves

Characteristics

- Wall-hung
- Washdown WC
- With flush rim
- Type 1, full flush volume 6 / 5 l, in accordance with EN 997

Technical data

Product material	Vitreous china
------------------	----------------

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]
501.769.00.5	white	35.5	34	52

To order additionally


- WC seat

Can be combined with

- Geberit Bastia WC seat, fastening from above → p. 787
- Geberit Bastia WC seat, fastening from below → p. 787

Floor-standing WCs

Geberit Bastia floor-standing WC for close-coupled exposed cistern, washdown, horizontal outlet, Rimfree

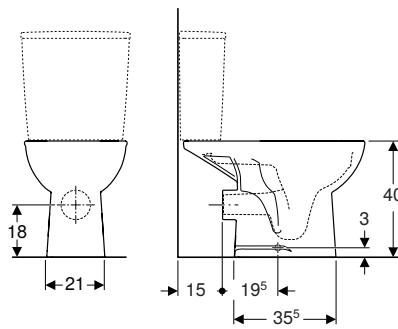

click & scan

Application purposes

- For close-coupled exposed cistern

Technical data

Product material	Vitreous china
------------------	----------------

Characteristics

- Floor-standing
- Washdown WC
- Rimless WC ceramic appliance featuring Rimfree flush technology
- Type 1, full flush volume 6 l, in accordance with EN 997
- Horizontal outlet

Scope of delivery

- WC ceramic appliance

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]
501.686.00.5	P white	35.5	40	62.5

P: Phase out


To order additionally

- Cistern
- WC seat
- Fastening material

Can be combined with

- Geberit Bastia exposed cistern, close-coupled, dual flush, lateral water supply connection, for WC Rimfree → p. 788
- Geberit Bastia exposed cistern, close-coupled, dual flush, bottom water supply connection, for WC Rimfree → p. 789
- Geberit Bastia WC seat, fastening from below → p. 787
- Geberit Bastia WC seat, fastening from above → p. 787

Geberit Bastia floor-standing WC for close-coupled exposed cistern, washdown, horizontal outlet

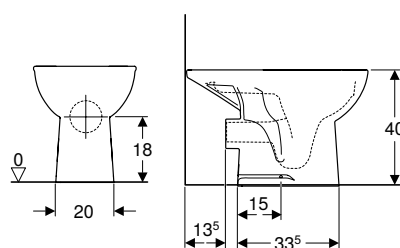

click & scan

Application purposes

- For close-coupled exposed cistern

Technical data

Product material	Vitreous china
------------------	----------------

Characteristics

- Floor-standing
- Dual flush
- Washdown WC
- With flush rim
- Type 1, full flush volume 6 l, in accordance with EN 997
- Horizontal outlet

Scope of delivery

- WC ceramic appliance

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]
501.960.00.1	white	35.5	40	62.5

To order additionally


- Cistern
- WC seat
- Fastening material

Can be combined with

- Geberit Bastia exposed cistern, close-coupled, dual flush, lateral water supply connection, for WC with flush rim → p. 788
- Geberit Bastia exposed cistern, close-coupled, dual flush, bottom water supply connection, for WC with flush rim → p. 789
- Geberit Bastia WC seat, fastening from below → p. 787
- Geberit Bastia WC seat, fastening from above → p. 787

WC seats

Geberit Bastia WC seat, fastening from below

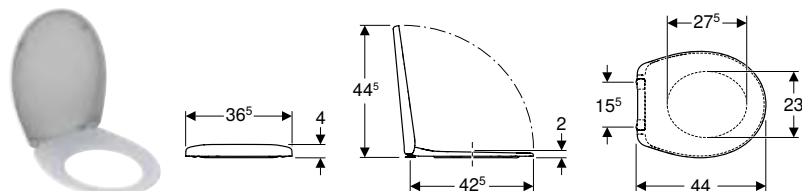

click & scan

Technical data


Product material	Duroplast
Fastening distance	15.5 cm

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]	Soft-closing mechanism	Fastening	Hinge material
501.679.00.1	white / glossy	36.5	4	44	no	from below	Stainless steel

Can be combined with

- Geberit Bastia floor-standing WC for close-coupled exposed cistern, washdown, horizontal outlet, Rimfree → p. 786
- Geberit Bastia wall-hung WC, washdown, Rimfree → p. 785
- Geberit Bastia wall-hung WC, washdown → p. 785
- Geberit Bastia floor-standing WC for close-coupled exposed cistern, washdown, horizontal outlet → p. 786

Geberit Bastia WC seat, fastening from above

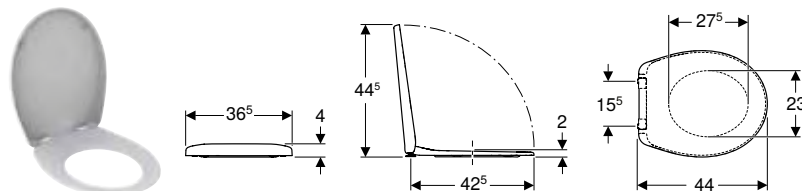

click & scan

Technical data

Product material	Duroplast
Fastening distance	15.5 cm

Characteristics

- Overlapping WC lid

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]	QuickRelease function	Soft-closing mechanism	Fastening	Hinge material
501.682.00.1	white / glossy	36.5	4	44	Yes, with QuickRelease hinges	yes	from above	Zinc
501.681.00.1	white / glossy	36.5	4	44	no	yes	from above	Brass chrome-plated


Can be combined with

- Geberit Bastia wall-hung WC, washdown, Rimfree → p. 785
- Geberit Bastia floor-standing WC for close-coupled exposed cistern, washdown, horizontal outlet, Rimfree → p. 786
- Geberit Bastia wall-hung WC, washdown → p. 785
- Geberit Bastia floor-standing WC for close-coupled exposed cistern, washdown, horizontal outlet → p. 786

Exposed cisterns

Exposed cisterns for WCs, made of sanitary ceramic

Geberit Bastia exposed cistern, close-coupled, dual flush, lateral water supply connection, for WC Rimfree

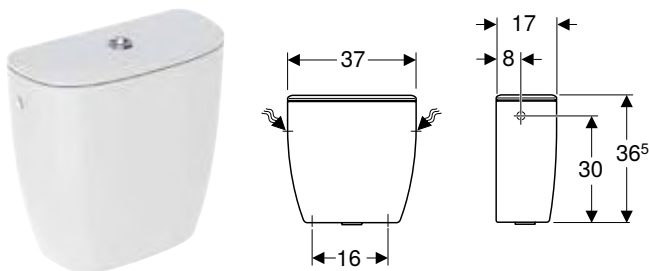

click & scan

Application purposes

- For close-coupled installation

Technical data

Flush volume, factory setting	6 l / 3 l
Flush volume large, adjustment range	4 l / 6 l
Flush volume small, adjustment range	2.6 l / 3 l
Product material	Vitreous china

Characteristics

- Dual flush
- Type 1, full flush volume 6 l, in accordance with EN 997
- Water supply connection on the left/right
- Sound-absorbing

Scope of delivery


- Mechanism

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]
501.683.00.1	white	37	36	17

Can be combined with

- Geberit Bastia floor-standing WC for close-coupled exposed cistern, washdown, horizontal outlet, Rimfree → p. 786

Geberit Bastia exposed cistern, close-coupled, dual flush, lateral water supply connection, for WC with flush rim

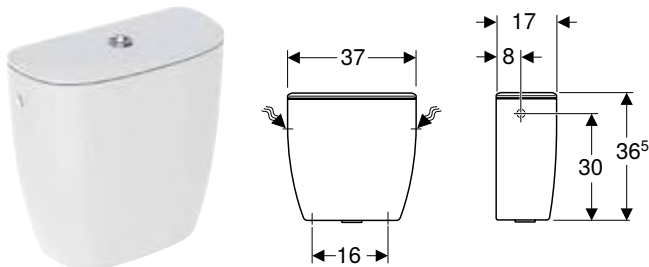

click & scan

Application purposes

- For water supply connections 3/8"
- For close-coupled installation

Technical data

Flush volume, factory setting	6 l / 3 l
Flush volume large, adjustment range	4 l / 6 l
Flush volume small, adjustment range	2.6 l / 3 l
Product material	Vitreous china

Characteristics

- Dual flush
- Type 1, full flush volume 6 l, in accordance with EN 997
- Water supply connection on the left/right
- Sound-absorbing

Scope of delivery


- Mechanism

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]
502.387.00.1	white	37	36	17

Can be combined with

- Geberit Bastia floor-standing WC for close-coupled exposed cistern, washdown, horizontal outlet → p. 786

Geberit Bastia exposed cistern, close-coupled, dual flush, bottom water supply connection, for WC Rimfree

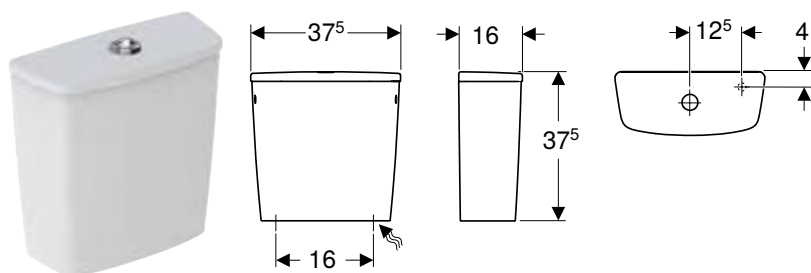

click & scan

Application purposes

- For close-coupled installation

Technical data

Flush volume, factory setting	6 l / 3 l
Flush volume large, adjustment range	4 l / 6 l
Flush volume small, adjustment range	2.6 l / 3 l
Product material	Vitreous china

Characteristics

- Dual flush
- Type 1, full flush volume 6 l, in accordance with EN 997
- Water supply connection on the bottom right
- Sound-absorbing

Scope of delivery


- Mechanism

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]
501.941.00.5	white	37.5	37.5	16

Can be combined with

- Geberit Bastia floor-standing WC for close-coupled exposed cistern, washdown, horizontal outlet, Rimfree → p. 786

Geberit Bastia exposed cistern, close-coupled, dual flush, bottom water supply connection, for WC with flush rim

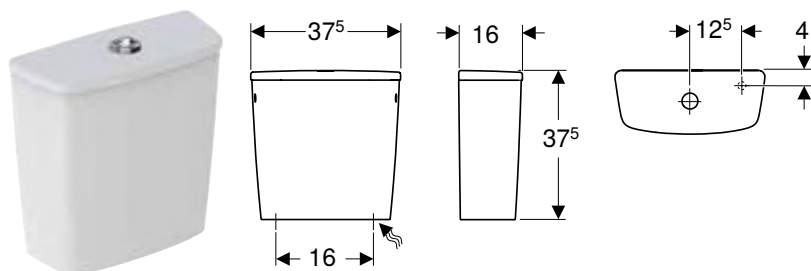

click & scan

Application purposes

- For water supply connections 3/8"
- For close-coupled installation

Technical data

Flush volume, factory setting	6 l / 3 l
Flush volume large, adjustment range	4 l / 6 l
Flush volume small, adjustment range	2.6 l / 3 l
Product material	Vitreous china

Characteristics

- Dual flush
- Type 1, full flush volume 6 l, in accordance with EN 997
- Water supply connection on the bottom right
- Sound-absorbing

Scope of delivery

- Mechanism

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]
502.388.00.1	white	37.5	37.5	16

Can be combined with

- Geberit Bastia floor-standing WC for close-coupled exposed cistern, washdown, horizontal outlet → p. 786

Geberit VariForm	793
Geberit Option	813
Geberit Bambini	825
Geberit Publica	859
Geberit AquaClean shower toilets	869
Geberit Monolith sanitary modules	903
Urinals	925
Showers	977
Bathtubs	1023
Additional product solutions	1033
Appendix	1045




Geberit VariForm

Washbasins.....	794
Lay-on washbasins.....	794
Countertop washbasins.....	798
Semirecessed washbasins.....	802
Under-countertop washbasins.....	803
Bathroom furniture.....	805
Side cabinets.....	805
Additional furniture.....	811

Washbasins

Lay-on washbasins

Geberit VariForm lay-on washbasin, round

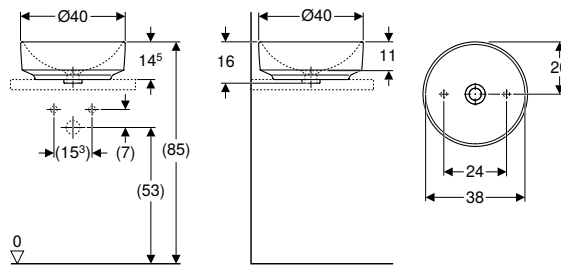

click & scan

Application purposes

- For mounting on washtops

Technical data

Product material	Fine fireclay
------------------	---------------

Characteristics

- Round
- Easy to mount thanks to provided cutout template
- Can be installed with a washbasin cabinet

Scope of delivery


- Fastening material
- Template

Art. no.	Colour / surface	Tap hole	Overflow	B [cm]	H [cm]	T [cm]
D / outer diameter: 40 cm						
500.768.01.2	white	without	without	40	16	40

Accessories

- Geberit waste outlet with free outlet and valve cover
- Geberit waste outlet with free outlet, screen

Geberit VariForm lay-on washbasin, round, with tap hole bench

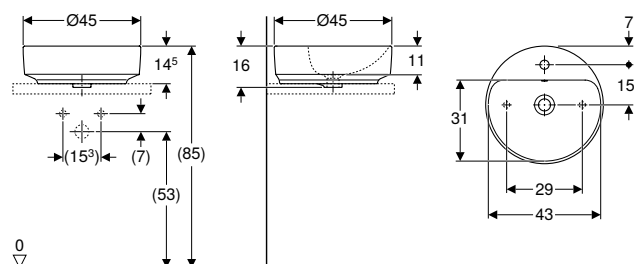

click & scan

Application purposes

- For mounting on washtops

Technical data

Product material	Fine fireclay
------------------	---------------

Characteristics

- Round
- Easy to mount thanks to provided cutout template
- Can be installed with a washbasin cabinet

Scope of delivery

- Fastening material
- Template


Art. no.	Colour / surface	Tap hole	Overflow	B [cm]	H [cm]	T [cm]
D / outer diameter: 45 cm						
500.769.01.2	white	centred	visible, symmetrical	45	16	45
500.770.01.2*	white	centred	without	45	16	45

* Order-based production

Accessories

- Geberit waste outlet with free outlet and valve cover
- Geberit waste outlet with free outlet, screen

Geberit VariForm lay-on washbasin, oval

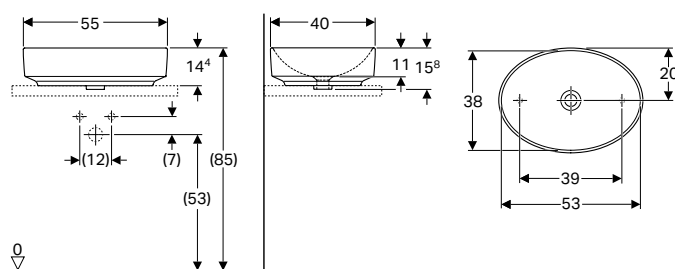

Application purposes

- For mounting on washtops

Technical data

Product material	Fine fireclay
------------------	---------------

Characteristics

- Oval
- Easy to mount thanks to provided cutout template
- Can be installed with a washbasin cabinet

Scope of delivery


- Fastening material
- Template

Art. no.	Colour / surface	Tap hole	Overflow	H [cm]	T [cm]
B / width: 55 cm					
500.771.01.2	white	without	without	15.8	40

Accessories

- Geberit waste outlet with free outlet and valve cover
- Geberit waste outlet with free outlet, screen

Geberit VariForm lay-on washbasin, oval, with tap hole bench

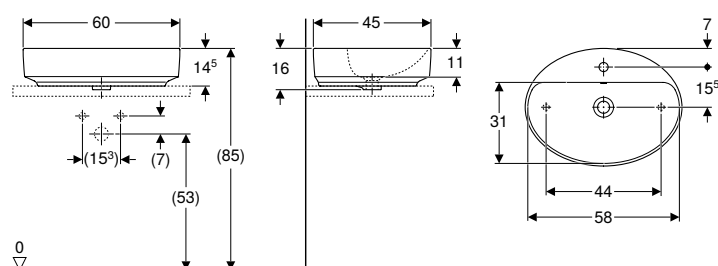

Application purposes

- For mounting on washtops

Technical data

Product material	Fine fireclay
------------------	---------------

Characteristics

- Oval
- Easy to mount thanks to provided cutout template
- Can be installed with a washbasin cabinet

Scope of delivery

- Fastening material
- Template


Art. no.	Colour / surface	Tap hole	Overflow	H [cm]	T [cm]
B / width: 60 cm					
500.772.01.2	white	centred	visible, symmetrical	16	45
500.773.01.2 *	white	centred	without	16	45

* Order-based production

Accessories

- Geberit waste outlet with free outlet and valve cover
- Geberit waste outlet with free outlet, screen

Geberit VariForm lay-on washbasin, elliptic

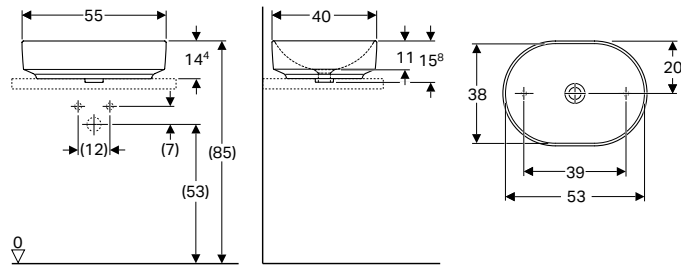

click & scan

Application purposes

- For mounting on washtops

Technical data

Product material	Fine fireclay
------------------	---------------

Characteristics

- Elliptic
- Easy to mount thanks to provided cutout template
- Can be installed with a washbasin cabinet

Scope of delivery


- Fastening material
- Template

Art. no.	Colour / surface	Tap hole	Overflow	H [cm]	T [cm]
B / width: 55 cm					
500.774.01.2	white	without	without	15.8	40

Accessories

- Geberit waste outlet with free outlet and valve cover
- Geberit waste outlet with free outlet, screen

Geberit VariForm lay-on washbasin, elliptic, with tap hole bench

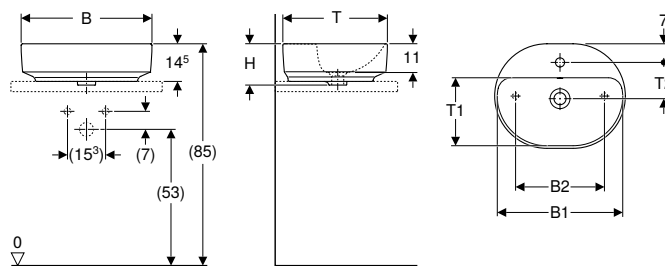

click & scan

Application purposes

- For mounting on washtops

Technical data

Product material	Fine fireclay
------------------	---------------

Characteristics

- Elliptic
- Easy to mount thanks to provided cutout template
- Can be installed with a washbasin cabinet

Scope of delivery

- Fastening material
- Template


Art. no.	Colour / surface	Tap hole	Overflow	B1 [cm]	B2 [cm]	H [cm]	T [cm]	T1 [cm]	T2 [cm]
B / width: 50 cm									
500.775.01.2	white	centred	visible, symmetrical	48	34	16	40	26	14
500.776.01.2 *	white	centred	without	48	34	16	40	26	14
B / width: 60 cm									
500.777.01.2	white	centred	visible, symmetrical	58	44	16	45	31	15.5
500.778.01.2 *	white	centred	without	58	44	16	45	31	15.5

* Order-based production

Accessories

- Geberit waste outlet with free outlet and valve cover
- Geberit waste outlet with free outlet, screen

Geberit VariForm lay-on washbasin, rectangular

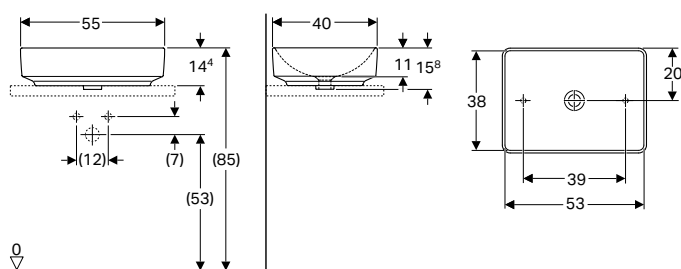

click & scan

Application purposes

- For mounting on washtops

Technical data

Product material	Fine fireclay
------------------	---------------

Characteristics

- Rectangular
- Easy to mount thanks to provided cutout template
- Can be installed with a washbasin cabinet

Scope of delivery


- Fastening material
- Template

Art. no.	Colour / surface	Tap hole	Overflow	H [cm]	T [cm]
B / width: 55 cm					
500.779.01.2	white	without	without	15.8	40

Accessories

- Geberit waste outlet with free outlet and valve cover
- Geberit waste outlet with free outlet, screen

Geberit VariForm lay-on washbasin, rectangular, with tap hole bench

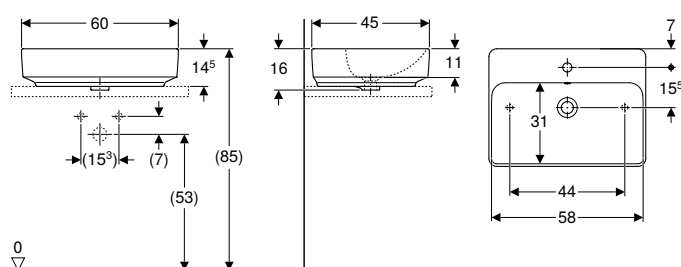

click & scan

Application purposes

- For mounting on washtops

Technical data

Product material	Fine fireclay
------------------	---------------

Characteristics

- Rectangular
- Easy to mount thanks to provided cutout template
- Can be installed with a washbasin cabinet

Scope of delivery

- Fastening material
- Template

Art. no.	Colour / surface	Tap hole	Overflow	H [cm]	T [cm]
B / width: 60 cm					
500.780.01.2	white	centred	visible, symmetrical	15.8	45
500.781.01.2*	white	centred	without	15.8	45


* Order-based production

Accessories

- Geberit waste outlet with free outlet and valve cover
- Geberit waste outlet with free outlet, screen

Countertop washbasins

Geberit VariForm countertop washbasin, round

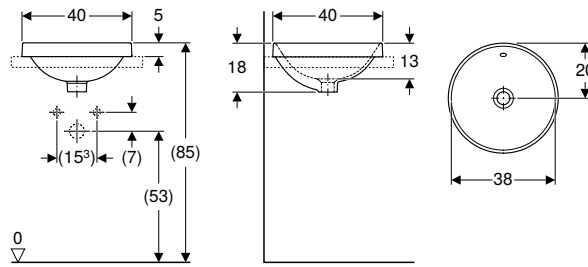

click & scan

Application purposes

- For mounting in washtops from above

Technical data

Product material	Vitreous china
------------------	----------------

Characteristics

- Round
- Easy to mount thanks to provided cutout template

Scope of delivery

- Template

Art. no.	Colour / surface	D [cm]	Tap hole [cm]	Overflow	H [cm]	T [cm]
----------	------------------	--------	---------------	----------	--------	--------

B / width: 40 cm


500.700.01.2	white	40	without	visible, symmetrical	18	40
500.702.01.2 *	white	40	without	without	18	40

* Order-based production

Accessories

- Geberit waste outlet with free outlet and valve cover
- Geberit waste outlet with free outlet, screen

Geberit VariForm countertop washbasin, round, with tap hole bench

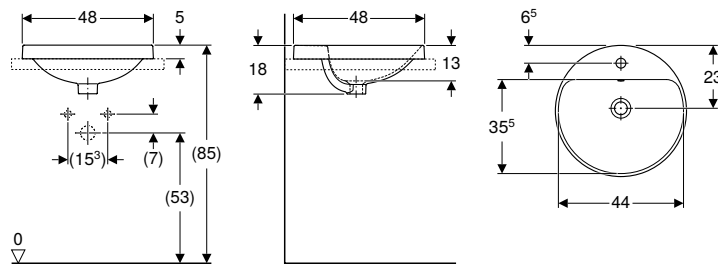

click & scan

Application purposes

- For mounting in washtops from above

Technical data

Product material	Vitreous china
------------------	----------------

Characteristics

- Round
- Easy to mount thanks to provided cutout template

Scope of delivery

- Template

Art. no.	Colour / surface	D [cm]	Tap hole [cm]	Overflow	H [cm]	T [cm]
----------	------------------	--------	---------------	----------	--------	--------

B / width: 48 cm


500.704.01.2	white	48	centred	visible, symmetrical	18	48
500.706.01.2 *	white	48	centred	without	18	48

* Order-based production

Accessories

- Geberit waste outlet with free outlet and valve cover
- Geberit waste outlet with free outlet, screen

Geberit VariForm countertop washbasin, oval

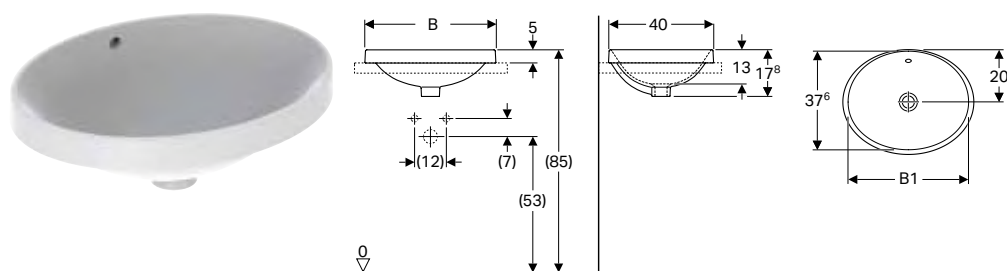

click & scan

Application purposes

- For mounting in washtops from above

Technical data

Product material	Vitreous china
------------------	----------------

Characteristics

- Oval
- Easy to mount thanks to provided cutout template

Scope of delivery

- Template

Art. no.	Colour / surface	Tap hole	Overflow	B1 [cm]	H [cm]	T [cm]
----------	------------------	----------	----------	------------	-----------	-----------

B / width: 50 cm

500.708.01.2	white	without	visible, symmetrical	46	17.8	40
500.710.01.2*	white	without	without	46	17.8	40

B / width: 55 cm


500.716.01.2	white	without	visible, symmetrical	53	17.8	40
500.718.01.2*	white	without	without	53	17.8	40

* Order-based production

Accessories

- Geberit waste outlet with free outlet and valve cover
- Geberit waste outlet with free outlet, screen

Geberit VariForm countertop washbasin, oval, with tap hole bench

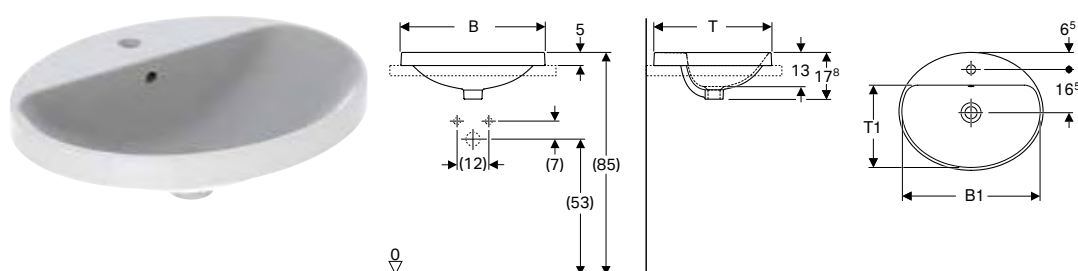

click & scan

Application purposes

- For mounting in washtops from above

Technical data

Product material	Vitreous china
------------------	----------------

Characteristics

- Oval
- Easy to mount thanks to provided cutout template

Scope of delivery

- Template

Art. no.	Colour / surface	Tap hole	Overflow	B1 [cm]	H [cm]	T [cm]	T1 [cm]
----------	------------------	----------	----------	------------	-----------	-----------	------------

B / width: 50 cm

500.712.01.2	white	centred	visible, symmetrical	47.8	17.8	45	31.5
500.714.01.2*	white	centred	without	47.8	17.8	45	31.5

B / width: 55 cm

500.720.01.2	white	centred	visible, symmetrical	52.8	17.8	45	31.5
500.722.01.2*	white	centred	without	52.8	17.8	45	31.5

B / width: 60 cm

500.724.01.2	white	centred	visible, symmetrical	58	17.8	48	34.5
500.726.01.2*	white	centred	without	58	17.8	48	34.5

* Order-based production


Can be combined with

- Geberit Selnova Square washtop for countertop washbasin → p. 711

Accessories

- Geberit waste outlet with free outlet and valve cover
- Geberit waste outlet with free outlet, screen

Geberit VariForm countertop washbasin, elliptic

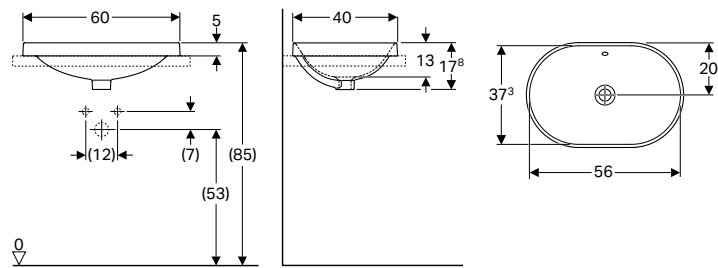

click & scan

Application purposes

- For mounting in washtops from above

Technical data

Product material	Vitreous china
------------------	----------------

Characteristics

- Elliptic
- Easy to mount thanks to provided cutout template

Scope of delivery

- Template

Art. no.	Colour / surface	Tap hole	Overflow	H [cm]	T [cm]
----------	------------------	----------	----------	-----------	-----------

B / width: 60 cm


500.728.01.2	white	without	visible, symmetrical	17.8	40
500.730.01.2 *	white	without	without	17.8	40

* Order-based production

Accessories

- Geberit waste outlet with free outlet and valve cover
- Geberit waste outlet with free outlet, screen

Geberit VariForm countertop washbasin, elliptic, with tap hole bench

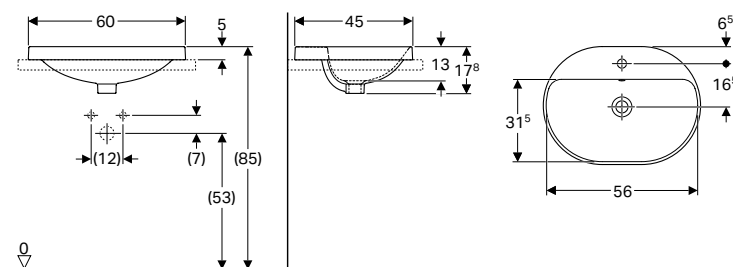

click & scan

Application purposes

- For mounting in washtops from above

Technical data

Product material	Vitreous china
------------------	----------------

Characteristics

- Elliptic
- Easy to mount thanks to provided cutout template

Scope of delivery

- Template

Art. no.	Colour / surface	Tap hole	Overflow	H [cm]	T [cm]
----------	------------------	----------	----------	-----------	-----------

B / width: 60 cm


500.732.01.2	white	centred	visible, symmetrical	17.8	45
500.734.01.2 *	white	centred	without	17.8	45

* Order-based production

Accessories

- Geberit waste outlet with free outlet and valve cover
- Geberit waste outlet with free outlet, screen

Geberit VariForm countertop washbasin, rectangular

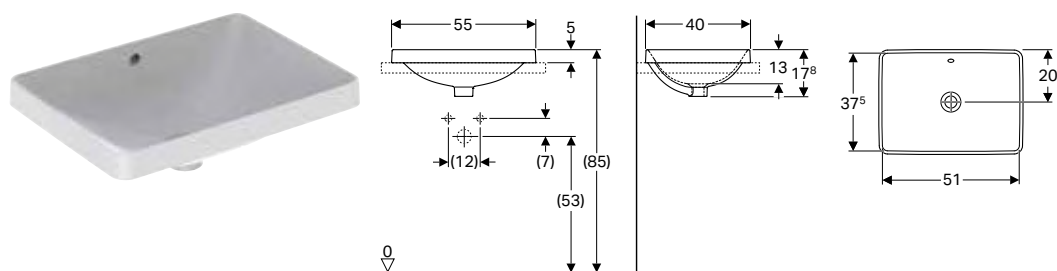

click & scan

Application purposes

- For mounting in washtops from above

Technical data

Product material	Fine fireclay
------------------	---------------

Characteristics

- Rectangular
- Easy to mount thanks to provided cutout template

Scope of delivery

- Template

Art. no.	Colour / surface	Tap hole	Overflow	H [cm]	T [cm]
----------	------------------	----------	----------	-----------	-----------

B / width: 55 cm


500.736.01.2	white	without	visible, symmetrical	17.8	40
500.738.01.2 *	white	without	without	17.8	40

* Order-based production

Accessories

- Geberit waste outlet with free outlet and valve cover
- Geberit waste outlet with free outlet, screen

Geberit VariForm countertop washbasin, rectangular, with tap hole bench

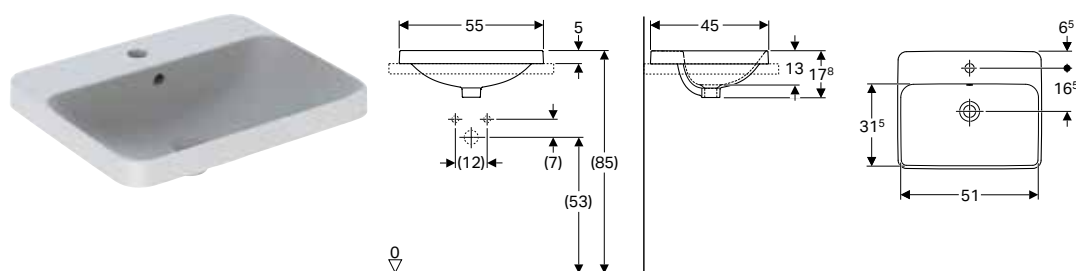

click & scan

Application purposes

- For mounting in washtops from above

Technical data

Product material	Fine fireclay
------------------	---------------

Characteristics

- Rectangular
- Easy to mount thanks to provided cutout template

Scope of delivery

- Template

Art. no.	Colour / surface	Tap hole	Overflow	H [cm]	T [cm]
----------	------------------	----------	----------	-----------	-----------

B / width: 55 cm

500.740.01.2	white	centred	visible, symmetrical	17.8	45
500.742.01.2 *	white	centred	without	17.8	45


* Order-based production

Accessories

- Geberit waste outlet with free outlet and valve cover
- Geberit waste outlet with free outlet, screen

Semirecessed washbasins

Geberit VariForm semirecessed washbasin, rectangular

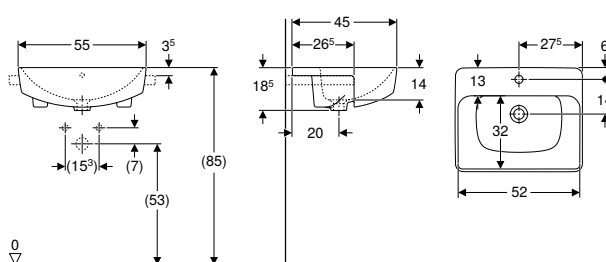

click & scan

Application purposes

- For mounting in washtops

Technical data

Product material	Vitreous china
------------------	----------------

Characteristics

- Rectangular
- Easy to mount thanks to provided cutout template

Scope of delivery


- Fastening material
- Template

Art. no.	Colour / surface	Tap hole	Overflow	H [cm]	T [cm]
----------	------------------	----------	----------	-----------	-----------

B / width: 55 cm

500.681.01.1	white	centred	visible, symmetrical	18.5	45
--------------	-------	---------	----------------------	------	----

Geberit VariForm semirecessed washbasin, round

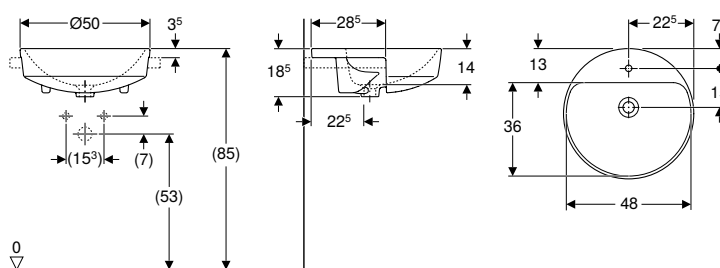

click & scan

Application purposes

- For mounting in washtops

Technical data

Product material	Vitreous china
------------------	----------------

Characteristics

- Round
- Easy to mount thanks to provided cutout template

Scope of delivery

- Fastening material
- Template


Art. no.	Colour / surface	D [cm]	Tap hole	Overflow	H [cm]	T [cm]
----------	------------------	-----------	----------	----------	-----------	-----------

B / width: 50 cm

500.783.01.2	white	50	left and right	visible, symmetrical	18.5	50
500.782.01.2	white	50	centred	visible, symmetrical	18.5	50

Under-countertop washbasins

Geberit VariForm under-countertop washbasin, round

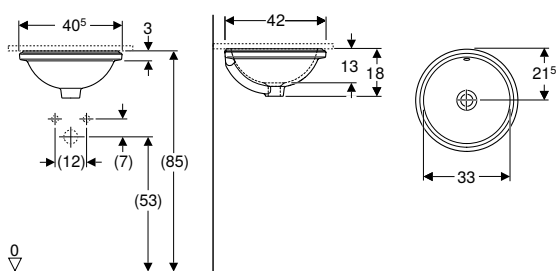

click & scan

Application purposes

- For mounting on washtops from below

Technical data

Product material	Vitreous china
------------------	----------------

Characteristics

- Round
- Easy to mount thanks to provided cutout template

Scope of delivery

- Fastening material
- Template

Art. no.	Colour / surface	Tap hole	Overflow	H	T
				[cm]	[cm]

B / width: 40.5 cm


500.744.01.2	white	without	visible, symmetrical	18	42
500.746.01.2 *	white	without	without	18	42

* Order-based production

Accessories

- Geberit waste outlet with free outlet and valve cover
- Geberit waste outlet with free outlet, screen

Geberit VariForm under-countertop washbasin, oval

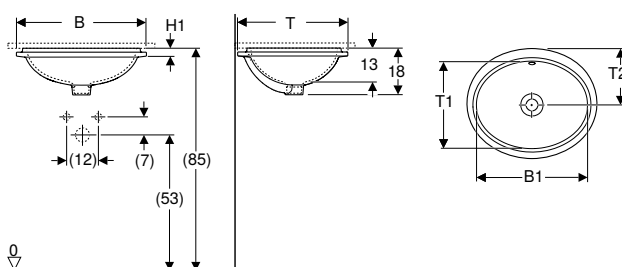

click & scan

Application purposes

- For mounting on washtops from below

Technical data

Product material	Vitreous china
------------------	----------------

Characteristics

- Oval
- Easy to mount thanks to provided cutout template

Scope of delivery

- Fastening material
- Template

Art. no.	Colour / surface	Tap hole	Overflow	B1	H	H1	T	T1	T2
				[cm]	[cm]	[cm]	[cm]	[cm]	[cm]

B / width: 49.5 cm

500.748.01.2	white	without	visible, symmetrical	42	18	3	42	33	21.5
500.750.01.2 *	white	without	without	42	18	3	42	33	21.5

B / width: 56 cm




500.752.01.2	white	without	visible, symmetrical	50	18	5	46	40	23
500.754.01.2 *	white	without	without	50	18	5	46	40	23

* Order-based production

Accessories

- Geberit waste outlet with free outlet and valve cover
- Geberit waste outlet with free outlet, screen

Geberit VariForm under-countertop washbasin, elliptic

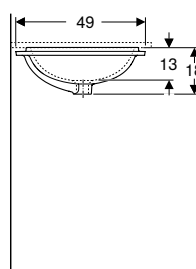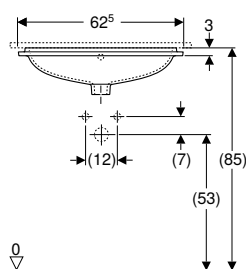

click & scan

Application purposes

- For mounting on washtops from below

Technical data

Product material	Vitreous china
------------------	----------------

Characteristics

- Elliptic
- Easy to mount thanks to provided cutout template

Scope of delivery

- Fastening material
- Template

Art. no.	Colour / surface	Tap hole	Overflow	H [cm]	T [cm]
----------	------------------	----------	----------	-----------	-----------

B / width: 62.5 cm




500.756.01.2	white	without	visible, symmetrical	18	49
500.758.01.2 *	white	without	without	18	49

* Order-based production

Accessories

- Geberit waste outlet with free outlet and valve cover
- Geberit waste outlet with free outlet, screen

Geberit VariForm under-countertop washbasin, rectangular

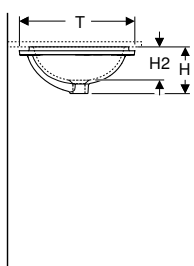

click & scan

Application purposes

- For mounting on washtops from below

Technical data

Product material	Vitreous china
------------------	----------------

Characteristics

- Rectangular
- Easy to mount thanks to provided cutout template

Scope of delivery

- Fastening material
- Template

Art. no.	Colour / surface	Tap hole	Overflow	B1 [cm]	H [cm]	H1 [cm]	H2 [cm]	T [cm]	T1 [cm]	T2 [cm]
----------	------------------	----------	----------	------------	-----------	------------	------------	-----------	------------	------------

B / width: 53 cm

500.760.01.2	white	without	visible, symmetrical	45	17.8	1.5	12.7	44	35	22
500.762.01.2 *	white	without	without	45	17.8	1.5	12.7	44	35	22

B / width: 58 cm

500.764.01.2	white	without	visible, symmetrical	50	17.8	1.5	12.7	49	40	24.5
500.767.01.2 *	Washbasin: white Bottom side: glazed	without	without	50	17.8	1.5	12.7	49	40	24.5
500.766.01.2 *	white	without	without	50	17.8	1.5	12.7	49	40	24.5

* Order-based production


Accessories

- Geberit waste outlet with free outlet and valve cover
- Geberit waste outlet with free outlet, screen

Bathroom furniture

Side cabinets

Geberit tall cabinet with one door

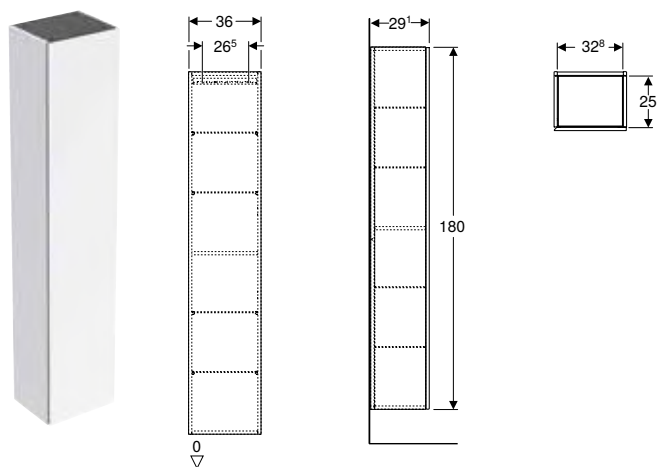

click & scan

Application purposes

- For Geberit ONE, Acanto and iCon series

Technical data

Product material	High-compressed three-layer chipboard
------------------	---------------------------------------

Scope of delivery

- Tall cabinet
- 4 glass shelves
- Fastening material

Characteristics

- FSC™ C134279 certified
- Wall-hung
- With one door
- Door with soft closing
- Opening with recessed handle or push-to-open mechanism
- With four movable glass shelves
- With one fixed shelf
- Hinge side left or right
- Moisture-resistant
- Delivered preassembled


Art. no.	Colour / surface	H [cm]	T [cm]
B / width: 36 cm			
502.316.01.1	Body, Front: white / high-gloss coated	180	29.1
502.316.01.2	Body: white / high-gloss coated Front: white / glossy glass	180	29.1
502.316.01.3 *	Body, Front: white / matt coated	180	29.1
502.316.JH.1	Body, Front: oak / wood-textured melamine	180	29.1
502.316.JK.1	Body, Front: lava / matt coated	180	29.1
502.316.JK.2	Body: lava / matt coated Front: lava / glossy glass	180	29.1
502.316.JR.1 *	Body, Front: hickory / wood-textured melamine	180	29.1
505.083.00.7 *	Body, Front: greige / matt coated	180	29.1
505.083.00.8 *	Body, Front: black / matt coated	180	29.1

* Order-based production

Accessories

- Geberit set of narrow feet → p. 579

Geberit tall cabinet with one door and internal mirror, small projection

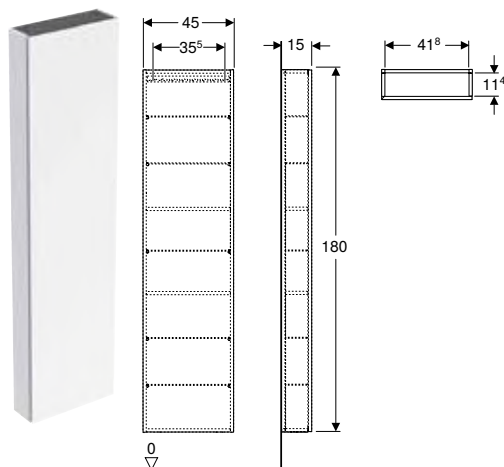

click & scan

Application purposes

- For Geberit ONE, Acanto and iCon series

Technical data

Product material	High-compressed three-layer chipboard
------------------	---------------------------------------

Scope of delivery

- Tall cabinet
- 5 glass shelves
- Fastening material

Characteristics

- FSC™ C134279 certified
- Wall-hung
- With one door
- Door with soft closing
- Opening with recessed handle or push-to-open mechanism
- With five movable glass shelves
- Door mirrored on inside
- With two fixed shelves
- Hinge side left or right
- Door opening angle 155°
- Moisture-resistant
- Delivered preassembled


Art. no.	Colour / surface	H [cm]	T [cm]
B / width: 45 cm			
502.317.01.1	Body, Front: white / high-gloss coated	180	15
502.317.01.2	Body: white / high-gloss coated Front: white / glossy glass	180	15
502.317.01.3 *	Body, Front: white / matt coated	180	15
502.317.JH.1	Body, Front: oak / wood-textured melamine	180	15
502.317.JK.1	Body, Front: lava / matt coated	180	15
502.317.JK.2	Body: lava / matt coated Front: lava / glossy glass	180	15
502.317.JL.1 *	Body, Front: sand grey / high-gloss coated	180	15
502.317.JR.1 *	Body, Front: hickory / wood-textured melamine	180	15

* Order-based production

Accessories

- Geberit set of narrow feet → p. 579

Geberit tall cabinet with two cargoes

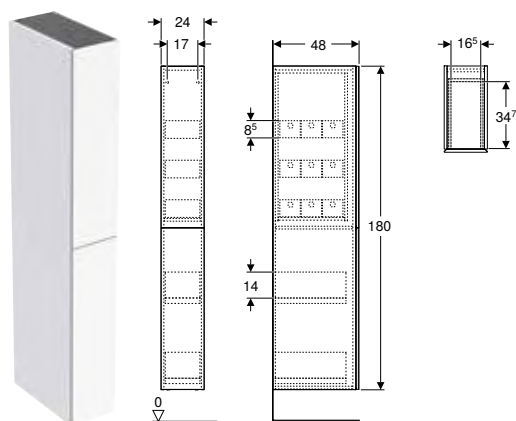

click & scan

Application purposes

- For Geberit ONE, Acanto and iCon series

Technical data

Product material	High-compressed three-layer chipboard
Drawer load max.	20 kg

Characteristics

- FSC™ C134279 certified
- Wall-hung
- With two drawers
- Wooden organiser boxes
- Drawer with soft closing
- Moisture-resistant
- Delivered preassembled

Scope of delivery

- Tall cabinet
- 9 organising boxes
- Fastening material

Art. no.	Colour / surface	H [cm]	T [cm]
B / width: 24 cm			
503.011.01.1	Body, Front: white / high-gloss coated	180	48
503.011.01.2	Body: white / high-gloss coated Front: white / glossy glass	180	48
503.011.01.3 *	Body, Front: white / matt coated	180	48
503.011.JH.1	Body, Front: oak / wood-textured melamine	180	48
503.011.JK.1	Body, Front: lava / matt coated	180	48
503.011.JK.2	Body: lava / matt coated Front: lava / glossy glass	180	48
503.011.JR.1 *	Body, Front: hickory / wood-textured melamine	180	48

* Order-based production


Can be combined with

- Geberit internal storage shelf → p. 1041
- Geberit organising box → p. 1041

Accessories

- Geberit internal storage shelf → p. 1041
- Geberit organising box → p. 1041
- Geberit power socket element with mains plug → p. 506

Geberit high-level cabinet, square, with one door

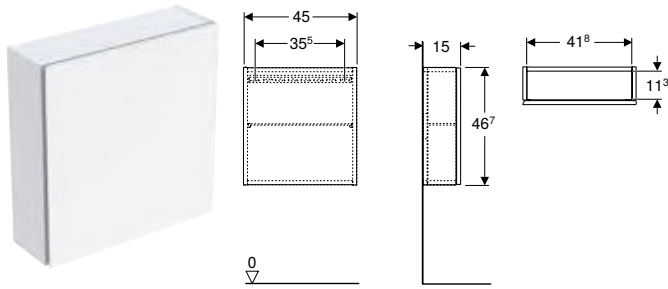

click & scan

Application purposes

- For Geberit ONE, Acanto and iCon series

Technical data

Product material	High-compressed three-layer chipboard
------------------	---------------------------------------

Scope of delivery

- High-level cabinet
- Glass shelf
- Fastening material


Characteristics

- FSC™ C134279 certified
- Wall-hung
- With one door
- Door with soft closing
- Opening with recessed handle or push-to-open mechanism
- Movable glass shelf
- Hinge side left or right
- Moisture-resistant
- Delivered preassembled

Art. no.	Colour / surface	H [cm]	T [cm]
B / width: 45 cm			
502.319.01.1	Body, Front: white / high-gloss coated	46.7	15
502.319.01.2	Body: white / high-gloss coated Front: white / glossy glass	46.7	15
502.319.01.3 *	Body, Front: white / matt coated	46.7	15
502.319.JH.1	Body, Front: oak / wood-textured melamine	46.7	15
502.319.JK.1	Body, Front: lava / matt coated	46.7	15
502.319.JK.2	Body: lava / matt coated Front: lava / glossy glass	46.7	15
502.319.JL.1 *	Body, Front: sand grey / high-gloss coated	46.7	15
502.319.JR.1 *	Body, Front: hickory / wood-textured melamine	46.7	15

* Order-based production

Geberit high-level cabinet, rectangular, with one door

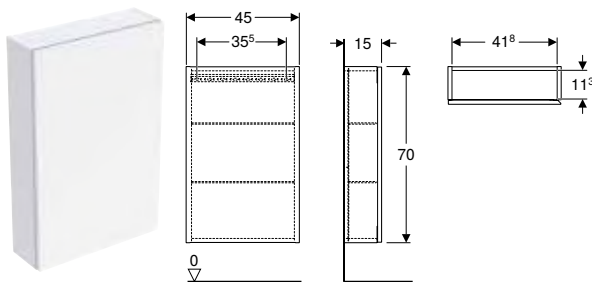

click & scan

Application purposes

- For Geberit ONE, Acanto and iCon series

Technical data

Product material	High-compressed three-layer chipboard
------------------	---------------------------------------

Scope of delivery

- High-level cabinet
- 2 glass shelves
- Fastening material

Characteristics

- FSC™ C134279 certified
- Wall-hung
- With one door
- Door with soft closing
- Opening with recessed handle or push-to-open mechanism
- With two adjustable glass shelves
- Hinge side left or right
- Moisture-resistant
- Delivered preassembled


Art. no.	Colour / surface	H [cm]	T [cm]
B / width: 45 cm			
502.318.01.1	Body, Front: white / high-gloss coated	70	15
502.318.01.2	Body: white / high-gloss coated Front: white / glossy glass	70	15
502.318.01.3 *	Body, Front: white / matt coated	70	15
502.318.JH.1	Body, Front: oak / wood-textured melamine	70	15

* Order-based production

Art. no.	Colour / surface	H [cm]	T [cm]
502.318.JK.1	Body, Front: lava / matt coated	70	15
502.318.JK.2	Body: lava / matt coated Front: lava / glossy glass	70	15
502.318.JL.1 *	Body, Front: sand grey / high-gloss coated	70	15
502.318.JR.1 *	Body, Front: hickory / wood-textured melamine	70	15

* Order-based production

Geberit shelf unit, rectangular

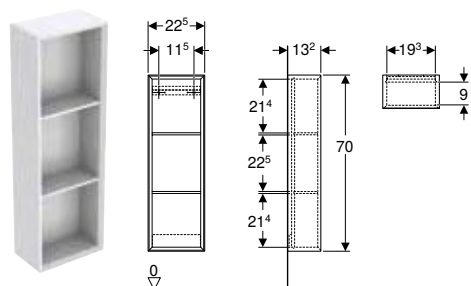

click & scan

Application purposes

- For Geberit ONE, Acanto and iCon series

Technical data

Product material	High-compressed three-layer chipboard
------------------	---------------------------------------

Characteristics

- FSC™ C134279 certified
- Wall-hung
- Hidden fastening
- With two fixed shelves
- Moisture-resistant
- Delivered preassembled


Scope of delivery

- High-level cabinet
- Fastening material

Art. no.	Colour / surface	H [cm]	T [cm]
B / width: 22.5 cm			
502.320.01.1	white / high-gloss coated	70	13.2
502.320.01.3 *	white / matt coated	70	13.2
502.320.JH.1	oak / wood-textured melamine	70	13.2
502.320.JK.1	lava / matt coated	70	13.2
502.320.JL.1 *	sand grey / high-gloss coated	70	13.2
502.320.JR.1 *	hickory / wood-textured melamine	70	13.2

* Order-based production

Geberit shelf unit, square

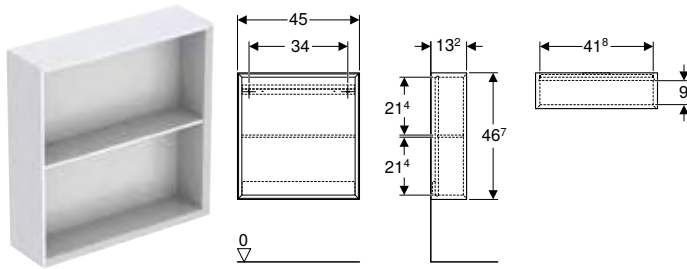

click & scan

Application purposes

- For Geberit ONE, Acanto and iCon series

Technical data

Product material	High-compressed three-layer chipboard
------------------	---------------------------------------

Characteristics

- FSC™ C134279 certified
- Wall-hung
- With one fixed shelf
- Hidden fastening
- Moisture-resistant
- Delivered preassembled


Scope of delivery

- High-level cabinet
- Fastening material

Art. no.	Colour / surface	H [cm]	T [cm]
B / width: 45 cm			
502.323.01.1	white / high-gloss coated	46.7	13.2
502.323.01.3 *	white / matt coated	46.7	13.2
502.323.JH.1	oak / wood-textured melamine	46.7	13.2
502.323.JK.1	lava / matt coated	46.7	13.2
502.323.JL.1 *	sand grey / high-gloss coated	46.7	13.2
502.323.JR.1 *	hickory / wood-textured melamine	46.7	13.2

* Order-based production

Geberit wall box, rectangular

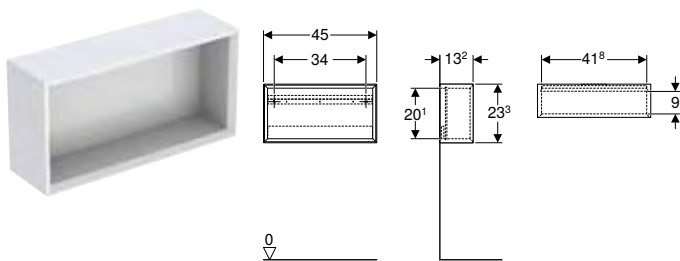

click & scan

Application purposes

- For Geberit ONE, Acanto and iCon series

Technical data

Product material	High-compressed three-layer chipboard
------------------	---------------------------------------

Characteristics

- FSC™ C134279 certified
- Wall-hung
- Hidden fastening
- Moisture-resistant
- Delivered preassembled


Scope of delivery

- High-level cabinet
- Fastening material

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]
502.322.01.1	white / high-gloss coated	45	23.3	13.2
502.322.01.3 *	white / matt coated	45	23.3	13.2
502.322.JH.1	oak / wood-textured melamine	45	23.3	13.2
502.322.JK.1	lava / matt coated	45	23.3	13.2
502.322.JL.1 *	sand grey / high-gloss coated	45	23.3	13.2
502.322.JR.1 *	hickory / wood-textured melamine	45	23.3	13.2

* Order-based production

Geberit wall box, square

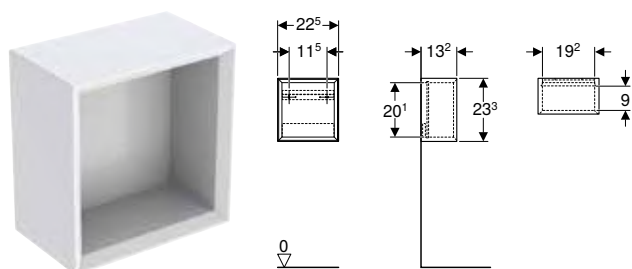

click & scan

Application purposes

- For Geberit ONE, Acanto and iCon series

Technical data

Product material	High-compressed three-layer chipboard
------------------	---------------------------------------

Characteristics

- FSC™ C134279 certified
- Wall-hung
- Hidden fastening
- Moisture-resistant
- Delivered preassembled

Scope of delivery


- High-level cabinet
- Fastening material

Art. no.	Colour / surface	H [cm]	T [cm]
B / width: 22.5 cm			
502.321.01.1	white / high-gloss coated	23.3	13.2
502.321.01.3 *	white / matt coated	23.3	13.2
502.321.JH.1	oak / wood-textured melamine	23.3	13.2
502.321.JK.1	lava / matt coated	23.3	13.2
502.321.JL.1 *	sand grey / high-gloss coated	23.3	13.2
502.321.JR.1 *	hickory / wood-textured melamine	23.3	13.2

* Order-based production

Additional furniture

Geberit wall shelf

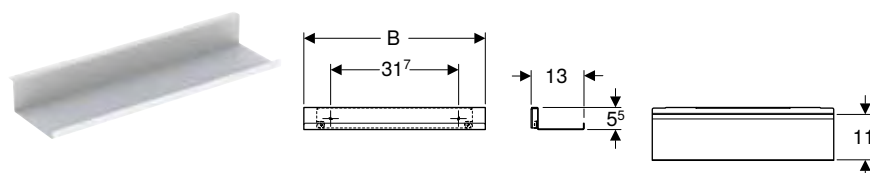

click & scan

Technical data

Product material	Steel
------------------	-------

Scope of delivery

- Wall shelf
- Fastening material

Characteristics

- Wall-hung
- Hidden fastening

Art. no.	Colour / surface	H [cm]	T [cm]
B / width: 45 cm			
502.326.01.3	white / matt powder-coated	5.5	13
502.326.JK.1	lava / matt powder-coated	5.5	13
502.326.JL.1	sand grey / matt powder-coated	5.5	13
B / width: 67.5 cm			
502.327.01.3	white / matt powder-coated	5.5	13
502.327.JK.1	lava / matt powder-coated	5.5	13
502.327.JL.1	sand grey / matt powder-coated	5.5	13





Geberit Option

Bathroom furniture	814
Accessory overview – Geberit Option bathroom furniture	814
Mirrors	814
Mirror cabinets	818

Bathroom furniture

Accessory overview – Geberit Option bathroom furniture

Geberit International Sales, version: December 2025


		Geberit magnetic holder	Geberit magnifying mirror
		510010000	510100000
			
		→ p. 516	
Mirror cabinets			
Geberit Option Basic mirror cabinet with lighting and two doors	500.257.00.1 500.258.00.1 500.273.00.1	✓	✓
	500.582.00.1 → p. 819		✓
Geberit Option mirror cabinet with lighting and two doors	500.205.00.1 500.583.00.1		✓
			✓
Geberit Option mirror cabinet with lighting and three doors	500.207.00.1 → p. 820		✓
Geberit Option Plus mirror cabinet with lighting and two doors	500.593.00.1 → p. 821 500.206.00.1		✓ ¹⁾
Geberit Option Plus mirror cabinet with lighting and three doors	500.594.00.1 → p. 822 500.592.00.1	✓ ¹⁾	

✓ Compatible

¹⁾ Included in scope of delivery

Mirrors

Geberit Option Basic illuminated mirror, square design, lighting at the top

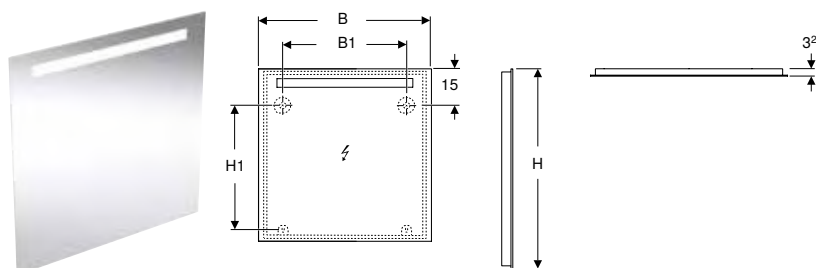

click & scan

Technical data

Degree of protection	IP44
Nominal voltage	220–240 V AC
Mains frequency	50 Hz / 60 Hz
Operating voltage	220–240 V AC
Product material	Aluminium
Light source energy efficiency class	E
Light colour	3000 K
Service life of LED lighting	30000 h
Measuring method	L70B50
Colour Rendering Index min.	80
Standard deviation of colour matching	6 SDCM

Scope of delivery

- Mirror
- Fastening material


Characteristics

- Suitable for all bathroom series
- LED lighting
- Light operated by wall switch
- With Geberit FlexInstall suspension

Art. no.	Colour / surface	B1 [cm]	H [cm]	H1 [cm]	T [cm]	Protection class	Power consumption [W]	Luminous flux [lm]
B / width: 40 cm								
502.803.00.1	anodised aluminium	22	70	50.5	3.2	II	5	499
B / width: 50 cm								
502.804.00.1	anodised aluminium	30	70	50.5	3.2	II	6	539
B / width: 60 cm								
502.805.00.1	anodised aluminium	40	70	50.5	3.2	II	8	702
502.812.00.1	anodised aluminium	40	90	70.5	3.2	II	7	702
B / width: 70 cm								
502.806.00.1	anodised aluminium	50	70	50.5	3.2	II	9	881
B / width: 80 cm								
502.807.00.1	anodised aluminium	60	70	50.5	3.2	II	10	991
502.813.00.1	anodised aluminium	60	90	70.5	3.2	II	10	991
B / width: 90 cm								
502.808.00.1	anodised aluminium	70	70	50.5	3.2	II	12	1152

Art. no.	Colour / surface	B1 [cm]	H [cm]	H1 [cm]	T [cm]	Protection class	Power consumption [W]	Luminous flux [lm]
B / width: 100 cm								
502.809.00.1	anodised aluminium	80	70	50.5	3.2	II	12	1273
502.814.00.1	anodised aluminium	80	90	70.5	3.2	II	12	1273
B / width: 120 cm								
502.810.00.1	anodised aluminium	100	70	50.5	3.2	II	14	1363
502.815.00.1	anodised aluminium	100	90	70.5	3.2	II	14	1363
B / width: 140 cm								
502.811.00.1	anodised aluminium	120	70	50.5	3.2	II	16	1533
502.816.00.1	anodised aluminium	120	90	70.5	3.2	II	16	1533

Geberit Option illuminated mirror, square design, lighting at the top

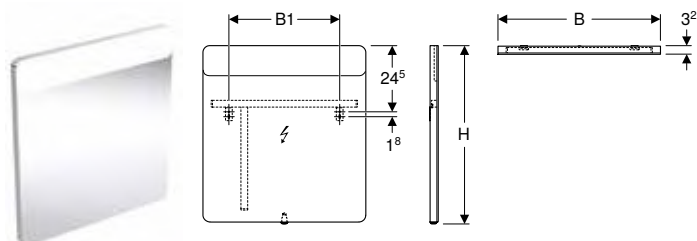

Technical data

Degree of protection	IP44
Nominal voltage	100–230 V AC
Mains frequency	50 Hz / 60 Hz
Operating voltage	12 V DC
Product material	Glass
Light source energy efficiency class	F
Light colour	4200 K
Service life of LED lighting	60000 h
Measuring method	LM-80
Colour Rendering Index min.	80

Scope of delivery


- Mirror
- Fastening material

Characteristics

- Suitable for all bathroom series
- LED lighting
- Mechanical switch

Art. no.	Colour / surface	B1 [cm]	H [cm]	T [cm]	Protection class	Power consumption [W]	Luminous flux [lm]
B / width: 40 cm							
819240000	brushed aluminium	21	80	3.2	I	7	880
B / width: 60 cm							
819260000	brushed aluminium	41	65	3.2	I	10.5	1320
B / width: 70 cm							
819270000	brushed aluminium	26	65	3.2	I	12.3	1540
B / width: 90 cm							
819200000	brushed aluminium	44	65	3.2	I	15.8	1980

Geberit Option illuminated mirror, square design, lighting on both sides

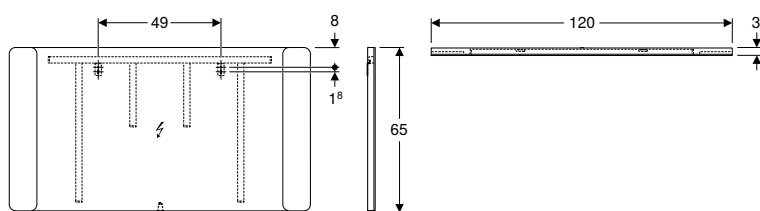

click & scan

Technical data

Degree of protection	IP44
Nominal voltage	100–230 V AC
Mains frequency	50 Hz / 60 Hz
Operating voltage	12 V DC
Output voltage	12 V DC
Product material	Glass
Light source energy efficiency class	F
Light colour	4200 K
Service life of LED lighting	60000 h
Measuring method	LM-80
Colour Rendering Index min.	80

Scope of delivery


- Mirror
- Fastening material

Characteristics

- Suitable for all bathroom series
- LED lighting
- Mechanical switch

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]	Protection class	Power consumption [W]	Luminous flux [lm]
819220000	brushed aluminium	120	65	3	I	22.8	2860

Geberit Option Plus illuminated mirror, square design, with direct and indirect lighting

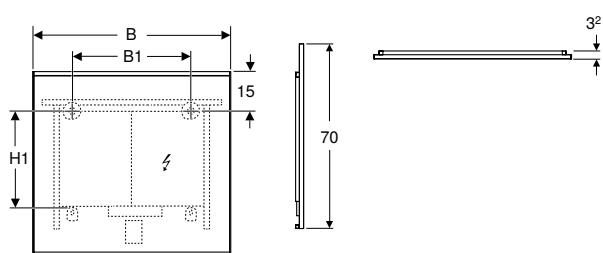

click & scan

Technical data

Degree of protection	IP44
Nominal voltage	220–240 V AC
Mains frequency	50 Hz / 60 Hz
Operating voltage	24 V DC
Product material	Aluminium
Light source energy efficiency class	F
Light colour	3000 K
Service life of LED lighting max.	72000 h
Measuring method	LM-80
Colour Rendering Index min.	80
Standard deviation of colour matching	3 SDCM

Scope of delivery

- Mirror
- Fastening material


Characteristics

- Suitable for all bathroom series
- LED lighting
- Direct and indirect lighting, continuously dimmable
- Touch sensor switch for lighting, with orientation light
- Orientation light can be deactivated
- With memory function for the lighting
- Heated rear to prevent mirror steaming up
- Touch sensor switch for mirror heating, with red indication light
- Automatic switch-off of the antimist heating after 30 minutes
- With Geberit FlexInstall suspension

Art. no.	Colour / surface	B1 [cm]	H [cm]	H1 [cm]	T [cm]	Protection class	Power consumption [W]	Power consumption of mirror heating [W]	Luminous flux (max. / above / below) [lm]
B / width: 40 cm									
502.780.00.1	anodised aluminium	20	70	46.5	3.2	I	14.8	17.5	1850
502.780.14.1	black matt / anodised aluminium	20	70	46.5	3.2	I	14.8	17.5	1850
B / width: 60 cm									
502.781.00.1	anodised aluminium	30	70	38.5	3.2	I	22.3	36	2850
502.781.14.1	black matt / anodised aluminium	30	70	38.5	3.2	I	22.3	36	2850
B / width: 75 cm									
502.782.00.1	anodised aluminium	45	70	38.5	3.2	I	28	35	3600
502.782.14.1	black matt / anodised aluminium	45	70	38.5	3.2	I	28	35	3600

Art. no.	Colour / surface	B1 [cm]	H [cm]	H1 [cm]	T [cm]	Protection class	Power consumption [W]	Power consumption of mirror heating [W]	Luminous flux (max. / above / below) [lm]
B / width: 90 cm									
502.783.00.1	anodised aluminium	60	70	38.5	3.2	I	33.6	53.5	4350
502.783.14.1	black matt / anodised aluminium	60	70	38.5	3.2	I	33.6	53.5	4350
B / width: 105 cm									
502.784.00.1	anodised aluminium	75	70	38.5	3.2	I	45	53.5	5700
502.784.14.1	black matt / anodised aluminium	75	70	38.5	3.2	I	45	53.5	5700
B / width: 120 cm									
502.785.00.1	anodised aluminium	90	70	38.5	3.2	I	39.3	53.5	5000
502.785.14.1	black matt / anodised aluminium	90	70	38.5	3.2	I	39.2	53.5	5000
B / width: 135 cm									
502.786.00.1	anodised aluminium	105	70	38.5	3.2	I	50.6	52.5	6500
502.786.14.1	black matt / anodised aluminium	105	70	38.5	3.2	I	50.6	53.5	6500
B / width: 160 cm									
502.787.00.1	anodised aluminium	130	70	38.5	3.2	I	60.1	89.5	7750
502.787.14.1	black matt / anodised aluminium	130	70	38.5	3.2	I	60.1	89.5	7750

Geberit Option illuminated mirror, round design, with direct and indirect lighting

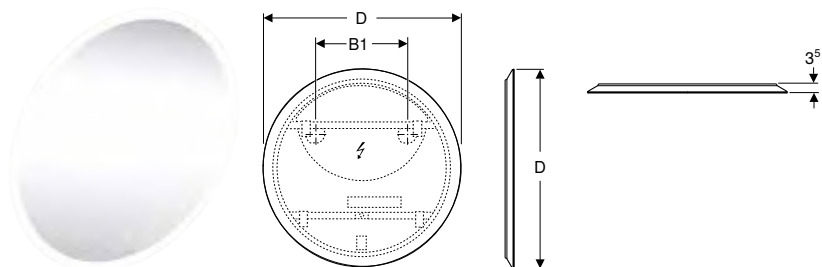

click & scan

Technical data

Degree of protection	IP44
Nominal voltage	220–240 V AC
Mains frequency	50 Hz / 60 Hz
Operating voltage	24 V DC
Product material	Aluminium
Light source energy efficiency class	F
Light colour	3000 K
Service life of LED lighting max.	72000 h
Measuring method	L70B50
Colour Rendering Index min.	80
Standard deviation of colour matching	3 SDCM

Scope of delivery


- Mirror
- Fastening material

Characteristics

- Suitable for all bathroom series
- LED lighting
- Direct and indirect lighting, continuously dimmable
- Touch sensor switch for lighting, with orientation light
- Memory function for lighting with touch sensor switch
- Orientation light can be deactivated
- With Geberit FlexInstall suspension

Art. no.	D [cm]	B1 [cm]	H [cm]	T [cm]	Protection class	Power consumption [W]	Luminous flux [lm]
B / width: 50 cm							
502.796.00.1	50	13	50	3.5	II	38.9	4875
B / width: 60 cm							
502.797.00.1	60	20	60	3.5	II	48.8	6045
B / width: 75 cm							
502.798.00.1	75	35	75	3.5	II	62.2	7800
B / width: 90 cm							
502.799.00.1	90	50	90	3.5	II	77.7	9750

Geberit Option illuminated mirror, oval design, indirect lighting

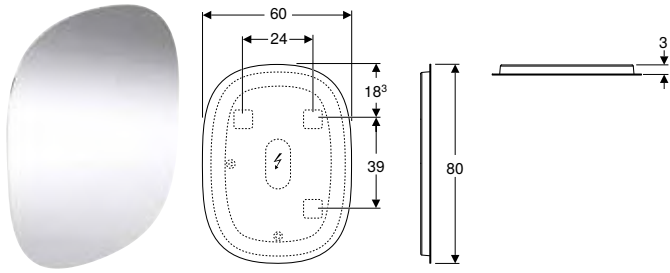

click & scan

Application purposes

- For horizontal and vertical installation

Technical data

Degree of protection	IP44
Nominal voltage	220–240 V AC
Mains frequency	50 Hz / 60 Hz
Operating voltage	12 V DC
Product material	Steel
Light source energy efficiency class	G
Light colour	3000 K
Service life of LED lighting	30000 h
Measuring method	L70B50
Colour Rendering Index min.	80
Standard deviation of colour matching	6 SDCM

Characteristics

- Suitable for all bathroom series
- LED lighting
- Indirect lighting
- Can be mounted vertically and horizontally
- Light operated by wall switch
- With Geberit FlexInstall suspension


Scope of delivery

- Mirror
- Fastening material

Art. no.	B	B1	H	H1	T	Protection class	Power consumption	Luminous flux
	[cm]	[cm]	[cm]	[cm]	[cm]		[W]	[lm]
502.800.00.1	60	24	80	39	3	II	23	850

Mirror cabinets

Geberit Option Basic mirror cabinet with lighting and two doors

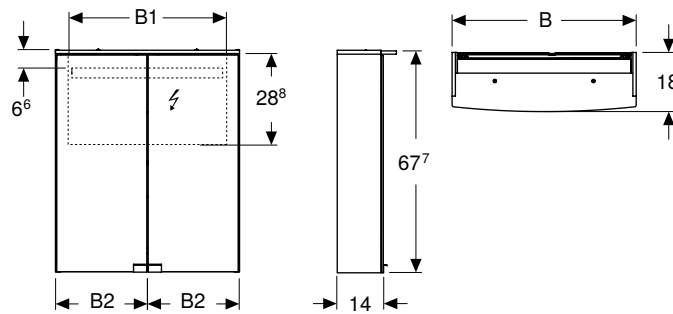

click & scan

Technical data

Degree of protection	IP44
Nominal voltage	230 V AC
Mains frequency	50 Hz
Operating voltage	12 V DC
Output voltage	12 V DC
Product material	High-compressed three-layer chipboard
Light source energy efficiency class	F
Light colour	4200 K
Service life of LED lighting	60000 h
Measuring method	LM-80
Colour Rendering Index min.	80

Scope of delivery

- Mirror cabinet
- 2 glass shelves
- Handle, bright chrome-plated
- Fastening material

Characteristics


- Suitable for all bathroom series
- FSC™ C134279 certified
- LED lighting
- Mechanical switch
- Power socket mounted on the bottom side on the left or right
- Movable glass shelves
- With two doors
- Doors mirrored on both sides
- With orientation light on switch

Art. no.	Colour / surface	B1	B2	H	T	Protection class	Power consumption [W]	Luminous flux [lm]
		[cm]	[cm]	[cm]	[cm]			
B / width: 50 cm								
500.257.00.1	Body: white / melamine-covered Interior door, exterior door: mirrored	46.8	24.7	67.7	18	I	9	1170
B / width: 56 cm								
500.258.00.1	Body: white / melamine-covered Interior door, exterior door: mirrored	52.8	27.7	67.7	18	I	10	1300
B / width: 60 cm								
500.273.00.1	Body: white / melamine-covered Interior door, exterior door: mirrored	56.8	29.7	67.7	18	I	11	1430

Accessories

- Geberit magnetic holder → p. 516
- Geberit magnifying mirror → p. 516

Geberit Option mirror cabinet with lighting and two doors

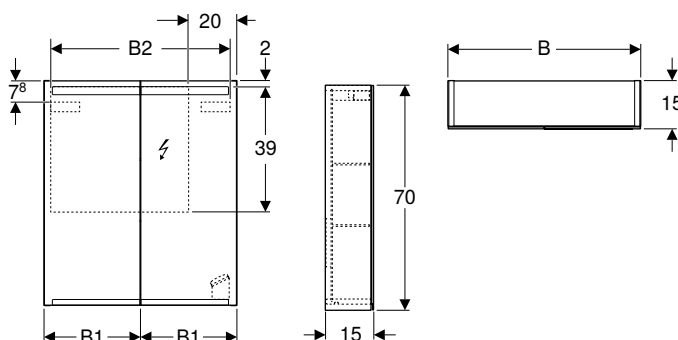

click & scan

Technical data

Degree of protection	IP44
Nominal voltage	230 V AC
Mains frequency	50 Hz
Operating voltage	12 V DC
Output voltage	12 V DC
Product material	High-compressed three-layer chipboard
Light source energy efficiency class	F
Light colour	4200 K
Service life of LED lighting	60000 h
Colour Rendering Index min.	80

Scope of delivery

- Mirror cabinet
- 2 glass shelves
- Fastening material

Characteristics


- Suitable for all bathroom series
- FSC™ C134279 certified
- LED lighting
- Indirect lighting
- Touch-sensor switch for the upper light
- Touch-sensor switch for the bottom light
- Orientation light can be deactivated
- Power socket
- Mirrored body
- With two doors
- Doors mirrored on both sides
- Movable glass shelves
- Opening with recessed handle
- Moisture-resistant

Art. no.	Colour / surface	B1	B2	H	T	Protection class	Power consumption [W]	Luminous flux [lm]
		[cm]	[cm]	[cm]	[cm]			
B / width: 60 cm								
500.582.00.1	Body, Interior door, exterior door: mirrored	29.8	54.2	70	15	I	9.65	935
B / width: 75 cm								
500.205.00.1	Body, Interior door, exterior door: mirrored	37.3	69.6	70	15	I	12.35	1190
B / width: 90 cm								
500.583.00.1	Body, Interior door, exterior door: mirrored	44.8	84.2	70	15	I	15.05	1445

Accessories

- Geberit magnetic holder → p. 516
- Geberit magnifying mirror → p. 516

Geberit Option mirror cabinet with lighting and three doors

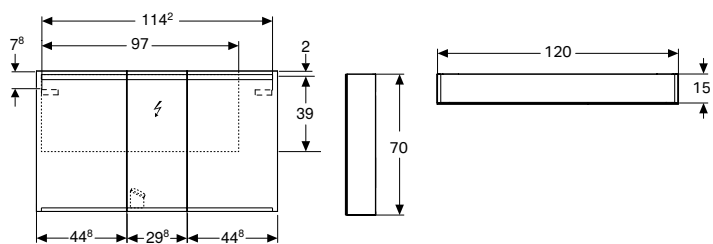

click & scan

Technical data

Degree of protection	IP44
Nominal voltage	230 V AC
Mains frequency	50 Hz
Operating voltage	12 V DC
Output voltage	12 V DC
Product material	High-compressed three-layer chipboard
Light source energy efficiency class	F
Light colour	4200 K
Service life of LED lighting	60000 h
Measuring method	LM-80
Colour Rendering Index min.	80

Scope of delivery

- Mirror cabinet
- 4 glass shelves
- Fastening material

Characteristics

- FSC™ C134279 certified
- Suitable for all bathroom series
- LED lighting
- Indirect lighting
- Touch-sensor switch for the upper light
- Touch-sensor switch for the bottom light
- Orientation light can be deactivated
- Power socket
- Mirrored body
- With three doors
- Doors mirrored on both sides
- Middle door hinges right
- Opening with recessed handle
- Movable glass shelves
- Moisture-resistant

Art. no.	Colour / surface	H [cm]	T [cm]	Protection class	Power consumption [W]	Luminous flux [lm]
----------	------------------	-----------	-----------	------------------	--------------------------	-----------------------


B / width: 120 cm

500.207.00.1	Body, Interior door, exterior door: mirrored	70	15	I	20.45	1995
--------------	--	----	----	---	-------	------

Accessories

- Geberit magnetic holder → p. 516
- Geberit magnifying mirror → p. 516

Geberit Option Plus mirror cabinet with lighting and two doors

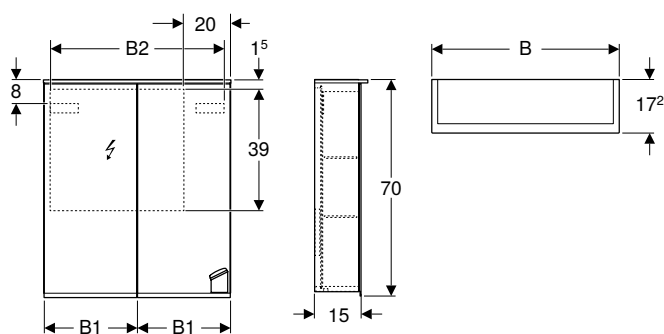

click & scan

Geberit Smyle

Technical data

Degree of protection	IP44
Nominal voltage	220–240 V AC
Mains frequency	50 Hz / 60 Hz
Operating voltage	12 V DC
Output voltage	12 V DC
Product material	High-compressed three-layer chipboard
Light source energy efficiency class	F
Light colour	4200 K
Service life of LED lighting	60000 h
Measuring method	LM-80
Colour Rendering Index min.	80

Scope of delivery

- Mirror cabinet
- 2 glass shelves
- Magnifying mirror
- Magnetic holder
- Fastening material

Characteristics


- Suitable for all bathroom series
- FSC™ C134279 certified
- LED lighting
- Indirect lighting
- Touch-sensor switch for the upper light
- Touch-sensor switch for the bottom light
- Orientation light can be deactivated
- Power socket
- Mirrored body
- Mirrored back side
- With two doors
- Doors mirrored on both sides
- Movable glass shelves
- Magnifying mirror
- Magnetic holder
- Moisture-resistant

Art. no.	Colour / surface	B1 [cm]	B2 [cm]	H [cm]	T [cm]	Protection class	Power consumption [W]	Luminous flux [lm]
B / width: 60 cm								
500.593.00.1	Body, Interior door, exterior door: mirrored	29.8	54.5	70	17.2	I	10	1050
B / width: 75 cm								
500.206.00.1	Body, Interior door, exterior door: mirrored	37.3	69.6	70	17.2	I	12.25	1260

Accessories

- Geberit magnetic holder → p. 516
- Geberit magnifying mirror → p. 516

Geberit Option Plus mirror cabinet with lighting and three doors

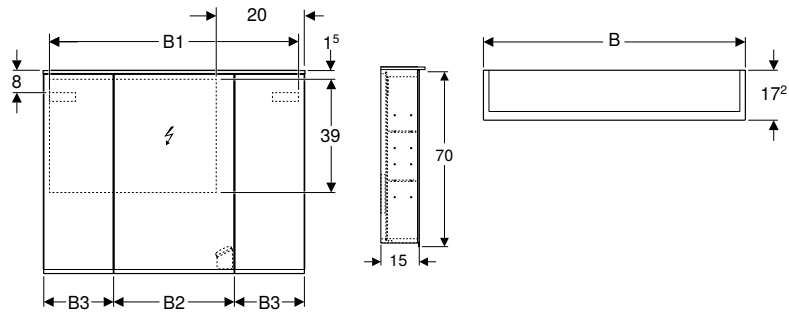

click & scan

Technical data

Degree of protection	IP44
Nominal voltage	220–240 V AC
Mains frequency	50 Hz / 60 Hz
Operating voltage	12 V DC
Output voltage	12 V DC
Product material	High-compressed three-layer chipboard
Light source energy efficiency class	F
Light colour	4200 K
Service life of LED lighting	60000 h
Measuring method	LM-80
Colour Rendering Index min.	80

Scope of delivery

- Mirror cabinet
- 6 glass shelves
- Magnifying mirror
- Magnetic holder
- Fastening material

Characteristics

- Suitable for all bathroom series
- FSC™ C134279 certified
- LED lighting
- Indirect lighting
- Touch-sensor switch for the upper light
- Touch-sensor switch for the bottom light
- Orientation light can be deactivated
- Power socket
- Mirrored body
- Mirrored back side
- With three doors
- Doors mirrored on both sides
- Middle door hinges right
- Opening with recessed handle
- Movable glass shelves
- Magnetic holder
- Magnifying mirror
- Moisture-resistant

Art. no.	Colour / surface	B1 [cm]	B2 [cm]	B3 [cm]	H [cm]	T [cm]	Protection class	Power consumption [W]	Luminous flux [lm]
B / width: 90 cm									
500.594.00.1	Body, Interior door, exterior door: mirrored	86.4	41.4	24	70	17.2	I	14.5	1470
B / width: 120 cm									
500.592.00.1	Body, Interior door, exterior door: mirrored	114.6	49.4	35	70	17.2	I	19	1890

Accessories

- Geberit magnetic holder → p. 516
- Geberit magnifying mirror → p. 516



- 1 power socket for mirror cabinet 90 cm
- 2 power sockets for mirror cabinet 120 cm
















Geberit Bambini

Assortment overview – Geberit Bambini play and washspaces for deck-mounted taps.....	827
Assortment overview – Geberit Bambini play and washspaces for wall-mounted taps.....	829
Washbasins.....	830
Washbasins	830
Washbasins for classrooms	830
Washing troughs	831
Accessories.....	837
Taps.....	840
Washbasin taps	840
Accessories.....	847
WCs	848
Accessory overview – Geberit Bambini wall-hung and floor-standing WCs, Rimfree	848
Accessory overview – Geberit Bambini wall-hung and floor-standing WCs with flush rim	849
Wall-hung WCs.....	850
Floor-standing WCs	851
WC seats.....	853
WC seat rings	854
Waste fittings.....	855
Drain assemblies for Geberit Bambini WCs	855
Bathtubs.....	856
Bathtubs made of solid surface material.....	856

Assortment overview – Geberit Bambini play and washspaces for deck-mounted taps

Geberit International Sales, version: December 2025













					Geberit Bambini play and washspace, with two washbasin areas, lower basin on the left	Geberit Bambini play and washspace, with two washbasin areas, lower basin on the right	
					90 cm	90 cm	
White-alpine					502.973.00.1	502.974.00.1	
Décor in carmine red / orange					502.973.FY.1	502.974.FY.1	
Décor in ocean blue / light blue					502.973.SX.1	502.974.SX.1	
Décor in forest green / light green					502.973.79.1	502.974.79.1	
							
					→ p. 831	→ p. 832	
Taps: select an option							
Mains operation	glossy chrome	116.209.21.5		→ p. 844	2	2	
	Multicolour	116.209.00.5		→ p. 843	2	2	
Battery operation	glossy chrome	116.208.21.5		→ p. 846	2	2	
	Multicolour	116.208.00.5		→ p. 845	2	2	
Single-lever mixer	ocean blue	116.207.SX.1		→ p. 841	2	2	
	forest green	116.207.79.1		→ p. 841	2	2	
	carmine red	116.207.FY.1		→ p. 841	2	2	
	glossy chrome	116.207.21.1		→ p. 841	2	2	
	Multicolour	571600000		→ p. 840	2	2	
Accessories taps							
Mini thermostat		599113000		→ p. 847	2	2	
Tap aerator, swivelling		571410000		→ p. 847	Required in combination with drain valves with overflow pipe	Required in combination with drain valves with overflow pipe	
Siphons: select an option							
Geberit P-trap for washbasin, with sleeve, horizontal outlet	glossy chrome	151.105.21.1			1	1	
Drain valves: select an option							
Geberit waste outlet with overflow pipe, for washbasin	transparent	240.648.00.1			1	1	
Geberit waste outlet with free outlet, screen		152.005.00.1			1	1	
Geberit waste outlet with free outlet and valve cover	glossy chrome	152.050.21.1			1	1	
For shell installation - select an option							
Duofix installation		111.490.00.2 Geberit Duofix element for washbasin, 82–98 cm, deck-mounted tap		→ p. 827	2 + 4x 465.034.00.2	2 + 4x 465.034.00.2	
Installation solid walls		500.121.00.1 Geberit fastening material for washbasin		→ p. 1035	2	2	

The overview shows the compatibility as well as the required quantity of articles (listed in the rows) for the desired Geberit Bambini play and wash landscape (listed in the columns).





Geberit Bambini play and washspace, with three washbasin areas, lower basin on the left	Geberit Bambini play and washspace, with three washbasin areas, lower basin on the right	Geberit Bambini play and washspace, with four washbasin areas, lower sink on the left	Geberit Bambini play and washspace, with four washbasin areas, lower basin on the right
140 cm	140 cm	180 cm	180 cm
502.975.00.1	502.976.00.1	502.977.00.1	502.978.00.1
502.975.FY.1	502.976.FY.1	502.977.FY.1	502.978.FY.1
502.975.SX.1	502.976.SX.1	502.977.SX.1	502.978.SX.1
502.975.79.1	502.976.79.1	502.977.79.1	502.978.79.1
			
→ p. 833	→ p. 834	→ p. 835	→ p. 836
3	3	4	4
3	3	4	4
3	3	4	4
3	3	4	4
3	3	4	4
3	3	4	4
3	3	4	4
3	3	4	4
3	3	4	4
3	3	4	4
3	3	4	4
3	3	4	4
3	3	4	4
3	3	4	4
3	3	4	4
3	3	4	4
3	3	4	4
Required in combination with drain valves with overflow pipe	Required in combination with drain valves with overflow pipe	Required in combination with drain valves with overflow pipe	Required in combination with drain valves with overflow pipe
2	2	2	2
2	2	2	2
2	2	2	2
2	2	2	2
2 + 1x 111.787.00.1 + 4x 465.034.00.2	2 + 1x 111.787.00.1 + 4x 465.034.00.2	3 + 8x 465.034.00.2	3 + 8x 465.034.00.2
2	2	3	3

Assortment overview – Geberit Bambini play and washspaces for wall-mounted taps

Geberit International Sales, version: December 2025

				Geberit Bambini play and washspace, with two wash-basin areas, lower basin on the left	Geberit Bambini play and washspace, with two wash-basin areas, lower basin on the right	
				90 cm	90 cm	
				Without tap hole	Without tap hole	
						
				→ p. 831	→ p. 832	
Taps: select an option						
Piave	Length 22 cm, see product range overview – Geberit wall-mounted taps for wash basins			2	2	
Brenta	Length 22 cm, see product range overview – Geberit wall-mounted taps for wash basins			2	2	
Accessories taps						
Tap aerator, swivelling	243.635.00.1		 → p. 829	Required in combination with drain valves with overflow pipe	Required in combination with drain valves with overflow pipe	
Siphons: select an option						
Geberit P-trap for washbasin, with sleeve, horizontal outlet	glossy chrome	151.105.21.1		1	1	
Drain valves: select an option						
Geberit waste outlet with overflow pipe, for washbasin	transparent	240.648.00.1		1	1	
Geberit waste outlet with free outlet, screen		152.005.00.1		1	1	
Geberit waste outlet with free outlet and valve cover	glossy chrome	152.050.21.1		1	1	
For shell installation - select an option						
Installation solid walls		500.121.00.1	 → p. 1035	2	2	
To be ordered additionally for Piave and Brenta wall-mounted taps						
GIS installation		461.146.00.1	 → p. 829	2	2	
	white alpine	116.425.11.1	 → p. 829	2	2	



The overview shows the compatibility as well as the required quantity of articles (listed in the rows) for the desired Geberit Bambini play and wash landscape (listed in the columns).

	Geberit Bambini play and washspace, with three washbasin areas, lower basin on the left	Geberit Bambini play and washspace, with three washbasin areas, lower basin on the right	Geberit Bambini play and washspace, with four washbasin areas, lower sink on the left	Geberit Bambini play and washspace, with four washbasin areas, lower basin on the right
	140 cm	140 cm	180 cm	180 cm
	Without tap hole	Without tap hole	Without tap hole	Without tap hole
				
	→ p. 833	→ p. 834	→ p. 835	→ p. 836
	3	3	4	4
	3	3	4	4
	Required in combination with drain valves with overflow pipe	Required in combination with drain valves with overflow pipe	Required in combination with drain valves with overflow pipe	Required in combination with drain valves with overflow pipe
	2	2	2	2
	2	2	2	2
	2	2	2	2
	2	2	2	2
	2	2	3	3
	3	3	4	4
	3	3	4	4

Washbasins

Washbasins

Geberit Bambini washbasin for children

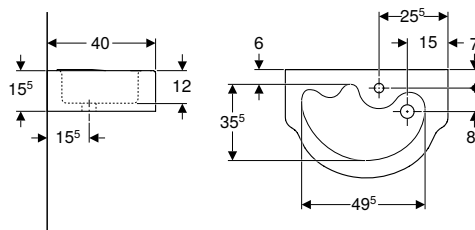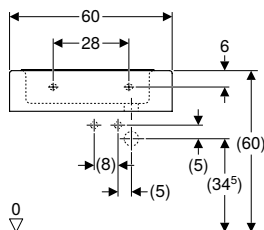

click & scan

Application purposes

- For children
- For schools, childcare facilities and other educational facilities

Characteristics

- Asymmetrical

Technical data

Product material	Vitreous china
------------------	----------------

Art. no.	Colour / surface	Tap hole	Overflow	H [cm]	T [cm]
B / width: 60 cm					
326060000	white	centred	without	15.5	40

Can be combined with



- Geberit Bambini washbasin tap, single-lever mixer → p. 841
- Geberit Bambini washbasin tap, mains operation → p. 842
- Geberit Bambini washbasin tap, battery operation, multicolour → p. 845
- Geberit Bambini washbasin tap, battery operation → p. 846
- Geberit Bambini washbasin tap, mains operation, multicolour → p. 843
- Geberit Bambini washbasin tap, mains operation → p. 844
- Geberit Bambini washbasin tap, single-lever mixer, multicolour → p. 840

Accessories

- Geberit waste outlet with free outlet and valve cover
- Geberit waste outlet with free outlet, screen
- Geberit fastening material for washbasin → p. 1035

Washbasins for classrooms

Geberit Bambini washbasin with recessed sponge tray

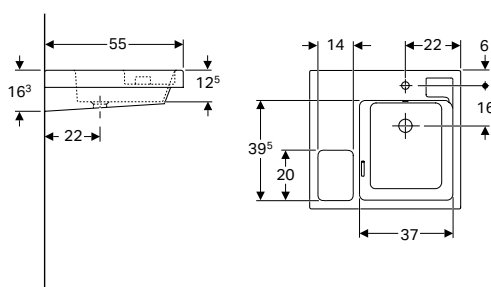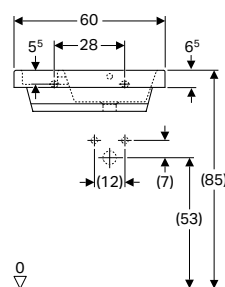

click & scan

Application purposes

- For schools and other educational facilities

Characteristics

- Asymmetrical
- Large shelf surface
- Integrated tray for sponges and cleaning cloths

Technical data

Product material	Fine fireclay
------------------	---------------

Art. no.	Colour / surface	Tap hole	Overflow	B [cm]	H [cm]	T [cm]	Shelf space
162700000	PO white	right	visible, symmetrical	60	16.3	55	left


PO: Phase out as of December 2026

Accessories

- Geberit dip tube trap for washbasin, horizontal outlet
- Geberit waste outlet with push actuation

Washing troughs

Geberit Bambini play and washspace, with two washbasin areas, lower basin on the left

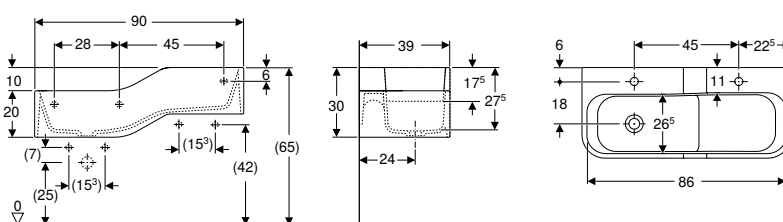

click & scan

Application purposes

- For children
- For schools, childcare facilities and other educational facilities
- Suitable for children of different age groups
- For playing and learning
- For mounting on solid walls or drywalls
- For mounting on Geberit GIS set for Bambini play and washspace
- To install on Geberit Duofix elements for washbasins

Characteristics

- Two washbasin areas
- Two different heights
- Small projection
- Integrated slide
- Rounded edges for avoiding injuries
- Shockproof
- Scratchproof
- Easy cleaning
- Seamless surface repair

Technical data

Product material	Varicor
------------------	---------

Scope of delivery

- Washing trough

Art. no.	Colour / surface	Overflow	Drain	B [cm]	H [cm]	T [cm]
----------	------------------	----------	-------	-----------	-----------	-----------

Tap hole: left and right

502.973.00.1	Washing trough: white alpine / matt	without	left	90	30	39
502.973.SX.1 *	Washing trough: white alpine / matt Dekorlinie aussen: light blue / matt Dekorlinie innen: ocean blue / matt	without	left	90	30	39
502.973.79.1 *	Washing trough: white alpine / matt Dekorlinie aussen: light green / matt Dekorlinie innen: forest green / matt	without	left	90	30	39
502.973.FY.1 *	Washing trough: white alpine / matt Dekorlinie aussen: orange / matt Dekorlinie innen: carmine red / matt	without	left	90	30	39

* Order-based production


Can be combined with

- Geberit Bambini washbasin tap, single-lever mixer → p. 841
- Geberit Bambini washbasin tap, battery operation → p. 846
- Geberit Bambini washbasin tap, mains operation → p. 842
- Geberit Bambini washbasin tap, mains operation → p. 844

Accessories

- Assortment overview – Geberit Bambini play and washspaces for deck-mounted taps → p. 827
- Assortment overview – Geberit Bambini play and washspaces for wall-mounted taps → p. 829

Geberit Bambini play and washspace, with two washbasin areas, lower basin on the right

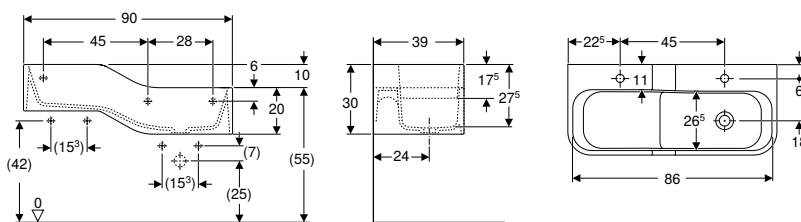

Application purposes

- For children
- For schools, childcare facilities and other educational facilities
- Suitable for children of different age groups
- For playing and learning
- For mounting on solid walls or drywalls
- For mounting on Geberit GIS set for Bambini play and washspace
- To install on Geberit Duofix elements for washbasins

Characteristics

- Two washbasin areas
- Two different heights
- Small projection
- Integrated slide
- Rounded edges for avoiding injuries
- Shockproof
- Scratchproof
- Easy cleaning
- Seamless surface repair

Technical data

Product material	Varicor
------------------	---------

Scope of delivery

- Washing trough

Art. no.	Colour / surface	Overflow	Drain	B [cm]	H [cm]	T [cm]
----------	------------------	----------	-------	-----------	-----------	-----------

Tap hole: left and right

502.974.00.1	Washing trough: white alpine / matt	without	right	90	30	39
502.974.SX.1 *	Washing trough: white alpine / matt Dekorlinie aussen: light blue / matt Dekorlinie innen: ocean blue / matt	without	right	90	30	39
502.974.79.1 *	Washing trough: white alpine / matt Dekorlinie aussen: light green / matt Dekorlinie innen: forest green / matt	without	right	90	30	39
502.974.FY.1 *	Washing trough: white alpine / matt Dekorlinie aussen: orange / matt Dekorlinie innen: carmine red / matt	without	right	90	30	39

* Order-based production


Can be combined with

- Geberit Bambini washbasin tap, single-lever mixer → p. 841
- Geberit Bambini washbasin tap, battery operation → p. 846
- Geberit Bambini washbasin tap, mains operation → p. 842
- Geberit Bambini washbasin tap, mains operation → p. 844


Accessories

- Assortment overview – Geberit Bambini play and washspaces for deck-mounted taps → p. 827
- Assortment overview – Geberit Bambini play and washspaces for wall-mounted taps → p. 829

Geberit Bambini play and washspace, with three washbasin areas, lower basin on the left

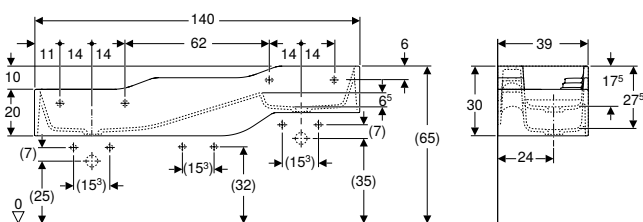

click & scan

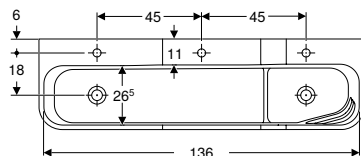

Application purposes

- For children
- For schools, childcare facilities and other educational facilities
- Suitable for children of different age groups
- For playing and learning
- For mounting on solid walls or drywalls
- For mounting on Geberit GIS set for Bambini play and washspace
- To install on Geberit Duofix elements for washbasins

Characteristics

- Three washbasin areas
- Three different heights
- Small projection
- Integrated storage function with slide and haptic area for water play and multi-sensory experience
- Rounded edges for avoiding injuries
- Shockproof
- Scratchproof
- Easy cleaning
- Seamless surface repair

Technical data

Product material	Varicor
------------------	---------

Scope of delivery

- Washing trough

Art. no.	Colour / surface	Overflow	Drain	B [cm]	H [cm]	T [cm]
Tap hole: centred, left and right						
502.975.00.1	Washing trough: white alpine / matt	without	left and right	140	30	39
502.975.SX.1 *	Washing trough: white alpine / matt Dekorlinie aussen: light blue / matt Dekorlinie innen: ocean blue / matt	without	left and right	140	30	39
502.975.79.1 *	Washing trough: white alpine / matt Dekorlinie aussen: light green / matt Dekorlinie innen: forest green / matt	without	left and right	140	30	39
502.975.FY.1 *	Washing trough: white alpine / matt Dekorlinie aussen: orange / matt Dekorlinie innen: carmine red / matt	without	left and right	140	30	39

* Order-based production


Can be combined with

- Geberit Bambini washbasin tap, single-lever mixer → p. 841
- Geberit Bambini washbasin tap, battery operation → p. 846
- Geberit Bambini washbasin tap, mains operation → p. 842
- Geberit Bambini washbasin tap, mains operation → p. 844


Accessories

- Assortment overview – Geberit Bambini play and washspaces for deck-mounted taps → p. 827
- Assortment overview – Geberit Bambini play and washspaces for wall-mounted taps → p. 829

Geberit Bambini play and washspace, with three washbasin areas, lower basin on the right

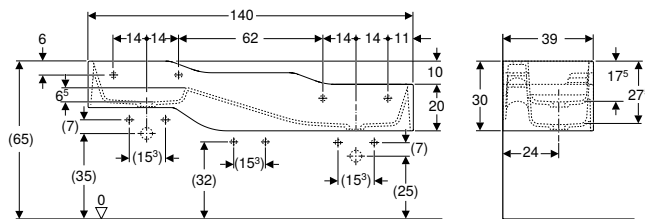

click & scan

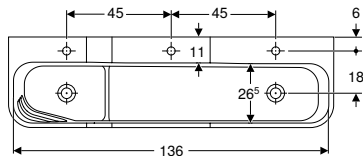

Application purposes

- For children
- For schools, childcare facilities and other educational facilities
- Suitable for children of different age groups
- For playing and learning
- For mounting on solid walls or drywalls
- For mounting on Geberit GIS set for Bambini play and washspace
- To install on Geberit Duofix elements for washbasins

Characteristics

- Three washbasin areas
- Three different heights
- Small projection
- Integrated storage function with slide and haptic area for water play and multi-sensory experience
- Rounded edges for avoiding injuries
- Shockproof
- Scratchproof
- Easy cleaning
- Seamless surface repair

Technical data

Product material	Varicor
------------------	---------

Scope of delivery

- Washing trough

Art. no.	Colour / surface	Overflow	Drain	B [cm]	H [cm]	T [cm]
Tap hole: centred, left and right						
502.976.00.1	Washing trough: white alpine / matt	without	left and right	140	30	39
502.976.SX.1 *	Washing trough: white alpine / matt Dekorlinie aussen: light blue / matt Dekorlinie innen: ocean blue / matt	without	left and right	140	30	39
502.976.79.1 *	Washing trough: white alpine / matt Dekorlinie aussen: light green / matt Dekorlinie innen: forest green / matt	without	left and right	140	30	39
502.976.FY.1 *	Washing trough: white alpine / matt Dekorlinie aussen: orange / matt Dekorlinie innen: carmine red / matt	without	left and right	140	30	39

* Order-based production


Can be combined with

- Geberit Bambini washbasin tap, single-lever mixer → p. 841
- Geberit Bambini washbasin tap, battery operation → p. 846
- Geberit Bambini washbasin tap, mains operation → p. 842
- Geberit Bambini washbasin tap, mains operation → p. 844


Accessories

- Assortment overview – Geberit Bambini play and washspaces for deck-mounted taps → p. 827
- Assortment overview – Geberit Bambini play and washspaces for wall-mounted taps → p. 829

Geberit Bambini play and washspace, with four washbasin areas, lower sink on the left

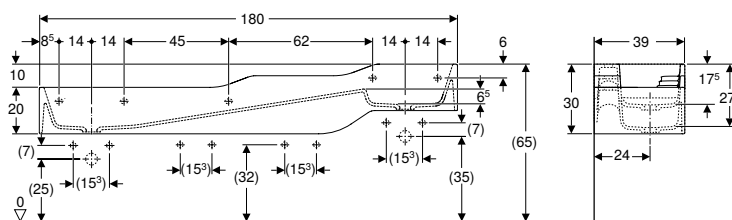

click & scan

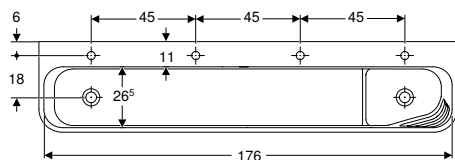

Application purposes

- For children
- For schools, childcare facilities and other educational facilities
- Suitable for children of different age groups
- For playing and learning
- For mounting on solid walls or drywalls
- For mounting on Geberit GIS set for Bambini play and washspace
- To install on Geberit Duofix elements for washbasins

Characteristics

- Four washbasin areas
- Three different heights
- Small projection
- Integrated storage function with slide and haptic area for water play and multi-sensory experience
- Rounded edges for avoiding injuries
- Shockproof
- Scratchproof
- Easy cleaning
- Seamless surface repair

Technical data

Product material	Varicor
------------------	---------

Scope of delivery

- Washing trough

Art. no.	Colour / surface	Overflow	Drain	B [cm]	H [cm]	T [cm]
Tap hole: left and right						
502.977.00.1	Washing trough: white alpine / matt	without	left and right	180	30	39
502.977.SX.1 *	Washing trough: white alpine / matt Dekorlinie aussen: light blue / matt Dekorlinie innen: ocean blue / matt	without	left and right	180	30	39
502.977.79.1 *	Washing trough: white alpine / matt Dekorlinie aussen: light green / matt Dekorlinie innen: forest green / matt	without	left and right	180	30	39
502.977.FY.1 *	Washing trough: white alpine / matt Dekorlinie aussen: orange / matt Dekorlinie innen: carmine red / matt	without	left and right	180	30	39

* Order-based production


Can be combined with

- Geberit Bambini washbasin tap, single-lever mixer → p. 841
- Geberit Bambini washbasin tap, battery operation → p. 846
- Geberit Bambini washbasin tap, mains operation → p. 842
- Geberit Bambini washbasin tap, mains operation → p. 844


Accessories

- Assortment overview – Geberit Bambini play and washspaces for deck-mounted taps → p. 827
- Assortment overview – Geberit Bambini play and washspaces for wall-mounted taps → p. 829

Geberit Bambini play and washspace, with four washbasin areas, lower basin on the right

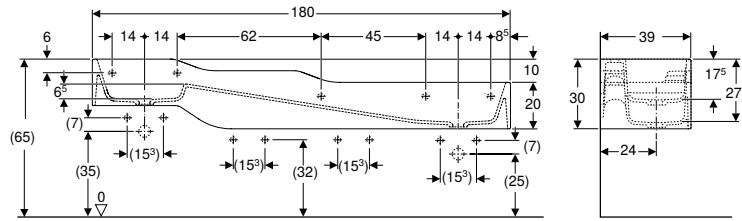

click & scan

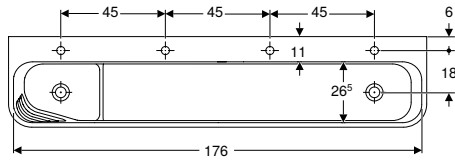

Application purposes

- For children
- For schools, childcare facilities and other educational facilities
- Suitable for children of different age groups
- For playing and learning
- For mounting on solid walls or drywalls
- For mounting on Geberit GIS set for Bambini play and washspace
- To install on Geberit Duofix elements for washbasins

Characteristics

- Four washbasin areas
- Three different heights
- Small projection
- Integrated storage function with slide and haptic area for water play and multi-sensory experience
- Rounded edges for avoiding injuries
- Shockproof
- Scratchproof
- Easy cleaning
- Seamless surface repair

Technical data

Product material	Varicor
------------------	---------

Scope of delivery

- Washing trough

Art. no.	Colour / surface	Overflow	Drain	B [cm]	H [cm]	T [cm]
Tap hole: left and right						
502.978.00.1	Washing trough: white alpine / matt	without	left and right	180	30	39
502.978.SX.1 *	Washing trough: white alpine / matt Dekorlinie aussen: light blue / matt Dekorlinie innen: ocean blue / matt	without	left and right	180	30	39
502.978.79.1 *	Washing trough: white alpine / matt Dekorlinie aussen: light green / matt Dekorlinie innen: forest green / matt	without	left and right	180	30	39
502.978.FY.1 *	Washing trough: white alpine / matt Dekorlinie aussen: orange / matt Dekorlinie innen: carmine red / matt	without	left and right	180	30	39

* Order-based production

Can be combined with


- Geberit Bambini washbasin tap, single-lever mixer → p. 841
- Geberit Bambini washbasin tap, battery operation → p. 846
- Geberit Bambini washbasin tap, mains operation → p. 842
- Geberit Bambini washbasin tap, mains operation → p. 844

Accessories

- Assortment overview – Geberit Bambini play and washspaces for deck-mounted taps → p. 827
- Assortment overview – Geberit Bambini play and washspaces for wall-mounted taps → p. 829

Accessories

Geberit Bambini decorative cover, front, for play and washspace, for two washbasin taps

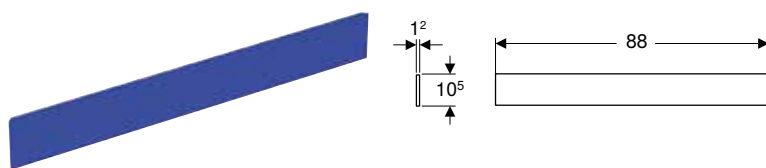

click & scan

Application purposes

- For Bambini play and washspaces

Technical data

Product material	Varicor
------------------	---------

Characteristics


- Shockproof
- Scratchproof
- Easy cleaning
- Seamless surface repair

Scope of delivery

- Decorative cover

Art. no.	Colour / surface
430210016	white alpine / matt

Geberit Bambini decorative cover, front, for play and washspace, for three washbasin taps, lower basin on the left

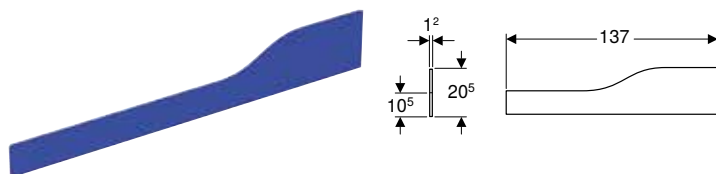

click & scan

Application purposes

- For Bambini play and washspaces

Technical data

Product material	Varicor
------------------	---------

Characteristics


- Shockproof
- Scratchproof
- Easy cleaning
- Seamless surface repair

Scope of delivery

- Decorative cover

Art. no.	Colour / surface
430310016	white alpine / matt

Geberit Bambini decorative cover, front, for play and washspace, for three washbasin taps, lower basin on the right

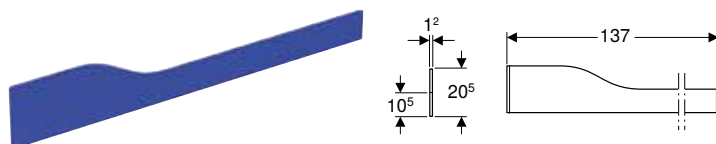

click & scan

Application purposes

- For Bambini play and washspaces

Technical data

Product material	Varicor
------------------	---------

Characteristics


- Shockproof
- Scratchproof
- Easy cleaning
- Seamless surface repair

Scope of delivery

- Decorative cover

Art. no.	Colour / surface
430360016	white alpine / matt

Geberit Bambini decorative cover, front, for play and washspace, for four washbasin taps, lower basin on the left

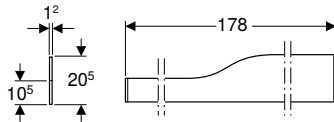

click & scan

Application purposes

- For Bambini play and washspaces

Technical data

Product material	Varicor
------------------	---------

Characteristics


- Shockproof
- Scratchproof
- Easy cleaning
- Seamless surface repair

Scope of delivery

- Decorative cover

Art. no.	Colour / surface
430010016	white alpine / matt

Geberit Bambini decorative cover, front, for play and washspace, for four washbasin taps, lower basin on the right

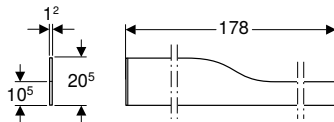

click & scan

Application purposes

- For Bambini play and washspaces

Technical data

Product material	Varicor
------------------	---------

Characteristics



- Shockproof
- Scratchproof
- Easy cleaning
- Seamless surface repair

Scope of delivery

- Decorative cover

Art. no.	Colour / surface
430060016	white alpine / matt

Geberit Bambini decorative cover, side, for play and washspace, lower basin

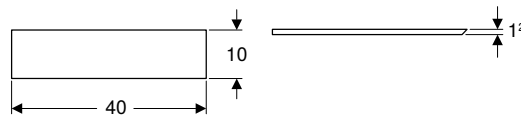

click & scan

Application purposes

- For Bambini play and washspaces

Technical data

Product material	Varicor
------------------	---------

Characteristics


- Shockproof
- Scratchproof
- Easy cleaning
- Seamless surface repair

Scope of delivery

- Decorative cover

Art. no.	Colour / surface
431020016	white alpine / matt

Geberit Bambini decorative cover, side, for play and washspace, upper basin

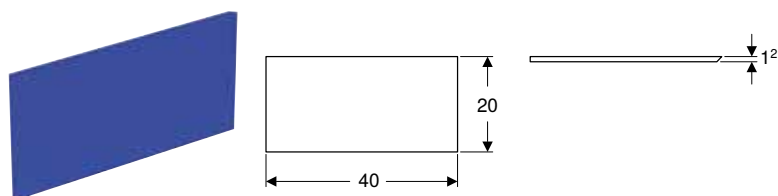

click & scan

Application purposes

- For Bambini play and washspaces

Technical data

Product material	Varicor
------------------	---------

Characteristics

- Shockproof
- Scratchproof
- Easy cleaning
- Seamless surface repair

Scope of delivery

- Decorative cover

Art. no.	Colour / surface
431030016	white alpine / matt

Geberit set of mounting brackets for play and washspace, for two washbasin taps



click & scan

Application purposes

- For Bambini play and washspaces

Technical data

Product material	Steel
------------------	-------

Scope of delivery


- Set of 2 pieces
- Fastening material

Art. no.
521095000

Taps

Washbasin taps

Geberit Bambini washbasin tap, single-lever mixer, multicolour

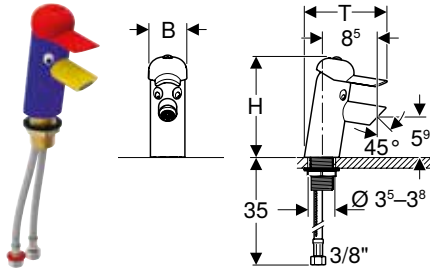

click & scan

Application purposes

- For children
- For childcare
- For installation in washbasins or washtops
- For installation in Bambini play and washspaces
- For connecting cold and hot water

Technical data

Operating pressure	1–10 bar
Water test pressure max.	16 bar
Test pressure air / inert gas max.	3 bar
Water temperature short-term max.	90 °C
Flow rate at 300 kPa / 3 bar	5.7 l/min
Product material	Brass

Characteristics

- Child-friendly design
- Tap group I in accordance with DIN 4109
- Single-lever mixer
- With integrated check valve
- Housing, powder-coated
- Lever made of ABS
- Tricolour
- Components in contact with drinking water lead-free

Scope of delivery

- Tap aerator key
- Key for lever
- Fastening material

Art. no.	Colour / surface	Mixer	B [cm]	H [cm]	T [cm]
57160000	Body: ultramarine blue / powder-coated Hat: carmine red Spout: rapeseed yellow / powder-coated	with mixer	5.6	14.5	13

Can be combined with

- Geberit Bambini washbasin for children → p. 830


Accessories

- Geberit Bambini mini thermostat for washbasin tap → p. 847
- Geberit Bambini tap aerator for washbasin tap → p. 847



- It is recommended to use the Geberit Bambini mini thermostat for washbasin taps in order to avoid scald injuries
- If the washbasin tap Bambini is used in the upper basin of a play and washspace Bambini in combination with an overflow pipe, the swiveling tap aerator for Geberit washbasin tap Bambini (art. no. 571410000) must be ordered separately

Geberit Bambini washbasin tap, single-lever mixer

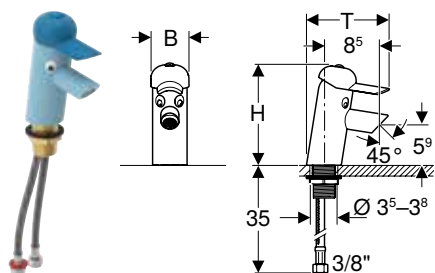

click & scan

Application purposes

- For children
- For childcare
- For installation in washbasins or washtops
- For installation in Bambini play and washspaces
- For connecting cold and hot water

Technical data

Operating pressure	1–10 bar
Water test pressure max.	16 bar
Test pressure air / inert gas max.	3 bar
Water temperature short-term max.	90 °C
Flow rate at 300 kPa / 3 bar	5.7 l/min
Product material	Brass

Characteristics

- Child-friendly design
- Tap group I in accordance with DIN 4109
- Single-lever mixer
- With integrated check valve
- Housing powder-coated or chrome-plated
- Lever made of ABS
- Components in contact with drinking water lead-free

Scope of delivery

- Tap aerator key
- Key for lever
- Fastening material

Art. no.	Colour / surface	Mixer	B [cm]	H [cm]	T [cm]
116.207.SX.1	Body: light blue / powder-coated Hat: ocean blue	with mixer	5.6	14.5	13
116.207.79.1	Body: light green / powder-coated Hat: forest green	with mixer	5.6	14.5	13
116.207.FY.1	Body: orange / powder-coated Hat: carmine red	with mixer	5.6	14.5	13
116.207.21.1	Body: chrome / glossy Hat: dust grey RAL 7037	with mixer	5.6	14.5	13

Can be combined with

- Geberit Bambini play and washspace, with two washbasin areas, lower basin on the left → p. 831
- Geberit Bambini play and washspace, with two washbasin areas, lower basin on the right → p. 832
- Geberit Bambini play and washspace, with three washbasin areas, lower basin on the left → p. 833
- Geberit Bambini play and washspace, with three washbasin areas, lower basin on the right → p. 834
- Geberit Bambini play and washspace, with four washbasin areas, lower sink on the left → p. 835
- Geberit Bambini play and washspace, with four washbasin areas, lower basin on the right → p. 836
- Geberit Bambini washbasin for children → p. 830


Accessories

- Geberit Bambini mini thermostat for washbasin tap → p. 847
- Geberit Bambini tap aerator for washbasin tap → p. 847



- It is recommended to use the Geberit Bambini mini thermostat for washbasin taps in order to avoid scald injuries
- If the washbasin tap Bambini is used in the upper basin of a play and washspace Bambini in combination with an overflow pipe, the swiveling tap aerator for Geberit washbasin tap Bambini (art. no. 571410000) must be ordered separately

Geberit Bambini washbasin tap, mains operation

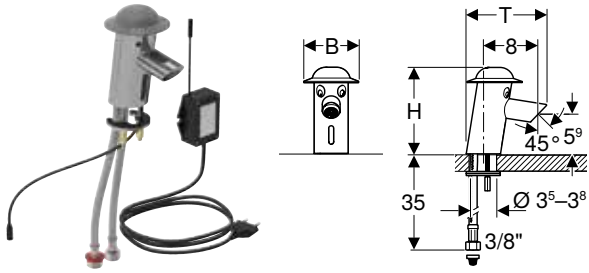

click & scan

Application purposes

- For children
- For childcare
- For installation in washbasins or washtops
- For installation in Bambini play and washspaces
- For connecting cold and hot water
- For combination with continuous flow heater, see technical data sheet "Washbasin taps with instantaneous water heaters"

Technical data

Degree of protection	IP65
Nominal voltage	230 V AC
Mains frequency	50 Hz
Operating voltage	6.6 V DC
Operating pressure	1–8.5 bar
Differentiated pressure CW/WW max.	1.5 bar
Water test pressure max.	16 bar
Test pressure air / inert gas max.	3 bar
Water temperature short-term max.	80 °C
Flow rate at 300 kPa / 3 bar	5.7 l/min
Interval flush	24 h
Interval flush time	10 s
Product material	Brass

Characteristics

- Child-friendly design
- Tap group I in accordance with DIN 4109
- Infrared user detection
- Adjustable activation distance
- Interval flush
- Flush actuation for basin cleaning can be deactivated manually
- With integrated check valve
- Chrome-plated housing
- Hat made of polycarbonate
- Components in contact with drinking water lead-free

Scope of delivery

- Power supply unit
- Basket filter
- Tap aerator key
- Fastening material

Art. no.	Colour / surface	Mixer	B [cm]	H [cm]	T [cm]	Power consumption [W]

P: Phase out

Can be combined with

- Geberit Bambini washbasin for children → p. 830
- Geberit Bambini play and washspace, with two washbasin areas, lower basin on the left → p. 831
- Geberit Bambini play and washspace, with two washbasin areas, lower basin on the right → p. 832
- Geberit Bambini play and washspace, with three washbasin areas, lower basin on the left → p. 833
- Geberit Bambini play and washspace, with three washbasin areas, lower basin on the right → p. 834
- Geberit Bambini play and washspace, with four washbasin areas, lower sink on the left → p. 835
- Geberit Bambini play and washspace, with four washbasin areas, lower basin on the right → p. 836

Accessories


- Geberit Bambini mini thermostat for washbasin tap → p. 847
- Geberit Bambini tap aerator for washbasin tap → p. 847



- It is recommended to use the Geberit Bambini mini thermostat for washbasin taps in order to avoid scald injuries
- If the washbasin tap Bambini is used in the upper basin of a play and washspace Bambini in combination with an overflow pipe, the swiveling tap aerator for Geberit washbasin tap Bambini (art. no. 571410000) must be ordered separately
- Replaced by art. no. 116.209.21.5

New

Geberit Bambini washbasin tap, mains operation, multicolour

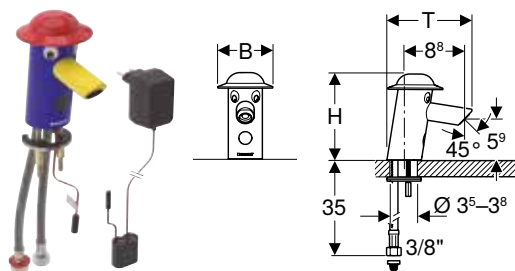

click & scan

Application purposes

- For children
- For childcare
- For installation in washbasins or washtops
- For installation in Bambini play and washspaces
- For connecting cold and hot water
- For combination with continuous flow heater, see technical data sheet "Washbasin taps with instantaneous water heaters"

Technical data

Degree of protection	IP44
Nominal voltage	230 V AC
Mains frequency	50–60 Hz
Operating voltage	12 V AC
Operating pressure	0.5–10 bar
Differentiated pressure CW/WW max.	1.5 bar
Water test pressure max.	16 bar
Test pressure air / inert gas max.	3 bar
Ambient temperature	1–40 °C
Water temperature short-term max.	90 °C
Flow rate at 300 kPa / 3 bar	5.7 l/min
Interval flush time, factory setting	3 s
Product material	Brass

Characteristics

- Child-friendly design
- Tap group I in accordance with DIN 4109
- Infrared user detection
- Functions can be set and queried with the Geberit Service Handy
- Device settings and operation with mobile device via integrated Bluetooth® interface
- Compatible with Geberit Control App
- Compatible with Geberit Connect
- Wirelessly connectable with Geberit Gateway via Bluetooth®
- Adjustable activation distance
- With integrated check valve
- Housing, powder-coated
- Hat made of polycarbonate
- Tricolour
- Components in contact with drinking water lead-free

Scope of delivery

- Power supply unit
- Basket filter
- Tap aerator key
- Fastening material

Art. no.	Colour / surface	Mixer	B [cm]	H [cm]	T [cm]	Power consumption [W]	Plug type
116.209.00.5	Body: ultramarine blue / powder-coated Hat: carmine red Spout: rapeseed yellow / powder-coated	with mixer	8	12.6	12.4	0.1	CEE 7/16

Available as of April 2026

Can be combined with

- Geberit Bambini washbasin for children → p. 830


Accessories

- Geberit Bambini mini thermostat for washbasin tap → p. 847
- Geberit Bambini tap aerator for washbasin tap → p. 847



- Replacement for art. no. 577660000

Geberit Bambini washbasin tap, mains operation

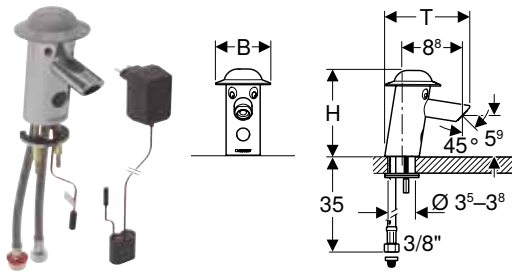

click & scan

Application purposes

- For children
- For childcare
- For installation in washbasins or washtops
- For installation in Bambini play and washspaces
- For connecting cold and hot water
- For combination with continuous flow heater, see technical data sheet "Washbasin taps with instantaneous water heaters"

Technical data

Degree of protection	IP44
Nominal voltage	230 V AC
Mains frequency	50–60 Hz
Operating voltage	12 V AC
Operating pressure	0.5–10 bar
Differentiated pressure CW/WW max.	1.5 bar
Water test pressure max.	16 bar
Test pressure air / inert gas max.	3 bar
Ambient temperature	1–40 °C
Water temperature short-term max.	90 °C
Flow rate at 300 kPa / 3 bar	5.7 l/min
Interval flush time, factory setting	3 s
Product material	Brass

Characteristics

- Child-friendly design
- Tap group I in accordance with DIN 4109
- Infrared user detection
- Functions can be set and queried with the Geberit Service Handy
- Device settings and operation with mobile device via integrated Bluetooth® interface
- Compatible with Geberit Control App
- Compatible with Geberit Connect
- Wirelessly connectable with Geberit Gateway via Bluetooth®
- Adjustable activation distance
- With integrated check valve
- Chrome-plated housing
- Hat made of polycarbonate
- Components in contact with drinking water lead-free

Scope of delivery

- Power supply unit
- Basket filter
- Tap aerator key
- Fastening material

Art. no.	Colour / surface	Mixer	B	H	T	Power consumption [W]	Plug type
			[cm]	[cm]	[cm]		
116.209.21.5	Body: chrome / glossy Hat: dust grey RAL 7037	with mixer	8	12.6	12.4	0.1	CEE 7/16

Can be combined with


- Geberit Bambini washbasin for children → p. 830
- Geberit Bambini play and washspace, with two washbasin areas, lower basin on the left → p. 831
- Geberit Bambini play and washspace, with two washbasin areas, lower basin on the right → p. 832
- Geberit Bambini play and washspace, with three washbasin areas, lower basin on the left → p. 833
- Geberit Bambini play and washspace, with three washbasin areas, lower basin on the right → p. 834
- Geberit Bambini play and washspace, with four washbasin areas, lower sink on the left → p. 835
- Geberit Bambini play and washspace, with four washbasin areas, lower basin on the right → p. 836

Accessories

- Geberit Bambini mini thermostat for washbasin tap → p. 847
- Geberit Bambini tap aerator for washbasin tap → p. 847

New

Geberit Bambini washbasin tap, battery operation, multicolour

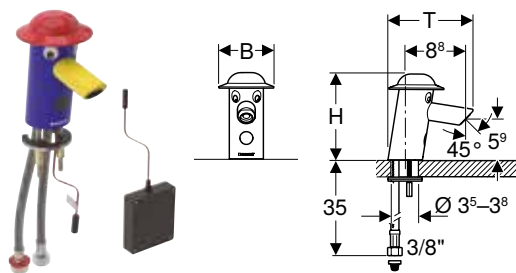

click & scan

Application purposes

- For children
- For childcare
- For installation in washbasins or washtops
- For installation in Bambini play and washspaces
- For connecting cold and hot water
- For combination with continuous flow heater, see technical data sheet "Washbasin taps with instantaneous water heaters"

Technical data

Battery type	Alkaline (1.5 V AA)
Degree of protection	IP44
Operating voltage	6 V DC
Operating pressure	0.5–10 bar
Differentiated pressure CW/WW max.	1.5 bar
Water test pressure max.	16 bar
Test pressure air / inert gas max.	3 bar
Ambient temperature	1–40 °C
Water temperature short-term max.	90 °C
Flow rate at 300 kPa / 3 bar	5.7 l/min
Interval flush time, factory setting	3 s
Product material	Brass

Characteristics

- Child-friendly design
- Tap group I in accordance with DIN 4109
- Infrared user detection
- Warning when the battery is low
- Functions can be set and queried with the Geberit Service Handy
- Device settings and operation with mobile device via integrated Bluetooth® interface
- Compatible with Geberit Control App
- Compatible with Geberit Connect
- Wirelessly connectable with Geberit Gateway via Bluetooth®
- Adjustable activation distance
- With integrated check valve
- Housing, powder-coated
- Hat made of polycarbonate
- Tricolour
- Components in contact with drinking water lead-free

Scope of delivery

- Battery compartment
- 4 alkaline manganese batteries Type AA 1.5 V
- Basket filter
- Tap aerator key
- Fastening material

Art. no.	Colour / surface	Mixer	B	H	T
			[cm]	[cm]	[cm]
116.208.00.5	Body: ultramarine blue / powder-coated Hat: carmine red Spout: rapeseed yellow / powder-coated	with mixer	8	12.6	12.4

Available as of April 2026

Can be combined with

- Geberit Bambini washbasin for children → p. 830

Accessories


- Geberit Bambini mini thermostat for washbasin tap → p. 847
- Geberit Bambini tap aerator for washbasin tap → p. 847



- Replacement for art. no. 577650000

New

Geberit Bambini washbasin tap, battery operation

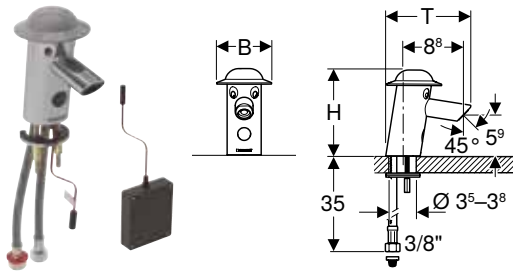

click & scan

Application purposes

- For children
- For childcare
- For installation in washbasins or washtops
- For installation in Bambini play and washspaces
- For connecting cold and hot water
- For combination with continuous flow heater, see technical data sheet "Washbasin taps with instantaneous water heaters"

Technical data

Battery type	Alkaline (1.5 V AA)
Degree of protection	IP44
Operating voltage	6 V DC
Operating pressure	0.5–10 bar
Differentiated pressure CW/WW max.	1.5 bar
Water test pressure max.	16 bar
Test pressure air / inert gas max.	3 bar
Ambient temperature	1–40 °C
Water temperature short-term max.	90 °C
Flow rate at 300 kPa / 3 bar	5.7 l/min
Interval flush time, factory setting	3 s
Product material	Brass

Characteristics

- Child-friendly design
- Tap group I in accordance with DIN 4109
- Infrared user detection
- Warning when the battery is low
- Functions can be set and queried with the Geberit Service Handy
- Device settings and operation with mobile device via integrated Bluetooth® interface
- Compatible with Geberit Control App
- Compatible with Geberit Connect
- Wirelessly connectable with Geberit Gateway via Bluetooth®
- Adjustable activation distance
- With integrated check valve
- Chrome-plated housing
- Hat made of polycarbonate
- Components in contact with drinking water lead-free

Scope of delivery

- Battery compartment
- 4 alkaline manganese batteries Type AA 1.5 V
- Basket filter
- Tap aerator key
- Fastening material

Art. no.	Colour / surface	Mixer	B [cm]	H [cm]	T [cm]
116.208.21.5	Body: chrome / glossy Hat: dust grey RAL 7037	with mixer	8	12.6	12.4

Available as of April 2026

Can be combined with

- Geberit Bambini play and washspace, with two washbasin areas, lower basin on the left → p. 831
- Geberit Bambini play and washspace, with two washbasin areas, lower basin on the right → p. 832
- Geberit Bambini play and washspace, with three washbasin areas, lower basin on the left → p. 833
- Geberit Bambini play and washspace, with three washbasin areas, lower basin on the right → p. 834
- Geberit Bambini play and washspace, with four washbasin areas, lower sink on the left → p. 835
- Geberit Bambini play and washspace, with four washbasin areas, lower basin on the right → p. 836
- Geberit Bambini washbasin for children → p. 830

Accessories

- Geberit Bambini mini thermostat for washbasin tap → p. 847
- Geberit Bambini tap aerator for washbasin tap → p. 847



- Replacement for art. no. 116.208.21.1

Accessories

Geberit Bambini tap aerator for washbasin tap




click & scan

Scope of delivery

- Installation wrench

Art. no.	Flow rate [l/min]	Model
571410000	5.7	swivelling

Geberit Bambini mini thermostat for washbasin tap

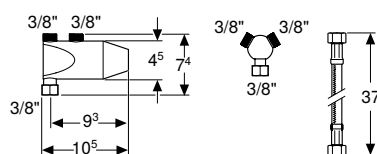

click & scan

Application purposes

- For Bambini washbasin taps
- For adjusting and limiting the hot water temperature
- For preventing scald injuries in case of cold water supply failure
- For mounting on G 3/8" angle stop valves

Technical data

Operating pressure	≤ 10 bar
Recommended operating pressure (bar)	1–5 bar
Operating temperature, hot water	60–65 °C
Operating temperature, cold water	10–15 °C
Flow rate at 300 kPa / 3 bar	12 l/min
Product material	Brass chrome-plated

Characteristics

- Tap group I in accordance with DIN 4109
- Scalding protection by thermal expansion element according to EN 1111
- Maximum water temperature can be adjusted at the outlet by thermostatic cartridge
- Components in contact with drinking water lead-free

Scope of delivery






- Y-piece
- Reinforced braided hose 3/8"
- Basket filter

Art. no.	599113000
----------	-----------

WCs

Accessory overview – Geberit Bambini wall-hung and floor-standing WCs, Rimfree









Geberit International Sales, version: December 2025

					Wall-hung WCs		Floor-standing WCs	
					Geberit Bambini wall-hung WC for children, washdown, Rimfree, for WC seat	Geberit Bambini floor-standing WC for children, washdown, Rimfree, for WC seat	Geberit Bambini floor-standing WC for small children, washdown, Rimfree	Geberit Bambini floor-standing WC for small children, washdown, Rimfree
White					502.959.00.1	502.966.00.1	502.965.00.1	
								
					Height of ceramic edge	35 cm	30 cm	24 cm
					→ p. 850	→ p. 851	→ p. 852	
WC seats and WC seat rings, to be ordered additionally								
Geberit Bambini WC seat for children, EasyMount hinges	Without soft-closing mechanism	white	502.969.01.1	→ p. 853	✓	✓		
	Without soft-closing mechanism	ocean blue	502.969.SX.1	→ p. 853	✓	✓		
	Without soft-closing mechanism	forest green	502.969.79.1	→ p. 853	✓	✓		
	Without soft-closing mechanism	carmine red	502.969.FY.1	→ p. 853	✓	✓		
	With soft-closing mechanism	white	502.970.01.1	→ p. 853	✓	✓		
	With soft-closing mechanism	ocean blue	502.970.SX.1	→ p. 853	✓	✓		
	With soft-closing mechanism	forest green	502.970.79.1	→ p. 853	✓	✓		
	With soft-closing mechanism	carmine red	502.970.FY.1	→ p. 853	✓	✓		
Geberit Bambini WC seat ring for children, with grips	Without soft-closing mechanism	white	502.971.01.1	→ p. 854	✓	✓		
	Without soft-closing mechanism	ocean blue	502.971.SX.1	→ p. 854	✓	✓		
	Without soft-closing mechanism	forest green	502.971.79.1	→ p. 854	✓	✓		
	Without soft-closing mechanism	carmine red	502.971.FY.1	→ p. 854	✓	✓		
Geberit Bambini WC seat ring for small children		agate grey	502.972.PL.1	→ p. 855				✓
		carmine red	502.972.FY.1	→ p. 855				✓
Duofix elements								
Geberit Duofix Bambini element for wall-hung WC for children, 97 cm, with Sigma concealed cistern 12 cm	Element height: 97 cm Actuator plate height: 88 cm		111.923.00.6			✓		
Actuator plates, to be ordered additionally in combination with Geberit Sigma concealed cisterns								
Geberit Sigma01 actuator plate, round, dual flush, for Bambini WC	Plate: white Full flush volume button: carmine red Partial flush volume button: orange		115.770.FY.5			✓	✓	✓
	Plate: white Full flush volume button: ocean blue Partial flush volume button: light blue		115.770.SX.5			✓	✓	✓
	Plate: white Full flush volume button: forest green Partial flush volume button: light green		115.770.79.5			✓	✓	✓
Geberit Sigma01 actuator plate, round, dual flush		white	115.770.11.5			✓	✓	✓

✓ Compatible

Accessory overview – Geberit Bambini wall-hung and floor-standing WCs with flush rim


Geberit International Sales, version: December 2025

					Wall-hung WCs	Floor-standing WCs	
					Geberit Bambini wall-hung WC for children, washdown, for WC seat	Geberit Bambini floor-standing WC for small children, wash-down WC	Geberit Bambini floor-standing WC for children, washout, for WC seat
White					201700000	211650000	211500000
							
Height of ceramic edge					35 cm	26 cm	35 cm
					→ p. 850	→ p. 852	→ p. 853
WC seats and WC seat rings, to be ordered additionally							
Geberit Bambini WC seat for children	Without soft-closing mechanism	white	573334000	 → p. 854	✓		✓
Geberit Bambini WC seat ring for small children		ruby red	573338000	 → p. 855		✓	
		agate grey	573348000	→ p. 855		✓	
Duofix elements							
Geberit Duofix Bambini element for wall-hung WC for children, 97 cm, with Sigma concealed cistern 12 cm	Element height: 97 cm Actuator plate height: 88 cm		111.923.00.6		✓		
For final installation, to be ordered additionally for Duofix elements							
Geberit Bambini connection set for WC for children		white	152.408.00.1	 → p. 855		✓	✓
Actuator plates, to be ordered additionally in combination with Geberit Sigma concealed cisterns							
Geberit Sigma01 actuator plate, round, dual flush		white	115.770.11.5		✓	✓	✓
Geberit Sigma01 actuator plate, round, dual flush, for Bambini WC	Multiple surface Plate: white Full flush volume button: carmine red Partial flush volume button: orange		115.770.FY.5		✓	✓	✓
	Multiple surface Plate: white Full flush volume button: ocean blue Partial flush volume button: light blue		115.770.SX.5		✓	✓	✓
	Multiple surface Plate: white Full flush volume button: forest green Partial flush volume button: light green		115.770.79.5		✓	✓	✓
	Plate: white Full flush volume button: blue Partial flush volume button: red		115.770.LB.5	→ p. 849	✓	✓	✓

✓ Compatible

Wall-hung WCs

Geberit Bambini wall-hung WC for children, washdown, Rimfree, for WC seat

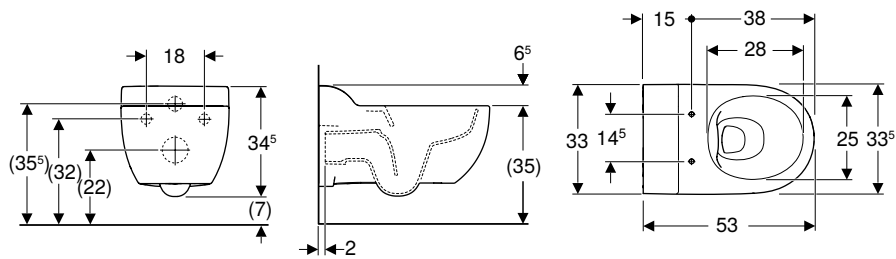

Application purposes

- For children
- For childcare
- For concealed cisterns

Technical data

Product material	Vitreous china
------------------	----------------

Characteristics

- Wall-hung
- Washdown WC
- Rimless WC ceramic appliance featuring Rimfree flush technology
- Floor clearance 7 cm
- Type 1, full flush volume 6 / 5 / 4 l, in accordance with EN 997
- Shrouded
- Hidden fastening
- Height of upper edge of sanitary ceramic: 35 cm

Scope of delivery

- WC ceramic appliance
- Fastening material

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]
502.959.00.1	white	33.5	34.5	53

To order additionally

- WC seat or WC seat ring


Can be combined with

- Geberit Bambini WC seat for children, EasyMount hinges → p. 853
- Geberit Bambini WC seat ring for children, with grips → p. 854
- Geberit Duofix Bambini element for wall-hung WC for children, 97 cm, with Sigma concealed cistern 12 cm
- Geberit Sigma01 actuator plate, round, dual flush, for Bambini WC

Accessories

- Accessory overview – Geberit Bambini wall-hung and floor-standing WCs, Rimfree → p. 848

Geberit Bambini wall-hung WC for children, washdown, for WC seat

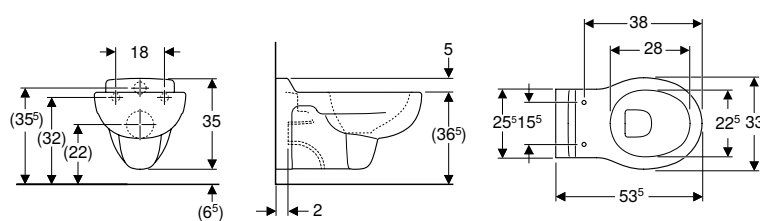

Application purposes

- For children
- For childcare
- For concealed cisterns
- For pressure flushing valves

Technical data

Product material	Vitreous china
------------------	----------------

Characteristics

- Wall-hung
- Washdown WC
- With flush rim
- Type 1, full flush volume 6 l, in accordance with EN 997

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]
201700000	white	33	35	53.5

To order additionally

- WC seat

Can be combined with


- Geberit Bambini WC seat for children → p. 854
- Geberit Duofix Bambini element for wall-hung WC for children, 97 cm, with Sigma concealed cistern 12 cm

Accessories

- Accessory overview – Geberit Bambini wall-hung and floor-standing WCs with flush rim → p. 849

Floor-standing WCs

Geberit Bambini floor-standing WC for children, washdown, Rimfree, for WC seat

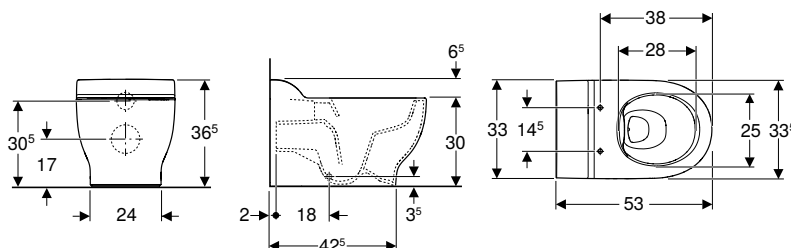

Application purposes

- For children
- For childcare
- For concealed cisterns

Technical data

Product material	Vitreous china
------------------	----------------

Characteristics

- Floor-standing
- Back-to-wall
- Washdown WC
- Rimless WC ceramic appliance featuring Rimfree flush technology
- Type 1, full flush volume 6 / 5 / 4 l, in accordance with EN 997
- Horizontal outlet
- Shrouded
- Hidden fastening
- Height of upper edge of sanitary ceramic: 30 cm

Scope of delivery

- WC ceramic appliance
- Fastening material

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]
502.966.00.1	white	33.5	36.5	53

To order additionally

- WC seat or WC seat ring


Can be combined with

- Geberit Bambini WC seat for children, EasyMount hinges → p. 853
- Geberit Bambini WC seat ring for children, with grips → p. 854
- Geberit Sigma01 actuator plate, round, dual flush, for Bambini WC

Accessories

- Accessory overview – Geberit Bambini wall-hung and floor-standing WCs, Rimfree → p. 848

Geberit Bambini floor-standing WC for small children, washdown, Rimfree

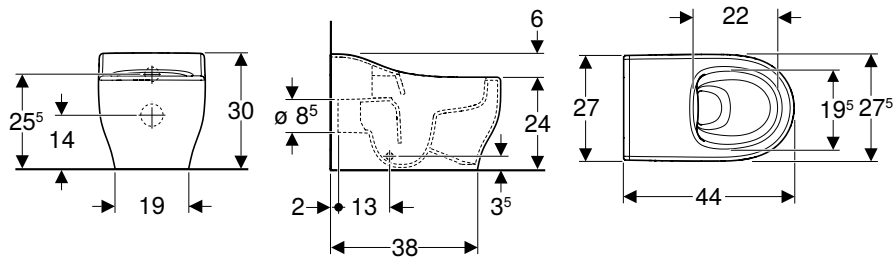

click & scan

Application purposes

- For small children
- For childcare
- For replacing potties
- For concealed cisterns

Technical data

Product material	Vitreous china
------------------	----------------

Scope of delivery

- WC ceramic appliance
- Fastening material

Characteristics

- Floor-standing
- Back-to-wall
- Washdown WC
- Rimless WC ceramic appliance featuring Rimfree flush technology
- Type 1, full flush volume 5 / 4 l, according to EN 997
- Horizontal outlet
- Outlet diameter 85 mm
- Shrouded
- Hidden fastening
- Height of upper edge of sanitary ceramic: 24 cm
- Potty chair shape

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]
502.965.00.1	white	27.5	30	44


Can be combined with

- Geberit Bambini WC seat ring for small children → p. 855
- Geberit Sigma01 actuator plate, round, dual flush, for Bambini WC

Accessories

- Accessory overview – Geberit Bambini wall-hung and floor-standing WCs, Rimfree → p. 848

Geberit Bambini floor-standing WC for small children, washdown WC

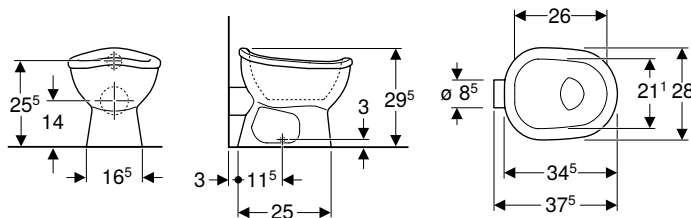

click & scan

Application purposes

- For small children
- For childcare
- For concealed cisterns
- For low, half-high and high level exposed cisterns
- For pressure flushing valves
- For replacing potties

Technical data

Product material	Vitreous china
------------------	----------------

Characteristics

- Floor-standing
- Washdown WC
- With flush rim
- Type 1, full flush volume 5 l, in accordance with EN 997
- Flushes with 4.5 l
- Horizontal outlet
- Outlet diameter 85 mm
- Potty chair shape

Scope of delivery

- WC ceramic appliance

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]
211650000	white	28	29.5	37.5

To order additionally

- Fastening material


Can be combined with

- Geberit Bambini WC seat ring for small children → p. 855

Accessories

- Accessory overview – Geberit Bambini wall-hung and floor-standing WCs with flush rim → p. 849

Geberit Bambini floor-standing WC for children, washout, for WC seat

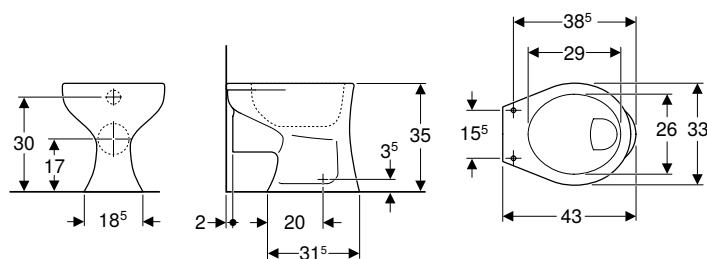

click & scan

Application purposes

- For children
- For childcare
- For concealed cisterns
- For pressure flushing valves

Characteristics

- Floor-standing
- Washout WC
- With flush rim
- Type 1, full flush volume 6 l, in accordance with EN 997
- Horizontal outlet

Technical data

Product material	Vitreous china
------------------	----------------

Scope of delivery

- WC ceramic appliance

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]
211500000	white	33	35	43

To order additionally

- WC seat
- Fastening material

Can be combined with


- Geberit Bambini WC seat for children → p. 854

Accessories

- Accessory overview – Geberit Bambini wall-hung and floor-standing WCs with flush rim → p. 849

WC seats

Geberit Bambini WC seat for children, EasyMount hinges

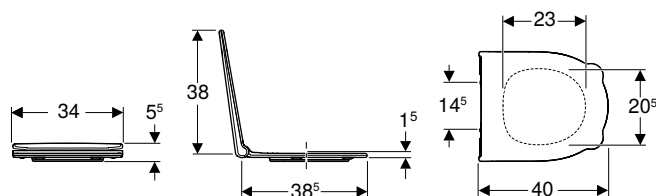

click & scan

Application purposes

- For WCs for children, Rimfree

Technical data

Product material	Duroplast
Fastening distance	14.5 cm

Characteristics

- Child-friendly design
- Handles adapted to children's hands for easy and hygienic opening and closing
- WC seat ring with overhang for protection against urine splashes
- Rounded edges for avoiding injuries
- Easy to clean
- WC seat with EasyMount hinges
- Sandwich shape

Scope of delivery


- WC seat

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]	Soft-closing mechanism	Fastening	Hinge material
502.970.01.1	white	34	5.5	40	yes	from above	Stainless steel / plastic
502.970.SX.1	ocean blue	34	5.5	40	yes	from above	Stainless steel / plastic
502.970.79.1	forest green	34	5.5	40	yes	from above	Stainless steel / plastic
502.970.FY.1	carmine red	34	5.5	40	yes	from above	Stainless steel / plastic
502.969.01.1	white	34	5.5	40	no	from above	Stainless steel / plastic
502.969.SX.1	ocean blue	34	5.5	40	no	from above	Stainless steel / plastic
502.969.79.1	forest green	34	5.5	40	no	from above	Stainless steel / plastic
502.969.FY.1	carmine red	34	5.5	40	no	from above	Stainless steel / plastic

Can be combined with

- Geberit Bambini wall-hung WC for children, washdown, Rimfree, for WC seat → p. 850
- Geberit Bambini floor-standing WC for children, washdown, Rimfree, for WC seat → p. 851

Geberit Bambini WC seat for children

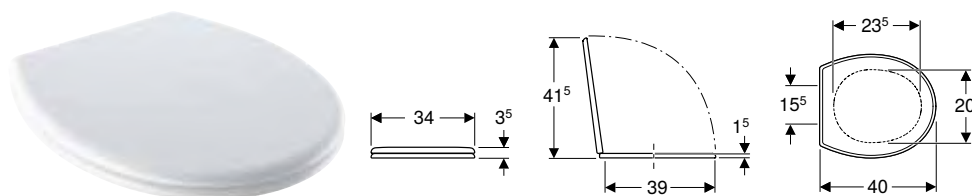

Application purposes

- For WCs for children

Scope of delivery

- WC seat

Technical data

Product material	Duroplast
Fastening distance	15.5 cm


Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]	Soft-closing mechanism	Fastening	Hinge material
573334000	white / glossy	34	3.5	40	no	from below	Stainless steel

Can be combined with

- Geberit Bambini floor-standing WC for children, washout, for WC seat → p. 853
- Geberit Bambini wall-hung WC for children, washdown, for WC seat → p. 850

WC seat rings

Geberit Bambini WC seat ring for children, with grips

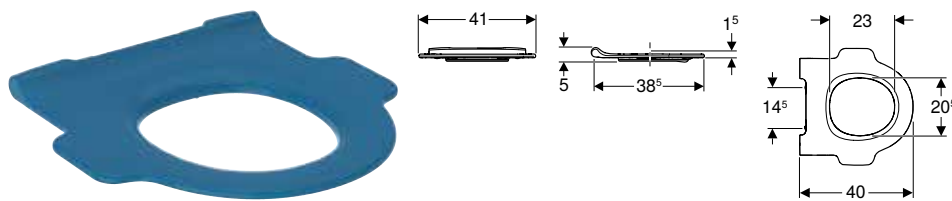

Application purposes

- For WCs for children, Rimfree

Technical data

Product material	Duroplast
Fastening distance	14.5 cm

Characteristics

- Child-friendly design
- With grips
- WC seat ring with overhang for protection against urine splashes
- Rounded edges for avoiding injuries
- Easy to clean
- WC seat with EasyMount hinges

Scope of delivery


- WC seat ring

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]	Soft-closing mechanism	Fastening	Hinge material
502.971.01.1	white	41	5	40	no	from above	Stainless steel / plastic
502.971.SX.1	ocean blue	41	5	40	no	from above	Stainless steel / plastic
502.971.79.1	forest green	41	5	40	no	from above	Stainless steel / plastic
502.971.FY.1	carmine red	41	5	40	no	from above	Stainless steel / plastic

Can be combined with

- Geberit Bambini wall-hung WC for children, washdown, Rimfree, for WC seat → p. 850
- Geberit Bambini floor-standing WC for children, washdown, Rimfree, for WC seat → p. 851

Geberit Bambini WC seat ring for small children

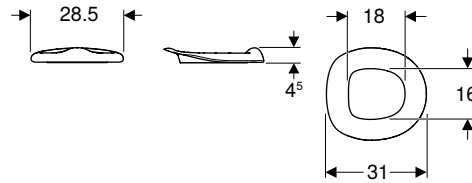

click & scan

Application purposes

- For WCs for small children, Rimfree

Technical data

Product material	PUR
------------------	-----

Characteristics

- Child-friendly design
- Potty chair shape
- Lay-on seat

Scope of delivery


- WC seat ring

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]	Soft-closing mechanism	Fastening
502.972.PL.1	agate grey	28.5	4.5	31	no	none
502.972.FY.1	carmine red	28.5	4.5	31	no	none

Can be combined with

- Geberit Bambini floor-standing WC for small children, washdown, Rimfree → p. 852

Geberit Bambini WC seat ring for small children

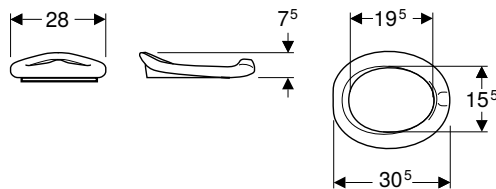

click & scan

Application purposes

- For WCs for small children

Technical data

Product material	PUR
------------------	-----

Characteristics

- Lay-on seat
- Potty chair shape

Scope of delivery

- WC seat ring

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]	Soft-closing mechanism	Fastening
573338000	ruby red / matt	28	7.5	30.5	no	none
573348000	agate grey / matt	28	7.5	30.5	no	none


Can be combined with

- Geberit Bambini floor-standing WC for small children, washdown WC → p. 852

Waste fittings

Drain assemblies for Geberit Bambini WCs

Geberit Bambini connection set for WC for children



click & scan

Application purposes

- For floor-standing WCs for children and small children

Technical data

Product material	PP
------------------	----

Scope of delivery


- Flush bend with sleeve, made of PVC
- Straight connector with sleeve, made of PP
- 2 collars

Art. no.	Colour / surface	d, \varnothing [mm]	AB [mm]
152.408.00.1	white	90	85-102

Bathtubs

Bathtubs made of solid surface material

Geberit Bambini asymmetrical bathtub for babies

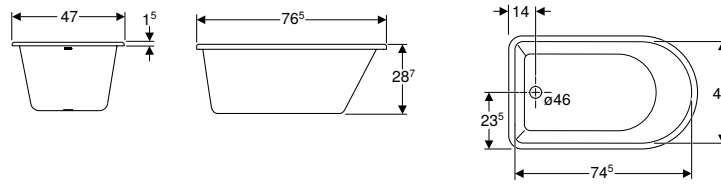

click & scan

Application purposes

- For mounting in washtops
- For childcare

Technical data

Product material	Varicor
------------------	---------

Characteristics


- Outlet at foot
- Asymmetrical
- Antibacterial
- Shockproof
- Scratchproof
- Easy cleaning
- Seamless surface repair
- Drain hole $\varnothing 46$ mm

Scope of delivery

- Bathtub
- Drain assembly
- Waste plug made of rubber
- Overflow pipe

Art. no.	Colour / surface	L [cm]	L2 [cm]	B [cm]	B2 [cm]	H [cm]	Total water capacity [l]	With overflow hole
406010016	white alpine / matt	76.5	64.5	47	32	28.5	40	No

Geberit Bambini oval bathtub for babies

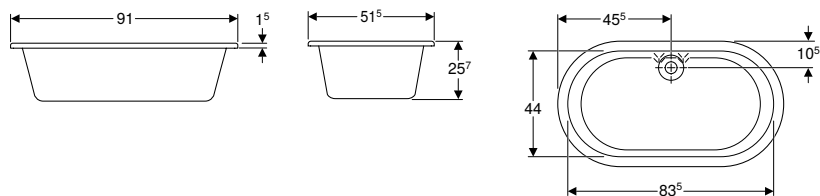

click & scan

Application purposes

- For mounting in washtops
- For childcare

Technical data

Product material	Varicor
------------------	---------

Characteristics

- Central outlet
- Oval
- Antibacterial
- Shockproof
- Scratchproof
- Easy cleaning
- Seamless surface repair
- Drain hole $\varnothing 46$ mm

Scope of delivery

- Bathtub
- Drain assembly
- Waste plug made of rubber
- Overflow pipe

Art. no.	Colour / surface	L [cm]	L2 [cm]	B [cm]	B2 [cm]	H [cm]	Total water capacity [l]	With overflow hole
407010016	white alpine / matt	91	71	51.5	36.5	25.7	80	No




Geberit Publica

Washbasins.....	860
Washbasins made of solid surface material.....	860
Squatting pans.....	861
With flush.....	861
Utility sinks.....	862
Utility sinks made of sanitary ceramic.....	862
Accessories.....	864
Disposal sinks.....	865
Cleaner sinks.....	865
Slop hoppers.....	865
Accessories.....	866

Washbasins

Washbasins made of solid surface material

Geberit Publica washbasin, round design, with-cut-outs, barrier-free

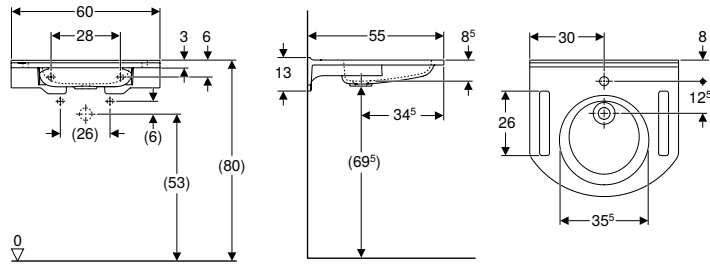

click & scan

Application purposes

- Suitable for use by wheelchair users
- Suitable for barrier-free construction

Technical data

Product material	Varicor
------------------	---------

Scope of delivery

- Washbasin
- Fastening material

Characteristics


- Barrier-free
- Cutouts for gripping
- With upstand to the wall
- Antibacterial
- Shockproof
- Scratchproof
- Easy cleaning
- Seamless surface repair

Art. no.	Colour / surface	Tap hole	Overflow	H [cm]	T [cm]
B / width: 60 cm					
402160016	white alpine / matt	centred	without	13	55

Accessories

- Geberit washbasin drain, space-saving model, slim design, with free outlet and valve cover
- Geberit dip tube trap for washbasin, space-saving model, horizontal outlet
- Geberit waste outlet with overflow pipe, for washbasin
- Geberit waste outlet with free outlet, screen

Geberit Publica washbasin, square design, with cut-outs, barrier-free

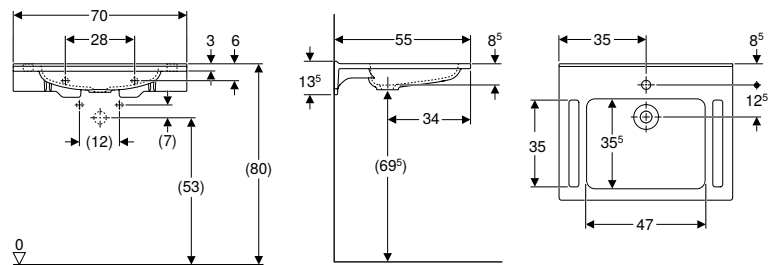

click & scan

Application purposes

- Suitable for use by wheelchair users
- Suitable for barrier-free construction

Technical data

Product material	Varicor
------------------	---------

Scope of delivery

- Washbasin
- Fastening material

Characteristics

- Barrier-free
- Square design
- Cutouts for gripping
- With upstand to the wall
- Antibacterial
- Shockproof
- Scratchproof
- Easy cleaning
- Seamless surface repair

Art. no.	Colour / surface	Tap hole	Overflow	H [cm]	T [cm]
B / width: 70 cm					
402170016	white alpine / matt	centred	without	13.5	55


Accessories

- Geberit washbasin drain, space-saving model, slim design, with free outlet and valve cover
- Geberit dip tube trap for washbasin, space-saving model, horizontal outlet
- Geberit waste outlet with overflow pipe, for washbasin
- Geberit waste outlet with free outlet, screen

Squatting pans

With flush

Geberit Publica squatting pan

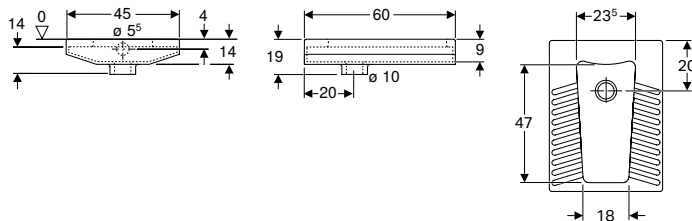

click & scan

Application purposes

- For floor-even installation
- For installation in thin bed mortar
- For exposed cisterns
- For concealed cisterns
- For pressure flushing valves
- For toilet use in squatting position

Scope of delivery

- Squatting pan

Technical data

Product material	Vitreous china
------------------	----------------

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]
208580000	white	45	19	60

Can be combined with

- Geberit Sigma concealed cistern 12 cm, 6 / 3 litres


Accessories

- Geberit flush bend set 90°, telescopic
- Geberit flush bend extension with sleeve
- Geberit trap for squat WC, vertical outlet
- Geberit trap for squat WC, horizontal outlet

Utility sinks

Utility sinks made of sanitary ceramic

Geberit Publica utility sink with overflow

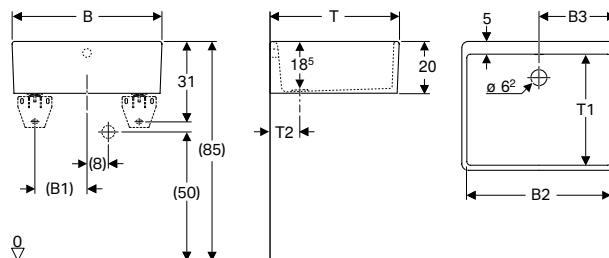

click & scan

Application purposes

- For mounting on mounting brackets
- For mounting on wall anchors
- For mounting on washtops
- For pouring out waste water
- For cleaning very dirty objects
- For industry and commerce
- For schools and other educational facilities
- For private areas

Characteristics

- With one bowl
- With overflow

Scope of delivery

- Utility sink
- Drain assembly
- Overflow assembly

Technical data


Product material	Fireclay
------------------	----------

Art. no.	Colour / surface	Overflow	B [cm]	B1 [cm]	B2 [cm]	B3 [cm]	H [cm]	T [cm]	T1 [cm]	T2 [cm]
361350000	white	visible, symmetrical	50	16	46.5	25	20	39	32	14
361360000	white	visible, symmetrical	60	20	56.5	30	20	50	43	13
361370000	white	visible, symmetrical	70	25	66	35	20	50	43	14

Accessories

- Geberit set of mounting brackets for utility sink → p. 864

Geberit Publica utility sink without overflow, height 20 cm

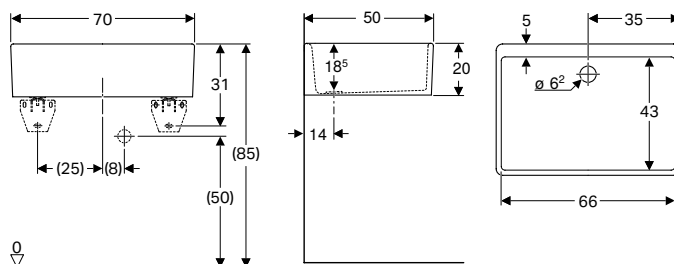

click & scan

Application purposes

- For mounting on mounting brackets
- For mounting on wall anchors
- For mounting on washtops
- For pouring out waste water
- For cleaning very dirty objects
- For industry and commerce
- For schools and other educational facilities
- For private areas

Technical data

Product material	Fireclay
------------------	----------

Characteristics

- With one bowl
- Without overflow

Scope of delivery


- Utility sink

Art. no.	Colour / surface	Overflow	B [cm]	H [cm]	T [cm]
360070000	white	without	70	20	50

Accessories

- Geberit set of mounting brackets for utility sink → p. 864

Geberit Publica utility sink with two bowls and overflows

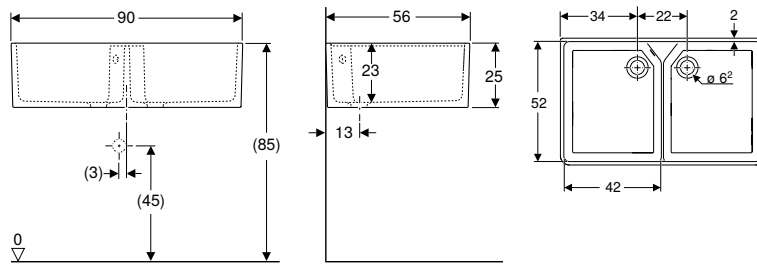

click & scan

Application purposes

- For mounting on mounting brackets
- For mounting on washtops
- For pouring out waste water
- For cleaning very dirty objects
- For industry and commerce
- For schools and other educational facilities
- For private areas

Characteristics

- With two bowls
- With overflow

Scope of delivery


- Utility sink
- Drain assembly
- Overflow assembly

Technical data

Product material	Fireclay
------------------	----------

Art. no.	Colour / surface	Overflow	B [cm]	H [cm]	T [cm]
350490000	white	visible, symmetrical	90	25	56

Geberit Publica Garda utility sink with overflow

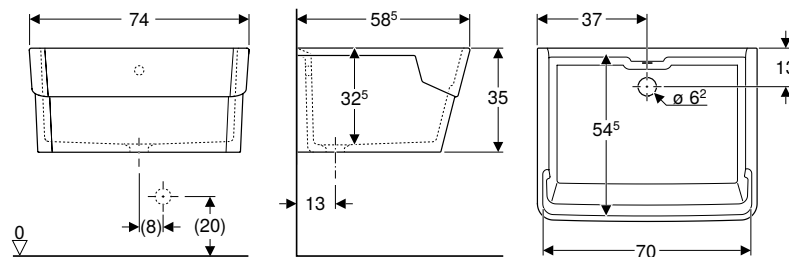

click & scan

Application purposes

- For cleaning very dirty objects
- For industry and commerce
- For laundrettes
- For private areas

Characteristics

- With one bowl
- With overflow
- With recess to mount a washboard

Scope of delivery


- Utility sink
- Drain assembly
- Overflow assembly

Technical data

Product material	Fireclay
------------------	----------

Art. no.	Colour / surface	Overflow	B [cm]	H [cm]	T [cm]
355675000	white	visible, symmetrical	74	35	58.5

Geberit Publica utility sink without overflow, height 13 cm

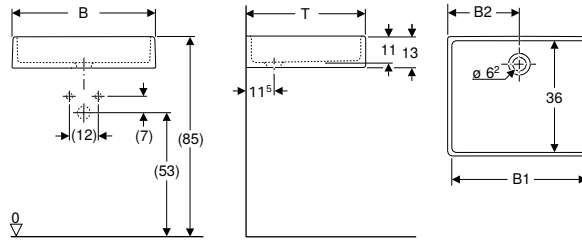

click & scan

Application purposes

- For mounting on mounting brackets
- For mounting on washtops
- For industry and commerce
- For schools and other educational facilities
- For private areas

Characteristics

- With one bowl
- Without overflow
- Acid-resistant

Scope of delivery

- Utility sink

Technical data

Product material	Fireclay
------------------	----------

Art. no.	Colour / surface	Overflow	B [cm]	B1 [cm]	B2 [cm]	H [cm]	T [cm]
360050000	white	without	50	46	25	13	40
360060000	white	without	60	56	30	13	40

Accessories

- Geberit set of mounting brackets for utility sink → p. 864
- Geberit waste outlet with overflow pipe, for cleaner sink

Accessories

Geberit set of mounting brackets for utility sink



Application purposes

- For Publica utility sinks

Scope of delivery

- Set of 2 pieces

Characteristics

- With levelling foot supports

Art. no.	L [cm]
500250000	36
500260000	45




click & scan

Disposal sinks

Cleaner sinks

Geberit Publica cleaner sink for hinged grating

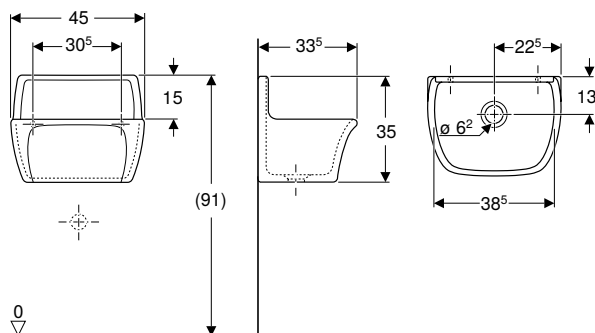

click & scan

Application purposes

- For pouring out waste water
- For cleaning very dirty objects
- For industry and commerce
- For schools and other educational facilities
- For private areas

Scope of delivery

- Cleaner sink

Technical data

Product material	Fireclay
------------------	----------

Art. no.	Colour / surface	Overflow	B [cm]	H [cm]	T [cm]
367200000	white	without	45	35	33.5

To order additionally

- Hinged grating made of stainless steel, with buffers
- Sink rim guard

Can be combined with


- Geberit Publica hinged grating with buffers → p. 866
- Geberit Publica sink rim guard → p. 866

Accessories

- Geberit waste outlet with overflow pipe, for cleaner sink
- Geberit P-trap for kitchen sink, horizontal outlet

Slop hoppers

Geberit Publica slop hopper with hinged grating

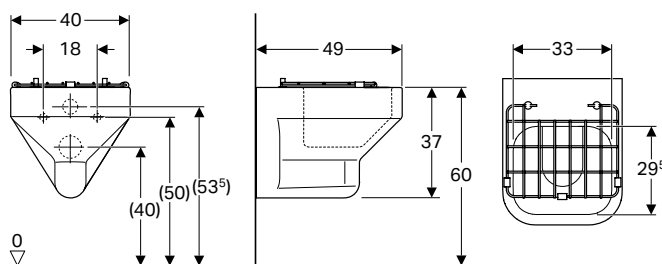

click & scan

Application purposes

- For concealed cisterns
- For disposing of waste water, liquid waste and human excretions
- For industry and commerce
- For schools, childcare facilities and other educational facilities

Characteristics

- Wall-hung
- With flush rim

Scope of delivery

- Slop hopper
- Hinged grating made of stainless steel, with buffers


Technical data

Product material	Vitreous china
------------------	----------------

Art. no.	Colour / surface	Overflow	B [cm]	H [cm]	T [cm]
201680600	white / KeraTect	without	40	37	49

Accessories

Geberit Publica hinged grating with buffers

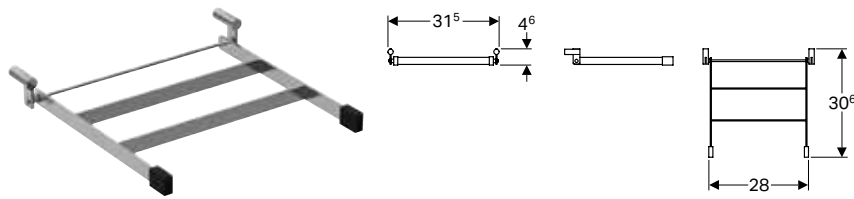

[click & scan](#)

Application purposes

- For Publica cleaner sink

Technical data

Product material	Stainless steel
------------------	-----------------

Scope of delivery

- Hinged grating made of stainless steel, with buffers
- Fastening material


Art. no.

552201000

Can be combined with

- Geberit Publica cleaner sink for hinged grating → p. 865

Geberit Publica sink rim guard

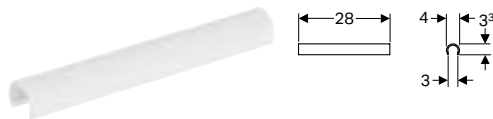

[click & scan](#)

Application purposes

- For Publica cleaner sink

Technical data

Product material	Plastic
------------------	---------

Scope of delivery

- Sink rim guard

Art. no.

552003000

Can be combined with

- Geberit Publica cleaner sink for hinged grating → p. 865






Geberit AquaClean shower toilets

WC complete solutions	870
Wall-hung WCs	870
WC enhancement solutions	876
WC enhancement solutions	876
Accessories	880
Accessory overview – Water and electrical connection for Geberit concealed cisterns	881
For WC complete solutions	886
For WC enhancement solutions	890
For WC enhancement solutions and WC complete solutions	892
Consumables	898

WC complete solutions

Wall-hung WCs

Geberit AquaClean Mera Comfort WC complete solution, wall-hung WC

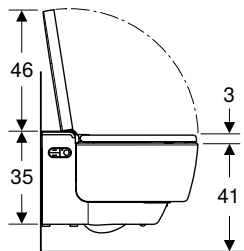

click & scan

Application purposes

- For convenient and odourless toilet use
- For gently cleaning the anal and vaginal areas with water

Technical data

Degree of protection	IPX4
Nominal voltage	230 V AC
Mains frequency	50 Hz
Power consumption in standby mode max.	0.5 W
Flow pressure	0.5–10 bar
Operating temperature	5–40 °C
Water temperature, adjustment range	34–40 °C
Spray time	30–50 s
WC seat load max.	150 kg

Scope of delivery

- Water supply connection set for Sigma and Omega concealed cisterns 12 cm, installation height 112 cm
- Female socket for mains connection
- Spray shield
- Descaling agent, 125 ml
- Cleaning set
- Connection set for WC, \varnothing 90 mm
- Remote control with wall-mounted case and battery CR2032
- Fastening material

Characteristics

- Hybrid hot water system with continuous flow heater and storage water heater
- Anal shower with double-nozzle WhirlSpray shower technology
- Separate Lady shower nozzle in protected resting position
- Adjustable shower water temperature
- Spray intensity can be set to five different levels
- Spray arm can be set to five different positions
- Adjustable oscillating spray (automatic forward and reverse motion of the spray arm)
- Automatic pre- and postrinsing of the spray nozzle with fresh water
- Descaling programme
- Wall-hung
- Rimless WC ceramic appliance featuring TurboFlush flush technology
- Horizontal outlet
- Washdown WC with special glaze KeraTect
- User detection
- Odour extraction with ceramic honey comb filter can be activated
- Odour extraction unit with run-on function
- Dryer can be activated
- Dryer air intensity can be set to 5 positions
- Dryer arm can be extended
- Adjustable dryer temperature
- WC seat ring with rapid heating function
- Adjustable temperature of the WC-seat heating
- WC seat ring and WC lid with soft-closing mechanism
- WC lid with SoftOpening
- WC lid with quick release
- Touchless opening and closing of the WC lid
- Activation of the orientation light when approaching
- Orientation light can be set in seven colours
- Functions and settings via remote control
- Three user profiles can be programmed
- Compatible with Geberit Home App
- Water supply connection on the left, hidden behind the WC ceramic
- Mains connection with flexible three-core sheathed cable, on the right side, hidden behind the WC ceramic
- External water supply connection on the left possible with accessories
- External mains connection with power outlet on the right possible
- Premounted sound insulation
- Approval in accordance with (DIN) EN 1717 / (DIN) EN 13077

Art. no.	Colour / surface	B	B1	H	T	Protection class	Power consumption [W]	QuickRelease function
		[cm]	[cm]	[cm]	[cm]			
146.210.11.1	WC ceramic appliance: white / KeraTect Design cover: white / glossy	39.5	39.5	38	59	I	2000	Yes, WC seat ring and WC lid
146.210.21.1	WC ceramic appliance: white / KeraTect Design cover: chrome / glossy	39.5	39.5	38	59	I	2000	Yes, WC seat ring and WC lid


Accessories

- Accessory overview – Water and electrical connection for Geberit concealed cisterns → p. 881



- This product is supplied with the Geberit AquaClean descaling agent. This consumable contains classified hazardous substances. Information, instructions and measures for handling hazardous substances safely can be found at <https://www.geberit-global.com>.

Geberit AquaClean Mera Classic WC complete solution, wall-hung WC

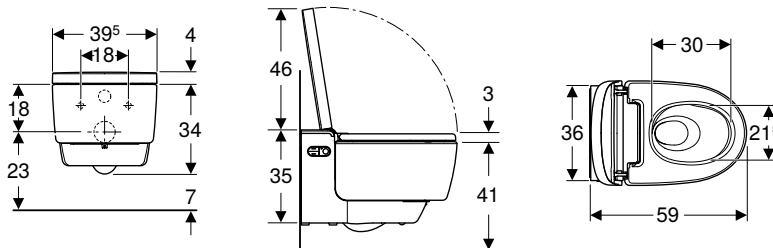

Application purposes

- For convenient and odourless toilet use
- For gently cleaning the anal and vaginal areas with water

Technical data

Degree of protection	IPX4
Nominal voltage	230 V AC
Mains frequency	50 Hz
Power consumption in standby mode max.	0.5 W
Flow pressure	0.5–10 bar
Operating temperature	5–40 °C
Water temperature, adjustment range	34–40 °C
Spray time	30–50 s
WC seat load max.	150 kg

Scope of delivery

- Water supply connection set for Sigma and Omega concealed cisterns 12 cm, installation height 112 cm
- Female socket for mains connection
- Spray shield
- Descaling agent, 125 ml
- Cleaning set
- Connection set for WC, \varnothing 90 mm
- Remote control with wall-mounted case and battery CR2032
- Fastening material

Characteristics

- Hybrid hot water system with continuous flow heater and storage water heater
- Anal shower with double-nozzle WhirlSpray shower technology
- Separate Lady shower nozzle in protected resting position
- Adjustable shower water temperature
- Spray intensity can be set to five different levels
- Spray arm can be set to five different positions
- Adjustable oscillating spray (automatic forward and reverse motion of the spray arm)
- Automatic pre- and postrinsing of the spray nozzle with fresh water
- Descaling programme
- Wall-hung
- Rimless WC ceramic appliance featuring TurboFlush flush technology
- Horizontal outlet
- Washdown WC with special glaze KeraTect
- User detection
- Odour extraction with ceramic honey comb filter can be activated
- Odour extraction unit with run-on function
- Dryer can be activated
- Dryer air intensity can be set to 5 positions
- Dryer arm can be extended
- Adjustable dryer temperature
- WC seat ring and WC lid with soft-closing mechanism
- WC lid with SoftOpening
- WC lid with quick release
- Functions and settings via remote control
- Three user profiles can be programmed
- Compatible with Geberit Home App
- Water supply connection on the left, hidden behind the WC ceramic
- Mains connection with flexible three-core sheathed cable, on the right side, hidden behind the WC ceramic
- External water supply connection on the left possible with accessories
- External mains connection with power outlet on the right possible
- Premounted sound insulation
- Approval in accordance with (DIN) EN 1717 / (DIN) EN 13077

Geberit AquaClean shower toilets

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]	Protection class	Power consumption [W]	QuickRelease function
146.200.11.1	WC ceramic appliance: white / KeraTect Design cover: white / glossy	39.5	38	59	I	2000	Yes, WC seat ring and WC lid
146.200.21.1	WC ceramic appliance: white / KeraTect Design cover: chrome / glossy	39.5	38	59	I	2000	Yes, WC seat ring and WC lid


Accessories

- Accessory overview – Water and electrical connection for Geberit concealed cisterns → p. 881



- This product is supplied with the Geberit AquaClean descaling agent. This consumable contains classified hazardous substances. Information, instructions and measures for handling hazardous substances safely can be found at <https://www.geberit-global.com>.

Geberit AquaClean Sela WC complete solution, wall-hung WC

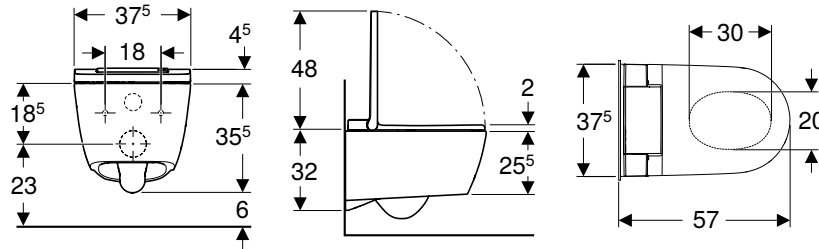

Application purposes

- For convenient toilet use
- For gently cleaning the anal and vaginal areas with water

Technical data

Degree of protection	IPX4
Nominal voltage	230 V AC
Mains frequency	50 Hz
Power consumption in standby mode max.	0.5 W
Flow pressure	0.5–10 bar
Operating temperature	5–40 °C
Water temperature, adjustment range	34–40 °C
Spray time	50 s
WC seat load max.	150 kg

Scope of delivery

- Water supply connection set for Sigma and Omega concealed cisterns 12 cm, installation height 112 cm
- Female socket for mains connection
- Sound insulation set
- Descaling agent, 125 ml
- Cleaning set
- Remote control with wall-mounted case and battery CR2032
- Fastening material

Characteristics

- Water heating via continuous flow heater
- Anal shower with WhirlSpray shower technology
- Separate Lady shower nozzle in protected resting position
- Adjustable shower water temperature
- Spray intensity can be set to five different levels
- Spray arm can be set to five different positions
- Adjustable oscillating spray (automatic forward and reverse motion of the spray arm)
- Automatic pre- and postrinsing of the spray nozzle with fresh water
- Descaling programme
- Wall-hung
- Rimless WC ceramic appliance featuring TurboFlush flush technology
- Horizontal outlet
- Washdown WC
- User detection
- WC seat ring and WC lid with soft-closing mechanism
- WC lid with SoftOpening
- WC seat ring and WC lid with quick release
- Activation of the orientation light via brightness sensor
- Orientation light can be set in seven colours
- Functions and settings via remote control
- Three user profiles can be programmed
- Compatible with Geberit Home App
- Water supply connection on the left, hidden behind the WC ceramic
- Mains connection with flexible three-core sheathed cable, on the right side, hidden behind the WC ceramic
- External water supply connection on the left possible with accessories
- External mains connection with power outlet on the right possible
- Approval in accordance with (DIN) EN 1717 / (DIN) EN 13077

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]	Protection class	Power consumption [W]	QuickRelease function
146.220.11.1	WC ceramic appliance: white / KeraTect Design cover: white / glossy	37.5	40	57	I	1850	Yes, WC seat ring and WC lid
146.220.21.1	WC ceramic appliance: white / KeraTect Design cover: chrome / glossy	37.5	40	57	I	1850	Yes, WC seat ring and WC lid
146.220.JT.1	WC ceramic appliance, Design cover: white / matt	37.5	40	57	I	1850	Yes, WC seat ring and WC lid

To order additionally

- Geberit straight connector with sleeve and cover caps




Accessories

- Accessory overview – Water and electrical connection for Geberit concealed cisterns → p. 881



- This product is supplied with the Geberit AquaClean descaling agent. This consumable contains classified hazardous substances. Information, instructions and measures for handling hazardous substances safely can be found at <https://www.geberit-global.com>.

Geberit AquaClean Sela WC complete solution, wall-hung WC, square

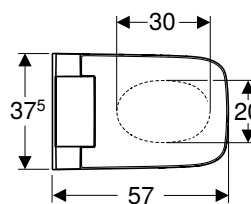

Application purposes

- For convenient toilet use
- For gently cleaning the anal and vaginal areas with water

Technical data

Degree of protection	IPX4
Nominal voltage	230 V AC
Mains frequency	50 Hz
Power consumption in standby mode max.	0.5 W
Flow pressure	0.5–10 bar
Operating temperature	5–40 °C
Water temperature, adjustment range	34–40 °C
Spray time	50 s
WC seat load max.	150 kg

Scope of delivery

- Water supply connection set for Sigma and Omega concealed cisterns 12 cm, installation height 112 cm
- Female socket for mains connection
- Sound insulation set
- Descaling agent, 125 ml
- Cleaning set
- Remote control with wall-mounted case and battery CR2032
- Fastening material

Characteristics

- Water heating via continuous flow heater
- Anal shower with WhirlSpray shower technology
- Separate Lady shower nozzle in protected resting position
- Adjustable shower water temperature
- Spray intensity can be set to five different levels
- Spray arm can be set to five different positions
- Adjustable oscillating spray (automatic forward and reverse motion of the spray arm)
- Automatic pre- and postrinsing of the spray nozzle with fresh water
- Descaling programme
- Wall-hung
- Rimless WC ceramic appliance featuring TurboFlush flush technology
- Horizontal outlet
- Washdown WC
- User detection
- WC seat ring and WC lid with soft-closing mechanism
- WC lid with SoftOpening
- WC seat ring and WC lid with quick release
- Activation of the orientation light via brightness sensor
- Orientation light can be set in seven colours
- Functions and settings via remote control
- Three user profiles can be programmed
- Compatible with Geberit Home App
- Water supply connection on the left, hidden behind the WC ceramic
- Mains connection with flexible three-core sheathed cable, on the right side, hidden behind the WC ceramic
- External water supply connection on the left possible with accessories
- External mains connection with power outlet on the right possible
- Approval in accordance with (DIN) EN 1717 / (DIN) EN 13077

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]	Protection class	Power consumption [W]	QuickRelease function
146.250.01.1	WC ceramic appliance: white / KeraTect Design cover: white / glossy	37.5	40	57	I	1850	Yes, WC seat ring and WC lid
146.250.21.1	WC ceramic appliance: white / KeraTect Design cover: chrome / glossy	37.5	40	57	I	1850	Yes, WC seat ring and WC lid

To order additionally

- Geberit straight connector with sleeve and cover caps


Accessories

- Accessory overview – Water and electrical connection for Geberit concealed cisterns → p. 881



- This product is supplied with the Geberit AquaClean descaling agent. This consumable contains classified hazardous substances. Information, instructions and measures for handling hazardous substances safely can be found at <https://www.geberit-global.com>.

Geberit AquaClean Tuma Comfort WC complete solution, wall-hung WC

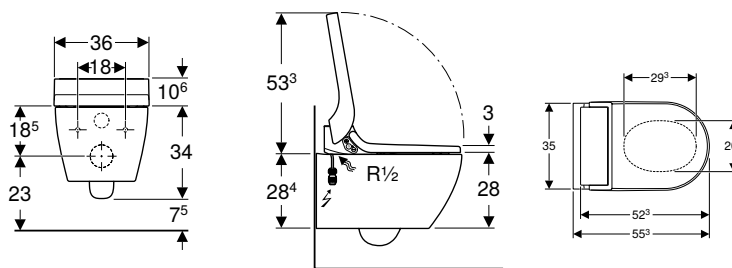

Application purposes

- For convenient and odourless toilet use
- For gently cleaning the anal and vaginal areas with water

Technical data

Degree of protection	IPX4
Nominal voltage	230 V AC
Mains frequency	50 Hz
Power consumption in standby mode max.	0.5 W
Flow pressure	0.5–10 bar
Operating temperature	5–40 °C
Water temperature, adjustment range	34–40 °C
Water temperature, factory setting	37 °C
Spray time	50 s
WC seat load max.	150 kg

Scope of delivery

- Water supply connection set for Sigma and Omega concealed cisterns 12 cm, installation height 112 cm
- Female socket for mains connection
- Sound insulation set
- Spray shield
- Compensation pad for WC seat / ceramic appliance
- Descaling agent, 125 ml
- Cleaning set
- Connection set for WC, ø 90 mm
- Remote control with wall-mounted case and battery CR2032
- Fastening material

Characteristics

- Water heating via continuous flow heater
- Anal shower with WhirlSpray shower technology
- Separate Lady shower nozzle in protected resting position
- Continuous flow heater can be deactivated
- Spray arm with nozzle can be extended for anal and vaginal area
- Spray intensity can be set to five different levels
- Spray arm can be set to five different positions
- Adjustable oscillating spray (automatic forward and reverse motion of the spray arm)
- Automatic pre- and postrinsing of the spray nozzle with fresh water
- Descaling programme
- Wall-hung
- Rimless WC ceramic appliance featuring Rimfree flush technology
- Easy fastening with Easy Fast Fixing (type EFF3)
- Horizontal outlet
- Washdown WC with special glaze KeraTect
- User detection
- Odour extraction with ceramic honey comb filter can be activated
- Odour extraction unit with run-on function
- Dryer can be activated
- WC seat ring with rapid heating function
- WC seat ring and WC lid with soft-closing mechanism
- WC lid with SoftOpening
- WC lid with quick release
- Functions and settings via remote control
- Three user profiles can be programmed
- Compatible with Geberit Home App
- Water supply connection on the left, hidden behind the WC ceramic
- Mains connection with flexible three-core sheathed cable, on the right side, hidden behind the WC ceramic
- Approval in accordance with (DIN) EN 1717 / (DIN) EN 13077
- Shower water temperature can be adjusted via Geberit Home App
- Dryer temperature can be adjusted via Geberit Home App
- Temperature of the WC seat heating can be adjusted via Geberit Home App

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]	Protection class	Power consumption [W]	QuickRelease function
146.290.11.1	WC ceramic appliance: white / KeraTect Design cover: white / glossy	36	44.6	55.3	I	2000	Yes, WC lid only
146.290.FW.1	WC ceramic appliance: white / KeraTect Design cover: brushed stainless steel	36	44.6	55.3	I	2000	Yes, WC lid only
146.290.SI.1	WC ceramic appliance: white / KeraTect Design cover: white / glass	36	44.6	55.3	I	2000	Yes, WC lid only
146.290.SJ.1	WC ceramic appliance: white / KeraTect Design cover: black / glass	36	44.6	55.3	I	2000	Yes, WC lid only




Accessories

- Accessory overview – Water and electrical connection for Geberit concealed cisterns → p. 881



- This product is supplied with the Geberit AquaClean descaling agent. This consumable contains classified hazardous substances. Information, instructions and measures for handling hazardous substances safely can be found at <https://www.geberit-global.com>.

Geberit AquaClean Alba WC complete solution, wall-hung WC

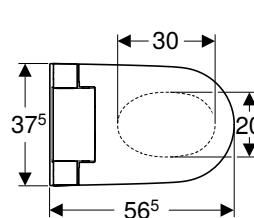

Application purposes

- For convenient toilet use
- For gently cleaning the anal area with water

Technical data

Degree of protection	IPX4
Nominal voltage	230 V AC
Mains frequency	50 Hz
Power consumption in standby mode max.	0.5 W
Flow pressure	0.5–10 bar
Operating temperature	5–40 °C
Water temperature, adjustment range	34–40 °C
Spray time	20 s
WC seat load max.	150 kg

Scope of delivery

- Water supply connection set for Sigma and Omega concealed cisterns 12 cm, installation height 112 cm
- Female socket for mains connection
- Sound insulation set
- Remote control with wall-mounted case and battery CR2032
- Fastening material

Characteristics

- Water heating by storage water heater
- Anal shower with WhirlSpray shower technology
- Spray intensity can be set to five different levels
- Shower water temperature can be adjusted via Geberit Home App
- Spray arm can be set to five different positions via Geberit Home App
- Adjustable oscillating spray (automatic forward and reverse motion of the spray arm)
- Automatic pre- and postrinsing of the spray nozzle with fresh water
- Descaling programme
- Wall-hung
- Rimless WC ceramic appliance featuring TurboFlush flush technology
- Horizontal outlet
- Washdown WC
- User detection
- WC seat ring and WC lid with soft-closing mechanism
- WC lid with SoftOpening
- WC seat ring and WC lid with quick release
- Functions can be controlled remotely
- Compatible with Geberit Home App
- Water supply connection on the left, hidden behind the WC ceramic
- Mains connection with flexible three-core sheathed cable, on the right side, hidden behind the WC ceramic
- External water supply connection on the left possible with accessories
- External mains connection with power outlet on the right possible
- Approval in accordance with (DIN) EN 1717 / (DIN) EN 13077

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]	Protection class	Power consumption [W]	QuickRelease function

To order additionally

- Geberit straight connector with sleeve and cover caps

Accessories


- Accessory overview – Water and electrical connection for Geberit concealed cisterns → p. 881

Geberit AquaClean shower toilets

WC enhancement solutions

WC enhancement solutions

Geberit AquaClean Tuma Comfort WC enhancement solution

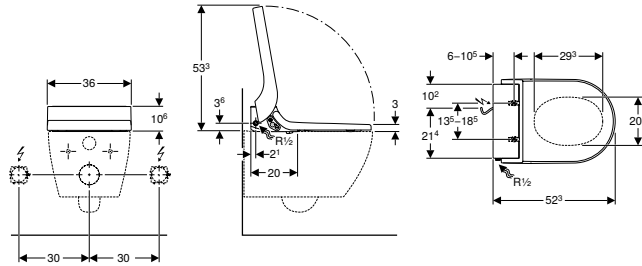

Application purposes

- For convenient and odourless toilet use
- For gently cleaning the anal and vaginal areas with water
- For subsequent mounting on WC ceramic appliances (replaces WC seat)

Technical data

Degree of protection	IPX4
Nominal voltage	230 V AC
Mains frequency	50 Hz
Power consumption in standby mode max.	0.5 W
Cable length	2 m
Flow pressure	0.5–10 bar
Operating temperature	5–40 °C
Water temperature, adjustment range	34–40 °C
Water temperature, factory setting	37 °C
Spray time	50 s
WC seat load max.	150 kg

Scope of delivery

- Reinforced braided hose 3/8", with bend 1/2"
- Spray shield
- Compensation pad for WC seat / ceramic appliance
- Descaling agent, 125 ml
- Cleaning set
- Remote control with wall-mounted case and battery CR2032
- Fastening material

Characteristics

- Water heating via continuous flow heater
- Anal shower with WhirlSpray shower technology
- Separate Lady shower nozzle in protected resting position
- Continuous flow heater can be deactivated
- Spray arm with nozzle can be extended for anal and vaginal area
- Spray intensity can be set to five different levels
- Spray arm can be set to five different positions
- Adjustable oscillating spray (automatic forward and reverse motion of the spray arm)
- Automatic pre- and postrinsing of the spray nozzle with fresh water
- Descaling programme
- User detection
- Odour extraction with ceramic honey comb filter can be activated
- Odour extraction unit with run-on function
- Dryer can be activated
- WC seat ring with rapid heating function
- WC seat ring and WC lid with soft-closing mechanism
- WC lid with SoftOpening
- WC lid with quick release
- Functions and settings via remote control
- Three user profiles can be programmed
- Water supply connection on the left
- Mains connection at rear, with hidden pipe-laying option to the left or right
- Mains connection cable can be cut to length
- Approval in accordance with (DIN) EN 1717 / (DIN) EN 13077
- Compatible with Geberit Home App
- Shower water temperature can be adjusted via Geberit Home App
- Dryer temperature can be adjusted via Geberit Home App
- Temperature of the WC seat heating can be adjusted via Geberit Home App

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]	Protection class	Power consumption [W]	QuickRelease function
146.270.11.1	Design cover: white / glossy WC top: white	36	10.6	52.3	I	2000	Yes, WC lid only
146.270.FW.1	Design cover: brushed stainless steel WC top: white alpine	36	10.6	52.3	I	2000	Yes, WC lid only
146.270.SI.1	Design cover: white / glass WC top: white alpine	36	10.6	52.3	I	2000	Yes, WC lid only
146.270.SJ.1	Design cover: black / glass WC top: white alpine	36	10.6	52.3	I	2000	Yes, WC lid only

To order additionally

- Water supply connection set

Can be combined with

- Geberit ONE wall-hung WC set, washdown, shrouded, TurboFlush, with WC seat → p. 517
- Geberit Selnova wall-hung WC, Premium, washdown, shrouded, Rimfree → p. 738
- Geberit iCon floor-standing WC, back-to-wall, shrouded, TurboFlush → p. 642
- Geberit iCon wall-hung WC, washdown, shrouded, Rimfree → p. 639
- Geberit iCon floor-standing WC, washdown, back-to-wall, shrouded, Rimfree → p. 643
- Geberit Acanto wall-hung WC, washdown, shrouded, TurboFlush → p. 581
- Geberit Selnova floor-standing WC for close-coupled exposed cistern, washdown, horizontal outlet, semi-shrouded, Rimfree → p. 746
- Geberit Selnova wall-hung WC, Premium, washdown, semi-shrouded, Rimfree → p. 738
- Geberit Selnova wall-hung WC, Premium, washdown, raised, shrouded, Rimfree → p. 741
- Geberit Selnova wall-hung WC, washdown → p. 740
- Geberit Selnova floor-standing WC for close-coupled exposed cistern, washdown, horizontal outlet, semi-shrouded → p. 748
- Geberit Selnova floor-standing WC, washdown, back-to-wall, horizontal outlet, semi-shrouded → p. 745
- Geberit Selnova floor-standing WC, washdown, back-to-wall, horizontal or vertical outlet, semi-shrouded, Rimfree → p. 744


Accessories

- Accessory overview – Water and electrical connection for Geberit concealed cisterns → p. 881



- This product is supplied with the Geberit AquaClean descaling agent. This consumable contains classified hazardous substances. Information, instructions and measures for handling hazardous substances safely can be found at <https://www.geberit-global.com>.
- Choose water supply connection set according to the installation type

Geberit AquaClean Tuma Classic WC enhancement solution

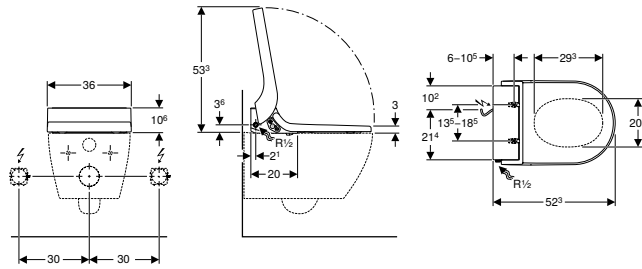

click & scan

Application purposes

- For convenient toilet use
- For gently cleaning the anal area with water
- For subsequent mounting on WC ceramic appliances (replaces WC seat)

Technical data

Degree of protection	IPX4
Nominal voltage	230 V AC
Mains frequency	50 Hz
Power consumption in standby mode max.	0.5 W
Cable length	2 m
Flow pressure	0.5–10 bar
Operating temperature	5–40 °C
Water temperature, adjustment range	34–40 °C
Water temperature, factory setting	37 °C
Spray time	50 s
WC seat load max.	150 kg

Scope of delivery

- Reinforced braided hose 3/8", with bend 1/2"
- Spray shield
- Fastening material
- Compensation pad for WC seat / ceramic appliance
- Remote control with wall-mounted case and battery CR2032
- Descaling agent, 125 ml

Characteristics

- Water heating via continuous flow heater
- Anal shower with WhirlSpray shower technology
- Spray arm with nozzle can be extended for anal area
- Spray intensity can be set to five different levels
- Oscillating spray (automatic forward and reverse motion of the spray arm)
- Automatic pre- and postrinsing of the spray nozzle with fresh water
- Descaling programme
- WC seat ring and WC lid with soft-closing mechanism
- WC lid with SoftOpening
- WC lid with quick release
- Functions can be controlled remotely
- Water supply connection on the left
- Mains connection at rear, with hidden pipe-laying option to the left or right
- Mains connection cable can be cut to length
- Approval in accordance with (DIN) EN 1717 / (DIN) EN 13077
- Compatible with Geberit Home App
- Shower water temperature can be adjusted via Geberit Home App
- Continuous flow heater can be deactivated via Geberit Home App
- Spray arm can be set to five different positions via Geberit Home App

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]	Protection class	Power consumption [W]	QuickRelease function
146.070.11.1	Design cover: white / glossy WC top: white	36	10.6	52.3	I	2000	Yes, WC lid only

To order additionally

- Water supply connection set

Can be combined with

- Geberit ONE wall-hung WC set, washdown, shrouded, TurboFlush, with WC seat → p. 517
- Geberit Selnova wall-hung WC, Premium, washdown, shrouded, Rimfree → p. 738
- Geberit iCon floor-standing WC, back-to-wall, shrouded, TurboFlush → p. 642
- Geberit iCon wall-hung WC, washdown, shrouded, Rimfree → p. 639
- Geberit iCon floor-standing WC, washdown, back-to-wall, shrouded, Rimfree → p. 643
- Geberit Acanto wall-hung WC, washdown, shrouded, TurboFlush → p. 581
- Geberit Selnova floor-standing WC for close-coupled exposed cistern, washdown, horizontal outlet, semi-shrouded, Rimfree → p. 746
- Geberit Selnova wall-hung WC, Premium, washdown, semi-shrouded, Rimfree → p. 738
- Geberit Selnova wall-hung WC, Premium, washdown, raised, shrouded, Rimfree → p. 741
- Geberit Selnova wall-hung WC, washdown → p. 740
- Geberit Selnova wall-hung WC, washdown, Rimfree → p. 739
- Geberit Selnova floor-standing WC for close-coupled exposed cistern, washdown, horizontal outlet, semi-shrouded → p. 748
- Geberit Selnova floor-standing WC, washdown, back-to-wall, horizontal outlet, semi-shrouded → p. 745
- Geberit Selnova floor-standing WC, washdown, back-to-wall, horizontal or vertical outlet, semi-shrouded, Rimfree → p. 744


Accessories

- Accessory overview – Water and electrical connection for Geberit concealed cisterns → p. 881



- This product is supplied with the Geberit AquaClean descaling agent. This consumable contains classified hazardous substances. Information, instructions and measures for handling hazardous substances safely can be found at <https://www.geberit-global.com>.
- Choose water supply connection set according to the installation type

Geberit AquaClean 4000 WC enhancement solution

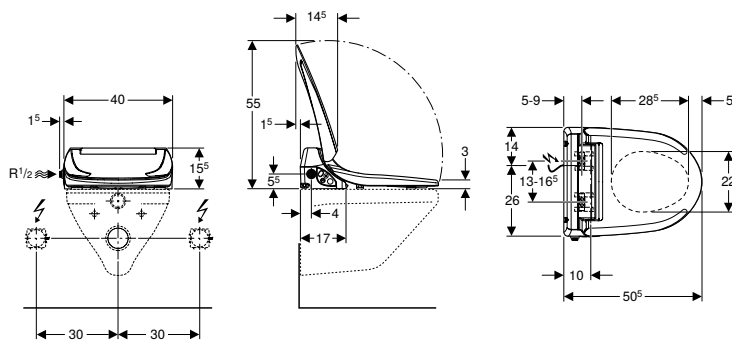

click & scan

Application purposes

- For convenient toilet use
- For gently cleaning the anal area with water
- For subsequent mounting on WC ceramic appliances (replaces WC seat)

Technical data

Degree of protection	IPX4
Nominal voltage	230 V AC
Mains frequency	50–60 Hz
Power consumption in economy mode / with heating switched on	0.45 W / 5.8 W
Cable length	2 m
Flow pressure	0.5–10 bar
Operating temperature	10–40 °C
Water temperature, factory setting	37 °C
Spray time	20 s
WC seat load max.	150 kg

Characteristics

- WC seat ring and WC lid with soft-closing mechanism
- Integrated storage water heater
- Spray arm with nozzle can be extended for anal area
- Spray intensity can be set to five different levels
- Automatic pre- and postrinsing of the spray nozzle with fresh water
- Shower spray gradually cools down continuously during shower procedure
- Adjustable storage water heater operating mode (ON/OFF/economy mode)
- User detection for water heating
- Most recently used settings are stored automatically
- Water supply connection on the left
- Mains connection at rear, with hidden pipe-laying option to the left or right
- Mains connection cable can be cut to length
- Approval in accordance with (DIN) EN 1717 / (DIN) EN 13077

Scope of delivery

- Water supply connection set for left connection, for exposed cistern
- Spray shield
- Compensation pad for WC seat / ceramic appliance
- Fastening material

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]	Protection class	Power consumption [W]	Plug type	QuickRelease function
146.130.11.1	WC top: white	40	15.5	50.5	I	800	CEE 7/7	Yes, WC seat ring and WC lid

Available as of April 2026

Can be combined with

- Geberit Selnova floor-standing WC for close-coupled exposed cistern, washdown, horizontal outlet, semi-shrouded, Rimfree → p. 746
- Geberit Selnova wall-hung WC, Premium, washdown, semi-shrouded, Rimfree → p. 738
- Geberit Selnova wall-hung WC, washdown → p. 740
- Geberit Selnova wall-hung WC, washdown, Rimfree → p. 739
- Geberit Selnova floor-standing WC for close-coupled exposed cistern, washdown, horizontal outlet, semi-shrouded → p. 748
- Geberit Selnova floor-standing WC for close-coupled exposed cistern, washdown, vertical outlet → p. 750
- Geberit Selnova floor-standing WC for close-coupled exposed cistern, washdown, horizontal outlet → p. 750
- Geberit Selnova floor-standing WC, washdown, back-to-wall, horizontal outlet, semi-shrouded → p. 745
- Geberit Selnova floor-standing WC, washdown, back-to-wall, horizontal or vertical outlet, semi-shrouded, Rimfree → p. 744

















Accessories



- Accessory overview – Water and electrical connection for Geberit concealed cisterns → p. 881

Accessories

Accessory overview – Water and electrical connection for Geberit concealed cisterns

Geberit International Sales, version: October 2025

		Sigma 12 cm until march 2013	Sigma 12 cm	Sigma 12 cm with Connect Box	Sigma 8 cm until march 2013	
						
For Geberit AquaClean 4000						
Water supply connection set	115.438.00.1					
	240.396.00.1					
	240.635.00.1					
	249.801.00.1		✓	✓	✓	✓
Reinforced braided hose	243.173.00.1					
For Geberit AquaClean Tuma WC enhancement solutions						
Water supply connection set	115.438.00.1					
	240.396.00.1					
	147.034.00.1					
	147.035.00.1		✓	✓	✓	✓
	147.036.00.1					
	147.045.00.1					
Reinforced braided hose	243.173.00.1					

	Sigma 8 cm until 2015	Sigma 8 cm from 2016	Omega 12 cm		Kappa 15 cm until march 2013	Kappa 15 cm	Without conduit pipe	Exposed cistern, wa- ter supply connection left / centre / right
			82 / 98 cm	112 cm				
								
								✓ ²⁾
								✓ ³⁾
			✓		✓	✓		
	✓	✓		✓				
		✓						
								✓ ²⁾
								✓ ³⁾
								✓ ⁴⁾
	✓	✓		✓				
			✓		✓	✓		
							✓	
		✓						




















Geberit AquaClean
shower toilets









Geberit AquaClean shower toilets

Accessories

WC enhancement solutions

Geberit International Sales, version: October 2025

			Sigma 12 cm until march 2013	Sigma 12 cm	Sigma 12 cm with Connect Box	Sigma 8 cm until march 2013	
							
For Geberit AquaClean Alba WC complete solution, wall-hung WC							
Water supply connection set	147.020.00.1						
	240.635.00.1						
	147.045.00.1						
	249.801.00.1		✓				✓
	147.077.00.1		✓	✓ ¹⁾	✓ ¹⁾		✓
Reinforced braided hose	243.173.00.1						
Mains cable with Exceedconn plug 147.081.P0.1			✓				✓
Mains cable for Power & Connect box	147.078.00.1				✓		
For Geberit AquaClean Sela WC complete solutions, wall-hung WC							
Water supply connection set	147.020.00.1						
	240.635.00.1						
	147.045.00.1						
	249.801.00.1		✓				✓
Reinforced braided hose	243.173.00.1						
Mains cable with mains plug	242.839.P0.1		✓				✓
Mains cable for Power & Connect box	147.075.00.1				✓		

	Sigma 8 cm until 2015	Sigma 8 cm from 2016	Omega 12 cm		Kappa 15 cm until march 2013	Kappa 15 cm	Without conduit pipe	Exposed cistern, wa- ter supply connection left / centre / right
			82 / 98 cm	112 cm				
								
			✓			✓		
					✓			
							✓	
	✓ ¹⁾	✓ ¹⁾	✓ ¹⁾	✓	✓	✓ ¹⁾	✓	
		✓						
					✓		✓	
							✓	
			✓			✓		
					✓			
							✓	
		✓						
					✓		✓	



















Geberit AquaClean shower toilets

Geberit AquaClean shower toilets

Accessories

WC enhancement solutions

Geberit International Sales, version: October 2025

		Sigma 12 cm until march 2013	Sigma 12 cm	Sigma 12 cm with Connect Box	Sigma 8 cm until march 2013	
						
For Geberit AquaClean Tuma WC complete solutions, wall-hung WC						
	147.020.00.1					
Water supply connection set	249.801.00.1		✓		✓	
	240.635.00.1					
	147.045.00.1					
Reinforced braided hose	243.173.00.1					
Mains cable with mains plug	242.839.P0.1		✓		✓	
Mains cable for Power & Connect box	147.075.00.1			✓		
For Geberit AquaClean Mera						
	147.020.00.1					
Water supply connection set	147.030.xx.1		✓		✓	
	147.031.xx.1					
	147.033.xx.1					
Reinforced braided hose	243.173.00.1					
Mains cable with mains plug	242.839.P0.1		✓		✓	
Mains cable for Power & Connect box	147.075.00.1			✓		









✓ Required

¹⁾ Optional, if additional shut-off is desired

²⁾ Rear water supply connection

³⁾ Right water supply connection

⁴⁾ Left water supply connection, for rear center and right water supply connection see optional accessories

	Sigma 8 cm until 2015	Sigma 8 cm from 2016	Omega 12 cm		Kappa 15 cm until march 2013	Kappa 15 cm	Without conduit pipe	Exposed cistern, wa- ter supply connection left / centre / right
			82 / 98 cm	112 cm				
								
			✓			✓		
					✓			
							✓	
		✓						
					✓		✓	
			✓			✓		
					✓			
							✓	
		✓						
					✓		✓	

Geberit AquaClean
shower toilets

For WC complete solutions

Water supply connection set for concealed cisterns 12 / 15 cm, for Geberit AquaClean WC complete solutions



click & scan

Application purposes

- For connecting Geberit AquaClean Alba to Geberit concealed cisterns
- For connecting Geberit AquaClean Tuma WC complete solutions to Geberit concealed cisterns
- For connecting Geberit AquaClean Sela to Geberit concealed cisterns
- For connecting Geberit AquaClean Mera to Geberit concealed cisterns
- For Omega concealed cisterns 12 cm, installation height 82 / 98 cm
- For Geberit concealed cisterns with premounted conduit pipe for the water supply connection
- For water supply connection 5 cm from the central axis

Scope of delivery

- 2 reinforced braided hoses 3/8"
- Connecting material

Art. no.

147.020.00.1

Water supply connection set for concealed cisterns 8 / 12 cm, for Geberit AquaClean Mera WC complete solutions



click & scan

Application purposes

- For connecting Geberit AquaClean Mera to Geberit concealed cisterns
- For Sigma concealed cisterns 12 cm
- For Sigma concealed cisterns 8 cm
- For Geberit concealed cisterns with premounted conduit pipe for the water supply connection
- For water supply connection 19.5 cm from the central axis

Scope of delivery

- Side cover with feed-through for external water supply connection
- Reinforced braided hose 3/8"
- Cover collar

Art. no.

Colour / surface

147.030.11.1 white alpine

147.030.21.1 chrome / glossy

Water supply connection set for Kappa concealed cisterns 15 cm, for Geberit AquaClean Mera WC complete solutions



click & scan

Application purposes

- For connecting Geberit AquaClean Mera to Geberit concealed cisterns
- For Geberit concealed cisterns with premounted conduit pipe for the water supply connection
- For water supply connection 19.5 cm from the central axis

Scope of delivery

- Side cover with feed-through for external water supply connection
- 2 reinforced braided hoses 3/8"
- Cover collar

Art. no. Colour / surface

147.031.11.1 white alpine

147.031.21.1 chrome / glossy

Conventional water supply connection set for Geberit AquaClean Mera



click & scan

Application purposes

- For conventional lateral water supply connections, left
- For connecting Geberit AquaClean Mera

Scope of delivery

- Side cover with feed-through for external water supply connection
- Angle stop valve 1/2"
- Reinforced braided hose 3/8"

Art. no. Colour / surface

147.033.11.1 white alpine

147.033.21.1 chrome / glossy

Reinforced braided hose with ball valve for Geberit AquaClean Alba / Sela



click & scan

Application purposes

- For additional barrier option
- For connecting Geberit AquaClean Alba

Scope of delivery

- Reinforced braided hoses 3/8"
- Ball valve

Art. no.

147.077.00.1

Mains cable for Geberit AquaClean



click & scan

Application purposes

- For connecting Geberit AquaClean Tuma WC complete solutions to external power sockets, right 30 cm
- For connecting Geberit AquaClean Sela to an external power outlet, right 30 cm
- For connecting Geberit AquaClean Mera to an external power outlet, right 30 cm

Characteristics

- Length 60 cm
- Premounted female socket

Technical data

Nominal voltage	220–230 V AC
Mains frequency	50–60 Hz
Product material	PVC

Art. no.	Colour / surface	d1, \varnothing [mm]	Plug type
242.839.P0.1	white	7	CEE 7/7

Mains cable for Geberit AquaClean Alba



click & scan

Application purposes

- For connecting Geberit AquaClean Alba, external mains connection, right, 30 cm

Characteristics

- Length 60 cm
- Premounted female socket

Art. no.	Colour / surface	Plug type
147.081.P0.1	white	CEE 7/7

Mains cable for Geberit AquaClean, for Power & Connect box



click & scan

Application purposes

- For connecting Geberit AquaClean Tuma WC complete solutions to hidden Power & Connect Box
- For connecting Geberit AquaClean Sela to hidden Power & Connect Box
- For connecting Geberit AquaClean Mera to hidden Power & Connect Box
- For hidden mains connection behind the WC ceramic appliance

Characteristics

- Premounted female socket
- Length 85 cm

Art. no.
147.075.00.1

Mains cable for Geberit AquaClean Alba, for Power & Connect box



click & scan

Application purposes

- For connecting Geberit AquaClean Alba to hidden Power & Connect box

Characteristics

- Length 85 cm
- Premounted female socket

Art. no.	Colour / surface
147.078.00.1	white

Interface module 4.1 V for Geberit AquaClean Mera / Sela


[click & scan](#)

Application purposes

- For hidden connection of electronic WC flush controls or actuator plates from Geberit
- For connecting Sigma10 and Sigma80 actuator plates (until year of manufacture June 2022)
- For connecting electronic flush actuations connected by wire (from year of manufacture June 2022)
- For connecting Geberit Monolith Plus sanitary modules (from year of manufacture 2019 to September 2023)

Characteristics

- Power supply via shower toilet

Technical data

Operating voltage	4.1 V DC
-------------------	----------

Art. no.

147.039.00.1

Interface module 12 V for Geberit AquaClean Mera/Sela


[click & scan](#)

Application purposes

- For the hidden electrical connection of the Geberit DuoFresh module with manual actuation
- For hidden connection of electronic WC flush controls or actuator plates from Geberit
- For connecting Sigma10 and Sigma80 actuator plates (from year of manufacture July 2022)
- For connecting electronic flush actuations connected by wire (from year of manufacture July 2022)
- For connecting Geberit Monolith Plus sanitary modules (from year of manufacture October 2023)

Characteristics

- Power supply via shower toilet
- Automatic flush actuation can be activated in combination with electronic flush actuation
- Automatic activation of the odour extraction of Geberit DuoFresh module

Technical data

Operating voltage	12 V DC
-------------------	---------

Art. no.

147.049.00.1

WC seat ring, fixed, for Geberit AquaClean Mera Classic


[click & scan](#)

Application purposes

- For Geberit AquaClean Mera Classic

Characteristics

- Withstands lateral forces

Art. no. Colour / surface

147.042.11.1 white alpine

For WC enhancement solutions

Water supply connection set for exposed cisterns, for Geberit AquaClean Tuma WC enhancement solutions



[click & scan](#)

Application purposes

- For connecting Geberit AquaClean Tuma WC enhancement solutions to exposed cisterns with left water supply connection
- For connecting Geberit AquaClean Tuma WC enhancement solutions to exposed cisterns with rear centre water supply connection
- For connecting Geberit AquaClean Tuma WC enhancement solutions to exposed cisterns with right water supply connection

Scope of delivery

- T-piece with male thread G 3/8", chrome-plated
- Straight copper pipe 0.5 m, chrome-plated
- Connecting material
- Fastening material

Art. no.

147.034.00.1



- For connecting Geberit AquaClean Tuma WC enhancement solutions to Geberit exposed cisterns with centre water supply connection, art. no. 115.438.00.1 has to be ordered additionally
- For connecting Geberit AquaClean Tuma WC enhancement solutions to Geberit exposed cisterns with right water supply connection, art. no. 147.034.00.1 has to be ordered additionally

Geberit water supply connection set for exposed cisterns with rear centre water supply connection



[click & scan](#)

Application purposes

- For connecting Geberit AquaClean 4000 to exposed cisterns with rear centre water supply connection
- For connecting Geberit AquaClean Tuma WC enhancement solutions to exposed cisterns with rear centre water supply connection

Scope of delivery

- 2 reinforced braided hoses 3/8"
- Connecting material
- Fastening material

Art. no.

115.438.00.1



- For connecting Geberit AquaClean Tuma WC enhancement solutions to Geberit exposed cisterns with centre water supply connection, art. no. 147.034.00.1 has to be ordered additionally

Geberit water supply connection for exposed cisterns with water supply connection on the right



[click & scan](#)

Application purposes

- For connecting Geberit AquaClean 4000 to exposed cisterns with right water supply connection
- For connecting Geberit AquaClean Tuma WC enhancement solutions to exposed cisterns with right water supply connection

Scope of delivery

- 4 reinforced braided hoses R 3/8"
- Stand
- Fastening material

Art. no.

240.396.00.1



- For connecting Geberit AquaClean Tuma WC enhancement solutions to Geberit exposed cisterns with right water supply connection, art. no. 147.034.00.1 has to be ordered additionally

Water supply connection set for concealed cisterns 12 cm, for Geberit AquaClean Tuma WC enhancement solutions

click & scan

Application purposes

- For Geberit concealed cisterns with premounted conduit pipe for the water supply connection
- For water supply connection 19.5 cm from the central axis
- For connecting Geberit AquaClean Tuma WC enhancement solutions to Geberit Sigma concealed cisterns 12 cm
- For connecting Geberit AquaClean Tuma WC enhancement solutions to Geberit Sigma concealed cisterns 8 cm
- For connecting Geberit AquaClean Tuma WC enhancement solutions to Geberit Omega concealed cisterns 12 cm, installation height 112 cm

Scope of delivery

- Y-branch
- Angle stop valve 1/2"
- Cover collar
- Reinforced braided hose 3/8"
- Connecting material
- Fastening material

Art. no.

147.035.00.1

Water supply connection set for concealed cisterns 12 cm / 15 cm, for Geberit AquaClean Tuma WC enhancement solutions

click & scan

Application purposes

- For connecting Geberit AquaClean Tuma WC enhancement solutions to Geberit concealed cisterns
- For Geberit concealed cisterns with premounted conduit pipe for the water supply connection
- For water supply connection 19.5 cm from the central axis
- For Omega concealed cisterns 12 cm, installation height 82 / 98 cm

Scope of delivery


- Angle stop valve 1/2"
- Cover collar
- 2 reinforced braided hoses 3/8"
- Connecting material
- Fastening material

Art. no.

147.036.00.1

For WC enhancement solutions and WC complete solutions

Wall-mounted control panel for Geberit AquaClean

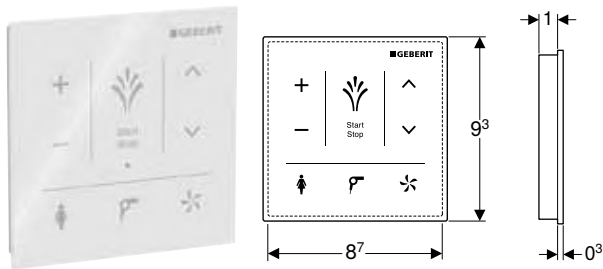

click & scan

Application purposes

- For manual, wireless operation of the shower toilet functions
- For exposed installation
- For Geberit AquaClean Tuma Comfort
- For Geberit AquaClean Mera WC complete solutions

Technical data

Battery type	CR2032 (3 V)
Service life, supplied battery	2 years
Degree of protection	IPX4
Operating temperature	5–40 °C

Characteristics


- Capacitive user interface
- Surface made of glass
- Connection via bluetooth
- Warning when the battery is low

Scope of delivery

- 3 lithium batteries, type CR 2032
- Fastening material

Art. no.	Colour / surface	B [cm]	H [cm]
147.038.SI.1	white / glass	9.3	9.3
147.038.SJ.1	black / glass	9.3	9.3

Wall-mounted control panel for Geberit AquaClean Sela

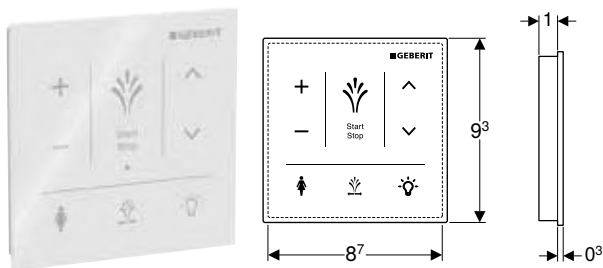

click & scan

Application purposes

- For manual, wireless operation of the shower toilet functions
- For exposed installation
- For Geberit AquaClean Sela

Technical data

Battery type	CR2032 (3 V)
Service life, supplied battery	2 years
Degree of protection	IPX4
Operating temperature	5–40 °C

Characteristics


- Capacitive user interface
- Surface made of glass
- Connection via bluetooth
- Warning when the battery is low

Scope of delivery

- 3 lithium batteries, type CR 2032
- Fastening material

Art. no.	Colour / surface	B [cm]	H [cm]
147.041.SI.1	white / glass	9.3	9.3
147.041.SJ.1	black / glass	9.3	9.3

Wall-mounted control panel, touchless, for Geberit AquaClean

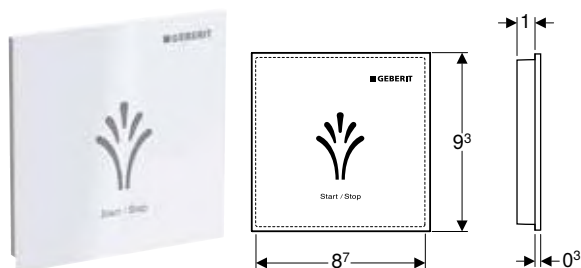

click & scan

Application purposes

- For exposed installation
- For Geberit AquaClean Sela
- For Geberit AquaClean Tuma Comfort
- For Geberit AquaClean Mera WC complete solutions
- For touchless control of the shower toilet functions

Technical data

Battery type	CR2032 (3 V)
Service life, supplied battery	2 years
Degree of protection	IPX4
Operating temperature	5–40 °C

Art. no.	Colour / surface
147.044.00.1	white / plastic

Characteristics

- Capacitive user interface
- Touchless actuation
- Surface made of plastic
- Connection via bluetooth
- Warning when the battery is low

Scope of delivery

- 3 lithium batteries, type CR 2032
- Fastening material

Remote control, large, for Geberit AquaClean Mera



click & scan

Application purposes

- For Geberit AquaClean Mera Comfort
- For Geberit AquaClean Mera Classic
- For full functionality of the remote control, update to the latest Mera firmware version (\geq v 28.0)

Characteristics

- For ease of operation
- For easy replacement
- Self-adhesive bracket, with magnets
- Display on back, for settings

Art. no.	Colour / surface
245.840.01.1	white

Scope of delivery

- Remote control
- Wall-mounted holder
- Battery

Accessories

- Wall-mounted holder, large, theft-proof, for Geberit AquaClean remote controls (from year of manufacture 2024) → p. 895

Large remote control, for Geberit AquaClean Mera, floor-standing WC



click & scan

Application purposes

- For Geberit AquaClean Mera Classic WC complete solution, floor-standing WC
- For full functionality of the remote control, update to the latest Mera firmware version (\geq v 28.0)

Scope of delivery

- Remote control
- Wall-mounted holder
- Battery

Characteristics

- For ease of operation
- For easy replacement
- Self-adhesive bracket, with magnets
- Display on back, for settings

Art. no. Colour / surface

245.830.01.1 white

Accessories

- Wall-mounted holder, large, theft-proof, for Geberit AquaClean remote controls (from year of manufacture 2024) → p. 895

Remote control large, for Geberit AquaClean Sela



click & scan

Application purposes

- For Geberit AquaClean Sela (from year of manufacture 2019)
- For full functionality of the remote control, update to the latest firmware version Sela (\geq v 8.0)

Scope of delivery

- Remote control
- Wall-mounted holder
- Battery

Characteristics

- For ease of operation
- For easy replacement
- Self-adhesive bracket, with magnets
- Display on back, for settings

Art. no. Colour / surface

245.820.01.1 white

Accessories

- Wall-mounted holder, large, theft-proof, for Geberit AquaClean remote controls (from year of manufacture 2024) → p. 895

Remote control large, for Geberit AquaClean Tuma Comfort



click & scan

Application purposes

- For Geberit AquaClean Tuma Comfort
- For full functionality of the remote control, update to the latest Tuma firmware version (\geq v 13.0)

Scope of delivery

- Remote control
- Wall-mounted holder
- Battery

Characteristics

- For ease of operation
- For easy replacement
- Self-adhesive bracket, with magnets
- Display on back, for settings

Art. no.	Colour / surface
245.999.01.1	white

Accessories

- Wall-mounted holder, large, theft-proof, for Geberit AquaClean remote controls (from year of manufacture 2024) → p. 895

Remote control, small, for Geberit AquaClean

click & scan

Application purposes

- For Geberit AquaClean Tuma Classic
- For full functionality of the remote control, update to the latest Tuma firmware version (\geq v 13.0)
- For Geberit AquaClean Alba
- For Geberit AquaClean Cama

Scope of delivery

- Remote control
- Battery
- Wall-mounted holder

Characteristics

- For ease of operation
- For easy replacement
- Self-adhesive bracket, with magnets

Art. no.	Colour / surface
245.368.01.1	white

Accessories

- Wall-mounted holder, small, theft-proof, for Geberit AquaClean remote controls (from year of manufacture 2024) → p. 896

Wall-mounted holder, large, theft-proof, for Geberit AquaClean remote controls (from year of manufacture 2024)

click & scan

Application purposes

- For remote controls for Geberit AquaClean Mera (from year of manufacture 2024)
- For remote controls for Geberit AquaClean Sela (from year of manufacture 2024)
- For remote controls for Geberit AquaClean Tuma Comfort (from year of manufacture 2024)

Scope of delivery

- Wall-mounted holder
- Fastening material

Characteristics

- For wall mounting
- Bracket with screw connection, with magnets
- Theft-proof

Art. no.	Colour / surface
147.086.01.1	white

Wall-mounted holder, small, theft-proof, for Geberit AquaClean remote controls (from year of manufacture 2024)



click & scan

Application purposes

- For remote controls for Geberit AquaClean Alba
- For remote controls for Geberit AquaClean Tuma Classic (from year of manufacture 2024)
- For remote controls for Geberit AquaClean Cama (from year of manufacture 2024)

Characteristics

- For wall mounting
- Bracket with screw connection, with magnets
- Theft-proof

Scope of delivery

- Wall-mounted holder
- Fastening material

Art. no.	Colour / surface
147.076.01.1	white

Geberit AquaClean water supply connection set for concealed cisterns 8 / 12 cm



click & scan

Application purposes

- For concealed cisterns with premounted conduit pipe for the water supply connection
- For water supply connection 19.5 cm from the central axis
- For connecting Geberit AquaClean 4000 to Geberit Sigma concealed cisterns 12 cm
- For connecting Geberit AquaClean 4000 to Geberit Sigma concealed cisterns 8 cm
- For connecting Geberit AquaClean 4000 to Geberit Omega concealed cisterns 12 cm, installation height 112 cm
- For connecting Geberit AquaClean 4000 to barrier-free Geberit Duofix installation elements
- For connecting Geberit AquaClean Alba to Geberit Sigma concealed cisterns 8 cm
- For connecting Geberit AquaClean Alba to Geberit Sigma concealed cisterns 12 cm
- For connecting Geberit AquaClean Tuma WC complete solutions to Geberit Sigma concealed cisterns 12 cm
- For connecting Geberit AquaClean Tuma WC complete solutions to Geberit Sigma concealed cisterns 8 cm
- For connecting Geberit AquaClean Sela WC complete solutions to Geberit Sigma concealed cisterns 8 cm
- For connecting Geberit AquaClean Sela WC complete solutions to Geberit concealed cisterns 12 cm

Scope of delivery

- Y-branch
- Angle stop valve 1/2"
- 2 reinforced braided hoses 3/8"
- Fastening material

Art. no.
249.801.00.1

Geberit AquaClean water supply connection set for concealed cisterns 12 / 15 cm



click & scan

Application purposes

- For concealed cisterns with premounted conduit pipe for the water supply connection
- For water supply connection 19.5 cm from the central axis
- For connecting Geberit AquaClean 4000 to Geberit Omega concealed cisterns 12 cm, installation height 82 / 98 cm
- For connecting Geberit AquaClean 4000 to Geberit Kappa concealed cisterns 15 cm
- For connecting Geberit AquaClean Alba to Geberit Kappa concealed cisterns 15 cm
- For connecting Geberit AquaClean Tuma WC complete solutions to Geberit Kappa concealed cisterns 15 cm
- For connecting Geberit AquaClean Sela WC complete solutions to Geberit Kappa concealed cisterns 15 cm

Scope of delivery

- Angle stop valve 1/2"
- 3 reinforced braided hoses 3/8"
- Connecting material

Art. no.

240.635.00.1

Conventional water supply connection set for Geberit AquaClean Sela / Tuma / Alba



click & scan

Application purposes

- For conventional lateral water supply connections, left
- For connecting Geberit AquaClean Sela
- For connecting Geberit AquaClean Tuma
- For connecting Geberit AquaClean Alba
- For connecting Geberit AquaClean WC complete solutions to visible barrier-free Geberit Duofix installation elements

Scope of delivery

- Angle stop valve 1/2"
- Reinforced braided hose 3/8"

Art. no.

147.045.00.1

Geberit reinforced braided hose for Sigma concealed cistern 8 cm (from year of manufacture 2016)



click & scan

Application purposes

- For Sigma concealed cisterns 8 cm, range 2016
- For connecting Geberit AquaClean

Characteristics

- Connection hose on angle stop valve can be attached without tools

Technical data

Product material	Thermoplastic / steel / brass
------------------	-------------------------------

Art. no.

G

["]

243.173.00.1

3/8

Geberit outlet mounting box



click & scan

Application purposes

- For connecting Geberit AquaClean Tuma shower toilets in combination with Geberit DuoFresh module
- For connecting Geberit AquaClean Sela WC complete solutions using fixed connections
- For connecting Geberit AquaClean Tuma WC complete solutions in combination with Geberit Sigma10 und Sigma80 actuator plates
- For connecting Geberit AquaClean Alba WC complete solutions in combination with Geberit DuoFresh module
- For connecting Geberit AquaClean Alba WC complete solutions in combination with Geberit Sigma10 and Sigma80 actuator plates
- For connecting Geberit Monolith Plus sanitary modules using a fixed connection
- For connecting Geberit Monolith Plus sanitary modules in combination with Geberit AquaClean Mera/Sela/Alba/Tuma using a fixed connection
- For connecting an odour extraction unit

Technical data

Degree of protection	IP66
----------------------	------

Characteristics

- Cover with screw connection

Scope of delivery

- 3 grommets
- 3 terminals
- 2 hook-and-loop strip

Art. no.

242.837.00.1

Consumables

Geberit AquaClean cleaning agent



click & scan

Application purposes

- For cleaning Geberit AquaClean shower toilets

Scope of delivery

- Cleaning agent, 500 ml

Characteristics

- Content 500 ml
- Can be used immediately and undiluted
- Environmentally friendly
- Dermatologically approved

Art. no.

242.546.00.1

Geberit AquaClean cleaning set



click & scan

Application purposes

- For cleaning Geberit AquaClean shower toilets

Characteristics

- Can be used immediately and undiluted
- Environmentally friendly
- Dermatologically approved

Scope of delivery

- Cleaning agent, 500 ml
- Cloth

Art. no.

242.547.00.1

Geberit AquaClean descaling agent



click & scan

Application purposes

- For descaling Geberit AquaClean Mera
- For descaling Geberit AquaClean Tuma
- For descaling Geberit AquaClean Sela
- For descaling Geberit AquaClean Alba
- For descaling Geberit AquaClean Cama

Scope of delivery

- Bottle 125 ml

Characteristics

- Ready-made
- For 1 descaling cycle

Art. no.

147.040.00.1



- This consumable contains classified hazardous substances. Information, instructions and measures for handling hazardous substances safely can be found at <https://www.geberit-global.com>.

Geberit AquaClean set descaling agent



click & scan

Application purposes

- For descaling Geberit AquaClean Mera
- For descaling Geberit AquaClean Tuma
- For descaling Geberit AquaClean Sela
- For descaling Geberit AquaClean Alba
- For descaling Geberit AquaClean Cama

Scope of delivery

- Set of 10 pieces
- Bottle 125 ml

Characteristics

- Ready-made
- For 10 descaling cycles

Art. no.

147.048.00.1



- This consumable contains classified hazardous substances. Information, instructions and measures for handling hazardous substances safely can be found at <https://www.geberit-global.com>.

Geberit Type 3 set of ceramic honeycomb filters



[click & scan](#)

Application purposes

- For odour neutralisation
- For Geberit AquaClean Tuma Comfort
- For Geberit AquaClean Mera
- For Geberit Monolith Plus sanitary modules

Scope of delivery

- Set of 2 pieces
- Ceramic honeycomb filter

Characteristics

- Service life of filter, 1 year

Art. no.

147.072.00.1

Active carbon filter for Geberit AquaClean 8000plus WC complete solutions



[click & scan](#)

Application purposes

- For odour neutralisation
- For Geberit AquaClean 8000plus
- For Balena 8000

Scope of delivery

- Active carbon filter

Characteristics

- Service life of filter, 1 year

Art. no.

250.022.00.1

Geberit AquaClean 8000plus nozzle cleaner



[click & scan](#)

Application purposes

- For Geberit AquaClean 8000plus
- For Balena 8000

Scope of delivery

- Nozzle cleaner, 400 ml

Characteristics

- Content 400 ml
- For approx. 650 uses
- Dermatologically approved

Art. no.

242.545.00.1




Geberit Monolith sanitary modules

Sanitary modules for WCs.....	904
For wall-hung WCs	904
For floor-standing WCs.....	912
Accessories.....	920
Consumables	923
Sanitary modules for bidets	923
For wall-hung and floor-standing bidets	923

Sanitary modules for WCs

For wall-hung WCs

Geberit Monolith sanitary module for wall-hung WC, 101 cm, front cladding made of glass

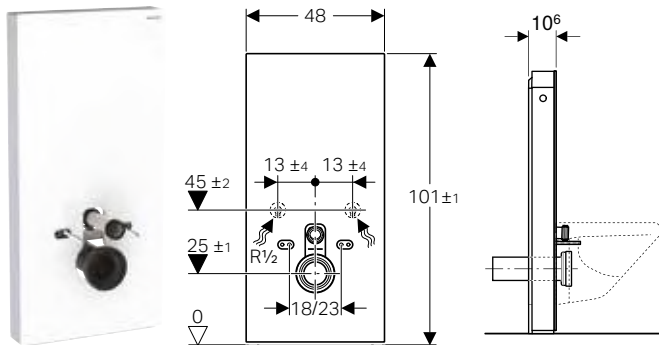

click & scan

Application purposes

- For renovations, conversions and new buildings
- For wall inlets with inlet height > 23 cm
- For replacing low-level exposed cisterns
- For replacing wall-hung WCs with close-coupled exposed cistern
- For Geberit AquaClean WC complete solutions
- For connecting Geberit AquaClean WC enhancement solutions, with accessories
- For mounting on finished floors
- For installation in front of drywalls or solid walls
- For compensating the offset between WC connections and wall drains using a stepped straight connector for wall-hung WCs

Technical data

Flow pressure	0.1–10 bar
Flush volume, factory setting	6 l / 3 l
Flush volume large, adjustment range	4.5 l / 6 l
Small flush volume	3 l

Characteristics

- Dual flush
- Compensation of dimensional tolerances possible
- Height-adjustable up to 7 cm
- Fastening height WC ceramic appliance 35 ± 1 cm
- Cistern, fully insulated against condensation
- Side cladding made of aluminium brushed
- Self-supporting
- Adjustable flush volume
- Water supply connection on the bottom
- Water supply connection on the left/right possible with accessories

Scope of delivery

- Water supply connection set with 2 angle stop valves, 1/2"
- Flush bend extension 160 mm
- Sleeve made of EPDM, $\varnothing 44 / 55$ mm
- Straight connector made of PE-HD, $\varnothing 90$ mm
- Adapter socket made of PE-HD, $\varnothing 90 / 110$ mm
- 2 threaded rods M12
- Sound insulation set
- Base cover
- Fastening material for drywall
- Fastening material


Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]
131.021.JK.5	Front: lava / glass Side cladding: black / brushed aluminium	48	101	10.6
131.021.JL.5	Front: sand grey / glass Side cladding: brushed aluminium	48	101	10.6
131.021.SI.5	Front: white / glass Side cladding: brushed aluminium	48	101	10.6
131.021.SJ.6	Front: black / glass Side cladding: black / brushed aluminium	48	101	10.6
131.021.SL.5	Front: mint / glass Side cladding: brushed aluminium	48	101	10.6
131.021.CD.5	N Front: black / Glass satinised Side cladding: black / brushed aluminium	48	101	10.6
131.021.TD.5	N Front: white / Glass satinised Side cladding: brushed aluminium	48	101	10.6

N: New, available as of April 2026

Accessories

- Geberit straight connector set for wall-hung WC, stepped by 3 cm → p. 920
- Geberit straight connector set for wall-hung WC, stepped by 7 cm → p. 921
- Lateral water supply connection set for Geberit Monolith sanitary module for WC → p. 920

Geberit Monolith sanitary module for wall-hung WC, 101 cm, front cladding made of stoneware

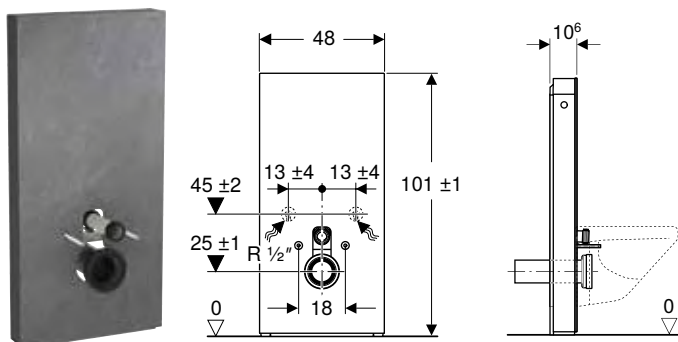

click & scan

Application purposes

- For renovations, conversions and new buildings
- For wall inlets with inlet height > 23 cm
- For replacing low-level exposed cisterns
- For replacing wall-hung WCs with close-coupled exposed cistern
- For Geberit AquaClean WC complete solutions
- For connecting Geberit AquaClean WC enhancement solutions, with accessories
- For mounting on finished floors
- For installation in front of drywalls or solid walls
- For compensating the offset between WC connections and wall drains using a stepped straight connector for wall-hung WCs

Technical data

Flow pressure	0.1–10 bar
Flush volume, factory setting	6 l / 3 l
Flush volume large, adjustment range	4.5 l / 6 l
Small flush volume	3 l

Characteristics

- Dual flush
- Compensation of dimensional tolerances possible
- Height-adjustable up to 7 cm
- Fastening height WC ceramic appliance 35 ± 1 cm
- Cistern, fully insulated against condensation
- Side cladding made of aluminium brushed
- Self-supporting
- Adjustable flush volume
- Water supply connection on the bottom
- Water supply connection on the left/right possible with accessories

Scope of delivery

- Water supply connection set with 2 angle stop valves, 1/2"
- Flush bend extension 160 mm
- Sleeve made of EPDM, $\varnothing 44 / 55$ mm
- Straight connector made of PE-HD, $\varnothing 90$ mm
- Adapter socket made of PE-HD, $\varnothing 90 / 110$ mm
- 2 threaded rods M12
- Base cover
- Support frame
- Fastening material for drywall
- Fastening material

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]
131.021.00.5	Front: slate look / stoneware Side cladding: black / brushed aluminium	48	101	10.6
131.021.JV.5	Front: concrete look / stoneware Side cladding: brushed aluminium	48	101	10.6


Accessories

- Geberit straight connector set for wall-hung WC, stepped by 3 cm → p. 920
- Geberit straight connector set for wall-hung WC, stepped by 7 cm → p. 921
- Lateral water supply connection set for Geberit Monolith sanitary module for WC → p. 920



- The colour and structure of natural products may vary

Geberit Monolith Plus sanitary module for wall-hung WC, 101 cm, front cladding made of glass

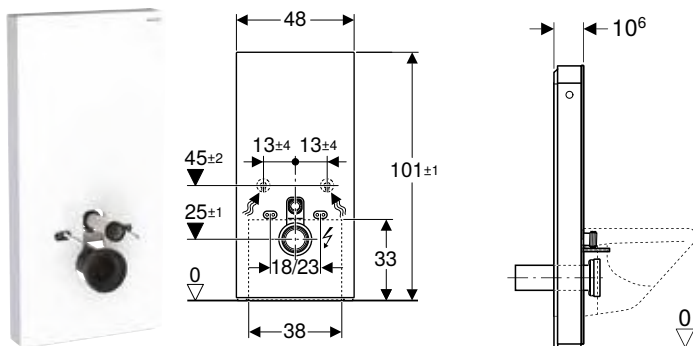

click & scan

Application purposes

- For renovations, conversions and new buildings
- For wall inlets with inlet height > 23 cm
- For replacing low-level exposed cisterns
- For replacing wall-hung WCs with close-coupled exposed cistern
- For Geberit AquaClean WC complete solutions
- For connecting Geberit AquaClean WC enhancement solutions, with accessories
- For mounting on finished floors
- For installation in front of drywalls or solid walls
- For compensating the offset between WC connections and wall drains using a stepped straight connector for wall-hung WCs

Technical data

Degree of protection	IPX4
Nominal voltage	100–240 V AC
Mains frequency	50–60 Hz
Operating voltage	12 V DC
Power consumption in standby mode max.	0.5 W
Flow pressure	0.1–10 bar
Flush volume, factory setting	6 l / 3 l
Flush volume large, adjustment range	4–6 l
Small flush volume	3 l
Light colour	2200–4000 K

Characteristics

- Dual flush
- Soft-touch buttons for flush actuation
- Settings can only be changed with the Geberit Home App
- Odour extraction with ceramic honey comb filter can be activated
- Odour extraction unit with run-on function
- Adjustable interval flush
- With ComfortLight
- Lighting mood infinitely adjustable from orientation light to day-light
- Light colour continuously adjustable from warm white to cool white
- DALI-compatible control
- Operation with extra-low voltage, no mains voltage in cistern
- Water supply connection on the bottom
- Water supply connection on the left/right possible with accessories
- Compensation of dimensional tolerances possible
- Height-adjustable up to 7 cm
- Fastening height WC ceramic appliance 35 ± 1 cm
- Cistern, fully insulated against condensation
- Side cladding made of aluminium brushed
- Self-supporting

Scope of delivery

- Water supply connection set with 2 angle stop valves, 1/2"
- Flush bend extension 160 mm
- Sleeve made of EPDM, ø 44 / 55 mm
- Straight connector made of PE-HD, ø 90 mm
- Adapter socket made of PE-HD, ø 90 / 110 mm
- 2 threaded rods M12
- Sound insulation set
- Female socket for mains connection
- Power supply unit
- Fastening material
- Base cover
- Fastening material for drywall


Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]	Protection class	Power consumption [W]
131.221.JK.7	Front: lava / glass Side cladding: black / brushed aluminium	48	101	10.6	I	15
131.221.JL.7	Front: sand grey / glass Side cladding: brushed aluminium	48	101	10.6	I	15
131.221.SI.7	Front: white / glass Side cladding: brushed aluminium	48	101	10.6	I	15
131.221.SJ.7	Front: black / glass Side cladding: black / brushed aluminium	48	101	10.6	I	15
131.221.CD.7	N Front: black / Glass satinised Side cladding: black / brushed aluminium	48	101	10.6	I	15
131.221.TD.7	N Front: white / Glass satinised Side cladding: brushed aluminium	48	101	10.6	I	15

N: New, available as of April 2026

Accessories

- Geberit straight connector set for wall-hung WC, stepped by 3 cm → p. 920
- Geberit straight connector set for wall-hung WC, stepped by 7 cm → p. 921
- Lateral water supply connection set for Geberit Monolith sanitary module for WC → p. 920
- Geberit outlet mounting box → p. 898
- Interface module 12 V for Geberit AquaClean Mera/Sela → p. 889

Geberit Monolith Plus sanitary module for wall-hung WC, 101 cm, front cladding made of stoneware

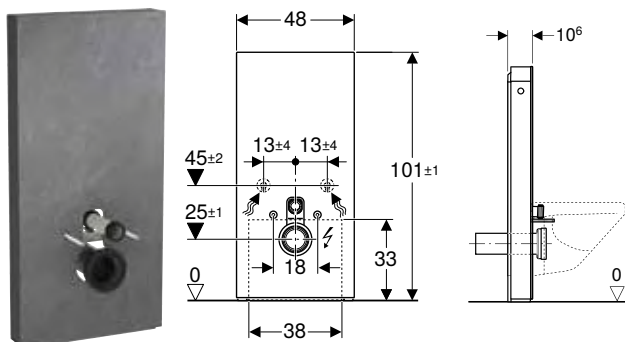

click & scan

Application purposes

- For renovations, conversions and new buildings
- For wall inlets with inlet height > 23 cm
- For replacing low-level exposed cisterns
- For replacing wall-hung WCs with close-coupled exposed cistern
- For Geberit AquaClean WC complete solutions
- For connecting Geberit AquaClean WC enhancement solutions, with accessories
- For mounting on finished floors
- For installation in front of drywalls or solid walls
- For compensating the offset between WC connections and wall drains using a stepped straight connector for wall-hung WCs

Technical data

Degree of protection	IPX4
Nominal voltage	100–240 V AC
Mains frequency	50–60 Hz
Operating voltage	12 V DC
Power consumption in standby mode max.	0.5 W
Flow pressure	0.1–10 bar
Flush volume, factory setting	6 l / 3 l
Flush volume large, adjustment range	4–6 l
Small flush volume	3 l
Light colour	2200–4000 K

Characteristics

- Dual flush
- Soft-touch buttons for flush actuation
- Settings can only be changed with the Geberit Home App
- Odour extraction with ceramic honey comb filter can be activated
- Odour extraction unit with run-on function
- Adjustable interval flush
- With ComfortLight
- Lighting mood infinitely adjustable from orientation light to daylight
- Light colour continuously adjustable from warm white to cool white
- DALI-compatible control
- Operation with extra-low voltage, no mains voltage in cistern
- Water supply connection on the bottom
- Water supply connection on the left/right possible with accessories
- Compensation of dimensional tolerances possible
- Height-adjustable up to 7 cm
- Fastening height WC ceramic appliance 35 ± 1 cm
- Cistern, fully insulated against condensation
- Side cladding made of aluminium brushed
- Self-supporting

Scope of delivery

- Water supply connection set with 2 angle stop valves, 1/2"
- Flush bend extension 160 mm
- Sleeve made of EPDM, \varnothing 44 / 55 mm
- Straight connector made of PE-HD, \varnothing 90 mm
- Adapter socket made of PE-HD, \varnothing 90 / 110 mm
- 2 threaded rods M12
- Female socket for mains connection
- Power supply unit
- Support frame
- Fastening material
- Base cover
- Fastening material for drywall

Art. no.	Colour / surface	B	H	T	Protection class	Power consumption [W]
		[cm]	[cm]	[cm]		
131.221.00.7	Front: slate look / stoneware Side cladding: black / brushed aluminium	48	101	10.6	I	15
131.221.JV.7	Front: concrete look / stoneware Side cladding: brushed aluminium	48	101	10.6	I	15


Accessories

- Geberit straight connector set for wall-hung WC, stepped by 3 cm → p. 920
- Geberit straight connector set for wall-hung WC, stepped by 7 cm → p. 921
- Lateral water supply connection set for Geberit Monolith sanitary module for WC → p. 920
- Geberit outlet mounting box → p. 898
- Interface module 12 V for Geberit AquaClean Mera/Sela → p. 889



- The colour and structure of natural products may vary

Geberit Monolith sanitary module for wall-hung WC, 114 cm, front cladding made of glass

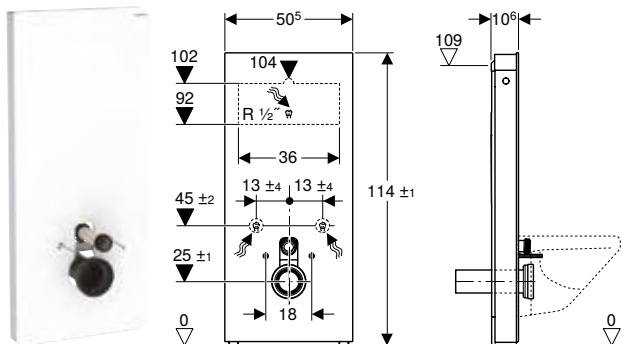

Application purposes

- For renovations, conversions and new buildings
- For wall inlets with inlet height > 23 cm
- For replacing low-level exposed cisterns
- For replacing half-high level exposed cisterns
- For replacing wall-hung WCs with close-coupled exposed cistern
- For replacing wall-hung WCs with pressure flushing valve
- For replacing wall-hung WCs with concealed cistern with maximum service opening height < 109 cm
- For Geberit AquaClean WC complete solutions
- For connecting Geberit AquaClean WC enhancement solutions, with accessories
- For mounting on finished floors
- For installation in front of drywalls or solid walls
- For compensating the offset between WC connections and wall drains using a stepped straight connector for wall-hung WCs

Technical data

Flow pressure	0.1–10 bar
Flush volume, factory setting	6 l / 3 l
Flush volume large, adjustment range	4.5 l / 6 l
Small flush volume	3 l
Flow rate at 300 kPa / 3 bar	9.6 l/min

Characteristics

- Dual flush
- Compensation of dimensional tolerances possible
- Height-adjustable up to 7 cm
- Fastening height WC ceramic appliance 35 ± 1 cm
- Cistern, fully insulated against condensation
- Side cladding made of aluminium brushed
- Self-supporting
- Adjustable flush volume
- Water supply connection on the rear centre
- Water supply connection on the left/right possible with accessories
- Water supply connection on the bottom

Scope of delivery

- Water supply connection set with 2 angle stop valves, 1/2"
- Flush bend extension 160 mm
- Sleeve made of EPDM, ø 44 / 55 mm
- Straight connector made of PE-HD, ø 90 mm
- Adapter socket made of PE-HD, ø 90 / 110 mm
- 2 threaded rods M12
- Sound insulation set
- Base cover
- Fastening material for drywall
- Fastening material
- Fastening material for installation in front of concealed cisterns


Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]
131.031.JK.5	Front: lava / glass Side cladding: black / brushed aluminium	50.5	114	10.6
131.031.JL.5	Front: sand grey / glass Side cladding: brushed aluminium	50.5	114	10.6
131.031.SI.5	Front: white / glass Side cladding: brushed aluminium	50.5	114	10.6
131.031.SJ.6	Front: black / glass Side cladding: black / brushed aluminium	50.5	114	10.6
131.031.CD.5	N Front: black / Glass satinised Side cladding: black / brushed aluminium	50.5	114	10.6
131.031.TD.5	N Front: white / Glass satinised Side cladding: brushed aluminium	50.5	114	10.6

N: New, available as of April 2026

Accessories

- Geberit straight connector set for wall-hung WC, stepped by 3 cm → p. 920
- Geberit straight connector set for wall-hung WC, stepped by 7 cm → p. 921
- Lateral water supply connection set for Geberit Monolith sanitary module for WC → p. 920

Geberit Monolith sanitary module for wall-hung WC, 114 cm, front panel made of stoneware

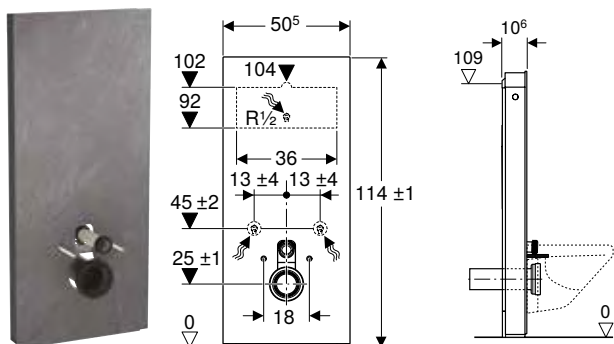

click & scan

Application purposes

- For renovations, conversions and new buildings
- For wall inlets with inlet height > 23 cm
- For replacing low-level exposed cisterns
- For replacing half-high level exposed cisterns
- For replacing wall-hung WCs with close-coupled exposed cistern
- For replacing wall-hung WCs with pressure flushing valve
- For replacing wall-hung WCs with concealed cistern with maximum service opening height < 109 cm
- For Geberit AquaClean WC complete solutions
- For connecting Geberit AquaClean WC enhancement solutions, with accessories
- For mounting on finished floors
- For installation in front of drywalls or solid walls
- For compensating the offset between WC connections and wall drains using a stepped straight connector for wall-hung WCs

Technical data

Flow pressure	0.1–10 bar
Flush volume, factory setting	6 l / 3 l
Flush volume large, adjustment range	4.5 l / 6 l
Small flush volume	3 l
Flow rate at 300 kPa / 3 bar	9.6 l/min

Characteristics

- Dual flush
- Compensation of dimensional tolerances possible
- Height-adjustable up to 7 cm
- Fastening height WC ceramic appliance 35 ± 1 cm
- Cistern, fully insulated against condensation
- Side cladding made of aluminium brushed
- Self-supporting
- Adjustable flush volume
- Water supply connection on the rear centre
- Water supply connection on the left/right possible with accessories
- Water supply connection on the bottom

Scope of delivery

- Water supply connection set with 2 angle stop valves, 1/2"
- Flush bend extension 160 mm
- Sleeve made of EPDM, $\varnothing 44 / 55$ mm
- Straight connector made of PE-HD, $\varnothing 90$ mm
- Adapter socket made of PE-HD, $\varnothing 90 / 110$ mm
- 2 threaded rods M12
- Base cover
- Support frame
- Fastening material for drywall
- Fastening material
- Fastening material for installation in front of concealed cisterns

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]
131.031.00.5	Front: slate look / stoneware Side cladding: black / brushed aluminium	50.5	114	10.6
131.031.JV.5	Front: concrete look / stoneware Side cladding: brushed aluminium	50.5	114	10.6


Accessories

- Geberit straight connector set for wall-hung WC, stepped by 3 cm → p. 920
- Geberit straight connector set for wall-hung WC, stepped by 7 cm → p. 921
- Lateral water supply connection set for Geberit Monolith sanitary module for WC → p. 920



- The colour and structure of natural products may vary

Geberit Monolith Plus sanitary module for wall-hung WC, 114 cm, front cladding made of glass

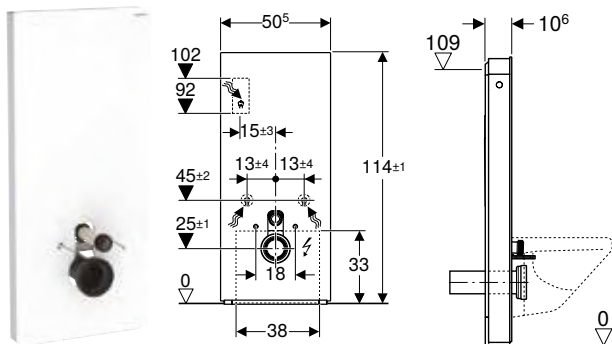

click & scan

Application purposes

- For renovations, conversions and new buildings
- For wall inlets with inlet height > 23 cm
- For replacing low-level exposed cisterns
- For replacing half-high level exposed cisterns
- For replacing wall-hung WCs with close-coupled exposed cistern
- For replacing wall-hung WCs with pressure flushing valve
- For replacing wall-hung WCs with concealed cistern with maximum service opening height < 109 cm
- For Geberit AquaClean WC complete solutions
- For connecting Geberit AquaClean WC enhancement solutions, with accessories
- For mounting on finished floors
- For installation in front of drywalls or solid walls
- For compensating the offset between WC connections and wall drains using a stepped straight connector for wall-hung WCs

Technical data

Degree of protection	IPX4
Nominal voltage	100–240 V AC
Mains frequency	50–60 Hz
Operating voltage	12 V DC
Power consumption in standby mode max.	0.5 W
Flow pressure	0.1–10 bar
Flush volume, factory setting	6 l / 3 l
Flush volume large, adjustment range	4–6 l
Small flush volume	3 l
Flow rate at 300 kPa / 3 bar	9.6 l/min
Light colour	2200–4000 K

Characteristics

- Dual flush
- Soft-touch buttons for flush actuation
- Settings can only be changed with the Geberit Home App
- Odour extraction with ceramic honey comb filter can be activated
- Odour extraction unit with run-on function
- Adjustable interval flush
- With ComfortLight
- Lighting mood infinitely adjustable from orientation light to day-light
- Light colour continuously adjustable from warm white to cool white
- DALI-compatible control
- Operation with extra-low voltage, no mains voltage in cistern
- Water supply connection on the rear centre
- Water supply connection on the left/right possible with accessories
- Water supply connection on the bottom
- Compensation of dimensional tolerances possible
- Height-adjustable up to 7 cm
- Fastening height WC ceramic appliance 35 ± 1 cm
- Cistern, fully insulated against condensation
- Side cladding made of aluminium brushed
- Self-supporting

Scope of delivery

- Water supply connection set with 2 angle stop valves, 1/2"
- Flush bend extension 160 mm
- Sleeve made of EPDM, ø 44 / 55 mm
- Straight connector made of PE-HD, ø 90 mm
- Adapter socket made of PE-HD, ø 90 / 110 mm
- 2 threaded rods M12
- Sound insulation set
- Female socket for mains connection
- Power supply unit
- Base cover
- Fastening material for drywall
- Fastening material
- Fastening material for installation in front of concealed cisterns


Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]	Protection class	Power consumption [W]
131.231.JK.7	Front: lava / glass Side cladding: black / brushed aluminium	50.5	114	10.6	I	15
131.231.JL.7	Front: sand grey / glass Side cladding: brushed aluminium	50.5	114	10.6	I	15
131.231.SI.7	Front: white / glass Side cladding: brushed aluminium	50.5	114	10.6	I	15
131.231.SJ.7	Front: black / glass Side cladding: black / brushed aluminium	50.5	114	10.6	I	15
131.231.CD.7	N Front: black / Glass satinised Side cladding: black / brushed aluminium	50.5	114	10.6	I	15
131.231.TD.7	N Front: white / Glass satinised Side cladding: brushed aluminium	50.5	114	10.6	I	15

N: New, available as of April 2026

Accessories

- Geberit straight connector set for wall-hung WC, stepped by 3 cm → p. 920
- Geberit straight connector set for wall-hung WC, stepped by 7 cm → p. 921
- Lateral water supply connection set for Geberit Monolith sanitary module for WC → p. 920
- Geberit outlet mounting box → p. 898
- Interface module 12 V for Geberit AquaClean Mera/Sela → p. 889

Geberit Monolith Plus sanitary module for wall-hung WC, 114 cm, front cladding made of stoneware

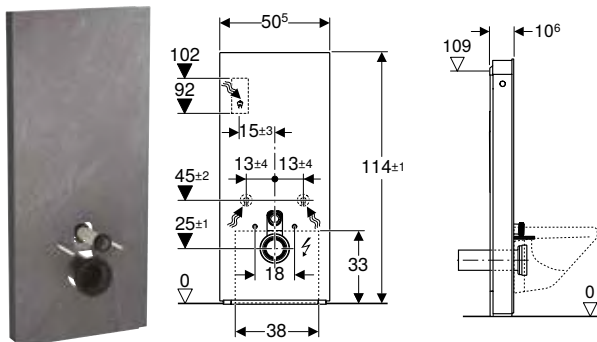

click & scan

Application purposes

- For renovations, conversions and new buildings
- For wall inlets with inlet height > 23 cm
- For replacing low-level exposed cisterns
- For replacing half-high level exposed cisterns
- For replacing wall-hung WCs with close-coupled exposed cistern
- For replacing wall-hung WCs with pressure flushing valve
- For replacing wall-hung WCs with concealed cistern with maximum service opening height < 109 cm
- For Geberit AquaClean WC complete solutions
- For connecting Geberit AquaClean WC enhancement solutions, with accessories
- For mounting on finished floors
- For installation in front of drywalls or solid walls
- For compensating the offset between WC connections and wall drains using a stepped straight connector for wall-hung WCs

Technical data

Degree of protection	IPX4
Nominal voltage	100–240 V AC
Mains frequency	50–60 Hz
Operating voltage	12 V DC
Power consumption in standby mode max.	0.5 W
Flow pressure	0.1–10 bar
Flush volume, factory setting	6 l / 3 l
Flush volume large, adjustment range	4–6 l
Small flush volume	3 l
Flow rate at 300 kPa / 3 bar	9.6 l/min
Light colour	2200–4000 K

Characteristics

- Dual flush
- Soft-touch buttons for flush actuation
- Settings can only be changed with the Geberit Home App
- Odour extraction with ceramic honey comb filter can be activated
- Odour extraction unit with run-on function
- Adjustable interval flush
- With ComfortLight
- Lighting mood infinitely adjustable from orientation light to daylight
- Light colour continuously adjustable from warm white to cool white
- DALI-compatible control
- Operation with extra-low voltage, no mains voltage in cistern
- Water supply connection on the rear centre
- Water supply connection on the left/right possible with accessories
- Water supply connection on the bottom
- Compensation of dimensional tolerances possible
- Height-adjustable up to 7 cm
- Fastening height WC ceramic appliance 35 ± 1 cm
- Cistern, fully insulated against condensation
- Side cladding made of aluminium brushed
- Self-supporting

Scope of delivery

- Water supply connection set with 2 angle stop valves, 1/2"
- Flush bend extension 160 mm
- Sleeve made of EPDM, ø 44 / 55 mm
- Straight connector made of PE-HD, ø 90 mm
- Adapter socket made of PE-HD, ø 90 / 110 mm
- 2 threaded rods M12
- Female socket for mains connection
- Power supply unit
- Base cover
- Support frame
- Fastening material for drywall
- Fastening material
- Fastening material for installation in front of concealed cisterns

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]	Protection class	Power consumption [W]
131.231.00.7	Front: slate look / stoneware Side cladding: black / brushed aluminium	50.5	114	10.6	I	15
131.231.JV.7	Front: concrete look / stoneware Side cladding: brushed aluminium	50.5	114	10.6	I	15

Accessories

- Geberit straight connector set for wall-hung WC, stepped by 3 cm → p. 920
- Geberit straight connector set for wall-hung WC, stepped by 7 cm → p. 921
- Lateral water supply connection set for Geberit Monolith sanitary module for WC → p. 920
- Geberit outlet mounting box → p. 898
- Interface module 12 V for Geberit AquaClean Mera/Sela → p. 889




• The colour and structure of natural products may vary

Geberit Monolith sanitary modules

For floor-standing WCs

Geberit Monolith sanitary module for floor-standing WC, 101 cm, front cladding made of glass

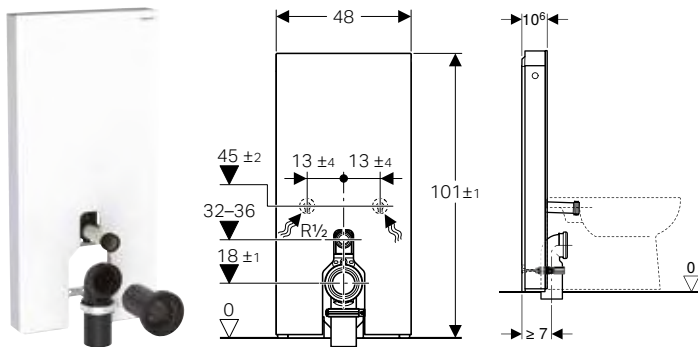

click & scan

Application purposes

- For floor inlets
- For renovations, conversions and new buildings
- For wall inlets with an inlet height of 18 cm
- For floor-standing WCs with water inlet height 32–36 cm above floor in accordance with DIN EN 33
- For replacing low-level exposed cisterns
- For replacing floor-standing WCs with close-coupled exposed cistern
- For connecting Geberit AquaClean Tuma WC complete solution, floor-standing WC
- For connecting Geberit AquaClean WC enhancement solutions, with accessories
- For mounting on finished floors
- For installation in front of drywalls or solid walls

Technical data

Flow pressure	0.1–10 bar
Flush volume, factory setting	6 l / 3 l
Flush volume large, adjustment range	4.5 l / 6 l
Small flush volume	3 l

Characteristics

- Dual flush
- Compensation of dimensional tolerances possible
- Cistern, fully insulated against condensation
- Side cladding made of aluminium brushed
- Self-supporting
- Adjustable flush volume
- Water supply connection on the bottom
- Water supply connection on the left/right possible with accessories

Scope of delivery

- Water supply connection set with 2 angle stop valves, 1/2"
- Flush bend extension 160 mm
- Sleeve made of EPDM, ø 44 / 55 mm
- Straight connector made of PE-HD, ø 90 mm
- Connection bend 90° made of PE-HD, ø 90 mm
- Adapter socket made of PE-HD, ø 90 / 110 mm
- Base cover
- Fastening material for drywall
- Fastening material


Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]
131.001.JK.5	Front: lava / glass Side cladding: black / brushed aluminium	48	101	10.6
131.001.JL.5	Front: sand grey / glass Side cladding: brushed aluminium	48	101	10.6
131.001.SI.5	Front: white / glass Side cladding: brushed aluminium	48	101	10.6
131.001.SJ.6	Front: black / glass Side cladding: black / brushed aluminium	48	101	10.6
131.001.SL.5	Front: mint / glass Side cladding: brushed aluminium	48	101	10.6
131.001.CD.5	N Front: black / Glass satinised Side cladding: black / brushed aluminium	48	101	10.6
131.001.TD.5	N Front: white / Glass satinised Side cladding: brushed aluminium	48	101	10.6

N: New, available as of April 2026

Accessories

- Lateral water supply connection set for Geberit Monolith sanitary module for WC → p. 920

Geberit Monolith sanitary module for floor-standing WC, 101 cm, front cladding made of stoneware

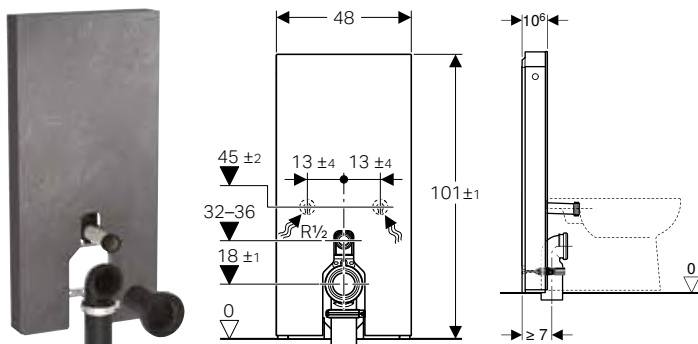

Application purposes

- For floor inlets
- For renovations, conversions and new buildings
- For wall inlets with an inlet height of 18 cm
- For floor-standing WCs with water inlet height 32–36 cm above floor in accordance with DIN EN 33
- For replacing low-level exposed cisterns
- For replacing floor-standing WCs with close-coupled exposed cistern
- For connecting Geberit AquaClean Tuma WC complete solution, floor-standing WC
- For connecting Geberit AquaClean WC enhancement solutions, with accessories
- For mounting on finished floors
- For installation in front of drywalls or solid walls

Technical data

Flow pressure	0.1–10 bar
Flush volume, factory setting	6 l / 3 l
Flush volume large, adjustment range	4.5 l / 6 l
Small flush volume	3 l

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]
131.001.00.5	Front: slate look / stoneware Side cladding: black / brushed aluminium	48	101	10.6
131.001.JV.5	Front: concrete look / stoneware Side cladding: brushed aluminium	48	101	10.6

Accessories

- Lateral water supply connection set for Geberit Monolith sanitary module for WC → p. 920



- The colour and structure of natural products may vary


Characteristics

- Dual flush
- Compensation of dimensional tolerances possible
- Cistern, fully insulated against condensation
- Side cladding made of aluminium brushed
- Self-supporting
- Adjustable flush volume
- Water supply connection on the bottom
- Water supply connection on the left/right possible with accessories

Scope of delivery

- Water supply connection set with 2 angle stop valves, 1/2"
- Flush bend extension 160 mm
- Sleeve made of EPDM, ø 44 / 55 mm
- Straight connector made of PE-HD, ø 90 mm
- Connection bend 90° made of PE-HD, ø 90 mm
- Adapter socket made of PE-HD, ø 90 / 110 mm
- Base cover
- Fastening material for drywall
- Fastening material

Geberit Monolith Plus sanitary module for floor-standing WC, 101 cm, front cladding made of glass

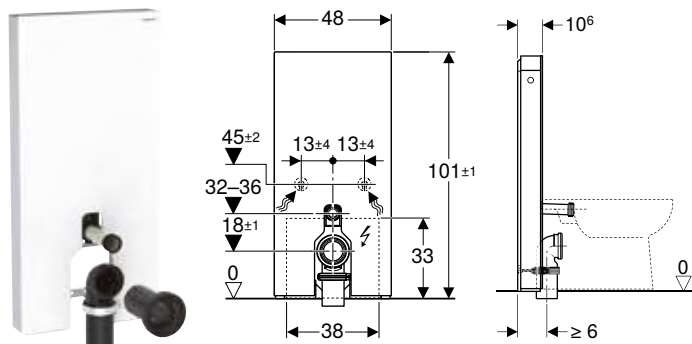

click & scan

Application purposes

- For floor inlets
- For renovations, conversions and new buildings
- For wall inlets with an inlet height of 18 cm
- For floor-standing WCs with water inlet height 32–36 cm above floor in accordance with DIN EN 33
- For replacing low-level exposed cisterns
- For replacing floor-standing WCs with close-coupled exposed cistern
- For connecting Geberit AquaClean Tuma WC complete solution, floor-standing WC
- For connecting Geberit AquaClean WC enhancement solutions, with accessories
- For mounting on finished floors
- For installation in front of drywalls or solid walls

Technical data

Degree of protection	IPX4
Nominal voltage	100–240 V AC
Mains frequency	50–60 Hz
Operating voltage	12 V DC
Power consumption in standby mode max.	0.5 W
Flow pressure	0.1–10 bar
Flush volume, factory setting	6 l / 3 l
Flush volume large, adjustment range	4–6 l
Small flush volume	3 l
Light colour	2200–4000 K

Characteristics

- Dual flush
- Soft-touch buttons for flush actuation
- Settings can only be changed with the Geberit Home App
- Odour extraction with ceramic honey comb filter can be activated
- Odour extraction unit with run-on function
- Adjustable interval flush
- With ComfortLight
- Lighting mood infinitely adjustable from orientation light to day-light
- Light colour continuously adjustable from warm white to cool white
- DALI-compatible control
- Operation with extra-low voltage, no mains voltage in cistern
- Water supply connection on the bottom
- Water supply connection on the left/right possible with accessories
- Compensation of dimensional tolerances possible
- Cistern, fully insulated against condensation
- Side cladding made of aluminium brushed
- Self-supporting

Scope of delivery

- Water supply connection set with 2 angle stop valves, 1/2"
- Flush bend extension 160 mm
- Sleeve made of EPDM, ø 44 / 55 mm
- Straight connector made of PE-HD, ø 90 mm
- Adapter socket made of PE-HD, ø 90 / 110 mm
- Connection bend 90° made of PE-HD, ø 90 / 110 mm
- Female socket for mains connection
- Power supply unit
- Base cover
- Fastening material for drywall
- Fastening material


Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]	Protection class	Power consumption [W]
131.201.JK.7	Front: lava / glass Side cladding: black / brushed aluminium	48	101	10.6	I	15
131.201.JL.7	Front: sand grey / glass Side cladding: brushed aluminium	48	101	10.6	I	15
131.201.SI.7	Front: white / glass Side cladding: brushed aluminium	48	101	10.6	I	15
131.201.SJ.7	Front: black / glass Side cladding: black / brushed aluminium	48	101	10.6	I	15
131.201.CD.7	N Front: black / Glass satinised Side cladding: black / brushed aluminium	48	101	10.6	I	15
131.201.TD.7	N Front: white / Glass satinised Side cladding: brushed aluminium	48	101	10.6	I	15

N: New, available as of April 2026

Accessories

- Lateral water supply connection set for Geberit Monolith sanitary module for WC → p. 920
- Geberit outlet mounting box → p. 898
- Interface module 12 V for Geberit AquaClean Mera/Sela → p. 889

Geberit Monolith sanitary module for floor-standing WC, 114 cm, front cladding made of glass

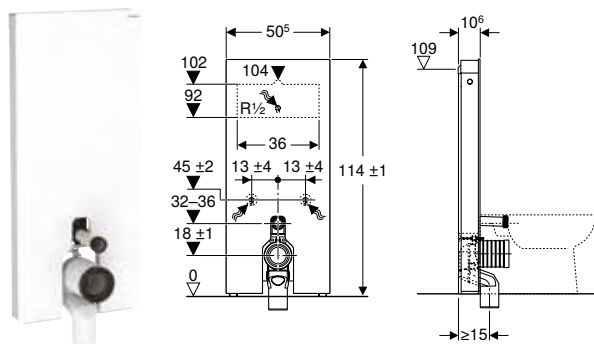

click & scan

Application purposes

- For floor inlets
- For renovations, conversions and new buildings
- For wall inlets with an inlet height of 18 cm
- For replacing floor-standing WCs with concealed cistern with maximum service opening height < 109 cm
- For replacing low-level exposed cisterns
- For replacing half-high level exposed cisterns
- For replacing floor-standing WCs with close-coupled exposed cistern
- For connecting Geberit AquaClean Tuma WC complete solution, floor-standing WC
- For connecting Geberit AquaClean WC enhancement solutions, with accessories
- For replacing pressure flushing valves
- For mounting on finished floors
- For installation in front of drywalls or solid walls

Technical data

Flow pressure	0.1–10 bar
Flush volume, factory setting	6 l / 3 l
Flush volume large, adjustment range	4.5 l / 6 l
Small flush volume	3 l
Flow rate at 300 kPa / 3 bar	9.6 l/min

Characteristics

- Dual flush
- Compensation of dimensional tolerances possible
- Cistern, fully insulated against condensation
- Side cladding made of aluminium brushed
- Self-supporting
- Adjustable flush volume
- Water supply connection on the rear centre
- Water supply connection on the left/right possible with accessories
- Water supply connection on the bottom

Scope of delivery

- Water supply connection set with 2 angle stop valves, 1/2"
- Flush bend extension 160 mm
- Connection bend made of PP, ø 90 mm
- Sleeve made of EPDM, ø 44 / 55 mm
- Adapter socket made of PE-HD, ø 90 / 110 mm
- Fastening material
- Base cover
- Fastening material for drywall


Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]
131.033.JK.5	Front: lava / glass Side cladding: black / brushed aluminium	50.5	114	10.6
131.033.JL.5	Front: sand grey / glass Side cladding: brushed aluminium	50.5	114	10.6
131.033.SI.5	Front: white / glass Side cladding: brushed aluminium	50.5	114	10.6
131.033.SJ.6	Front: black / glass Side cladding: black / brushed aluminium	50.5	114	10.6
131.033.CD.5	N Front: black / Glass satinised Side cladding: black / brushed aluminium	50.5	114	10.6
131.033.TD.5	N Front: white / Glass satinised Side cladding: brushed aluminium	50.5	114	10.6

N: New, available as of April 2026

Accessories

- Lateral water supply connection set for Geberit Monolith sanitary module for WC → p. 920

Geberit Monolith sanitary module for floor-standing WC, 114 cm, front cladding made of stoneware

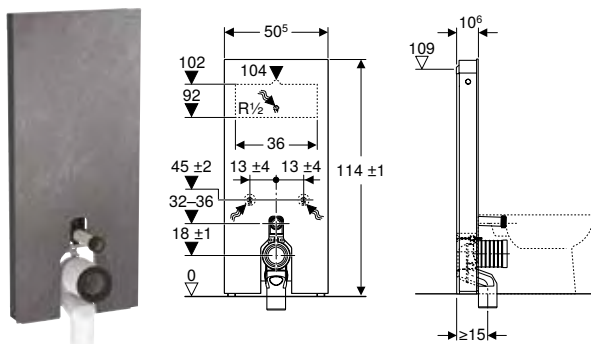

click & scan

Application purposes

- For floor inlets
- For renovations, conversions and new buildings
- For wall inlets with an inlet height of 18 cm
- For replacing floor-standing WCs with concealed cistern with maximum service opening height < 109 cm
- For replacing low-level exposed cisterns
- For replacing half-high level exposed cisterns
- For replacing floor-standing WCs with close-coupled exposed cistern
- For connecting Geberit AquaClean Tuma WC complete solution, floor-standing WC
- For connecting Geberit AquaClean WC enhancement solutions, with accessories
- For replacing pressure flushing valves
- For mounting on finished floors
- For installation in front of drywalls or solid walls

Technical data

Flow pressure	0.1–10 bar
Flush volume, factory setting	6 l / 3 l
Flush volume large, adjustment range	4.5 l / 6 l
Small flush volume	3 l
Flow rate at 300 kPa / 3 bar	9.6 l/min

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]
131.033.00.5	Front: slate look / stoneware Side cladding: black / brushed aluminium	50.5	114	10.6
131.033.JV.5	Front: concrete look / stoneware Side cladding: brushed aluminium	50.5	114	10.6

Accessories

- Lateral water supply connection set for Geberit Monolith sanitary module for WC → p. 920



- The colour and structure of natural products may vary


Characteristics

- Dual flush
- Compensation of dimensional tolerances possible
- Cistern, fully insulated against condensation
- Side cladding made of aluminium brushed
- Self-supporting
- Adjustable flush volume
- Water supply connection on the rear centre
- Water supply connection on the left/right possible with accessories
- Water supply connection on the bottom

Scope of delivery

- Water supply connection set with 2 angle stop valves, 1/2"
- Flush bend extension 160 mm
- Connection bend made of PP, ø 90 mm
- Sleeve made of EPDM, ø 44 / 55 mm
- Adapter socket made of PE-HD, ø 90 / 110 mm
- Fastening material
- Base cover
- Fastening material for drywall

Geberit Monolith Plus sanitary module for floor-standing WC, 114 cm, front cladding made of glass

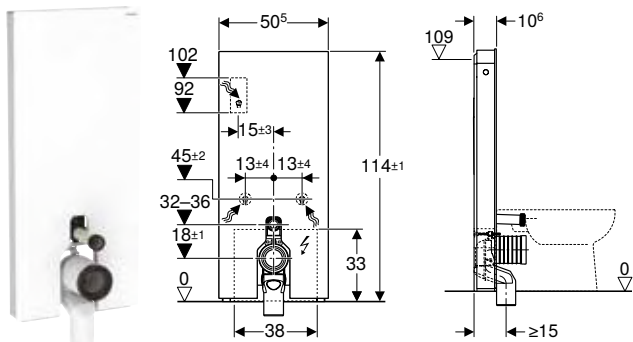

click & scan

Application purposes

- For floor inlets
- For renovations, conversions and new buildings
- For wall inlets with an inlet height of 18 cm
- For replacing floor-standing WCs with concealed cistern with maximum service opening height < 109 cm
- For replacing low-level exposed cisterns
- For replacing half-high level exposed cisterns
- For replacing floor-standing WCs with close-coupled exposed cistern
- For connecting Geberit AquaClean Tuma WC complete solution, floor-standing WC
- For replacing pressure flushing valves
- For connecting Geberit AquaClean WC enhancement solutions, with accessories
- For mounting on finished floors
- For installation in front of drywalls or solid walls

Technical data

Degree of protection	IPX4
Nominal voltage	100–240 V AC
Mains frequency	50–60 Hz
Operating voltage	12 V DC
Power consumption in standby mode max.	0.5 W
Flow pressure	0.1–10 bar
Flush volume, factory setting	6 l / 3 l
Flush volume large, adjustment range	4–6 l
Small flush volume	3 l
Flow rate at 300 kPa / 3 bar	9.6 l/min
Light colour	2200–4000 K

Characteristics

- Dual flush
- Soft-touch buttons for flush actuation
- Settings can only be changed with the Geberit Home App
- Odour extraction with ceramic honey comb filter can be activated
- Odour extraction unit with run-on function
- Adjustable interval flush
- With ComfortLight
- Lighting mood infinitely adjustable from orientation light to day-light
- Light colour continuously adjustable from warm white to cool white
- DALI-compatible control
- Operation with extra-low voltage, no mains voltage in cistern
- Water supply connection on the rear centre
- Water supply connection on the left/right possible with accessories
- Water supply connection on the bottom
- Compensation of dimensional tolerances possible
- Cistern, fully insulated against condensation
- Side cladding made of aluminium brushed
- Self-supporting

Scope of delivery

- Water supply connection set with 2 angle stop valves, 1/2"
- Flush bend extension 160 mm
- Connection bend made of PP, ø 90 mm
- Sleeve made of EPDM, ø 44 / 55 mm
- Adapter socket made of PE-HD, ø 90 / 110 mm
- Female socket for mains connection
- Power supply unit
- Fastening material
- Base cover
- Fastening material for drywall


Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]	Protection class	Power consumption [W]
131.233.JK.7	Front: lava / glass Side cladding: black / brushed aluminium	50.5	114	10.6	I	15
131.233.JL.7	Front: sand grey / glass Side cladding: brushed aluminium	50.5	114	10.6	I	15
131.233.SI.7	Front: white / glass Side cladding: brushed aluminium	50.5	114	10.6	I	15
131.233.SJ.7	Front: black / glass Side cladding: black / brushed aluminium	50.5	114	10.6	I	15
131.233.CD.7	N Front: black / Glass satinised Side cladding: black / brushed aluminium	50.5	114	10.6	I	15
131.233.TD.7	N Front: white / Glass satinised Side cladding: brushed aluminium	50.5	114	10.6	I	15

N: New, available as of April 2026

Accessories

- Lateral water supply connection set for Geberit Monolith sanitary module for WC → p. 920
- Geberit outlet mounting box → p. 898
- Interface module 12 V for Geberit AquaClean Mera/Sela → p. 889

Geberit Monolith Plus sanitary module for floor-standing WC, 114 cm, front cladding made of stoneware

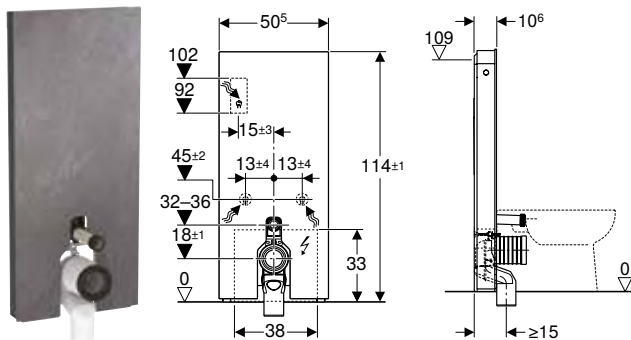

click & scan

Application purposes

- For floor inlets
- For renovations, conversions and new buildings
- For wall inlets with an inlet height of 18 cm
- For floor-standing WCs with P-bend and flush water inlet height 32–36 cm above the floor (EN 33)
- For replacing floor-standing WCs with concealed cistern with maximum service opening height < 109 cm
- For replacing low-level exposed cisterns
- For replacing half-high level exposed cisterns
- For replacing floor-standing WCs with close-coupled exposed cistern
- For connecting Geberit AquaClean Tuma WC complete solution, floor-standing WC
- For replacing pressure flushing valves
- For connecting Geberit AquaClean WC enhancement solutions, with accessories
- For mounting on finished floors
- For installation in front of drywalls or solid walls

Technical data

Degree of protection	IPX4
Nominal voltage	100–240 V AC
Mains frequency	50–60 Hz
Operating voltage	12 V DC
Power consumption in standby mode max.	0.5 W
Flow pressure	0.1–10 bar
Flush volume, factory setting	6 l / 3 l
Flush volume large, adjustment range	4–6 l
Small flush volume	3 l
Flow rate at 300 kPa / 3 bar	9.6 l/min
Light colour	2200–4000 K

Characteristics

- Dual flush
- Soft-touch buttons for flush actuation
- Settings can only be changed with the Geberit Home App
- Odour extraction with ceramic honey comb filter can be activated
- Odour extraction unit with run-on function
- Adjustable interval flush
- With ComfortLight
- Lighting mood infinitely adjustable from orientation light to daylight
- Light colour continuously adjustable from warm white to cool white
- DALI-compatible control
- Operation with extra-low voltage, no mains voltage in cistern
- Water supply connection on the rear centre
- Water supply connection on the left/right possible with accessories
- Water supply connection on the bottom
- Compensation of dimensional tolerances possible
- Cistern, fully insulated against condensation
- Side cladding made of aluminium brushed
- Self-supporting

Scope of delivery

- Water supply connection set with 2 angle stop valves, 1/2"
- Flush bend extension 160 mm
- Connection bend made of PP, ø 90 mm
- Sleeve made of EPDM, ø 44 / 55 mm
- Adapter socket made of PE-HD, ø 90 / 110 mm
- Female socket for mains connection
- Power supply unit
- Fastening material
- Base cover
- Fastening material for drywall

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]	Protection class	Power consumption [W]
131.233.00.7	Front: slate look / stoneware Side cladding: black / brushed aluminium	50.5	114	10.6	I	15
131.233.JV.7	Front: concrete look / stoneware Side cladding: brushed aluminium	50.5	114	10.6	I	15

Accessories

- Lateral water supply connection set for Geberit Monolith sanitary module for WC → p. 920
- Geberit outlet mounting box → p. 898
- Interface module 12 V for Geberit AquaClean Mera/Sela → p. 889



- The colour and structure of natural products may vary

Accessories

Lateral water supply connection set for Geberit Monolith sanitary module for WC



click & scan

Application purposes

- For lateral water supply connection

Characteristics


- Connecting bend 140 x 100 mm
- Visible water supply connection

Scope of delivery

- Angle stop valve 1/2"
- Reinforced braided hose 3/8"
- Fitting piece
- Collar, chrome-plated
- Connecting bend made of copper, chrome-plated
- 2 cone screw fittings
- Connecting nipple, offset

Art. no.	Colour / surface
131.071.21.1	chrome / glossy

Geberit straight connector set for WC



click & scan

Application purposes


- For connecting floor-standing WCs to wall drains
- For connecting wall-hung WCs

Scope of delivery

- Straight connector made of PE-HD, \varnothing 90 mm
- Sleeve made of EPDM, \varnothing 122 mm

Art. no.	DN	d, \varnothing [mm]
131.083.16.1	90	90

Geberit straight connector set for wall-hung WC, stepped by 3 cm



click & scan

Application purposes


- For compensating the offset between WC connections and wall drains

Scope of delivery

- Straight connector made of PP, \varnothing 90 mm
- 2 sleeves made of EPDM, \varnothing 90 / 110 mm

Art. no.	DN	d, \varnothing [mm]
131.085.11.1	90	90

Geberit straight connector set for wall-hung WC, stepped by 7 cm

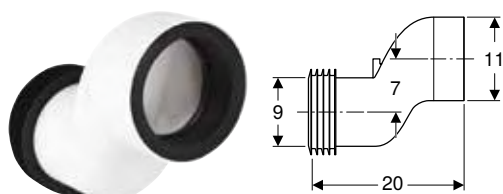

click & scan

Application purposes

- For compensating the offset between WC connections and wall drains

Scope of delivery

- Straight connector made of PP, \varnothing 90 mm
- 2 sleeves made of EPDM, \varnothing 90 / 110 mm

Art. no.	DN	d, \varnothing [mm]
131.108.11.1	90	90

Geberit connection set for floor-standing WC



click & scan

Application purposes


- For connecting wall-hung WCs to floor drains
- For connecting floor-standing WCs to floor drains

Scope of delivery

- Straight connector made of PE-HD, \varnothing 90 mm
- Connection bend 90° made of PE-HD, \varnothing 90 mm
- Adapter socket made of PE-HD, \varnothing 90 / 110 mm
- Sleeve made of EPDM, \varnothing 105 mm
- Sleeve made of EPDM, \varnothing 122 mm
- Sleeve made of EPDM, \varnothing 90 / 110 mm
- Sleeve made of EPDM, \varnothing 90 mm
- Fastening material

Art. no.
131.082.16.1

Geberit P-bend set for floor-standing WC

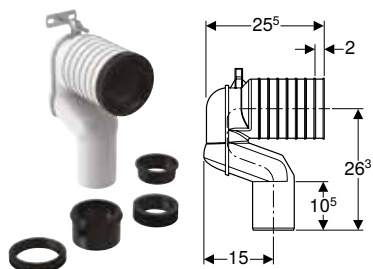

click & scan

Application purposes


- For connecting floor-standing WCs to floor drains

Scope of delivery

- Connection bend made of PP, \varnothing 90 mm
- Adapter socket made of PE-HD, \varnothing 90 / 110 mm
- Sleeve made of EPDM, \varnothing 122 mm
- Sleeve made of EPDM, \varnothing 105 mm
- Sleeve made of EPDM, \varnothing 90 / 110 mm
- Sleeve made of EPDM, \varnothing 90 / 100 mm
- Fastening material

Art. no.	d, \varnothing [mm]	arc [°]	di, \varnothing [mm]	L [cm]
131.081.11.1	90	90	122	22.5

Geberit S-bend set for wall-hung WC

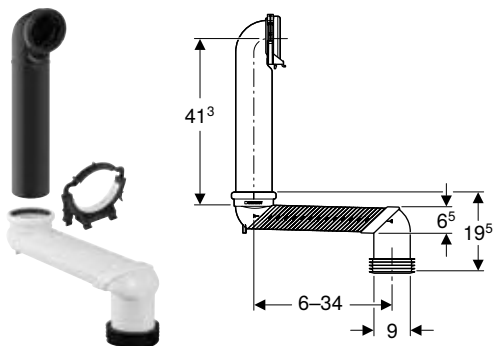

click & scan

Application purposes

- For connecting wall-hung WCs to floor drains

Scope of delivery

- Straight connector made of PE-HD, \varnothing 90 mm
- S-bend made of ABS, \varnothing 90 mm
- Pipe bracket
- Sleeve made of EPDM, \varnothing 90 / 110 mm
- Adhesive

Art. no.

131.088.29.1



- This product is supplied with the Tangit ABS special adhesive. This consumable contains classified hazardous substances. Information, instructions and measures for handling hazardous substances safely can be found at <https://www.geberit-global.com>.

Geberit outlet mounting box



click & scan

Application purposes

- For connecting Geberit AquaClean Tuma shower toilets in combination with Geberit DuoFresh module
- For connecting Geberit AquaClean Sela WC complete solutions using fixed connections
- For connecting Geberit AquaClean Tuma WC complete solutions in combination with Geberit Sigma10 und Sigma80 actuator plates
- For connecting Geberit AquaClean Alba WC complete solutions in combination with Geberit DuoFresh module
- For connecting Geberit AquaClean Alba WC complete solutions in combination with Geberit Sigma10 and Sigma80 actuator plates
- For connecting Geberit Monolith Plus sanitary modules using a fixed connection
- For connecting Geberit Monolith Plus sanitary modules in combination with Geberit AquaClean Mera/Sela/Alba/Tuma using a fixed connection
- For connecting an odour extraction unit

Technical data

Degree of protection	IP66
----------------------	------

Characteristics

- Cover with screw connection

Scope of delivery

- 3 grommets
- 3 terminals
- 2 hook-and-loop strip

Art. no.

242.837.00.1

Consumables

Geberit Type 3 set of ceramic honeycomb filters



click & scan

Application purposes

- For odour neutralisation
- For Geberit AquaClean Tuma Comfort
- For Geberit AquaClean Mera
- For Geberit Monolith Plus sanitary modules

Scope of delivery

- Set of 2 pieces
- Ceramic honeycomb filter

Characteristics

- Service life of filter, 1 year


Art. no.

147.072.00.1

Sanitary modules for bidets

For wall-hung and floor-standing bidets

Geberit Monolith sanitary module for bidet, 101 cm, with towel rail

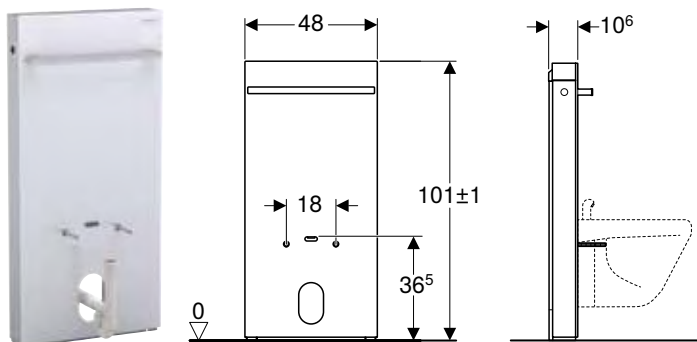

click & scan

Application purposes

- For renovations, conversions and new buildings
- For floor-standing and wall-hung bidets
- For deck-mounted taps
- For wall inlets
- For water supply connections at the bottom
- For replacing wall-hung and floor-standing bidets
- For mounting on finished floors
- For installation in front of drywalls or solid walls

Scope of delivery

- Water supply connection set with 2 elbow tap connectors 90° Rp 1/2" and G 3/8"
- P-trap
- Cover
- Base cover
- Fastening material for drywall
- Fastening material for solid wall

Characteristics

- Compensation of dimensional tolerances possible
- Fastening distance for wall-hung bidet 18 cm
- Height-adjustable up to 7 cm
- Front cladding made of glass (ESG)
- Wall inlet height 8–21 cm from finished floor
- Fastening height wall-hung bidet 35 ± 1 cm
- Side cladding made of aluminium brushed
- Bright chrome-plated towel rail
- Self-supporting
- Water supply connection on the bottom

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]
131.030.JK.5	Front: lava / glass Side cladding: black / brushed aluminium	48	101	10.6
131.030.JL.5	Front: sand grey / glass Side cladding: brushed aluminium	48	101	10.6
131.030.SI.5	Front: white / glass Side cladding: brushed aluminium	48	101	10.6
131.030.SJ.6	Front: black / glass Side cladding: black / brushed aluminium	48	101	10.6

90

74

54

















Urinals

Urinals, flush operation, with flush rim	926
Assortment overview – Geberit urinals, flush operation, with flush rim	926
Accessory overview – Geberit urinals, flush operation, with flush rim	928
Without lid	929
Urinals, flush operation, rimless	934
Assortment overview – Geberit urinals, flush operation, rimless	935
Accessory overview – Geberit urinals, flush operation, rimless.....	939
For exposed or concealed urinal flush control	942
With integrated urinal flush control	949
For integrated urinal flush control	958
Urinals, flush operation, with/for lid	961
Accessory overview – Geberit urinals, flush operation, with / for lid	961
Assortment overview – Geberit urinals, flush operation, with / for lid	962
With flush rim	963
Urinals, waterless operation	964
Accessory overview – Geberit urinals, waterless operation	964
Without lid	965
Urinal divisions	967
Urinal divisions made of plastic.....	967
Urinal divisions made of glass	968
Urinal divisions made of sanitary ceramic	968
Accessories	969
Urinal lid.....	969
Traps and trap accessories.....	969
Flush pipes, flush bends and adapters.....	972
Fastening material.....	973
Waste outlets	975







Urinals, flush operation, with flush rim

Assortment overview – Geberit urinals, flush operation, with flush rim

Geberit International Sales, October 2025

		Without lid					
		Geberit Selnova		Geberit Selnova trigonal		Geberit Smyle	Alvio
White, without aim		500.343.01.1	500.344.01.1	501.676.00.1	501.666.00.1	500.254.01.1	238150000
							
Geberit Duofix elements for urinals							
111.616.00.2 Geberit Duofix element for urinal, 112–130 cm, universal			✓		✓	✓	
111.689.00.2 Geberit Duofix element for urinal, 112–130 cm, universal, for hidden urinal flush control			✓		✓	✓	
111.665.00.6 Geberit Duofix element for urinal, 130 cm, universal, for Basic urinal flush control			✓		✓	✓	
111.686.00.2 Geberit Duofix element for urinal, 112–130 cm, universal, for exposed flushing valve		✓		✓			✓
Geberit GIS elements for urinals							
461.621.00.1 Geberit GIS element for urinal, 114 cm, universal			✓		✓	✓	
461.689.00.1 Geberit GIS element for urinal, 114–132 cm, universal, for hidden urinal flush control			✓		✓	✓	
461.686.00.1 Geberit GIS element for urinal, 114 cm, universal, for exposed flushing valve		✓		✓			✓
Geberit Kombifix elements for urinals							
457.611.00.1 Geberit Kombifix element for urinal, 109–127 cm, universal			✓		✓	✓	

Geberit International Sales, October 2025

		Without lid					
		Geberit Selnova		Geberit Selnova trigonal		Geberit Smyle	Alivio
457.689.00.1 Geberit Kombifix element for urinal, 109–127 cm, universal, for hidden urinal flush control			✓		✓	✓	
457.686.00.1 Geberit Kombifix element for urinal, 109–127 cm, universal, for exposed flushing valve		✓		✓			✓
Conventional solutions							
116.003.00.1 Geberit installation set with flush pipe, for urinal flush control, universal			✓		✓	✓	
116.004.00.1 Geberit installation set with nipple made of brass, for urinal flush control, universal			✓		✓	✓	
115.801.00.5 Geberit installation set for Basic urinal flush control			✓		✓	✓	
115.985.00.5 Geberit installation set with flush bend and flush bend extension, for Basic urinal flush control			✓		✓	✓	
✓ Compatible							

Urinals






Urinals, flush operation, with flush rim

Accessory overview – Geberit urinals, flush operation, with flush rim

Geberit International Sales, December 2025

			Geberit Selnova	Geberit Selonva	Geberit Selnova, trigonal		Geberit Smyle	Alivio
White, without aim			500.343.01.1	500.344.01.1	501.666.00.1	501.676.00.1	500.254.01.1	238150000
KeraTect, without aim								
								
			→ p. 758	→ p. 758	→ p. 760	→ p. 759	→ p. 694	→ p. 933
Urinal traps								
152.950.11.1 Geberit urinal trap, horizontal outlet			✓	✓	✓	✓	✓	✓
152.951.11.1 Geberit urinal trap, vertical outlet			✓		✓	✓		✓
261.483.11.1 Geberit urinal trap d40, horizontal outlet		→ p. 928						
152.607.11.1 Geberit P-trap for sink, with wall collar, horizontal outlet		→ p. 928						
152.627.16.1 Geberit concealed trap for urinal, vertical outlet			✓	✓	✓	✓	✓	✓
Traps and trap accessories								
116.020.00.1 Geberit drain strainer for Felix, Blagnac and Bastia urinals		→ p. 971						
Drain assemblies								
152.231.11.1 Geberit connection bend 90° for urinal, with wall collar		→ p. 928						
Fastening material								
551070000 Geberit fastening material for urinal, Kerafix		→ p. 973	✓	✓	✓	✓	✓	✓
551075000 Geberit fastening material for urinal, Kerafix		→ p. 973	✓	✓	✓	✓	✓ ¹⁾	✓ ¹⁾

Geberit International Sales, December 2025


			Geberit Selnova	Geberit Selonva	Geberit Selnova, trigonal	Geberit Smyle	Alivio
Flush pipes							
119.688.21.1 Geberit flush pipe for urinal with inlet from the top		→ p. 929	✓		✓		✓
152.489.16.1 Geberit flush bend extension for urinal, with sleeve				✓	✓	✓	
521005000 Geberit inlet connection piece for urinals		→ p. 973		✓	✓	✓	
Urinal flush controls, exposed							
116.076.00.1 Geberit urinal flush control with electronic flush actuation, mains operation, surface-mounted, hidden				✓	✓	✓	
116.077.00.1 Geberit urinal flush control with electronic flush actuation, battery operation, surface-mounted, hidden				✓	✓	✓	

✓ Compatible

¹) Included in the scope of delivery

Without lid

Geberit Selnova urinal, inlet from the top, outlet to the rear or downwards

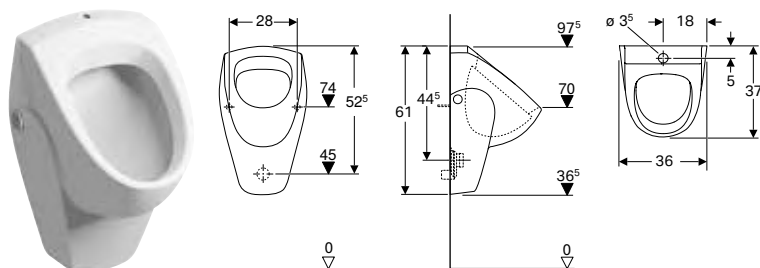

click & scan

Application purposes

- For operating with automatic, water-saving flush
- For exposed urinal flush controls

Technical data

Flush volume small, adjustment range	1 l
Product material	Vitreous china

Characteristics

- Wall-hung
- With flush rim
- Hidden trap
- Hidden fastening
- Fulfils requirements in accordance with EN 13407

Scope of delivery

- Urinal ceramic

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]	Outlet
500.343.01.1	white	36	61	37	to the rear or downwards

To order additionally

- Geberit fastening material for urinal, Kerafix → p. 973

Accessories

- Geberit pressure flushing valve for urinal with electronic flush actuation, battery operation, for surface mounting
- Geberit urinal trap d40, horizontal outlet
- Geberit urinal trap, horizontal outlet
- Geberit urinal trap, vertical outlet




- Urinal trap not included in scope of delivery

Urinals

Urinals, flush operation, with flush rim
Without lid

Geberit Selnova urinal, inlet from the rear, outlet to the rear

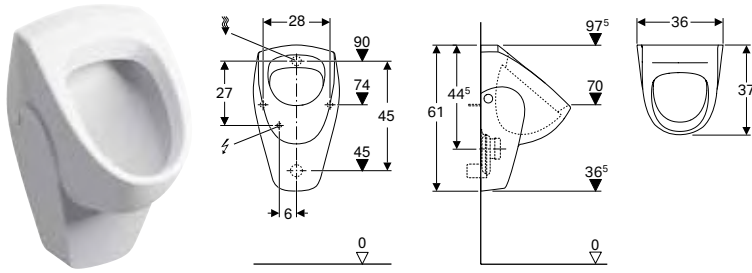

click & scan

Application purposes

- For operating with automatic, water-saving flush
- For operation with manual or automatic flush actuation
- For concealed urinal flush controls
- For concealed urinal flush controls, hidden
- For exposed urinal flush controls, hidden

Characteristics

- Wall-hung
- With flush rim
- Hidden trap
- Hidden fastening
- Fulfils requirements in accordance with EN 13407

Technical data

Flush volume small, adjustment range	1 l
Product material	Vitreous china

Scope of delivery

- Urinal ceramic

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]	Outlet
500.344.01.1	white	36	61	37	to the rear

To order additionally

- Geberit fastening material for urinal, Kerafix → p. 973


Accessories

- Geberit flush bend extension for urinal, with sleeve
- Geberit inlet connection piece for urinals → p. 973
- Geberit urinal trap d40, horizontal outlet
- Geberit urinal trap, horizontal outlet



- Urinal trap not included in scope of delivery
- Electrical connection required for urinal flush controls with mains operation

Geberit Selnova urinal, trigonal, inlet from the top, outlet to the rear or downwards

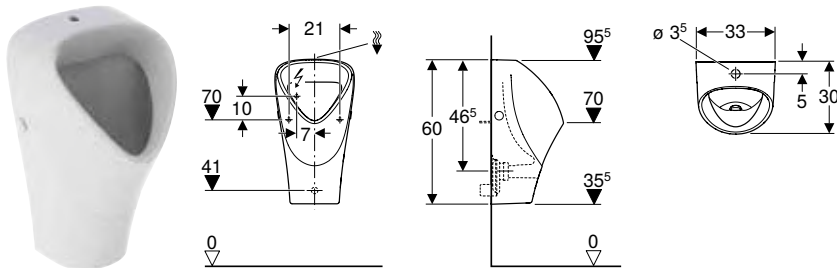

click & scan

Application purposes

- For operating with automatic, water-saving flush
- For exposed urinal flush controls

Technical data

Flush volume small, adjustment range	1 l
Product material	Vitreous china

Characteristics

- Wall-hung
- With flush rim
- Hidden trap
- Hidden fastening
- Fulfils requirements in accordance with EN 13407

Scope of delivery

- Urinal ceramic

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]	Outlet
501.676.00.1	white	33	60	30	to the rear

To order additionally


- Geberit fastening material for urinal, Kerafix → p. 973

Accessories

- Geberit pressure flushing valve for urinal with electronic flush actuation, battery operation, for surface mounting
- Geberit urinal trap, horizontal outlet
- Geberit urinal trap, vertical outlet
- Geberit urinal division, sanitary ceramic → p. 968
- Geberit urinal division, glass → p. 968



- Urinal trap not included in scope of delivery

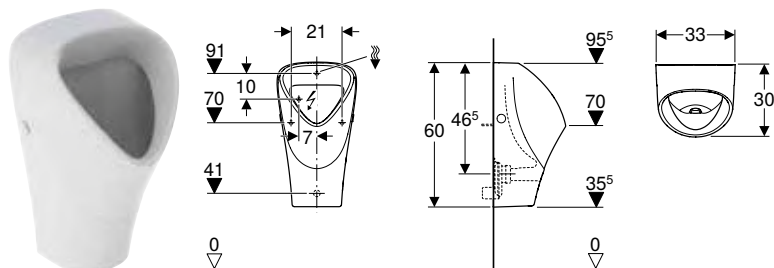Geberit Selnova urinal, trigonal, inlet from the rear, outlet to the rear or downwards

click & scan

Application purposes

- For operating with automatic, water-saving flush
- For operation with manual or automatic flush actuation
- For concealed urinal flush controls
- For concealed urinal flush controls, hidden
- For exposed urinal flush controls, hidden

Characteristics

- Wall-hung
- With flush rim
- Hidden trap
- Hidden fastening
- Fulfils requirements in accordance with EN 13407

Technical data

Flush volume small, adjustment range	1 l
Product material	Vitreous china

Scope of delivery

- Urinal ceramic

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]	Outlet
501.666.00.1	white	33	60	30	to the rear

To order additionally

- Geberit fastening material for urinal, Kerafix → p. 973

Accessories

- Geberit flush bend extension for urinal, with sleeve
- Geberit inlet connection piece for urinals → p. 973
- Geberit urinal trap, horizontal outlet
- Geberit urinal trap, vertical outlet
- Geberit urinal division, glass → p. 968
- Geberit urinal division, sanitary ceramic → p. 968




- Trap not included in scope of delivery
- Electrical connection required for urinal flush controls with mains operation

Urinals

Urinals, flush operation, with flush rim
Without lid

Geberit Smyle urinal, inlet from the rear, outlet to the rear

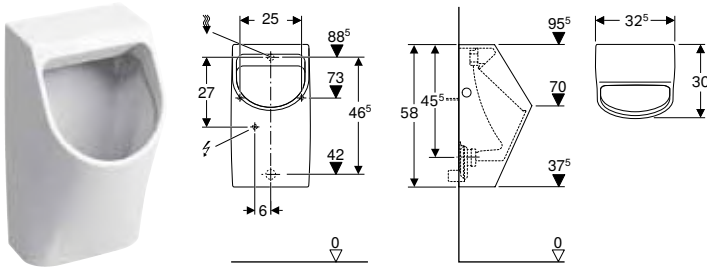

click & scan

Application purposes

- For operating with automatic, water-saving flush
- For operation with manual or automatic flush actuation
- For concealed urinal flush controls
- For concealed urinal flush controls, hidden
- For exposed urinal flush controls, hidden

Technical data

Flush volume small, adjustment range	1 l
Product material	Vitreous china

Characteristics

- Wall-hung
- With flush rim
- Hidden trap
- Hidden fastening
- Fulfils requirements in accordance with EN 13407

Scope of delivery

- Urinal ceramic
- Fastening material for urinal


Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]	Outlet
500.254.01.1	white	32.5	58	30	to the rear

Accessories

- Geberit flush bend extension for urinal, with sleeve
- Geberit inlet connection piece for urinals → p. 973
- Geberit urinal trap, horizontal outlet
- Geberit urinal trap d40, horizontal outlet



- Urinal trap not included in scope of delivery
- Electrical connection required for urinal flush controls with mains operation

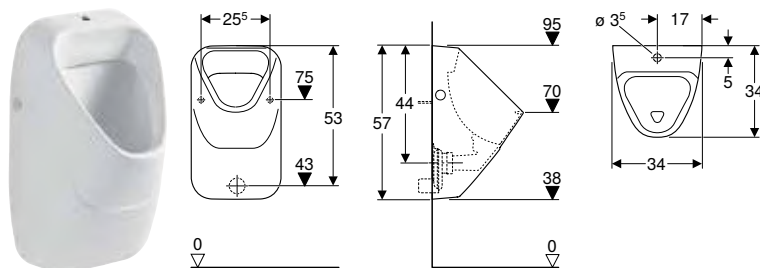Geberit Alivio urinal, inlet from the top, outlet to the rear or downwards**Application purposes**

- For operating with automatic, water-saving flush
- For exposed urinal flush controls

Technical data

Flush volume small, adjustment range	1 l
Product material	Vitreous china

Characteristics

- Wall-hung
- With flush rim
- Hidden trap
- Hidden fastening
- Fulfils requirements in accordance with EN 13407

Scope of delivery

- Urinal ceramic
- Fastening material for urinal

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]	Outlet
238150000	white	34	57	34	to the rear or downwards

To order additionally

- Urinal trap

Accessories

- Geberit pressure flushing valve for urinal with electronic flush actuation, battery operation, for surface mounting
- Geberit flush pipe for urinal with inlet from the top
- Geberit urinal trap, horizontal outlet
- Geberit urinal trap, vertical outlet
- Geberit urinal division, glass → p. 968
- Geberit urinal division, sanitary ceramic → p. 968



- Urinal trap not included in scope of delivery









Urinals

Urinals, flush operation, rimless
Without lid






Urinals, flush operation, rimless

Assortment overview – Geberit urinals, flush operation, rimless

Geberit International Sales, October 2025













	For exposed or concealed urinal flush control							
	Selnova S	Selnova M	Selnova L	Narva	Centaurus	Preda	Selva	Tamina
	503.105.00.1	503.125.00.1	503.135.00.1	501.655.00.1		116.070.00.1	116.080.00.1	116.140.00.1
White								
KeraTect / white					236450600			
								

Geberit Duofix elements for urinals

111.616.00.2 Geberit Duofix element for urinal, 112–130 cm, universal		✓	✓	✓					
111.665.00.6 Geberit Duofix element for urinal, 130 cm, universal, for Basic urinal flush control		✓	✓	✓					
111.676.00.2 Geberit Duofix element for urinal, 112–130 cm, universal, for spray head		✓ ¹⁾	✓ ¹⁾	✓ ¹⁾	✓	✓	✓	✓	✓
111.686.00.2 Geberit Duofix element for urinal, 112–130 cm, universal, for exposed flushing valve		✓ ²⁾	✓ ²⁾	✓ ²⁾	✓ ²⁾				
111.689.00.2 Geberit Duofix element for urinal, 112–130 cm, universal, for hidden urinal flush control		✓	✓	✓					

Geberit GIS elements for urinals

461.621.00.1 Geberit GIS element for urinal, 114 cm, universal		✓	✓	✓					
461.689.00.1 Geberit GIS element for urinal, 114–132 cm, universal, for hidden urinal flush control		✓	✓	✓					
461.606.00.1 Geberit GIS element for urinal, 114 cm, universal, for spray head		✓ ¹⁾	✓ ¹⁾	✓ ¹⁾	✓	✓	✓	✓	✓
461.686.00.1 Geberit GIS element for urinal, 114 cm, universal, for exposed flushing valve		✓ ²⁾	✓ ²⁾	✓ ²⁾	✓ ²⁾				










	With integrated control									For integrated control		
	Mains operation			Battery operation			Generator operation			Preda	Selva	Tamina
	Preda	Selva	Tamina	Preda	Selva	Tamina	Preda	Selva	Tamina			
	116.072.00.1	116.082.00.1	116.142.00.1	116.073.00.1	116.083.00.1	116.143.00.1	116.074.00.1	116.084.00.1	116.144.00.1	116.075.00.1	116.085.00.1	116.147.00.1
												
	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓

Urinals

Urinals

Urinals, flush operation, rimless
Without lid

Geberit International Sales, October 2025

		For exposed or concealed urinal flush control									
		Selnova S	Selnova M	Selnova L	Narva	Centaurus	Preda	Selva	Tamina		
Geberit Kombifix elements for urinals											
457.611.00.1 Geberit Kombifix element for urinal, 109–127 cm, universal		✓	✓	✓							
457.689.00.1 Geberit Kombifix element for urinal, 109–127 cm, universal, for hidden urinal flush control		✓	✓	✓							
457.606.00.1 Geberit Kombifix element for urinal, 109–127 cm, universal, for spray head		✓ ¹⁾	✓ ¹⁾	✓ ¹⁾	✓	✓	✓	✓	✓		
457.686.00.1 Geberit Kombifix element for urinal, 109–127 cm, universal, for exposed flushing valve		✓ ²⁾	✓ ²⁾	✓ ²⁾	✓ ²⁾						
Conventional solutions											
116.003.00.1 Geberit installation set with flush pipe, for urinal flush control, universal		✓	✓	✓							
115.985.00.5 Geberit installation set with flush bend and flush bend extension, for Basic urinal flush control		✓	✓	✓							
116.004.00.1 Geberit installation set with nipple made of brass, for urinal flush control, universal		✓ ¹⁾	✓ ¹⁾	✓ ¹⁾	✓	✓	✓	✓	✓		
115.801.00.5 Geberit installation set for Basic urinal flush control		✓ ¹⁾	✓ ¹⁾	✓ ¹⁾	✓	✓	✓	✓	✓		
116.005.00.1 Geberit installation set for urinal flush controls with 1/2" connection		✓ ¹⁾	✓ ¹⁾	✓ ¹⁾	✓	✓	✓	✓	✓		

✓ Compatible

¹⁾ Only with accessories Art. no. 116.120.00.1 - Geberit connection set for flush guide for urinal

²⁾ Nur in Kombination mit verdeckter Aufputzurinalsteuerung, Art.-Nrn. 116.077.00.1 / 116.076.00.1

	With integrated control									For integrated control		
	Mains operation			Battery operation			Generator operation					
	Preda	Selva	Tamina	Preda	Selva	Tamina	Preda	Selva	Tamina	Preda	Selva	Tamina
	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓

Urinals













Urinals

Urinals, flush operation, rimless
Without lid

Accessory overview – Geberit urinals, flush operation, rimless

Geberit International Sales, December 2025

			Without control							
			Selnova S	Selnova M	Selnova L	Narva	Centaurus	Preda	Selva	Tamina
White			503.105.00.1	503.125.00.1	503.135.00.1	501.655.00.1		116.070.00.1	116.080.00.1	116.140.00.1
KeraTect / white							236450600			
										
			→ p. 756	→ p. 756	→ p. 757	→ p. 944	→ p. 948	→ p. 945	→ p. 946	→ p. 947
Urinal traps										
116.066.00.1 Geberit hybrid trap for urinals		→ p. 969			✓ ²⁾	✓ ²⁾	✓ ¹⁾	✓ ²⁾	✓ ²⁾	✓ ²⁾
243.312.00.1 Geberit urinal trap with suction function, replaceable from the top		→ p. 972						✓ ¹⁾	✓ ¹⁾	✓ ¹⁾
152.950.11.1 Geberit urinal trap, horizontal outlet			✓	✓	✓	✓				
152.951.11.1 Geberit urinal trap, vertical outlet			✓	✓	✓	✓				
Traps and trap accessories										
116.058.00.1 Geberit hybrid trap adapter for Preda, Selva and Tamina urinals		→ p. 970						✓ ²⁾	✓ ²⁾	✓ ²⁾
116.065.00.1 Geberit suction nozzle for trap adapter		→ p. 970						✓ ²⁾	✓ ²⁾	✓ ²⁾
116.059.00.1 Geberit drain strainer for trap adapter d140		→ p. 971			✓			✓ ¹⁾	✓ ¹⁾	✓ ¹⁾
116.059.SN.1 Geberit drain strainer for trap adapter d140		→ p. 971			✓			✓	✓	✓
116.067.00.1 Geberit drain strainer for trap adapter d115		→ p. 971			✓ ¹⁾	✓ ¹⁾	✓ ¹⁾			
116.119.00.1 Geberit drain set for Renova and Selnova S/M urinals		→ p. 969	✓	✓						
Drain assemblies										
500.673.00.1 Geberit drain assembly set for waterless urinals		→ p. 975			✓ ²⁾	✓ ²⁾	✓ ²⁾			
500.674.00.1 Geberit drain set for hybrid and waterless urinals					✓	✓	✓			
Fastening material										
116.068.00.1 Geberit wall fixing, complete, for drywall construction		→ p. 973						✓	✓	✓
551070000 Geberit fastening material for urinal, Kerafix		→ p. 973	✓	✓	✓	✓	✓			











	With integrated control									For integrated control		
	Mains operation			Battery operation			Generator operation					
	Preda	Selva	Tamina	Preda	Selva	Tamina	Preda	Selva	Tamina	Preda	Selva	Tamina
	116.072.00.1	116.082.00.1	116.142.00.1	116.073.00.1	116.083.00.1	116.143.00.1	116.074.00.1	116.084.00.1	116.144.00.1	116.075.00.1	116.085.00.1	116.147.00.1
												
	→ p. 949	→ p. 950	→ p. 951	→ p. 952	→ p. 953	→ p. 954	→ p. 955	→ p. 956	→ p. 957	→ p. 958	→ p. 959	→ p. 960
	✓ ²⁾	✓ ²⁾	✓ ²⁾	✓ ²⁾	✓ ²⁾	✓ ²⁾	✓ ²⁾	✓ ²⁾	✓ ²⁾	✓ ²⁾	✓ ²⁾	✓ ²⁾
	✓ ¹⁾	✓ ¹⁾	✓ ¹⁾	✓ ¹⁾	✓ ¹⁾	✓ ¹⁾	✓ ¹⁾	✓ ¹⁾	✓ ¹⁾	✓ ¹⁾	✓ ¹⁾	✓ ¹⁾
	✓ ²⁾	✓ ²⁾	✓ ²⁾	✓ ²⁾	✓ ²⁾	✓ ²⁾	✓ ²⁾	✓ ²⁾	✓ ²⁾	✓ ²⁾	✓ ²⁾	✓ ²⁾
	✓ ²⁾	✓ ²⁾	✓ ²⁾	✓ ²⁾	✓ ²⁾	✓ ²⁾	✓ ²⁾	✓ ²⁾	✓ ²⁾	✓ ²⁾	✓ ²⁾	✓ ²⁾
	✓ ¹⁾	✓ ¹⁾	✓ ¹⁾	✓ ¹⁾	✓ ¹⁾	✓ ¹⁾	✓ ¹⁾	✓ ¹⁾	✓ ¹⁾	✓ ¹⁾	✓ ¹⁾	✓ ¹⁾
	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓

Urinals

Urinals

Urinals, flush operation, rimless Without lid

Geberit International Sales, December 2025

			Without control								
			Selnova S	Selnova M	Selnova L	Narva	Centaurus	Preda	Selva	Tamina	
551075000 Geberit fastening material for urinal, Kerafix		→ p. 973	✓ ¹⁾	✓ ¹⁾	✓ ¹⁾	✓ ¹⁾	✓ ¹⁾				
554015000 Geberit fastening material for urinal renovation		→ p. 974			✓		✓				
595723000 Geberit set of distance pieces for Centaurus urinal		→ p. 974			✓		✓				
Integrated controls											
243.275.00.1 Geberit urinal flush control for Preda, Selva and Tamina urinals, mains operation											
243.276.00.1 Geberit urinal flush control for Preda, Selva and Tamina urinals, battery operation											
243.277.00.1 Geberit urinal flush control for Preda, Selva and Tamina urinals, self-sustaining power supply											
Urinal flush controls, exposed											
116.076.00.1 Geberit urinal flush control with electronic flush actuation, mains operation, surface-mounted, hidden			✓	✓	✓	✓					
116.077.00.1 Geberit urinal flush control with electronic flush actuation, battery operation, surface-mounted, hidden			✓	✓	✓	✓					
Connections											
152.489.16.1 Geberit flush bend extension for urinal, with sleeve			✓	✓	✓						
521005000 Geberit inlet connection piece for urinals		→ p. 973	✓	✓	✓						

✓ Compatible

¹⁾ Included in the scope of delivery

²⁾ Optional functional extension

	With integrated control									For integrated control		
	Mains operation			Battery operation			Generator operation					
	Preda	Selva	Tamina	Preda	Selva	Tamina	Preda	Selva	Tamina	Preda	Selva	Tamina
	✓ ¹⁾	✓ ¹⁾	✓ ¹⁾	✓	✓	✓	✓	✓	✓	✓	✓	✓
	✓	✓	✓	✓ ¹⁾	✓ ¹⁾	✓ ¹⁾	✓	✓	✓	✓	✓	✓
	✓	✓	✓	✓	✓	✓	✓ ¹⁾	✓ ¹⁾	✓ ¹⁾	✓	✓	✓


Urinals

Urinals

Urinals, flush operation, rimless
For exposed or concealed urinal flush control

For exposed or concealed urinal flush control

Geberit Selnova S urinal, inlet from the rear, outlet to the rear or downwards

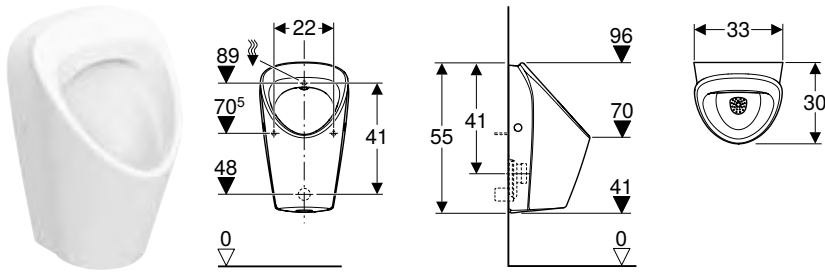

click & scan

Application purposes

- For operating with automatic, water-saving flush
- For operation with manual or automatic flush actuation
- For concealed urinal flush controls
- For concealed urinal flush controls, hidden
- For exposed urinal flush controls, hidden

Technical data

Flush volume small, adjustment range	0.5 l
Product material	Vitreous china

Characteristics

- Rimless
- Flushing out of urinal ceramic with 0.5 l per flush guaranteed, while compliant with EN13407
- Flush guide can be replaced without removing the sanitary ceramic
- Concealed flush guide
- Hidden trap
- Wall-hung
- Hidden fastening

Scope of delivery


- Urinal ceramic
- Fastening material for urinal
- Drain strainer
- Flush guide

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]	Outlet
503.105.00.1	white	33	55	30	to the rear or downwards

Accessories

- Geberit flush bend extension for urinal, with sleeve
- Geberit inlet connection piece for urinals → p. 973
- Geberit urinal trap, horizontal outlet
- Geberit urinal trap, vertical outlet
- Geberit urinal division, plastic → p. 967
- Geberit urinal division, glass → p. 968
- Geberit urinal division, sanitary ceramic → p. 968

Geberit Selnova M urinal, inlet from the rear, outlet to the rear or downwards

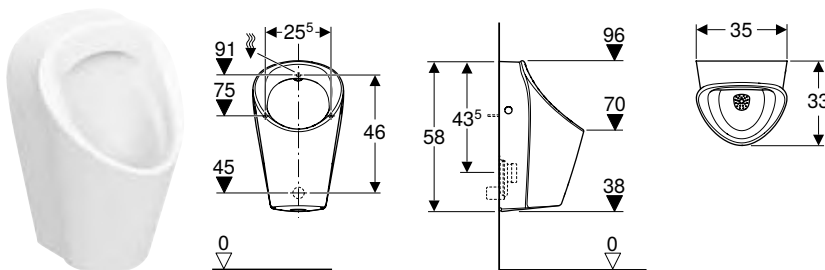

click & scan

Application purposes

- For operating with automatic, water-saving flush
- For operation with manual or automatic flush actuation
- For concealed urinal flush controls
- For concealed urinal flush controls, hidden
- For exposed urinal flush controls, hidden

Technical data

Flush volume small, adjustment range	0.5 l
Product material	Vitreous china

Characteristics

- Rimless
- Flushing out of urinal ceramic with 0.5 l per flush guaranteed, while compliant with EN13407
- Flush guide can be replaced without removing the sanitary ceramic
- Concealed flush guide
- Hidden trap
- Wall-hung
- Hidden fastening


Scope of delivery

- Urinal ceramic
- Fastening material for urinal
- Drain strainer
- Flush guide

Art. no.	B [cm]	H [cm]	T [cm]	Outlet
503.125.00.1	35	58	33	to the rear or downwards

Accessories

- Geberit flush bend extension for urinal, with sleeve
- Geberit inlet connection piece for urinals → p. 973
- Geberit urinal trap, horizontal outlet
- Geberit urinal trap, vertical outlet
- Geberit urinal division, glass → p. 968
- Geberit urinal division, plastic → p. 967
- Geberit urinal division, sanitary ceramic → p. 968

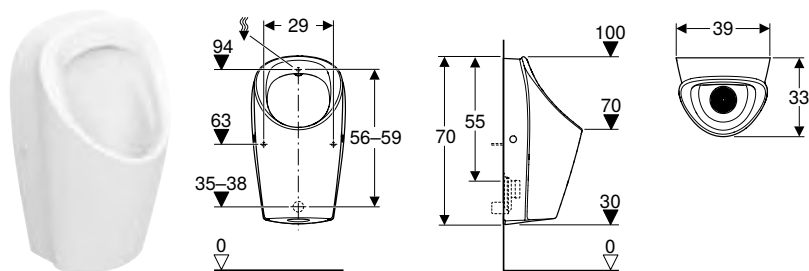Geberit Selnova L urinal, inlet from the rear, outlet to the rear or downwards**Application purposes**

- For operating with automatic, water-saving flush
- For operation with manual or automatic flush actuation
- For alternative operation with hybrid trap
- For concealed urinal flush controls
- For concealed urinal flush controls, hidden
- For exposed urinal flush controls, hidden

Technical data

Flush volume small, adjustment range	0.5 l
Product material	Vitreous china

Characteristics

- Rimless
- Flushing out of urinal ceramic with 0.5 l per flush guaranteed, while compliant with EN13407
- Flush guide can be replaced without removing the sanitary ceramic
- Concealed flush guide
- Hidden trap
- Wall-hung
- Hidden fastening

Scope of delivery

- Urinal ceramic
- Fastening material for urinal
- Drain strainer
- Drain assembly
- Flush guide

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]	Outlet
503.135.00.1	white	39	70	33	to the rear or downwards

Can be combined with

- Geberit fastening material for urinal renovation → p. 974


Accessories

- Geberit drain strainer for trap adapter d140 → p. 971
- Geberit flush bend extension for urinal, with sleeve
- Geberit inlet connection piece for urinals → p. 973
- Geberit urinal trap, horizontal outlet
- Geberit urinal trap, vertical outlet
- Geberit urinal division, plastic → p. 967
- Geberit urinal division, glass → p. 968
- Geberit urinal division, sanitary ceramic → p. 968

Urinals

Urinals, flush operation, rimless
For exposed or concealed urinal flush control

Geberit Narva urinal, inlet from the rear, outlet to the rear or downwards

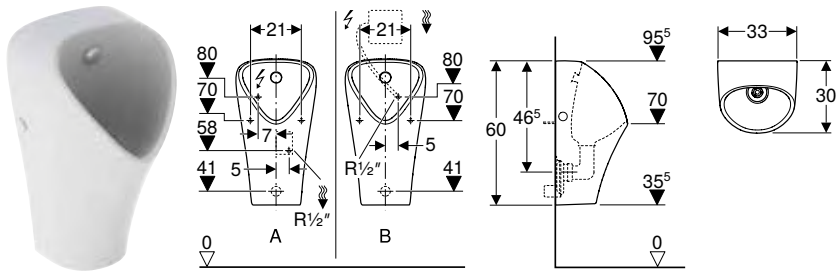

Application purposes

- For operating with automatic, water-saving flush
- For operation with manual or automatic flush actuation
- For concealed urinal flush controls
- For concealed urinal flush controls, hidden
- For exposed urinal flush controls, hidden
- For Geberit installation elements for urinals for spray head

Technical data

Flush volume small, adjustment range	1 l
Product material	Vitreous china

Characteristics

- Rimless
- Wall-hung
- Hidden trap
- Hidden fastening
- Fulfils requirements in accordance with EN 13407
- Spray head can be replaced from front, without removing ceramic appliance

Scope of delivery

- Urinal ceramic
- Fastening material for urinal
- Drain assembly
- Drain strainer
- Spray head with reinforced braided hose for R 1/2" connector
- Check valve
- Elbow tap connector 90° R 1/2"

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]	Outlet
501.655.00.1	white	33	60	30	to the rear

Can be combined with


- Geberit Duofix element for urinal, 112–130 cm, universal, for spray head
- Geberit GIS element for urinal, 114 cm, universal, for spray head
- Geberit Kombifix element for urinal, 109–127 cm, universal, for spray head
- Geberit Duofix element for urinal, 112–130 cm, universal, for exposed flushing valve
- Geberit GIS element for urinal, 114 cm, universal, for exposed flushing valve
- Geberit Kombifix element for urinal, 109–127 cm, universal, for exposed flushing valve

Accessories

- Geberit urinal flush control with electronic flush actuation, battery operation, surface-mounted, hidden
- Geberit urinal flush control with electronic flush actuation, mains operation, surface-mounted, hidden
- Geberit urinal trap, horizontal outlet
- Geberit urinal trap, vertical outlet
- Geberit urinal division, sanitary ceramic → p. 968
- Geberit urinal division, glass → p. 968



- Trap not included in scope of delivery
- Electrical connection required for urinal flush controls with mains operation

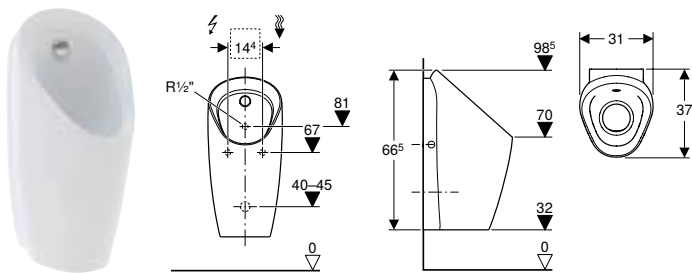Geberit Preda urinal for concealed flush control

click & scan

Application purposes

- For operating with automatic, water-saving flush
- For connecting to concealed urinal flush controls
- For Geberit installation elements for urinals for spray head
- For installation sets for urinal flush control, for Preda and Selva urinals

Technical data

Flush volume small, adjustment range	0.5 l
Product material	Vitreous china

Characteristics

- Wall-hung
- Rimless
- Spray head can be replaced from front, without removing ceramic appliance
- Trap can be replaced from top, without removing ceramic appliance
- Trap adapter can be height-adjusted without tools
- Drainage system can be cleaned without removing ceramic appliance
- Flushing out of urinal ceramic with 0.5 l per flush guaranteed, while compliant with EN13407
- Waterless operation possible

Scope of delivery

- Fastening material
- Urinal trap with suction function
- Drain strainer
- Drain assembly
- Check valve
- Elbow tap connector 90° R 1/2"

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]	Outlet
116.070.00.1	white	31	66.5	37	to the rear

Can be combined with

- Geberit installation set for urinal flush controls with 1/2" connection
- Geberit Duofix element for urinal, 112–130 cm, universal, for spray head
- Geberit GIS element for urinal, 114 cm, universal, for spray head
- Geberit Kombifix element for urinal, 109–127 cm, universal, for spray head


Accessories

- Geberit cover plate made of stainless steel, for urinal flush control
- Geberit hybrid trap adapter for Preda, Selva and Tamina urinals → p. 970
- Geberit hybrid trap for urinals → p. 969

Urinals

Urinals, flush operation, rimless
For exposed or concealed urinal flush control

Geberit Selva urinal for concealed flush control

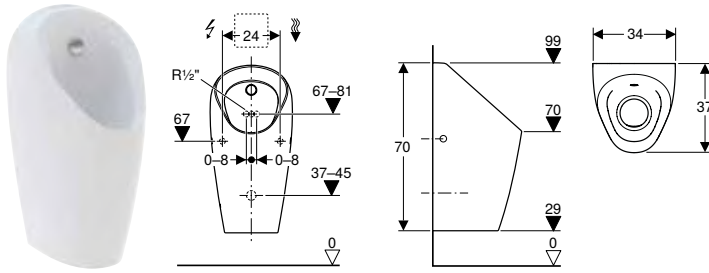

click & scan

Application purposes

- For operating with automatic, water-saving flush
- For connecting to concealed urinal flush controls
- For Geberit installation elements for urinals for spray head
- For installation sets for urinal flush control, for Preda and Selva urinals

Technical data

Flush volume small, adjustment range	0.5 l
Product material	Vitreous china

Characteristics

- Wall-hung
- Rimless
- Spray head can be replaced from front, without removing ceramic appliance
- Trap can be replaced from top, without removing ceramic appliance
- Trap adapter can be height-adjusted without tools
- Drainage system can be cleaned without removing ceramic appliance
- Flushing out of urinal ceramic with 0.5 l per flush guaranteed, while compliant with EN13407
- Waterless operation possible

Scope of delivery

- Fastening material
- Urinal trap with suction function
- Drain strainer
- Drain assembly
- Check valve
- Elbow tap connector 90° R 1/2"


Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]	Outlet
116.080.00.1	white	34	70	37	to the rear

Can be combined with

- Geberit Duofix element for urinal, 112–130 cm, universal, for spray head
- Geberit installation set for urinal flush controls with 1/2" connection
- Geberit GIS element for urinal, 114 cm, universal, for spray head
- Geberit Kombifix element for urinal, 109–127 cm, universal, for spray head

Accessories

- Geberit cover plate made of stainless steel, for urinal flush control
- Geberit hybrid trap adapter for Preda, Selva and Tamina urinals → p. 970
- Geberit hybrid trap for urinals → p. 969
- Geberit wall fixing, complete, for drywall construction → p. 973

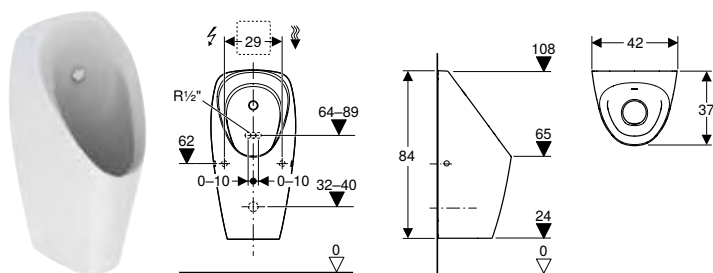Geberit Tamina urinal for concealed flush control

click & scan

Application purposes

- For operating with automatic, water-saving flush
- For connecting to concealed urinal flush controls
- For Geberit installation elements for urinals for spray head
- For installation sets for urinal flush control, for Preda and Selva urinals
- For covering existing connections in renovations

Technical data

Flush volume small, adjustment range	0.5 l
Product material	Vitreous china

Characteristics

- Wall-hung
- Rimless
- Spray head can be replaced from front, without removing ceramic appliance
- Trap can be replaced from top, without removing ceramic appliance
- Trap adapter can be height-adjusted without tools
- Drainage system can be cleaned without removing ceramic appliance
- Flushing out of urinal ceramic with 0.5 l per flush guaranteed, while compliant with EN13407
- Waterless operation possible

Scope of delivery

- Fastening material
- Urinal trap with suction function
- Drain strainer
- Drain assembly
- Check valve
- Elbow tap connector 90° R 1/2"

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]	Outlet
116.140.00.1	white	42	84	37	to the rear

Can be combined with

- Geberit Duofix element for urinal, 112–130 cm, universal, for spray head
- Geberit installation set for urinal flush controls with 1/2" connection
- Geberit GIS element for urinal, 114 cm, universal, for spray head
- Geberit Kombifix element for urinal, 109–127 cm, universal, for spray head


Accessories

- Geberit wall fixing, complete, for drywall construction → p. 973
- Geberit hybrid trap adapter for Preda, Selva and Tamina urinals → p. 970
- Geberit hybrid trap for urinals → p. 969

Urinals

Urinals, flush operation, rimless
For exposed or concealed urinal flush control

Geberit Centaurus urinal, hybrid operation, inlet from the rear, outlet to the rear or downwards

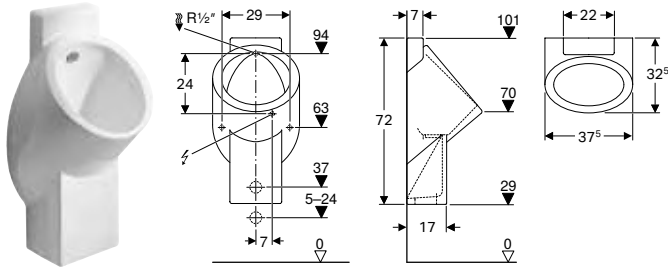

click & scan

Application purposes

- For urinal installations with inlet from the rear and outlet to the rear or downwards
- For hybrid operation
- For operating with automatic, water-saving flush

Technical data

Flush volume small, adjustment range	1 l
Product material	Vitreous china

Characteristics

- Wall-hung
- Rimless
- Hidden drain
- Hidden fastening

Scope of delivery

- Fastening material for urinal
- Flush unit
- Distance washers
- Connection bend G 1/2"
- Drain assembly

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]	Outlet
236450600	PO white / KeraTect	37.5	72	32.5	to the rear or downwards

PO: Phase out as of December 2025

To order additionally

- Geberit drain set for hybrid and waterless urinals

Can be combined with

- Geberit fastening material for urinal renovation → p. 974

Accessories


- Geberit fastening material for urinal renovation → p. 974
- Geberit urinal division, sanitary ceramic → p. 968



- Electrical connection is only required for urinal flush controls with mains operation

With integrated urinal flush control

Geberit Preda urinal with integrated control, mains operation

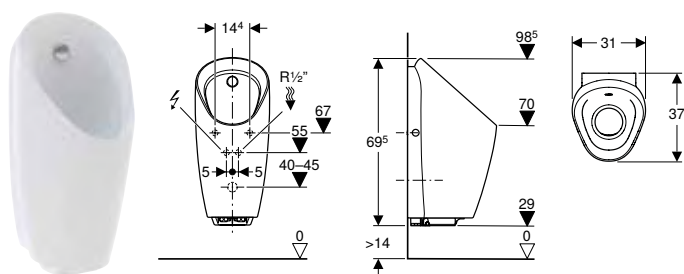

click & scan

Application purposes

- For operating with automatic, water-saving flush
- For Geberit installation elements for urinals with or for integrated flush control

Technical data

Degree of protection	IP45
Nominal voltage	110–240 V AC
Mains frequency	50–60 Hz
Operating voltage	4.5 V DC
Power consumption in standby mode max.	0.1 W
Flow pressure	1–8 bar
Water test pressure max.	16 bar
Flush volume small, adjustment range	0.5 l
Flow rate at 100 kPa / 1 bar with flow limiter	0.18 l/s
Interval flush time, factory setting	5 s
Detection time, factory setting	7 s
Flush time, adjustment range	1–15 s
Flush time, factory setting	7 s
Product material	Vitreous china

Scope of delivery

- Urinal flush control with power supply unit and solenoid valve
- Fastening material
- Urinal trap with suction function
- Drain strainer
- Drain assembly
- Inlet set
- Water pressure reducing valve

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]	Power consumption [W]	Inlet	Outlet	Target marking
116.072.00.1	white	31	69.5	37	≤ 0.5	rear	to the rear	no

Can be combined with

- Geberit Duofix element for urinal, 112–130 cm, universal, for exposed flushing valve
- Geberit GIS element for urinal, 114 cm, universal, for exposed flushing valve
- Geberit Kombifix element for urinal, 109–127 cm, universal, for exposed flushing valve

Accessories

- Geberit drain strainer for trap adapter d140 → p. 971



- For installing and removing the urinal flush control without removing the ceramic appliance, the urinal rim height must be at least 55 cm above finished floor


Characteristics

- IR user detection with leg detection
- Rimless
- Wall-hung
- Urinal flush control can be replaced from front, without removing ceramic appliance
- Spray head can be replaced from front, without removing ceramic appliance
- Trap can be replaced from top, without removing ceramic appliance
- Trap adapter can be height-adjusted without tools
- Drainage system can be cleaned without removing ceramic appliance
- Water-saving hybrid mode can be set
- Adjustable interval flush
- Preflush can be set
- Power failure control unit
- Valve-closing function when power fails
- Functions can be set and queried with the Geberit Service Handy
- Device settings and operation with mobile device via integrated Bluetooth® interface
- Compatible with Geberit Control App
- Wired networkable with Geberit gateway via GEBUS converter
- Wirelessly connectable with Geberit Gateway via Bluetooth®
- Compatible with Geberit Connect
- Flush volume can be reduced to 0.5 l per flush with flush time
- Flushing out of urinal ceramic with 0.5 l per flush guaranteed, while compliant with EN13407
- Tap group II in accordance with DIN 4109

Urinals

Urinals, flush operation, rimless
With integrated urinal flush control

Geberit Selva urinal with integrated control, mains operation

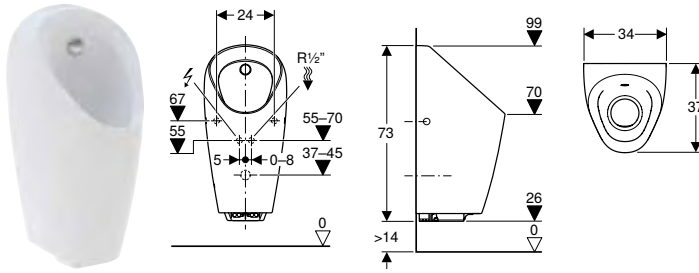

click & scan

Application purposes

- For operating with automatic, water-saving flush
- For Geberit installation elements for urinals with or for integrated flush control

Technical data

Degree of protection	IP45
Nominal voltage	110–240 V AC
Mains frequency	50–60 Hz
Operating voltage	4.5 V DC
Power consumption in standby mode max.	0.1 W
Flow pressure	1–8 bar
Water test pressure max.	16 bar
Flush volume small, adjustment range	0.5 l
Flow rate at 100 kPa / 1 bar with flow limiter	0.18 l/s
Interval flush time, factory setting	5 s
Detection time, factory setting	7 s
Flush time, adjustment range	1–15 s
Flush time, factory setting	7 s
Product material	Vitreous china

Scope of delivery

- Urinal flush control with power supply unit and solenoid valve
- Fastening material
- Urinal trap with suction function
- Drain strainer
- Drain assembly
- Inlet set
- Water pressure reducing valve

Characteristics

- IR user detection with leg detection
- Rimless
- Wall-hung
- Urinal flush control can be replaced from front, without removing ceramic appliance
- Spray head can be replaced from front, without removing ceramic appliance
- Trap can be replaced from top, without removing ceramic appliance
- Trap adapter can be height-adjusted without tools
- Drainage system can be cleaned without removing ceramic appliance
- Water-saving hybrid mode can be set
- Adjustable interval flush
- Preflush can be set
- Power failure control unit
- Valve-closing function when power fails
- Functions can be set and queried with the Geberit Service Handy
- Device settings and operation with mobile device via integrated Bluetooth® interface
- Compatible with Geberit Control App
- Wired networkable with Geberit gateway via GEBUS converter
- Wirelessly connectable with Geberit Gateway via Bluetooth®
- Compatible with Geberit Connect
- Flush volume can be reduced to 0.5 l per flush with flush time
- Flushing out of urinal ceramic with 0.5 l per flush guaranteed, while compliant with EN13407
- Tap group II in accordance with DIN 4109

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]	Power consumption [W]	Inlet	Outlet	Target marking
116.082.00.1	white	34	73	37	≤ 0.5	rear	to the rear	no

Can be combined with

- Geberit Duofix element for urinal, 112–130 cm, universal, for exposed flushing valve
- Geberit GIS element for urinal, 114 cm, universal, for exposed flushing valve
- Geberit Kombifix element for urinal, 109–127 cm, universal, for exposed flushing valve


Accessories

- Geberit drain strainer for trap adapter d140 → p. 971



- For installing and removing the urinal flush control without removing the ceramic appliance, the urinal rim height must be at least 58 cm above finished floor

Geberit Tamina urinal with integrated control, mains operation

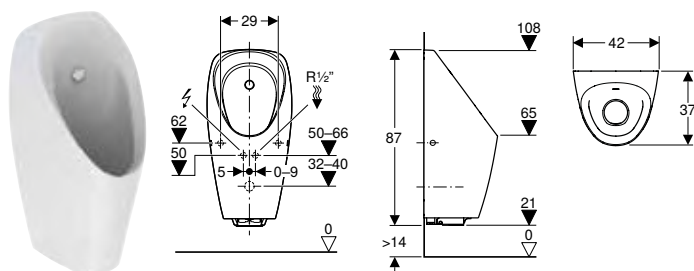

click & scan

Application purposes

- For operating with automatic, water-saving flush
- For Geberit installation elements for urinals with or for integrated flush control
- For covering existing connections in renovations

Technical data

Degree of protection	IP45
Nominal voltage	110–240 V AC
Mains frequency	50–60 Hz
Operating voltage	4.5 V DC
Power consumption in standby mode max.	0.1 W
Flow pressure	1–8 bar
Water test pressure max.	16 bar
Flush volume small, adjustment range	0.5 l
Flow rate at 100 kPa / 1 bar with flow limiter	0.18 l/s
Interval flush time, factory setting	5 s
Detection time, factory setting	7 s
Flush time, adjustment range	1–15 s
Flush time, factory setting	7 s
Product material	Vitreous china

Scope of delivery

- Urinal flush control with power supply unit and solenoid valve
- Fastening material
- Urinal trap with suction function
- Drain strainer
- Drain assembly
- Inlet set
- Water pressure reducing valve

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]	Power consumption [W]	Inlet	Outlet	Target marking
116.142.00.1	white	42	87	37	≤ 0.5	rear	to the rear	no

Can be combined with

- Geberit Duofix element for urinal, 112–130 cm, universal, for exposed flushing valve
- Geberit GIS element for urinal, 114 cm, universal, for exposed flushing valve
- Geberit Kombifix element for urinal, 109–127 cm, universal, for exposed flushing valve

Accessories

- Geberit drain strainer for trap adapter d140 → p. 971



- For installing and removing the urinal flush control without removing the ceramic appliance, the urinal rim height must be at least 58 cm above finished floor


Characteristics

- IR user detection with leg detection
- Rimless
- Wall-hung
- Urinal flush control can be replaced from front, without removing ceramic appliance
- Spray head can be replaced from front, without removing ceramic appliance
- Trap can be replaced from top, without removing ceramic appliance
- Trap adapter can be height-adjusted without tools
- Drainage system can be cleaned without removing ceramic appliance
- Water-saving hybrid mode can be set
- Adjustable interval flush
- Preflush can be set
- Power failure control unit
- Valve-closing function when power fails
- Functions can be set and queried with the Geberit Service Handy
- Device settings and operation with mobile device via integrated Bluetooth® interface
- Compatible with Geberit Control App
- Wired networkable with Geberit gateway via GEBUS converter
- Wirelessly connectable with Geberit Gateway via Bluetooth®
- Compatible with Geberit Connect
- Flush volume can be reduced to 0.5 l per flush with flush time
- Flushing out of urinal ceramic with 0.5 l per flush guaranteed, while compliant with EN13407
- Tap group II in accordance with DIN 4109

Urinals

Urinals, flush operation, rimless
With integrated urinal flush control

Geberit Preda urinal with integrated control, battery operation

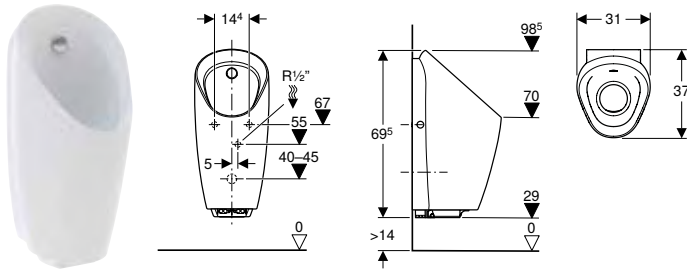

click & scan

Application purposes

- For operating with automatic, water-saving flush
- For Geberit installation elements for urinals with or for integrated flush control

Technical data

Battery type	Alkaline (1.5 V AA)
Service life, supplied battery	2 years
Degree of protection	IP45
Operating voltage	3 V DC
Power consumption in standby mode max.	0.1 W
Flow pressure	1–8 bar
Water test pressure max.	16 bar
Flush volume small, adjustment range	0.5 l
Flow rate at 100 kPa / 1 bar with flow limiter	0.18 l/s
Interval flush time, factory setting	5 s
Detection time, factory setting	7 s
Flush time, adjustment range	1–15 s
Flush time, factory setting	7 s
Product material	Vitreous china

Scope of delivery

- Urinal flush control with solenoid valve
- Battery compartment
- 2 alkaline manganese batteries type AA 1.5 V
- Fastening material
- Urinal trap with suction function
- Drain strainer
- Drain assembly
- Inlet set
- Water pressure reducing valve

Characteristics

- IR user detection with leg detection
- Rimless
- Wall-hung
- Urinal flush control can be replaced from front, without removing ceramic appliance
- Spray head can be replaced from front, without removing ceramic appliance
- Trap can be replaced from top, without removing ceramic appliance
- Trap adapter can be height-adjusted without tools
- Drainage system can be cleaned without removing ceramic appliance
- Water-saving hybrid mode can be set
- Adjustable interval flush
- Preflush can be set
- Warning when the battery is low
- Valve-closing function when battery is flat
- Functions can be set and queried with the Geberit Service Handy
- Device settings and operation with mobile device via integrated Bluetooth® interface
- Compatible with Geberit Control App
- Wired networkable with Geberit gateway via GEBUS converter
- Wirelessly connectable with Geberit Gateway via Bluetooth®
- Compatible with Geberit Connect
- Flush volume can be reduced to 0.5 l per flush with flush time
- Flushing out of urinal ceramic with 0.5 l per flush guaranteed, while compliant with EN13407
- Tap group II in accordance with DIN 4109

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]	Power consumption [W]	Inlet	Outlet	Target marking
116.073.00.1	white	31	69.5	37	≤ 0.5	rear	to the rear	no

Can be combined with

- Geberit Duofix element for urinal, 112–130 cm, universal, for exposed flushing valve
- Geberit GIS element for urinal, 114 cm, universal, for exposed flushing valve
- Geberit Kombifix element for urinal, 109–127 cm, universal, for exposed flushing valve


Accessories

- Geberit drain strainer for trap adapter d140 → p. 971



- For installing and removing the urinal flush control without removing the ceramic appliance, the urinal rim height must be at least 55 cm above finished floor

Geberit Selva urinal with integrated control, battery operation

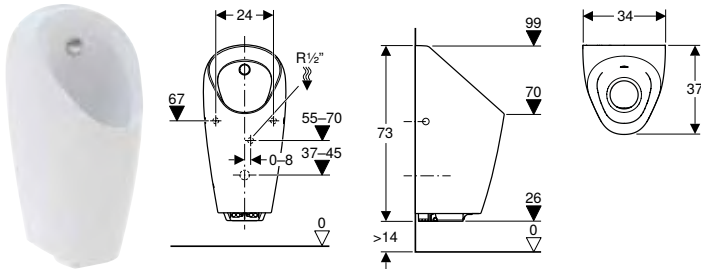

Application purposes

- For operating with automatic, water-saving flush
- For Geberit installation elements for urinals with or for integrated flush control

Technical data

Battery type	Alkaline (1.5 V AA)
Service life, supplied battery	2 years
Degree of protection	IP45
Operating voltage	3 V DC
Power consumption in standby mode max.	0.1 W
Flow pressure	1–8 bar
Water test pressure max.	16 bar
Flush volume small, adjustment range	0.5 l
Flow rate at 100 kPa / 1 bar with flow limiter	0.18 l/s
Interval flush time, factory setting	5 s
Detection time, factory setting	7 s
Flush time, adjustment range	1–15 s
Flush time, factory setting	7 s
Product material	Vitreous china

Scope of delivery

- Urinal flush control with solenoid valve
- Battery compartment
- 2 alkaline manganese batteries type AA 1.5 V
- Fastening material
- Urinal trap with suction function
- Drain strainer
- Drain assembly
- Inlet set
- Water pressure reducing valve

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]	Power consumption [W]	Inlet	Outlet	Target marking
116.083.00.1	white	34	73	37	≤ 0.5	rear	to the rear	no

Can be combined with

- Geberit Duofix element for urinal, 112–130 cm, universal, for exposed flushing valve
- Geberit GIS element for urinal, 114 cm, universal, for exposed flushing valve
- Geberit Kombifix element for urinal, 109–127 cm, universal, for exposed flushing valve

Accessories

- Geberit drain strainer for trap adapter d140 → p. 971



- For installing and removing the urinal flush control without removing the ceramic appliance, the urinal rim height must be at least 58 cm above finished floor


Characteristics

- IR user detection with leg detection
- Rimless
- Wall-hung
- Urinal flush control can be replaced from front, without removing ceramic appliance
- Spray head can be replaced from front, without removing ceramic appliance
- Trap can be replaced from top, without removing ceramic appliance
- Trap adapter can be height-adjusted without tools
- Drainage system can be cleaned without removing ceramic appliance
- Water-saving hybrid mode can be set
- Adjustable interval flush
- Preflush can be set
- Warning when the battery is low
- Valve-closing function when battery is flat
- Functions can be set and queried with the Geberit Service Handy
- Device settings and operation with mobile device via integrated Bluetooth® interface
- Compatible with Geberit Control App
- Wired networkable with Geberit gateway via GEBUS converter
- Wirelessly connectable with Geberit Gateway via Bluetooth®
- Compatible with Geberit Connect
- Flush volume can be reduced to 0.5 l per flush with flush time
- Flushing out of urinal ceramic with 0.5 l per flush guaranteed, while compliant with EN13407
- Tap group II in accordance with DIN 4109

Urinals

Urinals, flush operation, rimless
With integrated urinal flush control

Geberit Tamina urinal with integrated control, battery operation

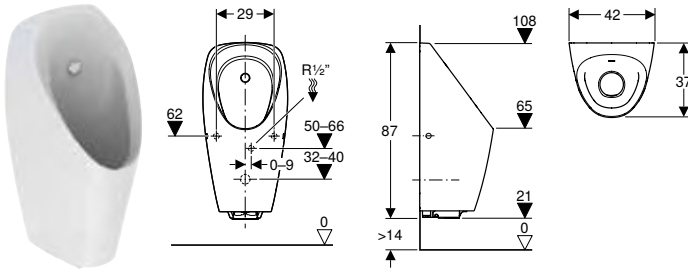

click & scan

Application purposes

- For operating with automatic, water-saving flush
- For Geberit installation elements for urinals with or for integrated flush control
- For covering existing connections in renovations

Technical data

Battery type	Alkaline (1.5 V AA)
Service life, supplied battery	2 years
Degree of protection	IP45
Operating voltage	3 V DC
Power consumption in standby mode max.	0.1 W
Flow pressure	1–8 bar
Water test pressure max.	16 bar
Flush volume small, adjustment range	0.5 l
Flow rate at 100 kPa / 1 bar with flow limiter	0.18 l/s
Interval flush time, factory setting	5 s
Detection time, factory setting	7 s
Flush time, adjustment range	1–15 s
Flush time, factory setting	7 s
Product material	Vitreous china

Scope of delivery

- Urinal flush control with solenoid valve
- Battery compartment
- 2 alkaline manganese batteries type AA 1.5 V
- Fastening material
- Urinal trap with suction function
- Drain strainer
- Drain assembly
- Inlet set
- Water pressure reducing valve

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]	Power consumption [W]	Inlet	Outlet	Target marking
116.143.00.1	white	42	87	37	≤ 0.5	rear	to the rear	no

Can be combined with

- Geberit Duofix element for urinal, 112–130 cm, universal, for exposed flushing valve
- Geberit GIS element for urinal, 114 cm, universal, for exposed flushing valve
- Geberit Kombifix element for urinal, 109–127 cm, universal, for exposed flushing valve

Accessories

- Geberit drain strainer for trap adapter d140 → p. 971




- For installing and removing the urinal flush control without removing the ceramic appliance, the urinal rim height must be at least 58 cm above finished floor

Characteristics

- IR user detection with leg detection
- Rimless
- Wall-hung
- Urinal flush control can be replaced from front, without removing ceramic appliance
- Spray head can be replaced from front, without removing ceramic appliance
- Trap can be replaced from top, without removing ceramic appliance
- Trap adapter can be height-adjusted without tools
- Drainage system can be cleaned without removing ceramic appliance
- Water-saving hybrid mode can be set
- Adjustable interval flush
- Preflush can be set
- Warning when the battery is low
- Valve-closing function when battery is flat
- Functions can be set and queried with the Geberit Service Handy
- Device settings and operation with mobile device via integrated Bluetooth® interface
- Compatible with Geberit Control App
- Wired networkable with Geberit gateway via GEBUS converter
- Wirelessly connectable with Geberit Gateway via Bluetooth®
- Compatible with Geberit Connect
- Flush volume can be reduced to 0.5 l per flush with flush time
- Flushing out of urinal ceramic with 0.5 l per flush guaranteed, while compliant with EN13407
- Tap group II in accordance with DIN 4109

Geberit Preda urinal with integrated control, generator operation

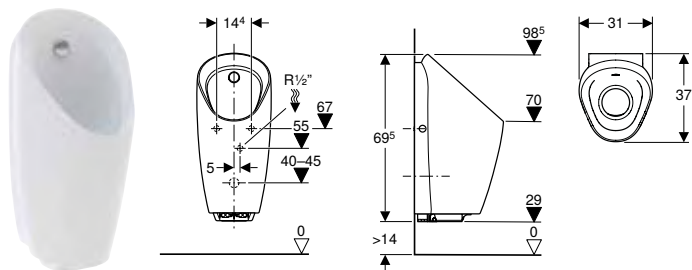

click & scan

Application purposes

- For operating with automatic, water-saving flush
- For Geberit installation elements for urinals with or for integrated flush control

Technical data

Degree of protection	IP45
Operating voltage	6.6 V DC
Power consumption in standby mode max.	0.1 W
Flow pressure	1–8 bar
Water test pressure max.	16 bar
Flush volume small, adjustment range	0.5 l
Flow rate at 100 kPa / 1 bar with flow limiter	0.18 l/s
Interval flush time, factory setting	5 s
Detection time, factory setting	7 s
Flush time, adjustment range	1–15 s
Flush time, factory setting	7 s
Product material	Vitreous china

Scope of delivery

- Urinal flush control with generator and solenoid valve
- Rechargeable battery
- Fastening material
- Urinal trap with suction function
- Drain strainer
- Drain assembly
- Inlet set
- Water pressure reducing valve

Characteristics

- IR user detection with leg detection
- Rimless
- Wall-hung
- Urinal flush control can be replaced from front, without removing ceramic appliance
- Spray head can be replaced from front, without removing ceramic appliance
- Trap can be replaced from top, without removing ceramic appliance
- Trap adapter can be height-adjusted without tools
- Drainage system can be cleaned without removing ceramic appliance
- Water-saving hybrid mode can be set
- Adjustable interval flush
- Preflush can be set
- Continuous flush readiness due to self-sustaining power supply from 30 flushes per day of around 7 s each
- Functions can be set and queried with the Geberit Service Handy
- Device settings and operation with mobile device via integrated Bluetooth® interface
- Compatible with Geberit Control App
- Wirelessly connectable with Geberit Gateway via Bluetooth®
- Compatible with Geberit Connect
- Flush volume can be reduced to 0.5 l per flush with flush time
- Flushing out of urinal ceramic with 0.5 l per flush guaranteed, while compliant with EN13407
- Tap group II in accordance with DIN 4109

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]	Power consumption [W]	Inlet	Outlet	Target marking
116.074.00.1	white	31	69.5	37	≤ 0.5	rear	to the rear	no

Can be combined with

- Geberit Duofix element for urinal, 112–130 cm, universal, for exposed flushing valve
- Geberit GIS element for urinal, 114 cm, universal, for exposed flushing valve
- Geberit Kombifix element for urinal, 109–127 cm, universal, for exposed flushing valve

Accessories

- Geberit drain strainer for trap adapter d140 → p. 971




- For installing and removing the urinal flush control without removing the ceramic appliance, the urinal rim height must be at least 55 cm above finished floor

Urinals

Urinals, flush operation, rimless
With integrated urinal flush control

Geberit Selva urinal with integrated control, generator operation

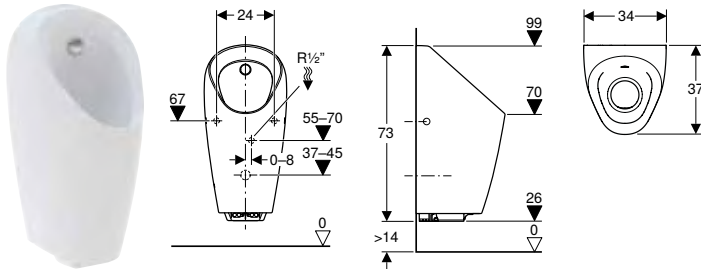

click & scan

Application purposes

- For operating with automatic, water-saving flush
- For Geberit installation elements for urinals with or for integrated flush control

Technical data

Degree of protection	IP45
Operating voltage	6.6 V DC
Power consumption in standby mode max.	0.1 W
Flow pressure	1–8 bar
Water test pressure max.	16 bar
Flush volume small, adjustment range	0.5 l
Flow rate at 100 kPa / 1 bar with flow limiter	0.18 l/s
Interval flush time, factory setting	5 s
Detection time, factory setting	7 s
Flush time, adjustment range	1–15 s
Flush time, factory setting	7 s
Product material	Vitreous china

Scope of delivery

- Urinal flush control with generator and solenoid valve
- Rechargeable battery
- Fastening material
- Urinal trap with suction function
- Drain strainer
- Drain assembly
- Inlet set
- Water pressure reducing valve

Characteristics

- IR user detection with leg detection
- Rimless
- Wall-hung
- Urinal flush control can be replaced from front, without removing ceramic appliance
- Spray head can be replaced from front, without removing ceramic appliance
- Trap can be replaced from top, without removing ceramic appliance
- Trap adapter can be height-adjusted without tools
- Drainage system can be cleaned without removing ceramic appliance
- Water-saving hybrid mode can be set
- Adjustable interval flush
- Preflush can be set
- Continuous flush readiness due to self-sustaining power supply from 30 flushes per day of around 7 s each
- Functions can be set and queried with the Geberit Service Handy
- Device settings and operation with mobile device via integrated Bluetooth® interface
- Compatible with Geberit Control App
- Wirelessly connectable with Geberit Gateway via Bluetooth®
- Compatible with Geberit Connect
- Flush volume can be reduced to 0.5 l per flush with flush time
- Flushing out of urinal ceramic with 0.5 l per flush guaranteed, while compliant with EN13407
- Tap group II in accordance with DIN 4109

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]	Power consumption [W]	Inlet	Outlet	Target marking
116.084.00.1	white	34	73	37	≤ 0.5	rear	to the rear	no

Can be combined with

- Geberit Duofix element for urinal, 112–130 cm, universal, for exposed flushing valve
- Geberit GIS element for urinal, 114 cm, universal, for exposed flushing valve
- Geberit Kombifix element for urinal, 109–127 cm, universal, for exposed flushing valve


Accessories

- Geberit drain strainer for trap adapter d140 → p. 971



- For installing and removing the urinal flush control without removing the ceramic appliance, the urinal rim height must be at least 58 cm above finished floor

Geberit Tamina urinal with integrated control, generator operation

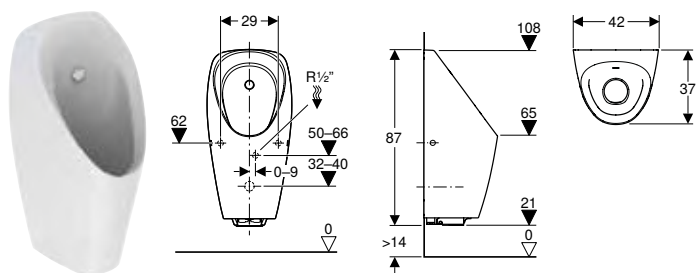

Application purposes

- For operating with automatic, water-saving flush
- For Geberit installation elements for urinals with or for integrated flush control
- For covering existing connections in renovations

Technical data

Degree of protection	IP45
Operating voltage	6.6 V DC
Power consumption in standby mode max.	0.1 W
Flow pressure	1–8 bar
Water test pressure max.	16 bar
Flush volume small, adjustment range	0.5 l
Flow rate at 100 kPa / 1 bar with flow limiter	0.18 l/s
Interval flush time, factory setting	5 s
Detection time, factory setting	7 s
Flush time, adjustment range	1–15 s
Flush time, factory setting	7 s
Product material	Vitreous china

Scope of delivery

- Urinal flush control with generator and solenoid valve
- Rechargeable battery
- Fastening material
- Urinal trap with suction function
- Drain strainer
- Drain assembly
- Inlet set
- Water pressure reducing valve

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]	Power consumption [W]	Inlet	Outlet	Target marking
116.144.00.1	white	42	87	37	≤ 0.5	rear	to the rear	no

Can be combined with

- Geberit Duofix element for urinal, 112–130 cm, universal, for exposed flushing valve
- Geberit GIS element for urinal, 114 cm, universal, for exposed flushing valve
- Geberit Kombifix element for urinal, 109–127 cm, universal, for exposed flushing valve

Accessories

- Geberit drain strainer for trap adapter d140 → p. 971




- For installing and removing the urinal flush control without removing the ceramic appliance, the urinal rim height must be at least 58 cm above finished floor

Characteristics

- IR user detection with leg detection
- Rimless
- Wall-hung
- Urinal flush control can be replaced from front, without removing ceramic appliance
- Spray head can be replaced from front, without removing ceramic appliance
- Trap can be replaced from top, without removing ceramic appliance
- Trap adapter can be height-adjusted without tools
- Drainage system can be cleaned without removing ceramic appliance
- Water-saving hybrid mode can be set
- Adjustable interval flush
- Preflush can be set
- Continuous flush readiness due to self-sustaining power supply from 30 flushes per day of around 7 s each
- Functions can be set and queried with the Geberit Service Handy
- Device settings and operation with mobile device via integrated Bluetooth® interface
- Compatible with Geberit Control App
- Wirelessly connectable with Geberit Gateway via Bluetooth®
- Compatible with Geberit Connect
- Flush volume can be reduced to 0.5 l per flush with flush time
- Flushing out of urinal ceramic with 0.5 l per flush guaranteed, while compliant with EN13407
- Tap group II in accordance with DIN 4109

Geberit Selva urinal for integrated control

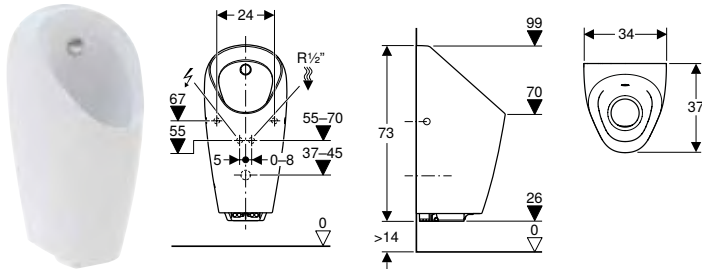

click & scan

Application purposes

- For waterless operation, can be refitted to operation with flush
- For Geberit installation elements for urinals with or for integrated flush control

Technical data

Degree of protection	IP45
Flush volume small, adjustment range	0.5 l
Product material	Vitreous china

Scope of delivery

- Fastening material
- Hybrid trap
- Urinal trap with suction function
- Drain strainer
- Drain assembly
- Inlet set
- Water pressure reducing valve

Characteristics

- Without urinal flush control
- Retrofitting to flush operation possible by adding a urinal flush control
- Rimless
- Wall-hung
- Urinal flush control can be mounted from front without removing ceramic appliance
- Trap can be replaced from top, without removing ceramic appliance
- Trap adapter can be height-adjusted without tools
- Drainage system can be cleaned without removing ceramic appliance
- Flushing out of urinal ceramic with 0.5 l per flush guaranteed, while compliant with EN13407

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]	Outlet
116.085.00.1	white	34	73	37	to the rear

Can be combined with

- Geberit Duofix element for urinal, 112–130 cm, universal, for exposed flushing valve
- Geberit GIS element for urinal, 114 cm, universal, for exposed flushing valve
- Geberit Kombifix element for urinal, 109–127 cm, universal, for exposed flushing valve

Accessories


- Geberit urinal flush control for Preda, Selva and Tamina urinals, mains operation
- Geberit urinal flush control for Preda, Selva and Tamina urinals, battery operation
- Geberit urinal flush control for Preda, Selva and Tamina urinals, self-sustaining power supply
- Geberit drain strainer for trap adapter d140 → p. 971

- For flushed operation the Geberit urinal flush control for urinals Preda, Selva and Tamina has to be ordered additionally
- Pre-install circular pipe if retrofitting to flush operation is to take place later. Avoid dead-end pipes.
- For installing and removing the urinal flush control without removing the ceramic appliance, the urinal rim height must be at least 58 cm above finished floor

Urinals

Urinals, flush operation, rimless
For integrated urinal flush control

Geberit Tamina urinal for integrated control

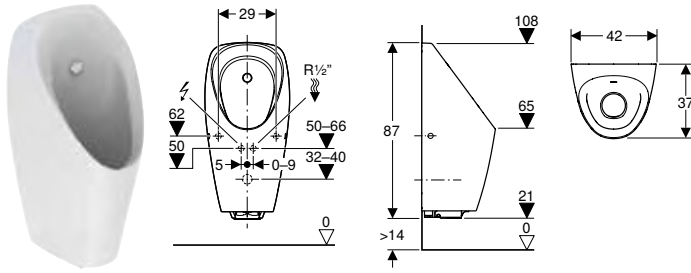

Application purposes

- For waterless operation, can be refitted to operation with flush
- For Geberit installation elements for urinals with or for integrated flush control
- For covering existing connections in renovations

Technical data

Degree of protection	IP45
Flush volume small, adjustment range	0.5 l
Product material	Vitreous china

Scope of delivery

- Fastening material
- Hybrid trap
- Urinal trap with suction function
- Drain strainer
- Drain assembly
- Inlet set
- Water pressure reducing valve

Characteristics

- Without urinal flush control
- Retrofitting to flush operation possible by adding a urinal flush control
- Rimless
- Wall-hung
- Urinal flush control can be mounted from front without removing ceramic appliance
- Trap can be replaced from top, without removing ceramic appliance
- Trap adapter can be height-adjusted without tools
- Drainage system can be cleaned without removing ceramic appliance
- Flushing out of urinal ceramic with 0.5 l per flush guaranteed, while compliant with EN13407

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]	Outlet
116.147.00.1	white	42	87	37	to the rear

Can be combined with

- Geberit Duofix element for urinal, 112–130 cm, universal, for exposed flushing valve
- Geberit GIS element for urinal, 114 cm, universal, for exposed flushing valve
- Geberit Kombifix element for urinal, 109–127 cm, universal, for exposed flushing valve

Accessories

- Geberit urinal flush control for Preda, Selva and Tamina urinals, mains operation
- Geberit urinal flush control for Preda, Selva and Tamina urinals, battery operation
- Geberit urinal flush control for Preda, Selva and Tamina urinals, self-sustaining power supply
- Geberit drain strainer for trap adapter d140 → p. 971



- For flushed operation the Geberit urinal flush control for urinals Preda, Selva and Tamina has to be ordered additionally
- Pre-install circular pipe if retrofitting to flush operation is to take place later. Avoid dead-end pipes.
- For installing and removing the urinal flush control without removing the ceramic appliance, the urinal rim height must be at least 58 cm above finished floor

Urinals, flush operation, with/for lid

Accessory overview – Geberit urinals, flush operation, with / for lid

Geberit International Sales, December 2025

			With / for lid
			Pareo
White, without aim			236100000
			
			→ p. 963
Urinal lid			
573410000 Geberit Pareo urinal lid		→ p. 969	✓
Urinal traps			
152.950.11.1 Geberit urinal trap, horizontal outlet			✓
152.951.11.1 Geberit urinal trap, vertical outlet			
152.627.16.1 Geberit concealed trap for urinal, vertical outlet			✓
Traps and trap accessories			
116.119.00.1 Geberit drain set for Renova and Selnova S/M urinals		→ p. 969	
Fastening material			
551070000 Geberit fastening material for urinal, Kerafix		→ p. 973	✓
551075000 Geberit fastening material for urinal, Kerafix		→ p. 973	✓
Flush pipes			
152.489.16.1 Geberit flush bend extension for urinal, with sleeve			✓
521005000 Geberit inlet connection piece for urinals		→ p. 973	✓
Urinal flush controls, exposed			
116.076.00.1 Geberit urinal flush control with electronic flush actuation, mains operation, surface-mounted, hidden			
116.077.00.1 Geberit urinal flush control with electronic flush actuation, battery operation, surface-mounted, hidden			

✓ Compatible

Urinals

Urinals, flush operation, with/for lid
For integrated urinal flush control


Assortment overview – Geberit urinals, flush operation, with / for lid

Geberit International Sales, December 2025

		With / for lid
		Pareo
White, without aim		236100000
		
Geberit Duofix elements for urinals		
111.616.00.2 Geberit Duofix element for urinal, 112–130 cm, universal		✓
111.689.00.2 Geberit Duofix element for urinal, 112–130 cm, universal, for hidden urinal flush control		✓
111.665.00.6 Geberit Duofix element for urinal, 130 cm, universal, for Basic urinal flush control		✓
Geberit GIS elements for urinals		
461.621.00.1 Geberit GIS element for urinal, 114 cm, universal		✓
461.689.00.1 Geberit GIS element for urinal, 114–132 cm, universal, for hidden urinal flush control		✓
Geberit Kombifix elements for urinals		
457.611.00.1 Geberit Kombifix element for urinal, 109–127 cm, universal		✓
457.689.00.1 Geberit Kombifix element for urinal, 109–127 cm, universal, for hidden urinal flush control		✓
Conventional solutions		
116.003.00.1 Geberit installation set with flush pipe, for urinal flush control, universal		✓
116.004.00.1 Geberit installation set with nipple made of brass, for urinal flush control, universal		✓
115.801.00.5 Geberit installation set for Basic urinal flush control		✓
115.985.00.5 Geberit installation set with flush bend and flush bend extension, for Basic urinal flush control		✓
✓ Compatible		

With flush rim

Geberit Pareo urinal for lid, inlet from the rear, outlet to the rear

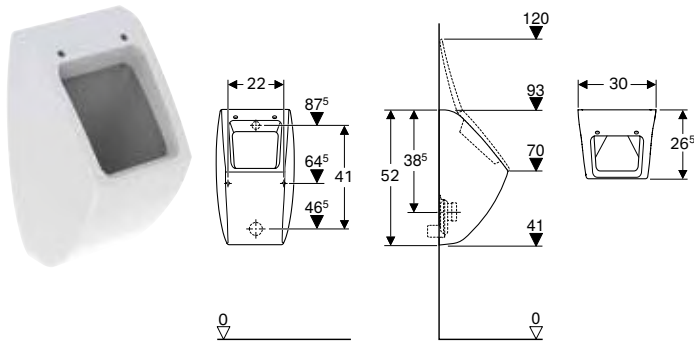

click & scan

Application purposes

- For operating with automatic, water-saving flush
- For operation with manual or automatic flush actuation
- For concealed urinal flush controls
- For concealed urinal flush controls, hidden

Characteristics

- Wall-hung
- With flush rim
- Hidden trap
- Hidden fastening
- Fulfils requirements in accordance with EN 13407

Technical data

Flush volume small, adjustment range	1 l
Product material	Vitreous china

Scope of delivery

- Urinal ceramic

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]	Outlet	Hinge material
236100000	PO white	30	52	26.5	to the rear	Brass chrome-plated

PO: Phase out as of December 2025

To order additionally

- Geberit Pareo urinal lid → p. 969
- Geberit fastening material for urinal, Kerafix → p. 973

Accessories

- Geberit urinal trap, horizontal outlet
- Geberit inlet connection piece for urinals → p. 973
- Geberit urinal division, sanitary ceramic → p. 968



- Urinal trap not included in scope of delivery
- Electrical connection required for urinal flush controls with mains operation

Urinals

Urinals, waterless operation
With flush rim

Urinals, waterless operation

Accessory overview – Geberit urinals, waterless operation

Geberit International Sales, December 2025

			Waterless operation				
			Geberit Smyle	Centaurus	Preda	Selva	Tamina
White			500.255.01.1		116.071.00.1	116.081.00.1	116.141.00.1
KeraTect / white				236400600			
							
			→ p. 695	→ p. 967	→ p. 965	→ p. 965	→ p. 966
Urinal traps							
116.066.00.1 Geberit hybrid trap for urinals		→ p. 969	✓ ¹⁾	✓ ¹⁾	✓ ²⁾	✓ ²⁾	✓ ²⁾
Trap accessories							
116.058.00.1 Geberit hybrid trap adapter for Preda, Selva and Tamina urinals		→ p. 970			✓ ²⁾	✓ ²⁾	✓ ²⁾
116.059.00.1 Geberit drain strainer for trap adapter d140		→ p. 971			✓ ²⁾	✓ ²⁾	✓ ²⁾
116.059.SN.1 Geberit drain strainer for trap adapter d140		→ p. 971			✓	✓	✓
116.067.00.1 Geberit drain strainer for trap adapter d115		→ p. 971			✓	✓	✓
Drain assemblies							
500.673.00.1 Geberit drain assembly set for waterless urinals		→ p. 975	✓ ²⁾	✓ ²⁾			
500.674.00.1 Geberit drain set for hybrid and waterless urinals			✓	✓			
Fastening material							
116.068.00.1 Geberit wall fixing, complete, for drywall construction		→ p. 973				✓	✓
551070000 Geberit fastening material for urinal, Kerafix		→ p. 973	✓	✓			
551075000 Geberit fastening material for urinal, Kerafix		→ p. 973	✓ ²⁾	✓ ²⁾			
554015000 Geberit fastening material for urinal renovation		→ p. 974		✓			
595723000 Geberit set of distance pieces for Centaurus urinal		→ p. 974		✓			


✓ Compatible

¹⁾ Optional functional extension

²⁾ Included in the scope of delivery

Without lid

Geberit Preda urinal, waterless

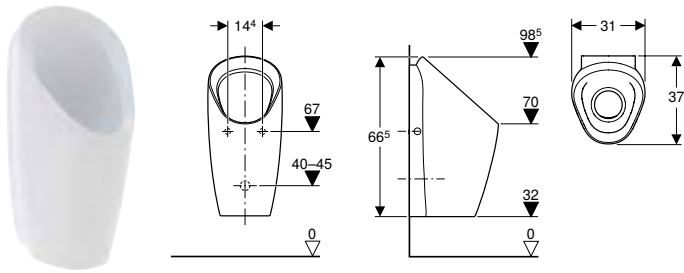

click & scan

Application purposes

- For operating without water
- For Geberit installation elements for waterless urinals

Technical data

Product material	Vitreous china
------------------	----------------

Characteristics


- Wall-hung
- Rimless
- Trap can be replaced from top, without removing ceramic appliance
- Trap adapter can be height-adjusted without tools
- Drainage system can be cleaned without removing ceramic appliance

Scope of delivery

- Fastening material
- Hybrid trap
- Drain strainer
- Drain assembly

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]	Outlet
116.071.00.1	white	31	66.5	37	to the rear

Geberit Selva urinal, waterless

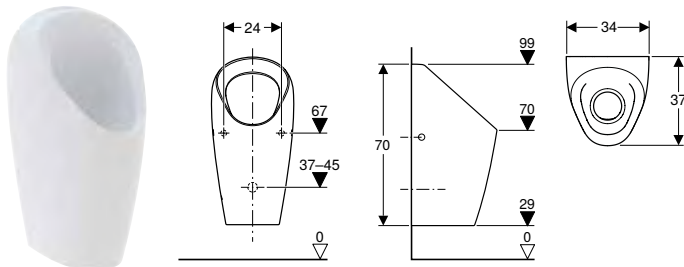

click & scan

Application purposes

- For operating without water
- For Geberit installation elements for waterless urinals

Technical data

Product material	Vitreous china
------------------	----------------

Characteristics

- Wall-hung
- Rimless
- Trap can be replaced from top, without removing ceramic appliance
- Trap adapter can be height-adjusted without tools
- Drainage system can be cleaned without removing ceramic appliance

Scope of delivery


- Fastening material
- Hybrid trap
- Drain strainer
- Drain assembly

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]	Outlet
116.081.00.1	white	34	70	37	to the rear

Urinals

Urinals, waterless operation
Without lid

Geberit Tamina urinal, waterless

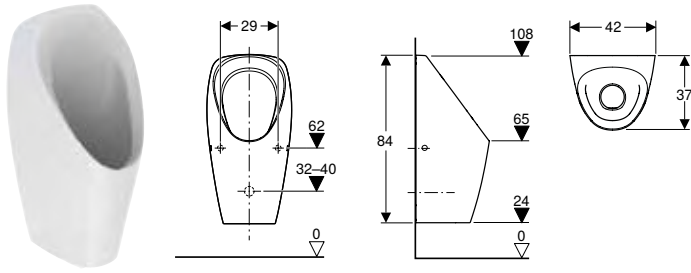

click & scan

Application purposes

- For operating without water
- For Geberit installation elements for waterless urinals
- For covering existing connections in renovations

Technical data

Product material	Vitreous china
------------------	----------------

Characteristics

- Wall-hung
- Rimless
- Trap can be replaced from top, without removing ceramic appliance
- Trap adapter can be height-adjusted without tools
- Drainage system can be cleaned without removing ceramic appliance

Scope of delivery


- Fastening material
- Hybrid trap
- Drain strainer
- Drain assembly

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]	Outlet
116.141.00.1	white	42	84	37	to the rear

Accessories

- Geberit wall fixing, complete, for drywall construction → p. 973

Geberit Smyle urinal, waterless, outlet to the rear

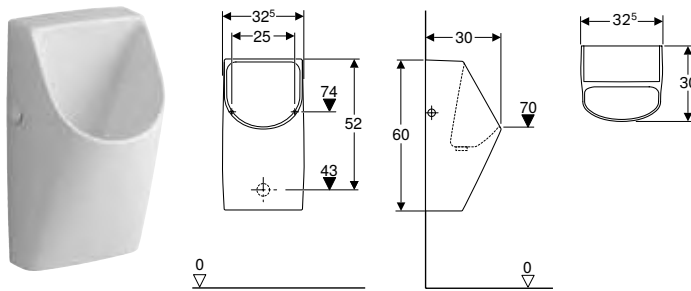

click & scan

Application purposes

- For operating without water

Technical data

Product material	Vitreous china
------------------	----------------

Characteristics


- Wall-hung
- Hidden drain
- Hidden fastening
- Easy fastening with Geberit fastening material Kerafix, for urinal
- Rimless

Scope of delivery

- Drain assembly
- Fastening material

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]	Outlet
500.255.01.1	white	32.5	60	30	to the rear

Geberit Centaurus urinal, waterless, outlet to the rear or downwards

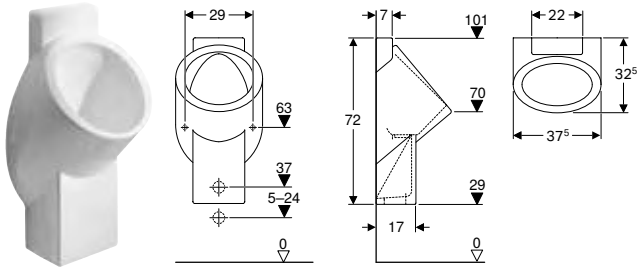

click & scan

Application purposes

- For urinal installations with inlet from the rear and outlet to the rear or downwards
- For operating without water

Technical data

Product material	Vitreous china
------------------	----------------

Characteristics

- Wall-hung
- Rimless
- Hidden drain
- Hidden fastening

Scope of delivery

- Fastening material for urinal
- Distance washers
- Drain assembly

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]	Outlet
236400600	PO white / KeraTect	37.5	72	32.5	to the rear or downwards

PO: Phase out as of December 2025

To order additionally

- Geberit drain set for hybrid and waterless urinals


Accessories

- Geberit fastening material for urinal renovation → p. 974
- Geberit urinal division, sanitary ceramic → p. 968

Urinal divisions

Urinal divisions made of plastic

Geberit urinal division, plastic

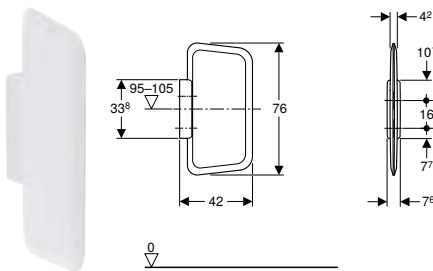

click & scan

Application purposes

- For mounting on solid walls or drywalls

Technical data

Product material	Plastic
------------------	---------

Characteristics

- Hidden fastening

Scope of delivery

- Distance bolt
- Fastening material
- Wall-mounted holder

Art. no.	Colour / surface	L [cm]	B [cm]	H [cm]
115.202.11.1	white alpine	42	7.6	76


Urinals

Urinal divisions

Urinal divisions made of sanitary ceramic

Urinal divisions made of glass

Geberit urinal division, glass

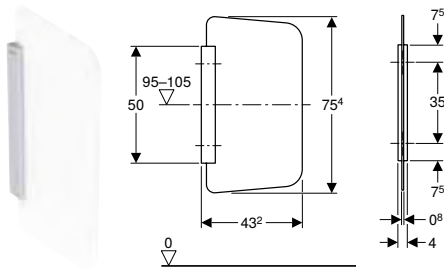

click & scan

Application purposes

- For mounting on solid walls or drywalls

Technical data

Product material	ESG (toughened safety glass)
------------------	------------------------------

Characteristics

- Partition wall made of glass, satinised on both sides
- Corrosion-resistant bracket
- Brushed and anodised bracket surface
- Covered installation


Scope of delivery

- Cover
- Wall-mounted holder
- Fastening material

Art. no.	Colour / surface	L [cm]	B [cm]	H [cm]
115.205.CD.1	anthracite	43.2	4	75.4
115.205.TD.1	white	43.2	4	75.4
115.211.CD.1	anthracite / satinised	43.2	4	75.4
115.211.TD.1	white / satinised	43.2	4	75.4
115.211.TF.1	umber / satinised	43.2	4	75.4

Urinal divisions made of sanitary ceramic

Geberit urinal division, sanitary ceramic

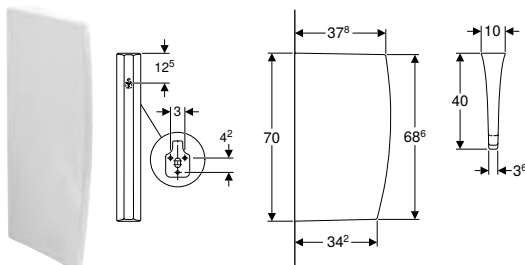

click & scan

Technical data

Product material	Vitreous china
------------------	----------------

Scope of delivery


- Fastening material

Art. no.	Colour / surface	L [cm]	B [cm]	H [cm]
110000000	white	40	10	70

Accessories

Urinal lid

Geberit Pareo urinal lid

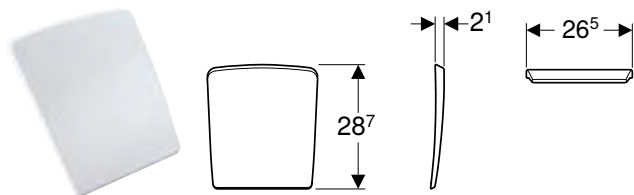

click & scan

Application purposes

- For Pareo urinals

Technical data

Product material		Duroplast	
Art. no.	Colour / surface	Soft-closing mechanism	Hinge material
573410000	white	no	Brass chrome-plated

Traps and trap accessories

Geberit drain set for Renova and Selnova S/M urinals



click & scan

Art. no.

116.119.00.1

Geberit hybrid trap for urinals



click & scan

Application purposes

- For waterless urinals
- For urinals with flush volume < 0.5 l
- For hybrid urinals

Characteristics

- Vertical outlet

Scope of delivery

- Maintenance key

Technical data

Product material	Plastic
------------------	---------

Art. no.	d, ø [mm]
116.066.00.1	40

Geberit hybrid trap adapter for Preda, Selva and Tamina urinals



click & scan

Application purposes

- For receiving Geberit hybrid traps for urinals
- For Preda urinals
- For Selva urinals
- For Tamina urinals

Characteristics

- Vertical outlet

Scope of delivery

- Maintenance key

Technical data

Product material	Plastic
------------------	---------

Art. no.	d, ø [mm]
116.058.00.1	112

To order additionally

- Geberit hybrid trap for urinals → p. 969

Geberit suction nozzle for trap adapter



click & scan

Application purposes

- For increasing the discharge rate of Geberit hybrid traps for urinals
- For installation on Geberit trap adapters for urinals

Characteristics

- Vertical outlet

Technical data

Product material	Plastic
------------------	---------

Art. no.	d, ø [mm]
116.065.00.1	42

Geberit hybrid trap adapter d103, for urinals



click & scan

Application purposes

- For waterless urinals
- Exclusively suitable for urinals made of plastic
- For receiving the Geberit hybrid trap in urinals by Urimat with trap ø 103 mm

Characteristics

- Vertical outlet

Scope of delivery

- Maintenance key

Technical data

Product material	Plastic
------------------	---------

Art. no.	d, ø [mm]
116.060.00.1	103

To order additionally

- Geberit hybrid trap for urinals → p. 969

Geberit hybrid trap adapter d125, for urinals



click & scan

Application purposes

- For waterless urinals
- For receiving the Geberit hybrid trap in urinals by Laufen, type Lema, with trap \varnothing 125 mm
- For receiving the Geberit hybrid trap in urinals by Roca, type Hall Flushfree, with trap \varnothing 125 mm
- For receiving the Geberit hybrid trap in urinals by Villeroy & Boch, type Subway AquaZero, with trap \varnothing 125 mm

Technical data

Product material	Plastic
------------------	---------

Characteristics

- Vertical outlet

Scope of delivery


- Maintenance key

Art. no.	d, \varnothing [mm]
116.062.00.1	125

To order additionally

- Geberit hybrid trap for urinals → p. 969

Geberit drain strainer for trap adapter d140



click & scan

Application purposes

- For protecting Geberit hybrid traps from dirt
- For protecting Geberit urinal traps with suction function from dirt
- For Preda urinals
- For Selva urinals
- For Tamina urinals

Art. no.	Colour / surface
116.059.00.1	white
116.059.SN.1	brushed

Geberit drain strainer for trap adapter d115




click & scan

Application purposes

- For Geberit trap adapter for urinals \varnothing 103–125 mm
- For protecting urinal traps from dirt

Art. no.	Colour / surface
116.067.00.1	white

Geberit drain strainer for Felix, Blagnac and Bastia urinals



click & scan

Art. no.
116.020.00.1

Urinals

Accessories

Flush pipes, flush bends and adapters

Geberit urinal trap with suction function, replaceable from the top



click & scan

Application purposes

- For flushing urinals
- For urinals with flush volume > 0.5 l
- For Preda urinals
- For Selva urinals
- For Tamina urinals

Characteristics

- Vertical outlet

Technical data

Product material	Plastic
------------------	---------

Art. no.	d, ø [mm]
243.312.00.1	112

Flush pipes, flush bends and adapters

Geberit flush pipe for urinal with concealed flush control



click & scan

Application purposes

- For iCon, Smyle and Abalona urinals for concealed urinal flush control

Characteristics

- Elbow made of brass

Scope of delivery

- Rubber connector
- Connection set

Technical data

Product material	Stainless steel
------------------	-----------------

Art. no.	d, ø [mm]
500.089.00.1	15

Geberit flush bend extension with sleeve



click & scan

Application purposes


- For urinals with inlet connection piece with sleeve, plug-in

Technical data

Product material	Brass
------------------	-------

Art. no.	d, ø [mm]	G ["]	di, ø [mm]
119.702.00.1	32	1/2	20

Geberit inlet connection piece for urinals

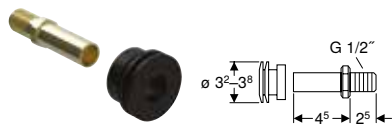

click & scan

Application purposes

- For pressure flushing valves

Characteristics

- Male thread 1/2"

Technical data

Product material	Brass
------------------	-------

Art. no.

521005000

Fastening material

Geberit wall fixing, complete, for drywall construction



click & scan

Application purposes

- For fastening Selva and Tamina urinals on drywall constructions

Scope of delivery

- Fastening material

Art. no.

	L
	[cm]
116.068.00.1	26.4

Geberit fastening material for urinal, Kerafix



click & scan

Technical data

Product material	Metal
------------------	-------

Scope of delivery

- Set of 2 pieces

Art. no. Colour / surface

551070000	chrome / glossy
551075000	white

Geberit fastening material for urinal renovation



click & scan

Application purposes

- For renovations and conversions

Scope of delivery

- Set of 2 pieces

Technical data

Product material	Metal
------------------	-------

Art. no.

554015000

Can be combined with

- Geberit Centaurus urinal, hybrid operation, inlet from the rear, outlet to the rear or downwards → p. 948
- Geberit Selnova L urinal, inlet from the rear, outlet to the rear or downwards → p. 757

Geberit set of distance pieces for Centaurus urinal



click & scan

Application purposes

- For Centaurus urinals

Scope of delivery

- Set of 2 pieces

Technical data

Product material	Metal
------------------	-------

Art. no.

595723000

Waste outlets

Geberit drain assembly set for waterless urinals



click & scan

Application purposes

- For Smyle urinals, waterless
- For Renova Plan urinals, waterless
- For Centaurus urinals, waterless
- For receiving Geberit diaphragm traps

Technical data

Product material	Plastic
------------------	---------

Characteristics

- Diaphragm trap, replaceable from the top
- Drain stainer made of stainless steel
- Corrosion-resistant drain strainer
- Vertical outlet

Scope of delivery

- Drain strainer lifter
- Drain strainer \varnothing 47 mm
- Diaphragm trap
- Trap adapter
- Connection pipe
- Fastening material for connection pipe

Art. no.	d, \varnothing [mm]
500.673.00.1	50

To order additionally

- Geberit drain set for hybrid and waterless urinals



Showers



Showers trays.....	978
Shower surfaces made of solid surface material.....	978
Accessory overview – Set of feet Geberit for CleanFloor30 shower surfaces	979
Installation elements	994
Assortment overview – Geberit CleanFloor30 shower surfaces, integrated	995
Shower tray made of solid surface material.....	998
Accessory overview – Geberit set of feet for shower trays made of mineral composite	999
Shower trays made of sanitary acrylic	1002
Shower drains.....	1012
Accessories.....	1020


Shower trays

Shower surfaces made of solid surface material

Accessory overview – Set of feet Geberit for CleanFloor30 shower surfaces

Geberit International Sales, version: December 2025

			Length		
			Height 6–12 cm		
			Height 9–21 cm		
Width 120 cm					
Geberit CleanFloor30 shower surface with sealing fleece, white	551.100.00.1	white		90 x 75 cm	→ p. 982
Geberit CleanFloor30 shower surface with sealing fleece, grey	551.100.29.1	grey		90 x 75 cm	→ p. 984
Geberit CleanFloor30 shower surface with sealing fleece, graphite	551.100.DM.1	graphite		90 x 75 cm	→ p. 986
Geberit CleanFloor30 shower surface with sealing fleece, white	551.101.00.1	white		170 x 75 cm	→ p. 982
Geberit CleanFloor30 shower surface with sealing fleece, grey	551.101.29.1	grey		170 x 75 cm	→ p. 984
Geberit CleanFloor30 shower surface with sealing fleece, graphite	551.101.DM.1	graphite		170 x 75 cm	→ p. 986
Width 75 cm					
Geberit CleanFloor30 shower surface with sealing fleece, white	551.102.00.1	white		80 x 80 cm	→ p. 982
Geberit CleanFloor30 shower surface with sealing fleece, grey	551.102.29.1	grey		80 x 80 cm	→ p. 984
Geberit CleanFloor30 shower surface with sealing fleece, graphite	551.102.DM.1	graphite		80 x 80 cm	→ p. 986
Geberit CleanFloor30 shower surface with sealing fleece, white	551.103.00.1	white		90 x 80 cm	→ p. 982
Geberit CleanFloor30 shower surface with sealing fleece, grey	551.103.29.1	grey		90 x 80 cm	→ p. 984
Geberit CleanFloor30 shower surface with sealing fleece, graphite	551.103.DM.1	graphite		90 x 80 cm	→ p. 986
Geberit CleanFloor30 shower surface with sealing fleece, white	551.104.00.1	white		100 x 80 cm	→ p. 982
Geberit CleanFloor30 shower surface with sealing fleece, grey	551.104.29.1	grey		100 x 80 cm	→ p. 984
Geberit CleanFloor30 shower surface with sealing fleece, graphite	551.104.DM.1	graphite		100 x 80 cm	→ p. 986
Geberit CleanFloor30 shower surface with sealing fleece, white	551.105.00.1	white		110 x 80 cm	→ p. 982
Geberit CleanFloor30 shower surface with sealing fleece, grey	551.105.29.1	grey		110 x 80 cm	→ p. 984
Geberit CleanFloor30 shower surface with sealing fleece, graphite	551.105.DM.1	graphite		110 x 80 cm	→ p. 986
Geberit CleanFloor30 shower surface with sealing fleece, white	551.106.00.1	white		120 x 80 cm	→ p. 982
Geberit CleanFloor30 shower surface with sealing fleece, grey	551.106.29.1	grey		120 x 80 cm	→ p. 984
Geberit CleanFloor30 shower surface with sealing fleece, graphite	551.106.DM.1	graphite		120 x 80 cm	→ p. 986
Geberit CleanFloor30 shower surface with sealing fleece, white	551.107.00.1	white		140 x 80 cm	→ p. 982
Geberit CleanFloor30 shower surface with sealing fleece, grey	551.107.29.1	grey		140 x 80 cm	→ p. 984
Geberit CleanFloor30 shower surface with sealing fleece, graphite	551.107.DM.1	graphite		140 x 80 cm	→ p. 986
Geberit CleanFloor30 shower surface with sealing fleece, white	551.108.00.1	white		150 x 80 cm	→ p. 982
Geberit CleanFloor30 shower surface with sealing fleece, grey	551.108.29.1	grey		150 x 80 cm	→ p. 984
Geberit CleanFloor30 shower surface with sealing fleece, graphite	551.108.DM.1	graphite		150 x 80 cm	→ p. 986
Geberit CleanFloor30 shower surface with sealing fleece, white	551.109.00.1	white		160 x 80 cm	→ p. 982
Geberit CleanFloor30 shower surface with sealing fleece, grey	551.109.29.1	grey		160 x 80 cm	→ p. 984
Geberit CleanFloor30 shower surface with sealing fleece, graphite	551.109.DM.1	graphite		160 x 80 cm	→ p. 986
Geberit CleanFloor30 shower surface with sealing fleece, white	551.110.00.1	white		170 x 80 cm	→ p. 982
Geberit CleanFloor30 shower surface with sealing fleece, grey	551.109.29.1	grey		170 x 80 cm	→ p. 984
Geberit CleanFloor30 shower surface with sealing fleece, graphite	551.109.DM.1	graphite		170 x 80 cm	→ p. 986

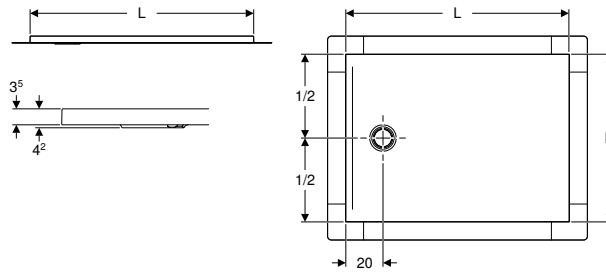New**Geberit CleanFloor30 shower surface with sealing fleece, white**

click & scan

Application purposes

- For use as floor-even shower surface
- For draining off waste water from a single shower head
- For floor constructions with shower tray legs up to upper edge of the shower surface 9.5–24 cm
- For raised installation up to 3.5 cm above finished floor
- Suitable for barrier-free construction

Technical data

Product material	Mineral composite material
------------------	----------------------------

Characteristics

- Outlet in the rear centre
- Sealing fleece, 10 cm circumferential, for connecting sealing systems
- Premounted sealing fleece
- Antislip class B according to EN 16165 (barefoot walking)
- Antislip class according to NF: PN 18
- Fulfils requirements in accordance with EN 14527, class 1
- Easy to clean
- Can bear loads of up to 300 kg

Scope of delivery

- Drain cover with comb insert

Art. no.	Colour / surface	B [cm]	H [cm]
L / length: 80 cm			
551.102.00.1	white / matt	80	3.5
L / length: 90 cm			
551.100.00.1	white / matt	75	3.5
551.103.00.1	white / matt	80	3.5
551.111.00.1	white / matt	90	3.5
L / length: 100 cm			
551.104.00.1	white / matt	80	3.5
551.112.00.1	white / matt	90	3.5
551.120.00.1	white / matt	100	3.5
L / length: 110 cm			
551.105.00.1	white / matt	80	3.5
551.113.00.1	white / matt	90	3.5
551.121.00.1	white / matt	100	3.5
L / length: 120 cm			
551.106.00.1	white / matt	80	3.5
551.114.00.1	white / matt	90	3.5
551.122.00.1	white / matt	100	3.5
551.126.00.1	white / matt	120	3.5
L / length: 140 cm			
551.107.00.1	white / matt	80	3.5
551.115.00.1	white / matt	90	3.5
551.123.00.1	white / matt	100	3.5
L / length: 150 cm			
551.108.00.1	white / matt	80	3.5
551.116.00.1	white / matt	90	3.5
551.124.00.1	white / matt	100	3.5
L / length: 160 cm			
551.109.00.1	white / matt	80	3.5
551.117.00.1	white / matt	90	3.5
551.125.00.1	white / matt	100	3.5
L / length: 170 cm			
551.101.00.1	white / matt	75	3.5
551.110.00.1	white / matt	80	3.5
551.118.00.1	white / matt	90	3.5
L / length: 180 cm			
551.119.00.1	white / matt	90	3.5

Available as of April 2026

To order additionally



- Geberit shower drain \varnothing 90 mm

Accessories

- Geberit repair kit for CleanFloor30 shower surface → p. 1020
- Geberit set of feet and crossbars, for shower trays made of mineral composite material, up to 140 cm → p. 1008
- Geberit set of feet and crossbars, for shower trays made of mineral composite material, over 140 cm → p. 1008
- Geberit set of feet for shower tray measuring up to 140 cm in length → p. 1009
- Geberit set of feet for shower tray measuring over 160 cm in length → p. 1009
- Geberit shower drain d90, depth of water seal 50 mm, outlet made of PE
- Geberit shower drain d90, depth of water seal 30 mm, outlet made of PE
- Geberit shower drain d90, for cross-floor installation, without trap

New

Geberit CleanFloor30 shower surface with sealing fleece, grey

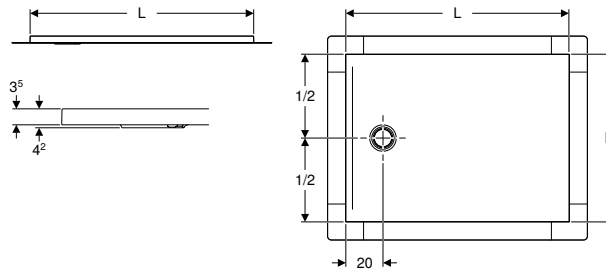

click & scan

Application purposes

- For use as floor-even shower surface
- For draining off waste water from a single shower head
- For floor constructions with shower tray legs up to upper edge of the shower surface 9.5–24 cm
- For raised installation up to 3.5 cm above finished floor
- Suitable for barrier-free construction

Technical data

Product material	Mineral composite material
------------------	----------------------------

Characteristics

- Outlet in the rear centre
- Sealing fleece, 10 cm circumferential, for connecting sealing systems
- Premounted sealing fleece
- Antislip class B according to EN 16165 (barefoot walking)
- Antislip class according to NF: PN 18
- Fulfils requirements in accordance with EN 14527, class 1
- Easy to clean
- Can bear loads of up to 300 kg

Scope of delivery

- Drain cover with comb insert

Art. no.	Colour / surface	B [cm]	H [cm]
L / length: 80 cm			
551.102.29.1 *	grey / matt	80	3.5
L / length: 90 cm			
551.100.29.1 *	grey / matt	75	3.5
551.103.29.1 *	grey / matt	80	3.5
551.111.29.1	grey / matt	90	3.5
L / length: 100 cm			
551.104.29.1 *	grey / matt	80	3.5
551.112.29.1 *	grey / matt	90	3.5
551.120.29.1 *	grey / matt	100	3.5
L / length: 110 cm			
551.105.29.1 *	grey / matt	80	3.5
551.113.29.1 *	grey / matt	90	3.5
551.121.29.1 *	grey / matt	100	3.5
L / length: 120 cm			
551.106.29.1	grey / matt	80	3.5
551.114.29.1	grey / matt	90	3.5
551.122.29.1 *	grey / matt	100	3.5
551.126.29.1 *	grey / matt	120	3.5
L / length: 140 cm			
551.107.29.1 *	grey / matt	80	3.5
551.115.29.1 *	grey / matt	90	3.5
551.123.29.1 *	grey / matt	100	3.5
L / length: 150 cm			
551.108.29.1 *	grey / matt	80	3.5
551.116.29.1 *	grey / matt	90	3.5
551.124.29.1 *	grey / matt	100	3.5
L / length: 160 cm			
551.109.29.1 *	grey / matt	80	3.5
551.117.29.1 *	grey / matt	90	3.5
551.125.29.1 *	grey / matt	100	3.5
L / length: 170 cm			
551.101.29.1 *	grey / matt	75	3.5
551.110.29.1 *	grey / matt	80	3.5
551.118.29.1 *	grey / matt	90	3.5
L / length: 180 cm			
551.119.29.1 *	grey / matt	90	3.5



Available as of April 2026; * Order-based production

To order additionally

- Geberit shower drain ø 90 mm

Accessories

- Geberit repair kit for CleanFloor30 shower surface → p. 1020
- Geberit touch-up pen for CleanFloor30 shower surface → p. 1020
- Geberit set of feet and crossbars, for shower trays made of mineral composite material, up to 140 cm → p. 1008
- Geberit set of feet and crossbars, for shower trays made of mineral composite material, over 140 cm → p. 1008
- Geberit set of feet for shower tray measuring up to 140 cm in length → p. 1009
- Geberit set of feet for shower tray measuring over 160 cm in length → p. 1009
- Geberit shower drain d90, depth of water seal 50 mm, outlet made of PE
- Geberit shower drain d90, depth of water seal 30 mm, outlet made of PE
- Geberit shower drain d90, for cross-floor installation, without trap

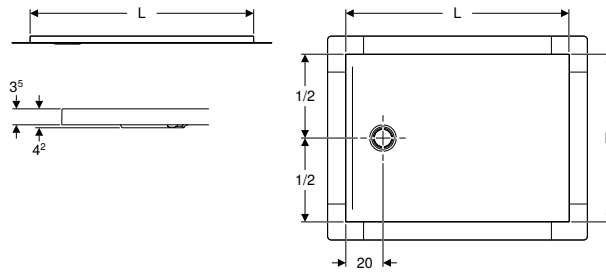New**Geberit CleanFloor30 shower surface with sealing fleece, graphite**

click & scan

Application purposes

- For use as floor-even shower surface
- For draining off waste water from a single shower head
- For floor constructions with shower tray legs up to upper edge of the shower surface 9.5–24 cm
- For raised installation up to 3.5 cm above finished floor
- Suitable for barrier-free construction

Technical data

Product material	Mineral composite material
------------------	----------------------------

Characteristics

- Outlet in the rear centre
- Sealing fleece, 10 cm circumferential, for connecting sealing systems
- Premounted sealing fleece
- Antislip class B according to EN 16165 (barefoot walking)
- Antislip class according to NF: PN 18
- Fulfils requirements in accordance with EN 14527, class 1
- Easy to clean
- Can bear loads of up to 300 kg

Scope of delivery

- Drain cover with comb insert

Art. no.	Colour / surface	B [cm]	H [cm]
L / length: 80 cm			
551.102.DM.1 *	graphite / matt	80	3.5
L / length: 90 cm			
551.100.DM.1 *	graphite / matt	75	3.5
551.103.DM.1 *	graphite / matt	80	3.5
551.111.DM.1	graphite / matt	90	3.5
L / length: 100 cm			
551.104.DM.1	graphite / matt	80	3.5
551.112.DM.1 *	graphite / matt	90	3.5
551.120.DM.1 *	graphite / matt	100	3.5
L / length: 110 cm			
551.105.DM.1 *	graphite / matt	80	3.5
551.113.DM.1 *	graphite / matt	90	3.5
551.121.DM.1 *	graphite / matt	100	3.5
L / length: 120 cm			
551.106.DM.1	graphite / matt	80	3.5
551.114.DM.1	graphite / matt	90	3.5
551.122.DM.1 *	graphite / matt	100	3.5
551.126.DM.1 *	graphite / matt	120	3.5
L / length: 140 cm			
551.107.DM.1	graphite / matt	80	3.5
551.115.DM.1	graphite / matt	90	3.5
551.123.DM.1 *	graphite / matt	100	3.5
L / length: 150 cm			
551.108.DM.1 *	graphite / matt	80	3.5
551.116.DM.1 *	graphite / matt	90	3.5
551.124.DM.1 *	graphite / matt	100	3.5
L / length: 160 cm			
551.109.DM.1 *	graphite / matt	80	3.5
551.117.DM.1 *	graphite / matt	90	3.5
551.125.DM.1 *	graphite / matt	100	3.5
L / length: 170 cm			
551.101.DM.1 *	graphite / matt	75	3.5
551.110.DM.1 *	graphite / matt	80	3.5
551.118.DM.1 *	graphite / matt	90	3.5
L / length: 180 cm			
551.119.DM.1 *	graphite / matt	90	3.5

Available as of April 2026; * Order-based production

To order additionally


- Geberit shower drain \varnothing 90 mm

Accessories

- Geberit repair kit for CleanFloor30 shower surface → p. 1020
- Geberit touch-up pen for CleanFloor30 shower surface → p. 1020
- Geberit set of feet and crossbars, for shower trays made of mineral composite material, up to 140 cm → p. 1008
- Geberit set of feet and crossbars, for shower trays made of mineral composite material, over 140 cm → p. 1008
- Geberit set of feet for shower tray measuring up to 140 cm in length → p. 1009
- Geberit set of feet for shower tray measuring over 160 cm in length → p. 1009
- Geberit shower drain d90, depth of water seal 50 mm, outlet made of PE
- Geberit shower drain d90, depth of water seal 30 mm, outlet made of PE
- Geberit shower drain d90, for cross-floor installation, without trap

New

Geberit CleanFloor30 integrated shower surface, with sealing fleece, white

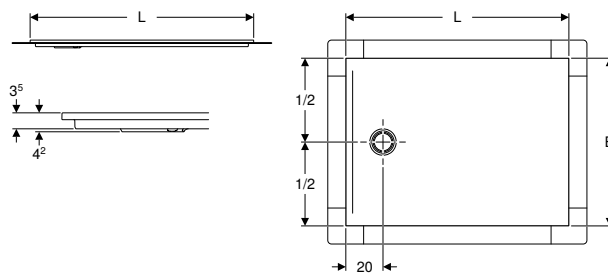

click & scan

Application purposes

- For use as floor-even shower surface
- For draining off waste water from a single shower head
- For floor constructions with Duofix installation frames up to upper edge of the shower surface 8–25 cm
- For raised installation up to 1.5 cm above finished floor
- Suitable for barrier-free construction

Technical data

Product material	Mineral composite material
------------------	----------------------------

Characteristics

- Outlet in the rear centre
- Sealing fleece, 10 cm circumferential, for connecting sealing systems
- Premounted sealing fleece
- Antislip class B according to EN 16165 (barefoot walking)
- Antislip class according to NF: PN 18
- Fulfils requirements in accordance with EN 14527, class 1
- Easy to clean
- Can bear loads of up to 300 kg

Scope of delivery

- Drain cover with comb insert

Art. no.	Colour / surface	B [cm]	H [cm]
L / length: 80 cm			
551.002.00.1	white / matt	80	3.5
L / length: 90 cm			
551.003.00.1	white / matt	80	3.5
551.011.00.1	white / matt	90	3.5
L / length: 100 cm			
551.004.00.1	white / matt	80	3.5
551.012.00.1	white / matt	90	3.5
551.020.00.1	white / matt	100	3.5
L / length: 110 cm			
551.005.00.1	white / matt	80	3.5
551.013.00.1	white / matt	90	3.5
551.021.00.1	white / matt	100	3.5
L / length: 120 cm			
551.006.00.1	white / matt	80	3.5
551.014.00.1	white / matt	90	3.5
551.022.00.1	white / matt	100	3.5
551.026.00.1	white / matt	120	3.5
L / length: 140 cm			
551.007.00.1	white / matt	80	3.5
551.015.00.1	white / matt	90	3.5
551.023.00.1	white / matt	100	3.5
L / length: 150 cm			
551.008.00.1	white / matt	80	3.5
551.016.00.1	white / matt	90	3.5
551.024.00.1	white / matt	100	3.5
L / length: 160 cm			
551.009.00.1	white / matt	80	3.5
551.017.00.1	white / matt	90	3.5
551.025.00.1	white / matt	100	3.5
L / length: 170 cm			
551.010.00.1	white / matt	80	3.5
551.018.00.1	white / matt	90	3.5
L / length: 180 cm			
551.019.00.1	white / matt	90	3.5


Available as of April 2026


To order additionally

- Geberit Duofix Rohbauset für Duschflächen
- Geberit Duofix Installationsrahmen für Duschflächen

Accessories

- Geberit repair kit for CleanFloor30 shower surface → p. 1020
- Geberit Duofix installation frame for shower surface up to 100 cm, for five feet → p. 1004
- Geberit Duofix installation frame for shower surface 110–140 cm, for seven feet → p. 1005
- Geberit Duofix installation frame for shower surface 150–180 cm, for ten feet → p. 1007

-  The installation manuals are included with the corresponding Geberit Duofix installation sets for shower surfaces
- Replacement for art. no. 154.260.11.1, 154.262.11.1, 154.264.11.1, 154.266.11.1, 154.267.11.1, 154.268.11.1, 154.269.11.1, 154.270.11.1, 154.271.11.1, 154.273.11.1, 154.275.11.1, 154.277.11.1, 154.278.11.1, 154.279.11.1, 154.280.11.1, 154.282.11.1, 154.284.11.1, 154.286.11.1, 154.290.11.1

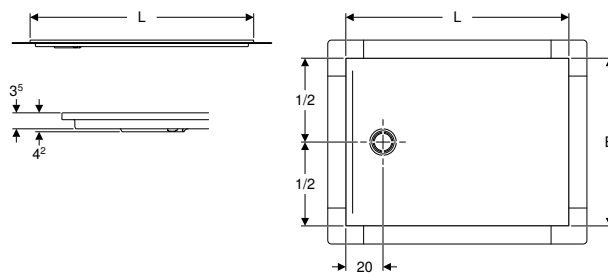New**Geberit CleanFloor30 integrated shower surface, with sealing fleece, grey**

click & scan

Application purposes

- For use as floor-even shower surface
- For draining off waste water from a single shower head
- For floor constructions with Duofix installation frames up to upper edge of the shower surface 8–25 cm
- For raised installation up to 1.5 cm above finished floor
- Suitable for barrier-free construction

Technical data

Product material	Mineral composite material
------------------	----------------------------

Characteristics

- Outlet in the rear centre
- Sealing fleece, 10 cm circumferential, for connecting sealing systems
- Premounted sealing fleece
- Antislip class B according to EN 16165 (barefoot walking)
- Antislip class according to NF: PN 18
- Fulfils requirements in accordance with EN 14527, class 1
- Easy to clean
- Can bear loads of up to 300 kg

Scope of delivery

- Drain cover with comb insert

Art. no.	Colour / surface	B [cm]	H [cm]
L / length: 80 cm			
551.002.29.1	grey / matt	80	3.5
L / length: 90 cm			
551.003.29.1 *	grey / matt	80	3.5
551.011.29.1	grey / matt	90	3.5
L / length: 100 cm			
551.004.29.1	grey / matt	80	3.5
551.012.29.1	grey / matt	90	3.5
551.020.29.1	grey / matt	100	3.5
L / length: 110 cm			
551.005.29.1 *	grey / matt	80	3.5
551.013.29.1 *	grey / matt	90	3.5
551.021.29.1 *	grey / matt	100	3.5
L / length: 120 cm			
551.006.29.1	grey / matt	80	3.5
551.014.29.1	grey / matt	90	3.5
551.022.29.1	grey / matt	100	3.5
551.026.29.1	grey / matt	120	3.5
L / length: 140 cm			
551.007.29.1 *	grey / matt	80	3.5
551.015.29.1	grey / matt	90	3.5
551.023.29.1	grey / matt	100	3.5
L / length: 150 cm			
551.008.29.1 *	grey / matt	80	3.5
551.016.29.1 *	grey / matt	90	3.5
551.024.29.1 *	grey / matt	100	3.5
L / length: 160 cm			
551.009.29.1 *	grey / matt	80	3.5
551.017.29.1 *	grey / matt	90	3.5
551.025.29.1 *	grey / matt	100	3.5
L / length: 170 cm			
551.010.29.1 *	grey / matt	80	3.5
551.018.29.1 *	grey / matt	90	3.5
L / length: 180 cm			
551.019.29.1 *	grey / matt	90	3.5

Available as of April 2026; * Order-based production

To order additionally


- Geberit Duofix Rohbauset für Duschflächen
- Geberit Duofix Installationsrahmen für Duschflächen

Accessories

- Geberit repair kit for CleanFloor30 shower surface → p. 1020
- Geberit touch-up pen for CleanFloor30 shower surface → p. 1020
- Geberit Duofix installation frame for shower surface up to 100 cm, for five feet → p. 1004
- Geberit Duofix installation frame for shower surface 110–140 cm, for seven feet → p. 1005
- Geberit Duofix installation frame for shower surface 150–180 cm, for ten feet → p. 1007

New

Geberit CleanFloor30 integrated shower surface, with sealing fleece, graphite

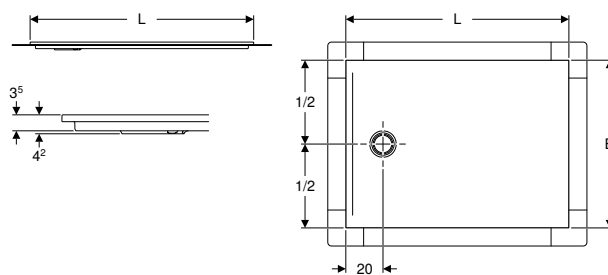

click & scan

Application purposes

- For use as floor-even shower surface
- For draining off waste water from a single shower head
- For floor constructions with Duofix installation frames up to upper edge of the shower surface 8–25 cm
- For raised installation up to 1.5 cm above finished floor
- Suitable for barrier-free construction

Technical data

Product material	Mineral composite material
------------------	----------------------------

Characteristics

- Outlet in the rear centre
- Sealing fleece, 10 cm circumferential, for connecting sealing systems
- Premounted sealing fleece
- Antislip class B according to EN 16165 (barefoot walking)
- Antislip class according to NF: PN 18
- Fulfils requirements in accordance with EN 14527, class 1
- Easy to clean
- Can bear loads of up to 300 kg

Scope of delivery

- Drain cover with comb insert

Art. no.	Colour / surface	B [cm]	H [cm]
L / length: 80 cm			
551.002.DM.1	graphite / matt	80	3.5
L / length: 90 cm			
551.003.DM.1 *	graphite / matt	80	3.5
551.011.DM.1	graphite / matt	90	3.5
L / length: 100 cm			
551.004.DM.1	graphite / matt	80	3.5
551.012.DM.1	graphite / matt	90	3.5
551.020.DM.1	graphite / matt	100	3.5
L / length: 110 cm			
551.005.DM.1 *	graphite / matt	80	3.5
551.013.DM.1	graphite / matt	90	3.5
551.021.DM.1 *	graphite / matt	100	3.5
L / length: 120 cm			
551.006.DM.1	graphite / matt	80	3.5
551.014.DM.1	graphite / matt	90	3.5
551.022.DM.1	graphite / matt	100	3.5
551.026.DM.1	graphite / matt	120	3.5
L / length: 140 cm			
551.007.DM.1	graphite / matt	80	3.5
551.015.DM.1	graphite / matt	90	3.5
551.023.DM.1	graphite / matt	100	3.5
L / length: 150 cm			
551.008.DM.1 *	graphite / matt	80	3.5
551.016.DM.1	graphite / matt	90	3.5
551.024.DM.1 *	graphite / matt	100	3.5
L / length: 160 cm			
551.009.DM.1 *	graphite / matt	80	3.5
551.017.DM.1	graphite / matt	90	3.5
551.025.DM.1 *	graphite / matt	100	3.5
L / length: 170 cm			
551.010.DM.1 *	graphite / matt	80	3.5
551.018.DM.1	graphite / matt	90	3.5
L / length: 180 cm			
551.019.DM.1	graphite / matt	90	3.5

Available as of April 2026; * Order-based production

To order additionally

- Geberit Duofix Rohbauset für Duschflächen
- Geberit Duofix Installationsrahmen für Duschflächen











Accessories

- Geberit repair kit for CleanFloor30 shower surface → p. 1020
- Geberit touch-up pen for CleanFloor30 shower surface → p. 1020
- Geberit Duofix installation frame for shower surface up to 100 cm, for five feet → p. 1004
- Geberit Duofix installation frame for shower surface 110–140 cm, for seven feet → p. 1005
- Geberit Duofix installation frame for shower surface 150–180 cm, for ten feet → p. 1007




Installation elements

Assortment overview – Geberit CleanFloor30 shower surfaces, integrated







Geberit International Sales, version: October 2025

Geberit CleanFloor30 shower surface, integrated, white matt	Geberit CleanFloor30 shower surface, integrated, with sealing fleece									
	551.002.00.1	551.003.00.1	551.004.00.1	551.005.00.1	551.006.00.1	551.007.00.1	551.008.00.1	551.009.00.1	551.010.00.1	551.011.00.1
Geberit CleanFloor30 shower surface, integrated, gray	551.002.29.1	551.003.29.1	551.004.29.1	551.005.29.1	551.006.29.1	551.007.29.1	551.008.29.1	551.009.29.1	551.010.29.1	551.011.29.1
Geberit CleanFloor30 shower surface, integrated, graphite	551.002.DM.1	551.003.DM.1	551.004.DM.1	551.005.DM.1	551.006.DM.1	551.007.DM.1	551.008.DM.1	551.009.DM.1	551.010.DM.1	551.011.DM.1
Geberit Duofix installation frame for shower surfaces	551.502.00.1	551.503.00.1	551.504.00.1	551.505.00.1	551.506.00.1	551.507.00.1	551.508.00.1	551.509.00.1	551.510.00.1	551.511.00.1
	80 x 80 cm	80 x 90 cm	80 x 100 cm	80 x 110 cm	80 x 120 cm	80 x 140 cm	80 x 150 cm	80 x 160 cm	80 x 170 cm	90 x 90 cm
										




Installation sets for installation height 11.5–18 cm

Geberit Duofix shower drain with five feet, integrated for CleanFloor30 shower surface, depth of water seal 50 mm	551.550.00.1		✓	✓	✓							✓
Geberit Duofix shower drain with seven feet, integrated for CleanFloor30 shower surface, depth of water seal 50 mm	551.552.00.1					✓	✓	✓				
Geberit Duofix shower drain with ten feet, integrated for CleanFloor30 shower surface, depth of water seal 50 mm	551.554.00.1								✓	✓	✓	
















Installation sets for installation height 10–14.5 cm

Geberit Duofix shower drain with five feet, integrated for CleanFloor30 shower surface, depth of water seal 30 mm	551.556.00.1		✓	✓	✓							✓
Geberit Duofix shower drain with seven feet, integrated for CleanFloor30 shower surface, depth of water seal 30 mm	551.557.00.1					✓	✓	✓				
Geberit Duofix shower drain with ten feet, integrated for CleanFloor30 shower surface, depth of water seal 30 mm	551.558.00.1								✓	✓	✓	
Geberit Duofix shower drain with five short feet, integrated for CleanFloor30 shower surface, depth of water seal 50 mm	551.562.00.1		✓	✓	✓							✓
Geberit Duofix shower drain with seven short feet, integrated for CleanFloor30 shower surface, depth of water seal 50 mm	551.563.00.1					✓	✓	✓				
Geberit Duofix shower drain with ten short feet, integrated for CleanFloor30 shower surface, depth of water seal 50 mm	551.564.00.1								✓	✓	✓	

Installation sets for installation height 8–13 cm

Geberit Duofix shower drain with five feet, integrated for CleanFloor30 shower surface, cross-floor installation	551.559.00.1		✓	✓	✓							✓
Geberit Duofix shower drain with seven feet, integrated for CleanFloor30 shower surface, cross-floor installation	551.560.00.1					✓	✓	✓				
Geberit Duofix shower drain with ten feet, integrated for CleanFloor30 shower surface, cross-floor installation	551.561.00.1								✓	✓	✓	

Geberit CleanFloor30 shower surface, integrated, with sealing fleece




	551.012.00.1	551.013.00.1	551.014.00.1	551.015.00.1	551.016.00.1	551.017.00.1	551.018.00.1	551.019.00.1	551.020.00.1	551.021.00.1	551.022.00.1	551.023.00.1	551.024.00.1	551.025.00.1	551.026.00.1
	551.012.29.1	551.013.29.1	551.014.29.1	551.015.29.1	551.016.29.1	551.017.29.1	551.018.29.1	551.019.29.1	551.020.29.1	551.021.29.1	551.022.29.1	551.023.29.1	551.024.29.1	551.025.29.1	551.026.29.1
	551.012.DM.1	551.013.DM.1	551.014.DM.1	551.015.DM.1	551.016.DM.1	551.017.DM.1	551.018.DM.1	551.019.DM.1	551.020.DM.1	551.021.DM.1	551.022.DM.1	551.023.DM.1	551.024.DM.1	551.025.DM.1	551.026.DM.1
	551.512.00.1	551.513.00.1	551.514.00.1	551.515.00.1	551.516.00.1	551.517.00.1	551.518.00.1	551.519.00.1	551.520.00.1	551.521.00.1	551.522.00.1	551.523.00.1	551.524.00.1	551.525.00.1	551.526.00.1
	90 x 100 cm	90 x 110 cm	90 x 120 cm	90 x 140 cm	90 x 150 cm	90 x 160 cm	90 x 170 cm	90 x 180 cm	100 x 100 cm	100 x 110 cm	100 x 120 cm	100 x 140 cm	100 x 150 cm	100 x 160 cm	120 x 120 cm
															
	✓								✓						
		✓	✓	✓						✓	✓	✓			✓
					✓	✓	✓	✓					✓	✓	
	✓								✓						
		✓	✓	✓						✓	✓	✓			✓
					✓	✓	✓	✓					✓	✓	
	✓								✓						
		✓	✓	✓						✓	✓	✓			✓
					✓	✓	✓	✓					✓	✓	
	✓								✓						
		✓	✓	✓						✓	✓	✓			✓
					✓	✓	✓	✓					✓	✓	

Showers
 Shower trays
 Installation elements




Geberit International Sales, version: October 2025

Geberit CleanFloor30 shower surface, integrated, with sealing fleece

Installation sets for installation height 13.5–25 cm

Geberit Duofix shower drain with five long feet, integrated for CleanFloor30 shower surface, depth of water seal 50 mm	551.565.00.1		✓	✓	✓								✓	
Geberit Duofix shower drain with seven long feet, integrated for CleanFloor30 shower surface, depth of water seal 50 mm	551.566.00.1					✓	✓	✓						
Geberit Duofix shower drain with ten long feet, integrated for CleanFloor30 shower surface, depth of water seal 50 mm	551.567.00.1								✓	✓	✓			

Sets of foot extensions, length up to 25 cm

5 pieces	551.580.00.1		✓	✓	✓								✓	✓
7 pieces	551.581.00.1					✓	✓	✓						
10 pieces	551.582.00.1								✓	✓	✓			

✓ Compatible



Geberit CleanFloor30 shower surface, integrated, with sealing fleece

	✓								✓						
		✓	✓	✓						✓	✓	✓			✓
					✓	✓	✓	✓					✓	✓	
	✓								✓						
		✓	✓	✓						✓	✓	✓			✓
					✓	✓	✓	✓					✓	✓	







Shower tray made of solid surface material

Accessory overview – Geberit set of feet for shower trays made of mineral composite

Geberit International Sales, version: December 2025

Length				
Height 6–12 cm				
Height 9–21 cm				
Geberit Olona square shower tray	550.750.00.1		80 x 80 cm	→ p. 1000
	550.751.00.1		90 x 90 cm	→ p. 1000
	550.752.00.1		100 x 100 cm	→ p. 1000
Geberit Olona rectangular shower tray	550.754.00.1		90 x 70 cm	→ p. 1001
	550.755.00.1		90 x 75 cm	→ p. 1001
	550.757.00.1		100 x 70 cm	→ p. 1001
	550.759.00.1		100 x 80 cm	→ p. 1001
	550.760.00.1		100 x 90 cm	→ p. 1001
	550.761.00.1		120 x 70 cm	→ p. 1001
	550.763.00.1		120 x 80 cm	→ p. 1001
	550.764.00.1		120 x 90 cm	→ p. 1001
	550.765.00.1		120 x 100 cm	→ p. 1001
	550.766.00.1		140 x 70 cm	→ p. 1001
	550.768.00.1		140 x 80 cm	→ p. 1001
	550.769.00.1		140 x 90 cm	→ p. 1001
	550.770.00.1		140 x 100 cm	→ p. 1001
	550.771.00.1		160 x 70 cm	→ p. 1001
	550.773.00.1		160 x 80 cm	→ p. 1001
	550.774.00.1		160 x 90 cm	→ p. 1001
	550.775.00.1		160 x 100 cm	→ p. 1001
	550.776.00.1		170 x 70 cm	→ p. 1001
	550.777.00.1		170 x 75 cm	→ p. 1001
	550.778.00.1		170 x 80 cm	→ p. 1001
550.779.00.1	170 x 90 cm	→ p. 1001		
550.790.00.1	180 x 90 cm	→ p. 1001		

✓ Compatible


Geberit set of feet and crossbars, for shower trays made of mineral composite material, up to 140 cm				Geberit set of feet and crossbars, for shower trays made of mineral composite material, over 140 cm		
62.5 cm	70 cm	80 cm	110 cm	62.5 cm	70 cm	80 cm
554.955.00.1	554.958.00.1	554.961.00.1	554.964.00.1	554.956.00.1	554.959.00.1	554.962.00.1
554.955.00.2	554.958.00.2	554.961.00.2	554.964.00.2	554.956.00.2	554.959.00.2	554.962.00.2
						
→ p. 1008	→ p. 1008	→ p. 1008	→ p. 1008	→ p. 1008	→ p. 1008	→ p. 1008
	✓					
		✓				
		✓				
✓						
✓						
✓						
	✓					
		✓				
		✓				
		✓				
		✓				
✓						
	✓					
		✓				
		✓				
				✓		
					✓	
						✓
						✓
				✓		
				✓		
					✓	
						✓
						✓

Showers

Showers trays

Showers tray made of solid surface material

Geberit Olona square shower tray

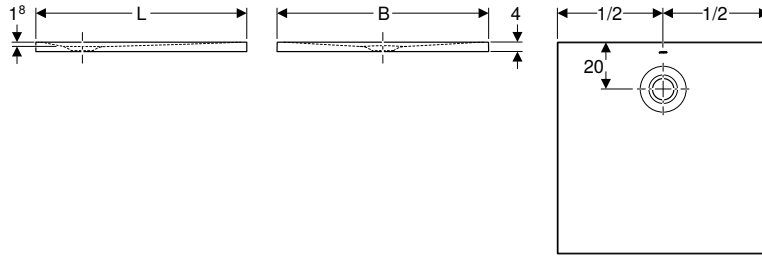

click & scan

Application purposes

- For use as floor-even shower surface
- For draining off waste water from a single shower head
- For floor constructions with shower tray legs up to top edge of the finished floor 10–25 cm
- For raised installation up to 4 cm above finished floor
- Suitable for barrier-free construction

Characteristics

- Square
- Outlet in the rear centre
- Drain hole \varnothing 90 mm
- Antislip class C according to EN 16165 (barefoot walking)
- Antislip class according to NF: PN 24
- Fulfils requirements in accordance with EN 14527, class 1

Technical data

Product material	Mineral composite material
------------------	----------------------------

Scope of delivery

- Drain cover with comb insert

Art. no.	Colour / surface	L [cm]	B [cm]	H [cm]
550.750.00.1	white / matt	80	80	4
550.751.00.1	white / matt	90	90	4
550.752.00.1	white / matt	100	100	4



To order additionally

- Geberit shower drain d90, suitable for the drain cover
- Installation set
- Sealing material

Accessories

- Geberit set of feet and crossbars, for shower trays made of mineral composite material, up to 140 cm → p. 1008
- Geberit set of feet for shower tray measuring up to 140 cm in length → p. 1009
- Geberit shower drain d90, depth of water seal 30 mm, outlet made of PE
- Geberit shower drain d90, depth of water seal 50 mm, outlet made of PE
- Geberit shower drain d90, for cross-floor installation, without trap
- Geberit repair set for Melua and Olona shower trays made of mineral composite material → p. 1020
- Geberit sealing set for shower trays → p. 1021

Geberit Olona rectangular shower tray

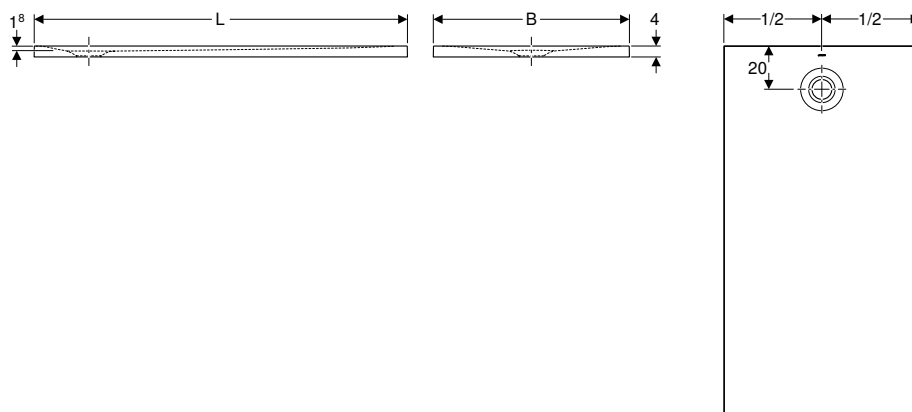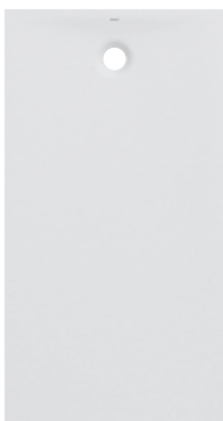

click & scan

Application purposes

- For use as floor-even shower surface
- For draining off waste water from a single shower head
- For floor constructions with shower tray legs up to top edge of the finished floor 10–25 cm
- For raised installation up to 4 cm above finished floor
- Suitable for barrier-free construction

Characteristics

- Rectangular
- Drain hole \varnothing 90 mm
- Outlet in the rear centre
- Antislip class C according to EN 16165 (barefoot walking)
- Antislip class according to NF: PN 24
- Fulfils requirements in accordance with EN 14527, class 1

Technical data

Product material	Mineral composite material
------------------	----------------------------

Scope of delivery

- Drain cover with comb insert

Art. no.	Colour / surface	B [cm]	H [cm]
L / length: 90 cm			
550.754.00.1	white / matt	70	4
550.755.00.1	white / matt	75	4
L / length: 100 cm			
550.757.00.1	white / matt	70	4
550.759.00.1	white / matt	80	4
550.760.00.1	white / matt	90	4
L / length: 120 cm			
550.761.00.1	white / matt	70	4
550.763.00.1	white / matt	80	4
550.764.00.1	white / matt	90	4
550.765.00.1	white / matt	100	4
L / length: 140 cm			
550.766.00.1	white / matt	70	4
550.768.00.1	white / matt	80	4
550.769.00.1	white / matt	90	4
550.770.00.1	white / matt	100	4
L / length: 160 cm			
550.771.00.1	white / matt	70	4
550.773.00.1	white / matt	80	4
550.774.00.1	white / matt	90	4
550.775.00.1	white / matt	100	4
L / length: 170 cm			
550.776.00.1	white / matt	70	4
550.777.00.1	white / matt	75	4
550.778.00.1	white / matt	80	4
550.779.00.1	white / matt	90	4
L / length: 180 cm			
550.790.00.1	white / matt	90	4

To order additionally


- Geberit shower drain d90, suitable for the drain cover
- Sealing material

Accessories

- Geberit set of feet and crossbars, for shower trays made of mineral composite material, over 140 cm → p. 1008
- Geberit set of feet and crossbars, for shower trays made of mineral composite material, up to 140 cm → p. 1008
- Geberit set of feet for shower tray measuring up to 140 cm in length → p. 1009
- Geberit set of feet for shower tray measuring over 160 cm in length → p. 1009
- Geberit shower drain d90, depth of water seal 30 mm, outlet made of PE
- Geberit shower drain d90, depth of water seal 50 mm, outlet made of PE
- Geberit shower drain d90, for cross-floor installation, without trap
- Geberit repair set for Melua and Olona shower trays made of mineral composite material → p. 1020
- Geberit sealing set for shower trays → p. 1021

Shower trays made of sanitary acrylic

Geberit Nemea square shower tray

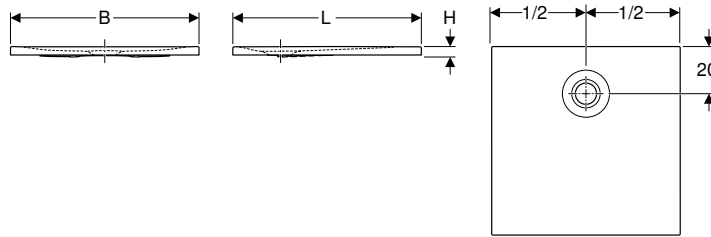

click & scan

Application purposes

- For draining off waste water from a single shower head
- For private bathrooms and hotels
- For installation with set of feet for shower trays
- For installation with bathtub support
- For use as floor-even shower surface
- Suitable for barrier-free construction

Characteristics

- Square
- Drain hole \varnothing 90 mm
- Antislip class A according to EN 16165 (barefoot walking) only for models with a matt surface
- Fulfils requirements in accordance with EN 14527, class 1

Technical data

Product material	Sanitary acrylic
------------------	------------------

Art. no.	Colour / surface	L [cm]	B [cm]	H [cm]
550.570.00.1	white / glossy	80	80	3.5
550.571.00.1	white / glossy	90	90	3.5
550.590.00.1	white / matt	80	80	3.5
550.591.00.1	white / matt	90	90	3.5


To order additionally

- Shower drain \varnothing 90 mm
- Set of legs and crossbar with wall anchor
- Sealing material

Accessories

- Geberit set of feet and crossbars, with wall anchors, for shower tray made of sanitary acrylic → p. 1009
- Geberit shower drain d90, depth of water seal 30 mm, outlet made of PE
- Geberit shower drain d90, depth of water seal 50 mm, outlet made of PE
- Geberit shower drain d90, for cross-floor installation, without trap, with drain cover
- Geberit shower drain d90, with drain cover, depth of water seal 30 mm, outlet made of PE
- Geberit shower drain d90, with drain cover, depth of water seal 50 mm, outlet made of PE
- Geberit Split drain cover, d90, for shower drain, 30/50 mm water seal depth
- Geberit sealing set for shower trays → p. 1021

Geberit Nemea rectangular shower tray

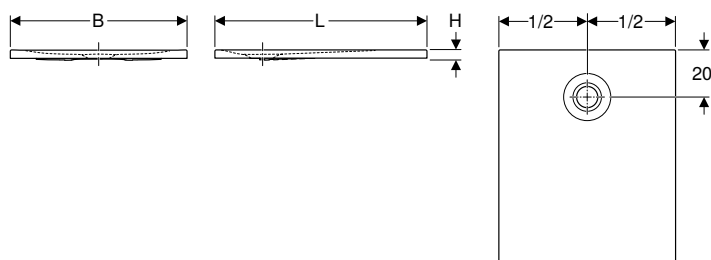

click & scan

Application purposes

- For draining off waste water from a single shower head
- For private bathrooms and hotels
- For installation with set of feet for shower trays
- For installation with bathtub support
- For use as floor-even shower surface
- Suitable for barrier-free construction

Characteristics

- Rectangular
- Drain hole \varnothing 90 mm
- Antislip class A according to EN 16165 (barefoot walking) only for models with a matt surface
- Fulfils requirements in accordance with EN 14527, class 1

Technical data

Product material	Sanitary acrylic
------------------	------------------



Art. no.	Colour / surface	d, \varnothing [mm]	L [cm]	B [cm]	H [cm]
550.572.00.1	white / glossy	90	90	75	3.5
550.573.00.1	white / glossy	90	100	80	3.5
550.574.00.1	white / glossy	90	100	90	3.5
550.575.00.1	white / glossy	90	120	80	3.5
550.576.00.1	white / glossy	90	120	90	3.5
550.577.00.1	white / glossy	90	140	80	3.5
550.578.00.1	white / glossy	90	140	90	3.5
550.592.00.1	white / matt	90	90	75	3.5
550.593.00.1	white / matt	90	100	80	3.5
550.594.00.1	white / matt	90	100	90	3.5
550.595.00.1	white / matt	90	120	80	3.5
550.596.00.1	white / matt	90	120	90	3.5
550.597.00.1	white / matt	90	140	80	3.5
550.598.00.1	white / matt	90	140	90	3.5

To order additionally

- Shower drain \varnothing 90 mm
- Set of legs and crossbar with wall anchor
- Sealing material

Accessories

- Geberit set of feet and crossbars, with wall anchors, for shower tray made of sanitary acrylic → p. 1009
- Geberit shower drain d90, depth of water seal 30 mm, outlet made of PE
- Geberit shower drain d90, depth of water seal 50 mm, outlet made of PE
- Geberit shower drain d90, for cross-floor installation, without trap, with drain cover
- Geberit shower drain d90, with drain cover, depth of water seal 30 mm, outlet made of PE
- Geberit shower drain d90, with drain cover, depth of water seal 50 mm, outlet made of PE
- Geberit Split drain cover, d90, for shower drain, 30/50 mm water seal depth
- Geberit sealing set for shower trays → p. 1021

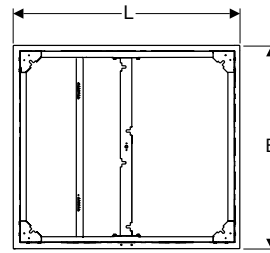New**Geberit Duofix installation frame for shower surface up to 100 cm, for five feet**

click & scan

Application purposes

- For installation of CleanFloor30 shower surfaces integrated inside buildings
- For installation of shower surfaces made of enamelled steel up to an inner height of 3.5 cm and a rim height of 4.5 cm
- For floor constructions with CleanFloor30 shower surfaces up to upper edge of the shower surface 8–25 cm
- For floor constructions with shower surfaces made of enamelled steel of up to top edge of set of rubber support 10–25 cm
- For installation before or after introduction of the screed

Characteristics

- Premounted sound insulation tape
- Premounted retainer for foot fastener
- Height-adjustable from the top

Scope of delivery

- 2 prefabricated shuttering panels
- Crossbar for shower drain

Technical data

Product material	Powder-coated steel
------------------	---------------------

Art. no.	L [cm]	B [cm]	H [cm]
551.502.00.1	80	80	3.4
551.503.00.1	90	80	3.4
551.504.00.1	100	80	3.4
551.511.00.1	90	90	3.4
551.512.00.1	100	90	3.4
551.520.00.1	100	100	3.4

Available as of April 2026

To order additionally

- Geberit CleanFloor30 integrated shower surface or shower surface made of enamelled steel
- Shower drain with five feet, for CleanFloor30 integrated shower surface
- Installation set for shower surfaces made of enamelled steel, with five feet

Accessories



- Geberit Duofix shower drain with five feet, integrated for CleanFloor30 shower surface, depth of water seal 50 mm → p. 1012
- Geberit Duofix shower drain with five feet, integrated for CleanFloor30 shower surface, depth of water seal 30 mm → p. 1014
- Geberit Duofix shower drain with five feet, integrated for CleanFloor30 shower surface, cross-floor installation → p. 1015
- Geberit Duofix shower drain with five short feet, integrated for CleanFloor30 shower surface, depth of water seal 50 mm → p. 1017
- Geberit Duofix shower drain with five long feet, integrated for CleanFloor30 shower surface, depth of water seal 50 mm → p. 1018
- Geberit Duofix set of foot extensions installation frames → p. 1010
- Set of rubber supports for Geberit Duofix installation frame for shower surface → p. 1011



- Replacement for art. no. 154.460.00.1, 154.462.00.1, 154.470.00.1, 154.471.00.1, 154.480.00.1

New

Geberit Duofix installation frame for shower surface 110–140 cm, for seven feet

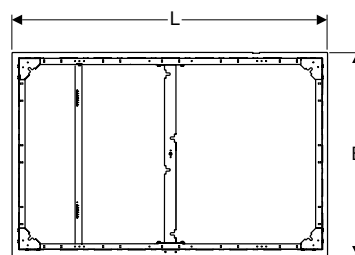

click & scan

Application purposes

- For installation of CleanFloor30 shower surfaces integrated inside buildings
- For installation of shower surfaces made of enamelled steel up to an inner height of 3.5 cm and a rim height of 4.5 cm
- For floor constructions with CleanFloor30 shower surfaces up to upper edge of the shower surface 8–25 cm
- For floor constructions with shower surfaces made of enamelled steel of up to top edge of set of rubber support 10–25 cm
- For installation before or after introduction of the screed

Characteristics

- Premounted sound insulation tape
- Premounted retainer for foot fastener
- Height-adjustable from the top

Scope of delivery

- 2 prefabricated shuttering panels
- Crossbar for shower drain

Technical data

Product material	Powder-coated steel
------------------	---------------------

Art. no.	L [cm]	B [cm]	H [cm]
551.505.00.1	110	80	3.4
551.507.00.1	140	80	3.4
551.513.00.1	110	90	3.4
551.514.00.1	120	90	3.4
551.515.00.1	140	90	3.4
551.521.00.1	110	100	3.4
551.522.00.1	120	100	3.4
551.523.00.1	140	100	3.4
551.506.00.1	120	80	3.4

Available as of April 2026

To order additionally


- Geberit CleanFloor30 integrated shower surface or shower surface made of enamelled steel
- Shower drain with seven feet, for CleanFloor30 shower surface integrated
- Installation set for shower surface made of enamelled steel, with seven feet



- Replacement for art. no. 154.466.00.1, 154.473.00.1, 154.475.00.1, 154.482.00.1, 154.484.00.1, 154.464.00.1

New

Geberit Duofix installation frame for shower surface 120x120 cm, for ten feet

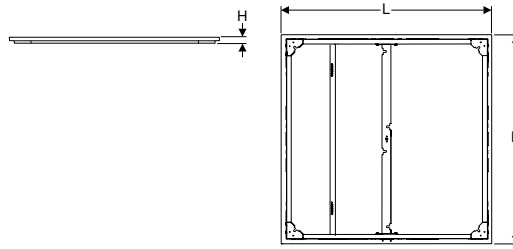

click & scan

Application purposes

- For installation of CleanFloor30 shower surfaces integrated inside buildings
- For installation of shower surfaces made of enamelled steel up to an inner height of 3.5 cm and a rim height of 4.5 cm
- For floor constructions with CleanFloor30 shower surfaces up to upper edge of the shower surface 8–25 cm
- For floor constructions with shower surfaces made of enamelled steel of up to top edge of set of rubber support 10–25 cm
- For installation before or after introduction of the screed

Characteristics

- Premounted sound insulation tape
- Premounted retainer for foot fastener
- Height-adjustable from the top

Scope of delivery

- 2 prefabricated shuttering panels
- Crossbar for shower drain

Technical data

Product material	Powder-coated steel
------------------	---------------------

Art. no.	L [cm]	B [cm]	H [cm]
551.526.00.1	120	120	3.4

Available as of April 2026

To order additionally

- Geberit CleanFloor30 integrated shower surface or shower surface made of enamelled steel
- Shower drain with ten feet, for CleanFloor30 shower surface integrated
- Installation set for shower surface made of enamelled steel, with ten feet

Accessories


- Geberit Duofix shower drain with ten feet, integrated for CleanFloor30 shower surface, depth of water seal 50 mm → p. 1013
- Geberit Duofix shower drain with ten feet, integrated for CleanFloor30 shower surface, depth of water seal 30 mm → p. 1015
- Geberit Duofix shower drain with ten feet, integrated for CleanFloor30 shower surface, cross-floor installation → p. 1016
- Geberit Duofix shower drain with ten short feet, integrated for CleanFloor30 shower surface, depth of water seal 50 mm → p. 1018
- Geberit Duofix shower drain with ten long feet, integrated for CleanFloor30 shower surface, depth of water seal 50 mm → p. 1019




- Replacement for art. no. 154.490.00.1

New

Geberit Duofix installation frame for shower surface 150–180 cm, for ten feet



click & scan

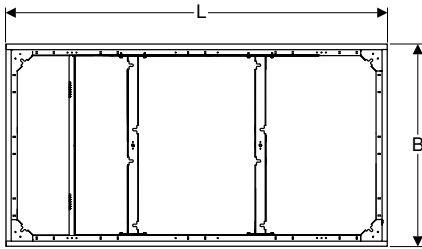

Application purposes

- For installation of CleanFloor30 shower surfaces integrated inside buildings
- For installation of shower surfaces made of enamelled steel up to an inner height of 3.5 cm and a rim height of 4.5 cm
- For floor constructions with CleanFloor30 shower surfaces up to upper edge of the shower surface 8–25 cm
- For floor constructions with shower surfaces made of enamelled steel of up to top edge of set of rubber support 10–25 cm
- For installation before or after introduction of the screed

Characteristics

- Premounted sound insulation tape
- Premounted retainer for foot fastener
- Height-adjustable from the top

Scope of delivery

- 2 prefabricated shuttering panels
- Crossbar for shower drain

Technical data

Product material	Powder-coated steel
------------------	---------------------

Art. no.	L [cm]	B [cm]	H [cm]
551.508.00.1	150	80	3.4
551.509.00.1	160	80	3.4
551.510.00.1	170	80	3.4
551.516.00.1	150	90	3.4
551.517.00.1	160	90	3.4
551.518.00.1	170	90	3.4
551.519.00.1	180	90	3.4
551.524.00.1	150	100	3.4
551.525.00.1	160	100	3.4

Available as of April 2026

To order additionally

- Geberit CleanFloor30 integrated shower surface or shower surface made of enamelled steel
- Shower drain with ten feet, for CleanFloor30 shower surface integrated
- Installation set for shower surface made of enamelled steel, with ten feet




- Replacement for art. no. 154.467.00.1, 154.468.00.1, 154.469.00.1, 154.477.00.1, 154.478.00.1, 154.479.00.1, 154.486.00.1

Showers

Showers trays

Showers trays made of sanitary acrylic

Geberit set of feet and crossbars, for shower trays made of resin stone, up to 140 cm

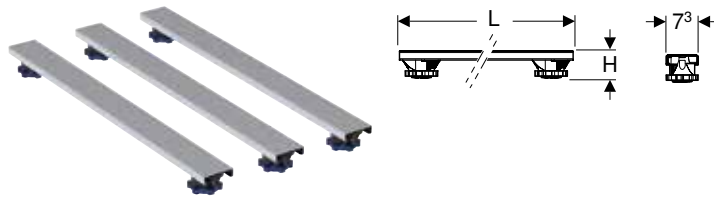

click & scan

Application purposes

- For installation and hight setting of shower trays
- For Olona shower tray

Characteristics


- Feet adjustable
- Height-adjustable without tools

Scope of delivery

- 6 feet
- 3 crossbars
- Fastening material

Art. no.	L [cm]	B [cm]	H [cm]
554.955.00.1	62.5	7.3	6.2-12
554.955.00.2	62.5	7.3	9.2-21
554.958.00.1	70	7.3	6.2-12
554.958.00.2	70	7.3	9.2-21
554.961.00.1	80	7.3	6.2-12
554.961.00.2	80	7.3	9.2-21
554.964.00.1	110	7.3	6.2-12
554.964.00.2	110	7.3	9.2-21

Geberit set of feet and crossbars, for shower trays made of resin stone, from 140 cm

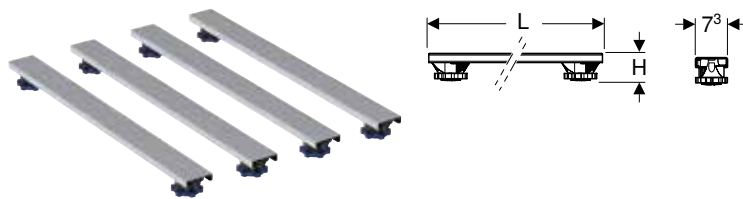

click & scan

Application purposes

- For installation and hight setting of shower trays
- For Olona shower tray

Characteristics

- Feet adjustable
- Height-adjustable without tools

Scope of delivery

- 4 crossbars
- 8 feet, height-adjustable
- Fastening material

Art. no.	L [cm]	B [cm]	H [cm]
554.956.00.1	62.5	7.3	6.2-12
554.956.00.2	62.5	7.3	9.2-21
554.959.00.1	70	7.3	6.2-12
554.959.00.2	70	7.3	9.2-21
554.962.00.1	80	7.3	6.2-12
554.962.00.2	80	7.3	9.2-21

Geberit set of feet for shower tray measuring up to 140 cm in length



click & scan

Application purposes

- For installation and height setting of shower trays
- For Geberit bathtubs made out of resin stone and sanitary ceramic with a length up to 140 cm

Scope of delivery

- Set of 9 pieces

Characteristics

- Feet adjustable
- Height-adjustable without tools

Art. no.	H [cm]
554.952.00.1	6-12
554.953.00.1	9-21

Geberit set of feet for shower tray measuring over 160 cm in length



click & scan

Application purposes

- For installation and height setting of shower trays
- For Geberit bathtubs made out of resin stone and sanitary ceramic with a length up to 160 cm or larger

Scope of delivery


- Set of 12 pieces

Characteristics

- Feet adjustable
- Height-adjustable without tools

Art. no.	H [cm]
554.952.00.2	6-12
554.953.00.2	9-21

Geberit set of feet and crossbars, with wall anchors, for shower tray made of sanitary acrylic

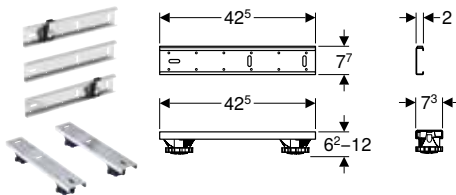

click & scan

Application purposes

- For placing, height adjustment and fastening of acrylic shower trays

Scope of delivery

- 4 feet, height-adjustable
- 2 crossbars
- 3 crossbars, sound-decoupled
- 2 wall anchors
- Fastening material


Characteristics

- Feet adjustable
- Height-adjustable without tools

Art. no.	L [cm]	B [cm]	H [cm]
550.950.00.1	42.5	7.3	6.2-12

New

Geberit Duofix set of foot extensions installation frames

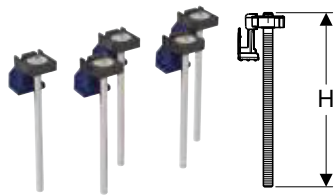

click & scan

Application purposes

- For floor constructions up to finished floor level 25 cm
- For extending the feet of Geberit Duofix installation frames for CleanFloor30 shower surfaces

Scope of delivery

- Set of 5 pieces

Characteristics

- Threaded rods can be shortened

Art. no.	H [cm]
551.580.00.1	13.5


Available as of April 2026



- Replacement for art. no. 154.036.00.1

New

Geberit Duofix set of foot extensions for installation frames

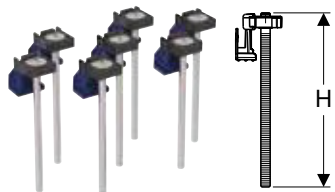

click & scan

Application purposes

- For floor constructions up to finished floor level 25 cm
- For extending the feet of Geberit Duofix installation frames for CleanFloor30 shower surfaces

Scope of delivery

- Set of 7 pieces

Characteristics

- Threaded rods can be shortened

Art. no.	H [cm]
551.581.00.1	≥ 13.5


Available as of April 2026



- Replacement for art. no. 154.036.00.1

New

Geberit Duofix set of foot extensions for installation frames

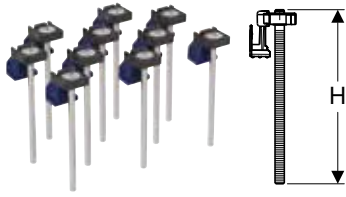

click & scan

Application purposes

- For floor constructions up to finished floor level 25 cm
- For extending the feet of Geberit Duofix installation frames for CleanFloor30 shower surfaces

Characteristics

- Threaded rods can be shortened

Scope of delivery

- Set of 10 pieces

Art. no.	H [cm]
551.582.00.1	13.5


Available as of April 2026



- Replacement for art. no. 154.036.00.1

New

Set of rubber pads for Geberit Duofix installation frame for shower surface

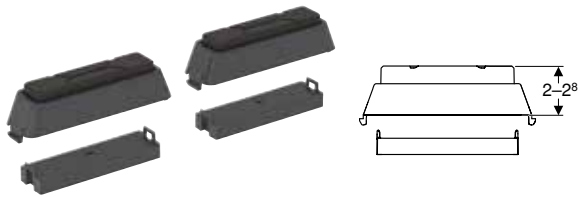

click & scan


Art. no.	H [cm]
551.585.00.1	2-2.8

Available as of April 2026

Shower drains

New

Geberit Duofix shower drain with five feet, integrated for CleanFloor30 shower surface, depth of water seal 50 mm

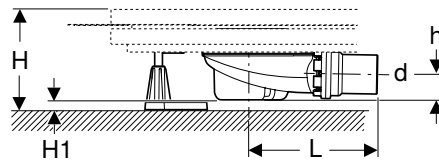

click & scan

Application purposes

- For drainage of Geberit CleanFloor30 shower surfaces, integrated
- For floor constructions up to finished floor level 11.5–18 cm
- For fastening to Geberit Duofix installation frames for shower surfaces
- For use as floor drain with horizontal outlet

Technical data

Depth of water seal (mm)	50 mm
--------------------------	-------

Characteristics

- Quality-monitored in accordance with EN 274-3
- Removable trap cup
- Threaded rods can be shortened

Scope of delivery

- Shower drain \varnothing 90 mm
- Straight connector made of PE-HD
- Feet for installation frame
- 12 Gummiauflagen
- Holder for shower drain
- Assembly clamp
- Fastening screw

Art. no.	DN	d, \varnothing [mm]	H [cm]	H1 [cm]	h [cm]
551.550.00.1	50	50	11.5–18	1.3–6.4	3.3

Available as of April 2026

To order additionally


- Geberit CleanFloor30 integrated shower surface, with sealing fleece
- Geberit Duofix installation frame for shower surfaces



- Replacement for art. no. 154.010.00.1

New

Geberit Duofix shower drain with seven feet, integrated for CleanFloor30 shower surface, depth of water seal 50 mm

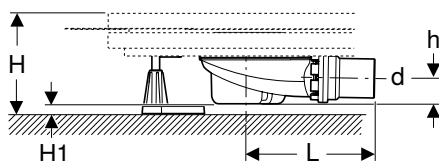

click & scan

Application purposes

- For drainage of Geberit CleanFloor30 shower surfaces, integrated
- For floor constructions up to finished floor level 11.5–18 cm
- For fastening to Geberit Duofix installation frames for shower surfaces
- For use as floor drain with horizontal outlet

Scope of delivery

- Shower drain \varnothing 90 mm
- Straight connector made of PE-HD
- Feet for installation frame
- 14 Gummiauflagen
- Holder for shower drain
- Assembly clamp
- Fastening screw

Characteristics

- Quality-monitored in accordance with EN 274-3
- Removable trap cup
- Threaded rods can be shortened

Art. no.	DN	d, \varnothing [mm]	H [cm]	H1 [cm]	h [cm]
551.552.00.1	50	50	11.5–18	1.3–6.4	3.3

Available as of April 2026

To order additionally


- Geberit CleanFloor30 integrated shower surface, with sealing fleece
- Geberit Duofix installation frame for shower surfaces



- Replacement for art. no. 154.013.00.1

New

Geberit Duofix shower drain with ten feet, integrated for CleanFloor30 shower surface, depth of water seal 50 mm

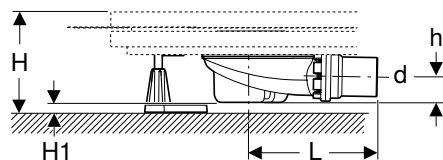

click & scan

Application purposes

- For drainage of Geberit CleanFloor30 shower surfaces, integrated
- For floor constructions up to finished floor level 11.5–18 cm
- For fastening to Geberit Duofix installation frames for shower surfaces
- For use as floor drain with horizontal outlet

Scope of delivery

- Shower drain \varnothing 90 mm
- Straight connector made of PE-HD
- Feet for installation frame
- 16 Gummiauflagen
- Holder for shower drain
- Assembly clamp
- Fastening screw

Characteristics

- Quality-monitored in accordance with EN 274-3
- Removable trap cup
- Threaded rods can be shortened

Art. no.	DN	d, \varnothing [mm]	H [cm]	H1 [cm]	h [cm]
551.554.00.1	50	50	11.5–18	1.3–6.4	3.3

Available as of April 2026

To order additionally


- Geberit CleanFloor30 integrated shower surface, with sealing fleece
- Geberit Duofix installation frame for shower surfaces



- Replacement for art. no. 154.013.00.1

New

Geberit Duofix shower drain with five feet, integrated for CleanFloor30 shower surface, depth of water seal 30 mm

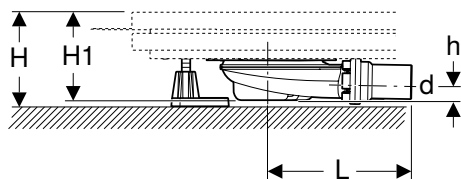

click & scan

Application purposes

- For drainage of Geberit CleanFloor30 shower surfaces, integrated
- For floor constructions up to finished floor level 10–14.5 cm
- For fastening to Geberit Duofix installation frames for shower surfaces
- For use as floor drain with horizontal outlet

Scope of delivery

- Shower drain \varnothing 90 mm
- Straight connector made of PE-HD
- Feet for installation frame
- 12 Gummiauflagen
- Holder for shower drain
- Assembly clamp
- Fastening screw

Characteristics

- Quality-monitored in accordance with EN 274-3
- Removable trap cup
- Threaded rods can be shortened

Art. no.	DN	d, \varnothing [mm]	H [cm]	H1 [cm]	h [cm]
551.556.00.1	40	40	10–14.5	7.7	2.2

Available as of April 2026

To order additionally


- Geberit CleanFloor30 integrated shower surface, with sealing fleece
- Geberit Duofix installation frame for shower surfaces



- Replacement for art. no. 154.020.00.1

New

Geberit Duofix shower drain with seven feet, integrated for CleanFloor30 shower surface, depth of water seal 30 mm

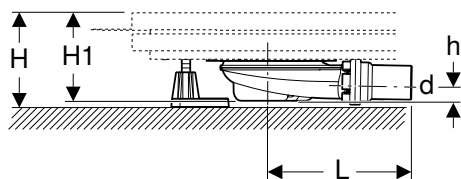

click & scan

Application purposes

- For drainage of Geberit CleanFloor30 shower surfaces, integrated
- For floor constructions up to finished floor level 10–14.5 cm
- For fastening to Geberit Duofix installation frames for shower surfaces
- For use as floor drain with horizontal outlet

Scope of delivery

- Shower drain \varnothing 90 mm
- Straight connector made of PE-HD
- Feet for installation frame
- 14 Gummiauflagen
- Holder for shower drain
- Assembly clamp
- Fastening screw

Characteristics

- Quality-monitored in accordance with EN 274-3
- Removable trap cup
- Threaded rods can be shortened

Art. no.	DN	d, \varnothing [mm]	H [cm]	H1 [cm]	h [cm]
551.557.00.1	40	40	10–14.5	7.7	2.2

Available as of April 2026

To order additionally


- Geberit CleanFloor30 integrated shower surface, with sealing fleece
- Geberit Duofix installation frame for shower surfaces



- Replacement for art. no. 154.021.00.1

New

Geberit Duofix shower drain with ten feet, integrated for CleanFloor30 shower surface, depth of water seal 30 mm

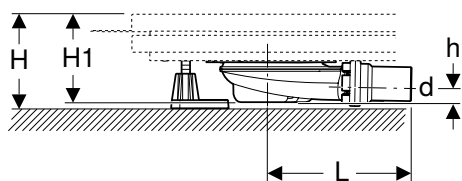

click & scan

Application purposes

- For drainage of Geberit CleanFloor30 shower surfaces, integrated
- For floor constructions up to finished floor level 10–14.5 cm
- For fastening to Geberit Duofix installation frames for shower surfaces
- For use as floor drain with horizontal outlet

Characteristics

- Quality-monitored in accordance with EN 274-3
- Removable trap cup
- Threaded rods can be shortened

Scope of delivery

- Shower drain \varnothing 90 mm
- Straight connector made of PE-HD
- Feet for installation frame
- 16 Gummiauflagen
- Holder for shower drain
- Assembly clamp
- Fastening screw

Art. no.	DN	d, \varnothing [mm]	H [cm]	H1 [cm]	h [cm]
551.558.00.1	40	40	10–14.5	7.7	2.2

Available as of April 2026

To order additionally



- Geberit CleanFloor30 integrated shower surface, with sealing fleece
- Geberit Duofix installation frame for shower surfaces



- Replacement for art. no. 154.021.00.1

New

Geberit Duofix shower drain with five feet, integrated for CleanFloor30 shower surface, cross-floor installation



click & scan

Application purposes

- For drainage of Geberit CleanFloor30 shower surfaces, integrated
- For floor constructions up to finished floor level 8–13 cm
- For fastening to Geberit Duofix installation frames for shower surfaces
- For use as floor drain with horizontal outlet

Characteristics

- Quality-monitored in accordance with EN 274-3
- Removable trap cup
- Threaded rods can be shortened

Scope of delivery

- Shower drain \varnothing 90 mm
- Straight connector made of PE-HD
- Feet for installation frame
- 12 Gummiauflagen
- Holder for shower drain
- Assembly clamp
- Fastening screw

Art. no.	DN	d, \varnothing [mm]	H [cm]	H1 [cm]
551.559.00.1	50	50	8–13	13.2

Available as of April 2026

To order additionally



- Geberit CleanFloor30 integrated shower surface, with sealing fleece
- Geberit Duofix installation frame for shower surfaces



- Replacement for art. no. 154.030.00.1

New

Geberit Duofix shower drain with seven feet, integrated for CleanFloor30 shower surface, cross-floor installation



click & scan

Application purposes

- For drainage of Geberit CleanFloor30 shower surfaces, integrated
- For floor constructions up to finished floor level 8–13 cm
- For fastening to Geberit Duofix installation frames for shower surfaces
- For use as floor drain with horizontal outlet

Characteristics

- Quality-monitored in accordance with EN 274-3
- Removable trap cup
- Threaded rods can be shortened

Scope of delivery

- Shower drain \varnothing 90 mm
- Straight connector made of PE-HD
- Feet for installation frame
- 14 Gummiauflagen
- Holder for shower drain
- Assembly clamp
- Fastening screw

Art. no.	DN	d, \varnothing [mm]	H [cm]	H1 [cm]
551.560.00.1	50	50	8–13	13.2

Available as of April 2026

To order additionally



- Geberit CleanFloor30 integrated shower surface, with sealing fleece
- Geberit Duofix installation frame for shower surfaces



- Replacement for art. no. 154.031.00.1

New

Geberit Duofix shower drain with ten feet, integrated for CleanFloor30 shower surface, cross-floor installation



click & scan

Application purposes

- For drainage of Geberit CleanFloor30 shower surfaces, integrated
- For floor constructions up to finished floor level 8–13 cm
- For fastening to Geberit Duofix installation frames for shower surfaces
- For use as floor drain with horizontal outlet

Characteristics

- Quality-monitored in accordance with EN 274-3
- Removable trap cup
- Threaded rods can be shortened

Scope of delivery

- Shower drain \varnothing 90 mm
- Straight connector made of PE-HD
- Feet for installation frame
- 16 Gummiauflagen
- Holder for shower drain
- Assembly clamp
- Fastening screw

Art. no.	DN	d, \varnothing [mm]	H [cm]	H1 [cm]
551.561.00.1	50	50	8–13	13.2

Available as of April 2026

To order additionally


- Geberit CleanFloor30 integrated shower surface, with sealing fleece
- Geberit Duofix installation frame for shower surfaces



- Replacement for art. no. 154.031.00.1

New

Geberit Duofix shower drain with five short feet, integrated for CleanFloor30 shower surface, depth of water seal 50 mm

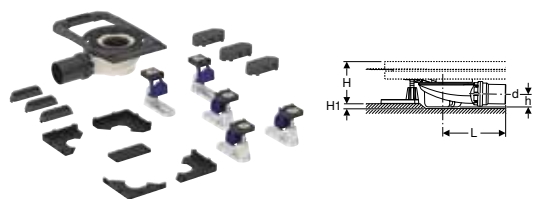

click & scan

Application purposes

- For drainage of Geberit CleanFloor30 shower surfaces, integrated
- For floor constructions up to finished floor level 10–14.5 cm
- For fastening to Geberit Duofix installation frames for shower surfaces
- For use as floor drain with horizontal outlet

Characteristics

- Quality-monitored in accordance with EN 274-3
- Removable trap cup
- Threaded rods can be shortened

Scope of delivery

- Shower drain \varnothing 90 mm
- Straight connector made of PE-HD
- Feet for installation frame
- 12 rubber supports
- Holder for shower drain
- Assembly clamp
- Fastening screw

Art. no.	DN	d, \varnothing [mm]	H [cm]	H1 [cm]	h [cm]
551.562.00.1	56	56	10–14.5	0.67–2.9	3.3


Available as of April 2026

To order additionally

- Geberit CleanFloor30 integrated shower surface, with sealing fleece
- Geberit Duofix installation frame for shower surfaces

New

Geberit Duofix shower drain with seven short feet, integrated for CleanFloor30 shower surface, depth of water seal 50 mm

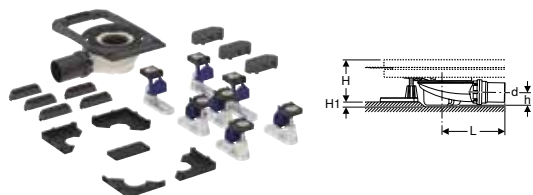

click & scan

Application purposes

- For drainage of Geberit CleanFloor30 shower surfaces, integrated
- For floor constructions up to finished floor level 10–14.5 cm
- For fastening to Geberit Duofix installation frames for shower surfaces
- For use as floor drain with horizontal outlet

Scope of delivery

- Shower drain \varnothing 90 mm
- Straight connector made of PE-HD
- Feet for installation frame
- 14 Gummiauflagen
- Holder for shower drain
- Assembly clamp
- Fastening screw

Characteristics

- Quality-monitored in accordance with EN 274-3
- Removable trap cup
- Threaded rods can be shortened

Art. no.	DN	d, \varnothing [mm]	H [cm]	H1 [cm]	h [cm]
551.563.00.1	56	56	10–14.5	0.67–2.9	3.3


Available as of April 2026

To order additionally

- Geberit CleanFloor30 integrated shower surface, with sealing fleece
- Geberit Duofix installation frame for shower surfaces

New

Geberit Duofix shower drain with ten short feet, integrated for CleanFloor30 shower surface, depth of water seal 50 mm

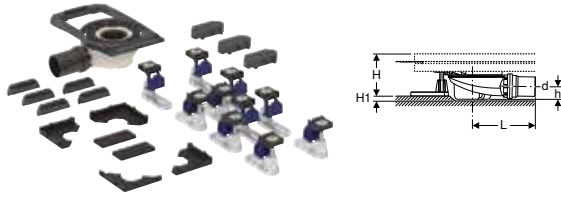

Application purposes

- For drainage of Geberit CleanFloor30 shower surfaces, integrated
- For floor constructions up to finished floor level 10–14.5 cm
- For fastening to Geberit Duofix installation frames for shower surfaces
- For use as floor drain with horizontal outlet

Characteristics

- Quality-monitored in accordance with EN 274-3
- Removable trap cup
- Threaded rods can be shortened

Scope of delivery

- Shower drain \varnothing 90 mm
- Straight connector made of PE-HD
- Feet for installation frame
- 16 Gummiauflagen
- Holder for shower drain
- Assembly clamp
- Fastening screw

Art. no.	DN	d, \varnothing [mm]	H [cm]	H1 [cm]	h [cm]
551.564.00.1	56	56	10–14.5	0.67–2.9	3.3


Available as of April 2026

To order additionally

- Geberit CleanFloor30 integrated shower surface, with sealing fleece
- Geberit Duofix installation frame for shower surfaces

New

Geberit Duofix shower drain with five long feet, integrated for CleanFloor30 shower surface, depth of water seal 50 mm

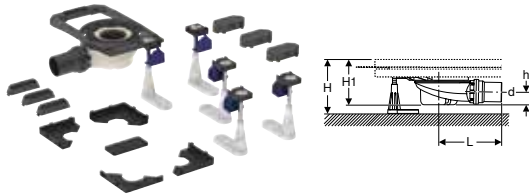

Application purposes

- For drainage of Geberit CleanFloor30 shower surfaces, integrated
- For floor constructions up to upper edge of the finished floor 13.5–25 cm
- For fastening to Geberit Duofix installation frames for shower surfaces
- For use as floor drain with horizontal outlet

Characteristics

- Quality-monitored in accordance with EN 274-3
- Removable trap cup
- Threaded rods can be shortened

Scope of delivery

- Shower drain \varnothing 90 mm
- Straight connector made of PE-HD
- Feet for installation frame
- 12 Gummiauflagen
- Holder for shower drain
- Assembly clamp
- Fastening screw

Art. no.	DN	d, \varnothing [mm]	H [cm]	H1 [cm]	h [cm]
551.565.00.1	50	50	13.5–25	11.8	3.3


Available as of April 2026

To order additionally

- Geberit CleanFloor30 integrated shower surface, with sealing fleece
- Geberit Duofix installation frame for shower surfaces

New

Geberit Duofix shower drain with seven long feet, integrated for CleanFloor30 shower surface, depth of water seal 50 mm

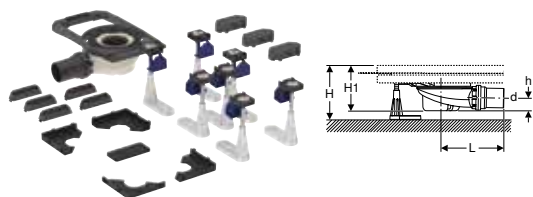

click & scan

Application purposes

- For drainage of Geberit CleanFloor30 shower surfaces, integrated
- For floor constructions up to upper edge of the finished floor 13.5–25 cm
- For fastening to Geberit Duofix installation frames for shower surfaces
- For use as floor drain with horizontal outlet

Characteristics

- Quality-monitored in accordance with EN 274-3
- Removable trap cup
- Threaded rods can be shortened

Scope of delivery

- Shower drain \varnothing 90 mm
- Straight connector made of PE-HD
- Feet for installation frame
- 14 Gummiauflagen
- Holder for shower drain
- Assembly clamp
- Fastening screw

Art. no.	DN	d, \varnothing [mm]	H [cm]	H1 [cm]	h [cm]
551.566.00.1	50	50	13.5–25	11.8	3.3


Available as of April 2026

To order additionally

- Geberit CleanFloor30 integrated shower surface, with sealing fleece
- Geberit Duofix installation frame for shower surfaces

New

Geberit Duofix shower drain with ten long feet, integrated for CleanFloor30 shower surface, depth of water seal 50 mm

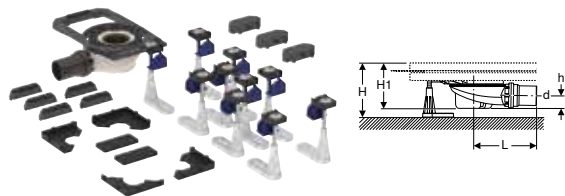

click & scan

Application purposes

- For drainage of Geberit CleanFloor30 shower surfaces, integrated
- For floor constructions up to upper edge of the finished floor 13.5–25 cm
- For fastening to Geberit Duofix installation frames for shower surfaces
- For use as floor drain with horizontal outlet

Characteristics

- Quality-monitored in accordance with EN 274-3
- Removable trap cup
- Threaded rods can be shortened

Scope of delivery

- Shower drain \varnothing 90 mm
- Straight connector made of PE-HD
- Feet for installation frame
- 16 Gummiauflagen
- Holder for shower drain
- Assembly clamp
- Fastening screw

Art. no.	DN	d, \varnothing [mm]	H [cm]	H1 [cm]	h [cm]
551.567.00.1	50	50	13.5–25	11.8	3.3

Available as of April 2026

To order additionally

- Geberit CleanFloor30 integrated shower surface, with sealing fleece
- Geberit Duofix installation frame for shower surfaces

Accessories

New

Geberit repair kit for CleanFloor30 shower surface



[click & scan](#)

Art. no. Colour / surface

551.590.00.1 white / Matt

Available as of April 2026

New

Geberit repair kit for CleanFloor30 shower surface



[click & scan](#)

Art. no. Colour / surface

551.590.29.1 grey / Matt

551.590.DM.1 graphite / Matt

Available as of April 2026

New

Geberit touch-up pen for CleanFloor30 shower surface



[click & scan](#)

Art. no. Colour / surface

551.591.29.1 grey / Matt

551.591.DM.1 graphite / Matt

Available as of April 2026

Geberit repair set for Melua and Olona shower trays made of resin stone



[click & scan](#)


Art. no. Colour / surface

16084600000 white



- Art. no. 16084600000 is applicable for Geberit Olona and Melua shower trays

Geberit sealing set for shower trays



[click & scan](#)

Scope of delivery

- Sealing fleece roll, 5 m length
- Sealing fleece for internal corner
- 3 sealing fleeces for external corners

Art. no.

550.083.00.1

New

Geberit Duofix sealing strip for CleanFloor30 shower surfaces



[click & scan](#)

Art. no.

551.586.00.1

Available as of April 2026



Bathtubs















Bathtubs made of sanitary acrylic.....	1024
Rectangular bathtubs	1024
Accessory overview – Geberit rectangular bathtubs made of sanitary acrylic....	1025
Installation elements	1030
Set of legs and crossbar with wall anchor.....	1030
Accessories	1031
Additional accessories	1031
Repair sets.....	1031

Bathtubs made of sanitary acrylic





Rectangular bathtubs

Accessory overview – Geberit rectangular bathtubs made of sanitary acrylic

Geberit International Sales, version: December 2025

				Type Supero		
				Geberit Supero rectangular bathtub with feet	Geberit Supero rectangular bathtub, duo, with feet	
				554.101.01.1 554.102.01.1 554.100.01.1 554.103.01.1 554.104.01.1	554.105.01.1	
						
				→ p. 1028	→ p. 1029	
Geberit set of feet and crossbars, with wall anchors, for bathtub made of sanitary acrylic	554.910.00.1		→ p. 1030			
Geberit set of feet and crossbars, with holders, for bathtub made of sanitary acrylic	554.911.00.1		→ p. 1030			
Geberit bathtub drain with turn handle, d52, length 26 cm	150.501.00.6		→ p. 1025	✓	✓	
Geberit bathtub drain with turn handle, d52, length 26 cm, with ready-to-fit-set	150.520.21.6		→ p. 1025	✓	✓	
Geberit bathtub drain with turn handle, d52, length 73 cm	150.505.00.6		→ p. 1025			
Geberit bathtub drain with turn handle, d52, length 73 cm, with ready-to-fit-set	150.525.21.6		→ p. 1025			
Geberit bathtub drain with turn handle and inlet, d52, length 26 cm	150.700.00.6		→ p. 1025	✓	✓	
Geberit bathtub drain with turn handle and inlet, d52, length 32 cm, with connection bend, counterflow principle	150.702.00.6		→ p. 1025	✓	✓	
Geberit bathtub drain with turn handle and inlet, d52, length 26cm, with ready-to-fit-set	150.710.21.6		→ p. 1025	✓	✓	
Geberit bathtub drain with turn handle and inlet, d52, length 73 cm	150.701.00.6		→ p. 1025			
Geberit bathtub drain with turn handle and inlet, d52, length 73cm, with ready-to-fit-set	150.711.21.6		→ p. 1025			
Geberit bathtub drain with push actuation PushControl, d52, length 26 cm, with ready-to-fit-set and connection bend	150.755.21.6		→ p. 1025	✓	✓	

✓ Compatible


	Rekord	Perfect	Soana	
	Geberit Rekord rectangular bathtub, with feet	Geberit Perfect rectangular bathtub with feet	Geberit Soana rectangular bathtub, slim rim, with feet	Geberit Soana rectangular bathtub, slim rim, duo, with feet
	554.107.01.1 554.108.01.1 554.106.01.1	554.070.01.1 554.071.01.1 554.072.01.1 554.073.01.1 554.074.01.1	554.001.01.1 554.002.01.1 554.014.01.1 554.015.01.1	554.003.01.1 554.004.01.1 554.005.01.1
				
	→ p. 1028	→ p. 1029	→ p. 1026	→ p. 1027
	✓	✓		
	✓	✓		
			✓	✓
			✓	✓
	✓	✓		
	✓	✓		
	✓	✓		
			✓	✓
			✓	✓
	✓	✓	✓	✓

Additional product solutions

Bathtubs

Bathtubs made of sanitary acrylic
Rectangular bathtubs

Geberit Soana rectangular bathtub, slim rim, with feet

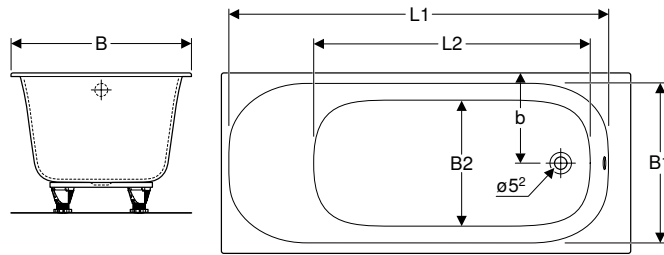

click & scan

Application purposes

- For private bathrooms and hotels
- For installation with bathtub feet or supports

Technical data

Product material	Sanitary acrylic
------------------	------------------

Characteristics

- Built-in bathtub
- Rectangular
- Slim rim
- Outlet at foot
- Drain hole \varnothing 52 mm
- Tap hole drilling according to EN 232 possible

Scope of delivery

- Bathtub
- Set of feet


Art. no.	Colour / surface	L [cm]	L1 [cm]	L2 [cm]	B [cm]	B1 [cm]	B2 [cm]	b [cm]	H [cm]	Total water capacity [l]	With overflow hole
554.001.01.1	P white / glossy	160	147.5	104.8	70	61	47.3	35	45	195	Yes
554.002.01.1	P white / glossy	170	157.5	114.8	70	61	47.3	35	45	213	Yes
554.014.01.1	P white / glossy	170	157.5	114.8	75	66	52.3	37.5	45	233	Yes
554.015.01.1	P white / glossy	180	167.5	125	80	71.5	57.2	37.5	45	272	Yes

P: Phase out


Accessories

- Geberit bathtub drain with push actuation PushControl, d52, length 26 cm, with ready-to-fit-set and connection bend
- Geberit bathtub drain with turn handle, d52, length 26 cm, with ready-to-fit-set
- Geberit bathtub drain with turn handle and inlet, d52, length 26 cm
- Geberit bathtub drain with turn handle and inlet, d52, length 32 cm, with connection bend, counterflow principle
- Geberit bathtub drain with turn handle and inlet, d52, length 26cm, with ready-to-fit-set
- Geberit insulation tape → p. 1031
- Geberit Acrylic polishing set → p. 1031

Geberit Soana rectangular bathtub, slim rim, duo, with feet

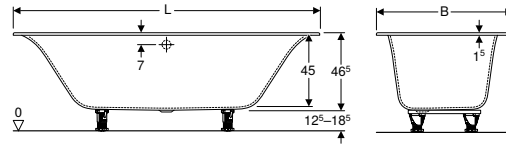

click & scan

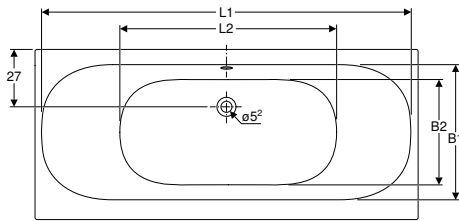

Application purposes

- For private bathrooms and hotels
- For installation with bathtub feet or supports

Technical data

Product material	Sanitary acrylic
------------------	------------------

Scope of delivery

- Bathtub
- Set of feet

Characteristics

- Built-in bathtub
- Rectangular
- Suitable for two persons
- Slim rim
- Eccentric central outlet
- Drain hole \varnothing 52 mm
- Tap hole drilling according to EN 232 possible

Art. no.	Colour / surface	L [cm]	L1 [cm]	L2 [cm]	B [cm]	B1 [cm]	B2 [cm]	H [cm]	Total water capacity [l]	With overflow hole	
										Yes	No
554.003.01.1	P white / glossy	170	163	91.8	75	58.7	44.4	45	179	Yes	
554.004.01.1	P white / glossy	180	173	101.8	80	64	49.4	45	212	Yes	
554.005.01.1	P white / glossy	190	183	111.8	90	75	59.4	45	271	Yes	

P: Phase out


Accessories

- Geberit bathtub drain with push actuation PushControl, d52, length 26 cm, with ready-to-fit-set and connection bend
- Geberit bathtub drain with turn handle, d52, length 26 cm, with ready-to-fit-set
- Geberit bathtub drain with turn handle and inlet, d52, length 26 cm
- Geberit bathtub drain with turn handle and inlet, d52, length 32 cm, with connection bend, counterflow principle
- Geberit bathtub drain with turn handle and inlet, d52, length 26cm, with ready-to-fit-set
- Geberit insulation tape → p. 1031
- Geberit Acrylic polishing set → p. 1031

Bathtubs

Bathtubs made of sanitary acrylic
Rectangular bathtubs

Geberit Rekord rectangular bathtub, with feet

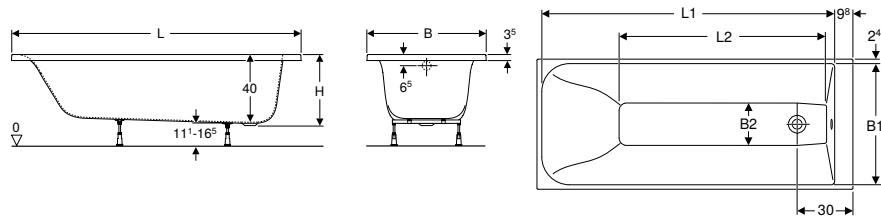

click & scan

Application purposes

- For private bathrooms and hotels
- For installation with bathtub feet or supports

Technical data

Product material	Sanitary acrylic
------------------	------------------

Characteristics

- Rectangular
- Outlet at foot
- Drain hole \varnothing 52 mm
- Tap hole drilling according to EN 232 possible

Scope of delivery

- Bathtub
- Set of feet


Art. no.	Colour / surface	L [cm]	L1 [cm]	L2 [cm]	B [cm]	B1 [cm]	B2 [cm]	H [cm]	Total water capacity [l]	With overflow hole
554.106.01.1	P white / glossy	160	147.6	101.6	70	65.2	22.8	41.7	163	Yes
554.107.01.1	P white / glossy	170	157.6	111.6	70	65.2	22.8	41.7	176	Yes
554.108.01.1	P white / glossy	170	157.6	111.6	75	70.2	27.8	41.7	195	Yes

P: Phase out

Accessories

- Geberit bathtub drain with turn handle, d52, length 26 cm, with ready-to-fit-set

Geberit Supero rectangular bathtub with feet

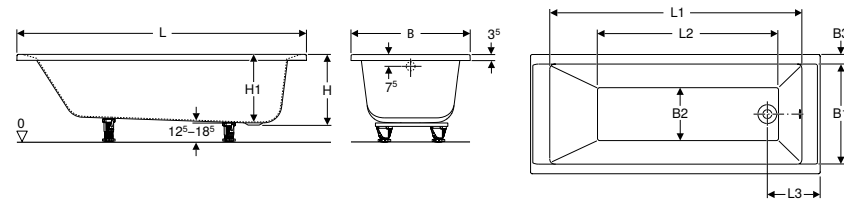

click & scan

Application purposes

- For private bathrooms and hotels
- For installation with bathtub feet or supports

Technical data

Product material	Sanitary acrylic
------------------	------------------

Characteristics

- Rectangular
- Outlet at foot
- Drain hole \varnothing 52 mm
- Tap hole drilling according to EN 232 possible

Scope of delivery


- Bathtub
- Set of feet

Art. no.	Colour / surface	L [cm]	L1 [cm]	L2 [cm]	L3 [cm]	B [cm]	B1 [cm]	B2 [cm]	B3 [cm]	H [cm]	H1 [cm]	Total water capacity [l]	With overflow hole
554.100.01.1	white / glossy	150	130	86	31	70	58	31	6	41.5	40	158	Yes
554.101.01.1	white / glossy	160	139	96	31	70	58	31	6	41.5	40	170	Yes
554.102.01.1	white / glossy	170	148	106	31	70	58	31	6	41.5	40	183	Yes
554.103.01.1	white / glossy	170	148	106	31	75	63	36	6	43.5	42	210	Yes
554.104.01.1	white / glossy	180	157	113	33	80	66	39	7	42	40.5	229	Yes

Accessories

- Geberit bathtub drain with turn handle, d52, length 26 cm, with ready-to-fit-set

Geberit Supero rectangular bathtub, duo, with feet

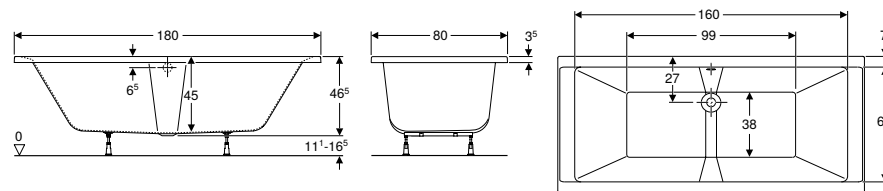

click & scan

Application purposes

- For private bathrooms and hotels
- For installation with bathtub feet or supports

Technical data

Product material	Sanitary acrylic
------------------	------------------

Characteristics

- Rectangular
- Suitable for two persons
- Central outlet
- Drain hole \varnothing 52 mm
- Tap hole drilling according to EN 232 possible

Scope of delivery


- Bathtub
- Set of feet

Art. no.	Colour / surface	L [cm]	L2 [cm]	B [cm]	B2 [cm]	H [cm]	Total water capacity	With overflow hole
554.105.01.1	white / glossy	180	99	80	38	46.5	266	Yes

Accessories

- Geberit bathtub drain with turn handle, d52, length 26 cm, with ready-to-fit-set

Geberit Perfect rectangular bathtub with feet

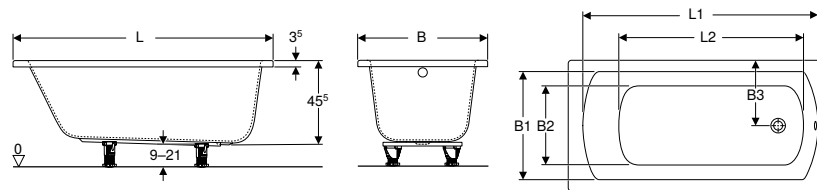

click & scan

Application purposes

- For private bathrooms and hotels
- For installation with bathtub feet or supports

Technical data

Product material	Sanitary acrylic
------------------	------------------

Characteristics

- Rectangular
- Outlet at foot
- Drain hole \varnothing 52 mm

Scope of delivery

- Set of feet
- Bathtub

Art. no.	Colour / surface	L [cm]	L1 [cm]	L2 [cm]	B [cm]	B1 [cm]	B2 [cm]	B3 [cm]	H [cm]	Total water capacity	With overflow hole
554.070.01.1	P white / glossy	140	130	100	70	60	45	35	45.5	210	Yes
554.071.01.1	P white / glossy	150	137	107.5	75	64	51	37.5	45.5	230	Yes
554.072.01.1	P white / glossy	160	147	115	75	64	51	37.5	45.5	250	Yes
554.073.01.1	P white / glossy	170	157	122.5	75	64	51	37.5	45.5	270	Yes
554.074.01.1	white / glossy	180	167	130	80	70	56	40	45.5	290	Yes

P: Phase out


Accessories

- Geberit bathtub drain with turn handle, d52, length 26 cm, with ready-to-fit-set
- Geberit bathtub drain with turn handle and inlet, d52, length 26cm, with ready-to-fit-set

Installation elements

Set of legs and crossbar with wall anchor

Geberit set of feet and crossbars, with wall anchors, for bathtub made of sanitary acrylic

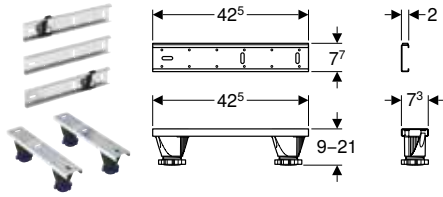[click & scan](#)**Application purposes**

- For placing, height adjustment and fastening of bathtubs

Characteristics

- Feet adjustable 8.7–20.7 cm
- Height-adjustable without tools


Scope of delivery

- 4 feet, height-adjustable
- 2 crossbars
- 3 crossbars, sound-decoupled
- 2 wall anchors
- Fastening material

Art. no.

554.910.00.1

Geberit set of feet and crossbars, with holders, for bathtub made of sanitary acrylic

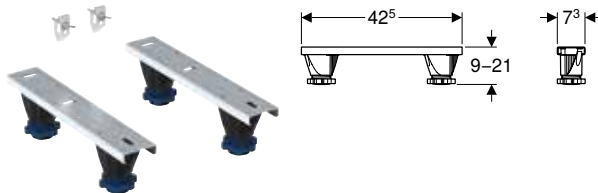[click & scan](#)**Application purposes**

- For placing, height adjustment and fastening of acrylic bathtubs

Characteristics

- Feet adjustable 8.7–20.7 cm
- Height-adjustable without tools

Scope of delivery

- 4 feet, height-adjustable
- 2 crossbars
- 2 holders
- Fastening material


Art. no.

554.911.00.1

Accessories

Additional accessories

Geberit insulation tape



[click & scan](#)

Application purposes

- For structure-borne sound insulation between bathtubs or shower trays and the building structure

Characteristics

- Sound-insulating
- Self-adhesive

Technical data

Product material	PE-E
------------------	------

Art. no.	s [mm]	L [m]	B [cm]
653009000	4	3.3	7

Repair sets

Geberit Acrylic polishing set



[click & scan](#)

Application purposes

- For repairing damaged surfaces of bathtubs and shower trays made of acrylic

Scope of delivery

- Wet sandpaper
- Polishing paste
- Polishing cloth
- Sandpaper holder

Art. no.	590153000
----------	-----------




Additional product solutions

Washbasins.....	1034
Handrinse basins.....	1034
Washbasins.....	1034
Accessories.....	1035
Bathroom furniture.....	1037
Additional furniture.....	1037
Accessories.....	1038
WCs.....	1042
Floor-standing WCs.....	1042
WC seats.....	1042
Exposed cisterns.....	1043
Exposed cisterns for WCs.....	1043

Washbasins

Handrinse basins

Geberit Preciosa II handrinse basin

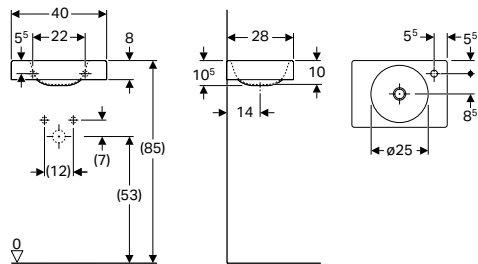

click & scan

Application purposes

- Suitable for installation in small bathrooms and guest WCs

Technical data

Product material	Fine fireclay
------------------	---------------

Art. no.	Colour / surface	Tap hole	Overflow	H [cm]	T [cm]
----------	------------------	----------	----------	--------	--------

B / width: 40 cm

273240000	PO white	right	without	10.5	28
-----------	----------	-------	---------	------	----

PO: Phase out as of December 2026

Can be combined with


- Geberit Preciosa II towel rail for handrinse basin → p. 1036

Accessories

- Geberit dip tube trap for washbasin, horizontal outlet
- Geberit waste outlet with free outlet and valve cover
- Geberit dip tube trap for washbasin, space-saving model, horizontal outlet
- Geberit waste outlet with free outlet, screen
- Geberit fastening material for handrinse basin → p. 1035

Washbasins

Geberit Preciosa II washbasin with shelf surface

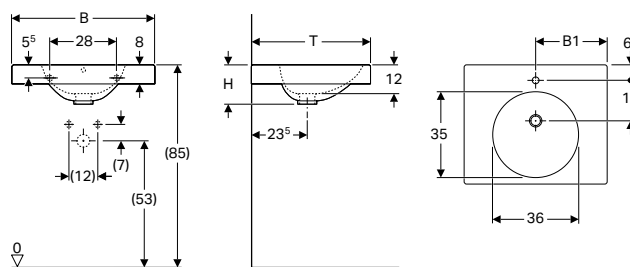

click & scan

Technical data

Product material	Fine fireclay
------------------	---------------

Characteristics

- With shelf surface

Art. no.	Colour / surface	Tap hole	Overflow	B1 [cm]	H [cm]	T [cm]	Shelf space
----------	------------------	----------	----------	---------	--------	--------	-------------

B / width: 60 cm

123260000	white	centred	visible, symmetrical	30	16.5	50	on both sides
123262000	white	centred	without	30	16.5	50	on both sides
123261000	white	without	without	30	16.5	50	on both sides

B / width: 90 cm

123290000	PO white	centred	visible, symmetrical	45	16.5	50	on both sides
123292000	PO white	centred	without	45	16.5	50	on both sides
123291000	PO white	without	without	45	16.5	50	on both sides

PO: Phase out as of December 2026

Can be combined with

- Geberit Preciosa II towel rail for washbasin → p. 1036

Accessories

- Geberit dip tube trap for washbasin, horizontal outlet
- Geberit dip tube trap for washbasin, space-saving model, horizontal outlet
- Geberit fastening material for washbasin → p. 1035

Accessories

Geberit fastening material for handrinse basin


[click & scan](#)

Application purposes

- For fastening handrinse basins on solid walls

Scope of delivery

- Fastening material

Characteristics

- Thread M10

Art. no.	M [mm]	L [cm]
500.122.00.1	10	12

Geberit fastening material for washbasin


[click & scan](#)

Application purposes

- For fastening Geberit washbasins on solid walls

Scope of delivery

- Fastening material

Characteristics

- Thread M10

Art. no.	M [mm]	L [cm]
500.121.00.1	10	14

Geberit fastening material for half pedestal for handrinse basin, Kerafix


[click & scan](#)

Application purposes

- For fastening half pedestals for Renova Compact handrinse basins
- For fastening half pedestals for Selnova Compact handrinse basins

Scope of delivery

- Brace
- 2 nuts M10
- 4 washers

Art. no.	L [cm]	B [cm]
551062000	30	13
551064000	20	11

Geberit fastening material for half pedestal for washbasin, Kerafix



click & scan

Application purposes

- For fastening half pedestals for washbasins

Scope of delivery

- Brace
- 2 nuts M10
- 4 washers

Art. no.	L [cm]	B [cm]
551067000	31	13
551081000	30	11

Geberit fastening bracket for handrinse basin



click & scan

Application purposes

- For fastening handrinse basins on solid walls


Art. no.

554005000



- Please order 2 pieces for one handrinse basin

Geberit Preciosa II towel rail for handrinse basin

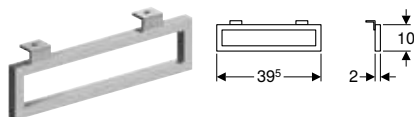

click & scan

Technical data

Product material	Brass
------------------	-------

Scope of delivery

- Fastening material


Art. no.	Colour / surface	L [cm]	H [cm]	T [cm]	Fastening
500740000	PO chrome / glossy	39.5	10	2	front

PO: Phase out as of December 2026

Can be combined with

- Geberit Preciosa II handrinse basin → p. 1034

Geberit Preciosa II towel rail for washbasin

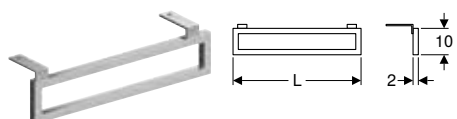

click & scan

Technical data

Product material	Brass
------------------	-------

Scope of delivery

- Fastening material

Art. no.	Colour / surface	L [cm]	H [cm]	T [cm]	Fastening
500750000	PO chrome / glossy	48.5	10	2	lateral

PO: Phase out as of December 2026


Can be combined with

- Geberit Preciosa II washbasin with shelf surface → p. 1034

Bathroom furniture

Additional furniture

Geberit magnetic board with storage boxes

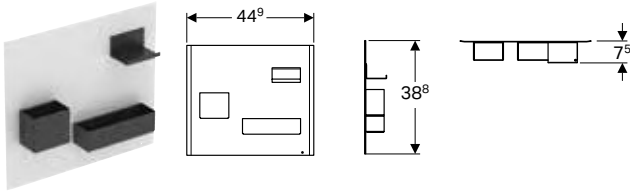

click & scan

Technical data

Product material	Steel
------------------	-------

Scope of delivery

- Magnetic board
- Storage boxes

Characteristics


- Storage boxes of different sizes
- Storage boxes fixed with magnetic fixing

Art. no.	Colour / surface
500.649.01.2	Magnetic board: white / matt powder-coated Storage boxes with magnetic fixing: lava / matt powder-coated
500.649.JL.2	Magnetic board: sand grey / matt powder-coated Storage boxes with magnetic fixing: lava / matt powder-coated
500.649.JK.2	Magnetic board, Storage boxes with magnetic fixing: lava / matt powder-coated
500.649.16.1	Magnetic board: black / matt powder-coated Storage boxes with magnetic fixing: lava / matt powder-coated

Can be combined with

- Geberit iCon low cabinet with two drawers → p. 624
- Geberit Smyle low cabinet with two drawers → p. 681

Geberit wall shelf

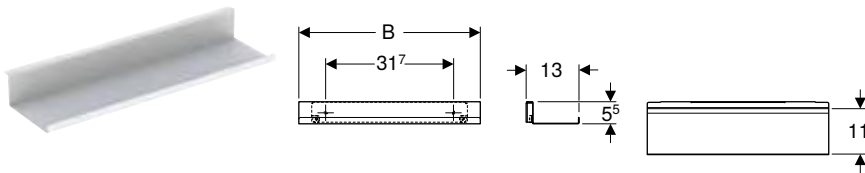

click & scan

Technical data

Product material	Steel
------------------	-------

Scope of delivery

- Wall shelf
- Fastening material


Characteristics

- Wall-hung
- Hidden fastening

Art. no.	Colour / surface	H [cm]	T [cm]
B / width: 45 cm			
502.326.01.3	white / matt powder-coated	5.5	13
502.326.JK.1	lava / matt powder-coated	5.5	13
502.326.JL.1	sand grey / matt powder-coated	5.5	13
B / width: 67.5 cm			
502.327.01.3	white / matt powder-coated	5.5	13
502.327.JK.1	lava / matt powder-coated	5.5	13
502.327.JL.1	sand grey / matt powder-coated	5.5	13

Accessories

Geberit light strip for drawer




click & scan

Technical data

Degree of protection	IP21
Nominal voltage	230 V AC
Mains frequency	50 Hz
Operating voltage	12 V DC
Output voltage	12 V DC
Light source energy efficiency class	F
Light colour	4000 K

Art. no.	L [cm]	Protection class	Power consumption [W]	Luminous flux [lm]
501410000	41	II	3.5	392
501480000	48	II	4	448
501535000	53.5	II	4.5	504
501635000	63.5	II	5.5	616
501735000	73.5	II	6.5	728
501825000	82.5	II	7.5	840
501885000	88.5	II	8	898

Geberit double light strip for drawer

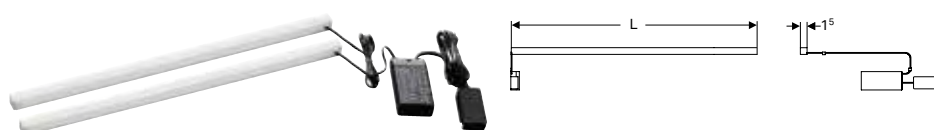

click & scan

Technical data


Degree of protection	IP21
Nominal voltage	230 V AC
Mains frequency	50 Hz
Operating voltage	12 V DC
Output voltage	12 V DC
Light source energy efficiency class	F
Light colour	4000 K

Scope of delivery

- Set of 2 pieces
- Fastening material

Art. no.	L [cm]	Protection class	Power consumption [W]	Luminous flux [lm]
501470000	47	II	8	896
501550000	55	II	9.5	1064

Geberit lamp for mirror cabinet

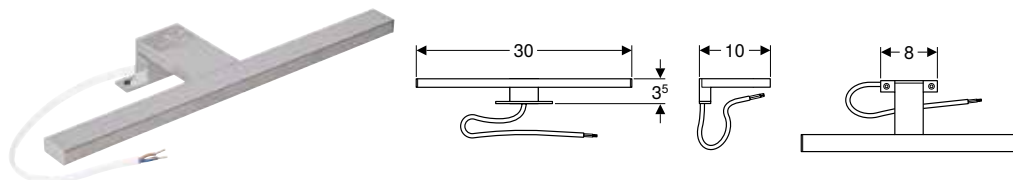

click & scan

Technical data


Degree of protection	IP44
Nominal voltage	220–240 V AC
Mains frequency	50 Hz / 60 Hz
Operating voltage	24 V DC
Light source energy efficiency class	E
Light colour	4000 K

Scope of delivery

- Lamp
- Junction box

Art. no.	Colour / surface	Protection class	Power consumption [W]
501.280.00.1	chrome / glossy	II	6

Geberit magnetic holder




click & scan

Characteristics

- Self-adhesive

Art. no.	B [cm]	H [cm]	T [cm]
510010000	10	2	0.5

Geberit magnifying mirror

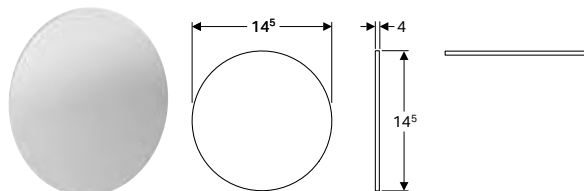


click & scan

Characteristics

- With triple magnification
- Self-adhesive

Art. no.	510100000
----------	-----------

Geberit towel rail for bathroom furniture, with right-angled corner

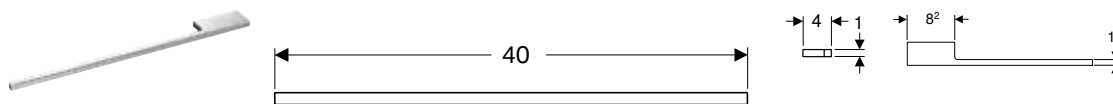

click & scan

Application purposes

- For mounting on a washbasin cabinet

Characteristics

- Right-angled corner

Technical data


Product material	Zinc
------------------	------

Scope of delivery

- Fastening material

Art. no.	Colour / surface	L [cm]
510040000	chrome / glossy	40

Geberit towel rail for bathroom furniture, with radius corner

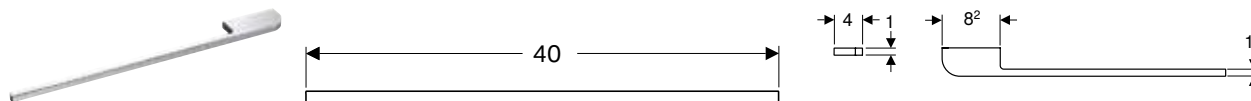

click & scan

Application purposes

- For mounting on a washbasin cabinet

Characteristics

- Radius corner

Technical data


Product material	Zinc
------------------	------

Scope of delivery

- Fastening material

Art. no.	Colour / surface	L [cm]
510140000	chrome / glossy	40

Geberit towel rail for bathroom furniture



click & scan

Application purposes

- For mounting on a washbasin cabinet
- For Geberit ONE, Acanto and iCon series

Scope of delivery


- Towel rail
- Fastening material

Technical data

Product material	Aluminium
------------------	-----------

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]
503.012.01.1	white / matt powder-coated	40	0.8	7.2
503.012.14.1	black matt / matt powder-coated	40	0.8	7.2
503.012.21.1	chrome / glossy	40	0.8	7.2
503.012.JK.1	lava / matt powder-coated	40	0.8	7.2

Geberit towel rail for bathroom furniture

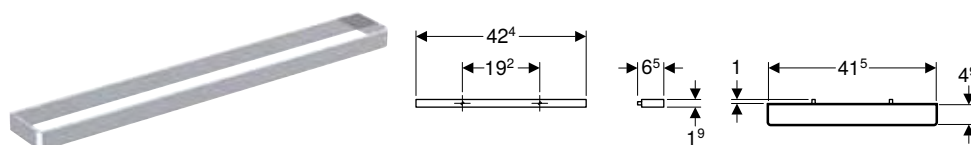

click & scan

Application purposes

- For mounting on a washbasin cabinet

Characteristics

- Right-angled corner

Technical data


Product material	Steel
------------------	-------

Scope of delivery

- Towel rail
- Fastening material

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]
502.328.00.1	chrome / glossy	42.4	1.9	4.9
502.328.01.3	white / matt powder-coated	42.4	1.9	4.9
502.328.14.1	black matt / matt powder-coated	42.4	1.9	4.9
502.328.JK.1	lava / matt powder-coated	42.4	1.9	4.9
502.328.JL.1	sand grey / matt powder-coated	42.4	1.9	4.9

Geberit organising box

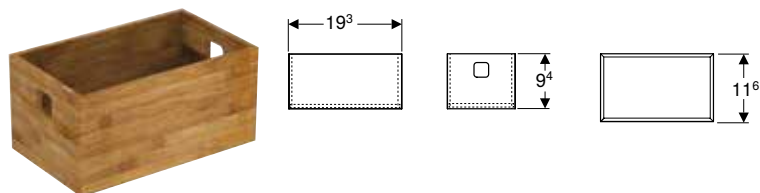

click & scan

Technical data


Product material	Bamboo
------------------	--------

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]
503.016.00.1	bamboo	19.3	9.4	11.6

Can be combined with

- Geberit tall cabinet with two cargoes → p. 494

Geberit internal storage shelf

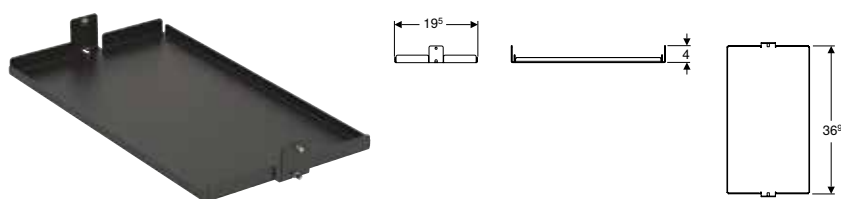

click & scan

Technical data

Product material	Powder-coated steel
------------------	---------------------

Art. no.	B [cm]	H [cm]	T [cm]
503.017.00.1	19.8	4	36.9


Can be combined with

- Geberit tall cabinet with two cargoes → p. 494

WCs

Floor-standing WCs

Geberit Eternity floor-standing WC for close-coupled exposed cistern, washdown, shrouded

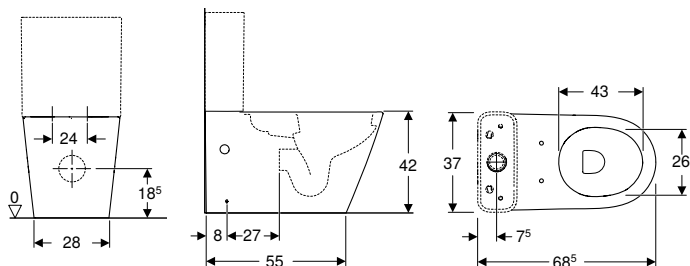

click & scan

Technical data

Product material	Vitreous china
------------------	----------------

Scope of delivery

- WC ceramic appliance
- Fastening material

Characteristics

- Washdown WC
- Floor-standing
- With flush rim
- Horizontal or vertical outlet
- Shrouded

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]
171.001.01.2	white	37	42	68.5

To order additionally


- Cistern
- WC seat

Can be combined with

- Geberit Eternity WC seat → p. 1042
- Geberit Eternity close-coupled exposed cistern, dual flush, rear or bottom water supply connection → p. 1043

WC seats

Geberit Eternity WC seat

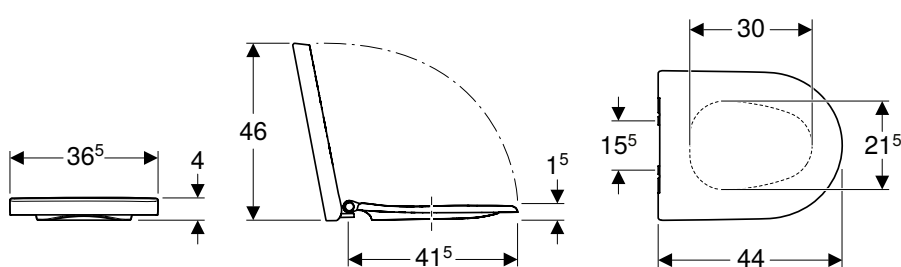

click & scan

Technical data

Product material	Duroplast
Fastening distance	15.5 cm

Characteristics

- Overlapping WC lid

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]	Soft-closing mechanism
171.006.01.2	white / glossy	36.5	4	44	yes


Can be combined with

- Geberit Eternity floor-standing WC for close-coupled exposed cistern, washdown, shrouded → p. 1042

Exposed cisterns

Exposed cisterns for WCs

Geberit Eternity close-coupled exposed cistern, dual flush, rear or bottom water supply connection

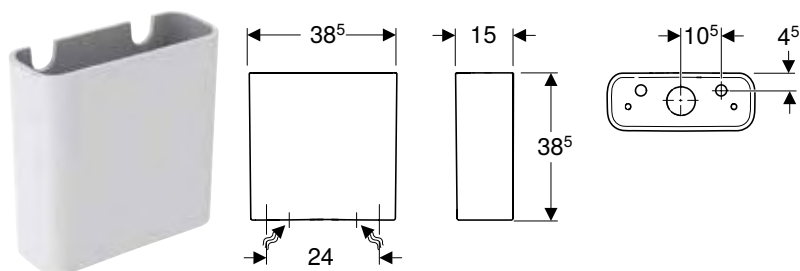

Application purposes

- For water supply connections 1/2"
- For close-coupled installation

Characteristics

- Dual flush
- Water supply connection on the rear or bottom

Technical data

Flush volume, factory setting	4.5 l / 3 l
Product material	Vitreous china

Scope of delivery

- Mechanism

Art. no.	Colour / surface	B [cm]	H [cm]	T [cm]
171.005.01.2	white	38.5	38.5	15

Can be combined with










- Geberit Eternity floor-standing WC for close-coupled exposed cistern, washdown, shrouded → p. 1042

Appendix






Assortment overview – Retrofitting of older Geberit concealed cisterns.....	1046
System overview Geberit Monolith sanitary module.....	1048
Colours / Materials	1052
Abbreviations.....	1058
Spare parts availability	1059
International sales and delivery conditions	1060
Index.....	1064

Assortment overview – Retrofitting of older Geberit concealed cisterns

Geberit International Sales, version: December 2022






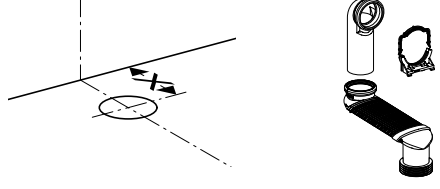
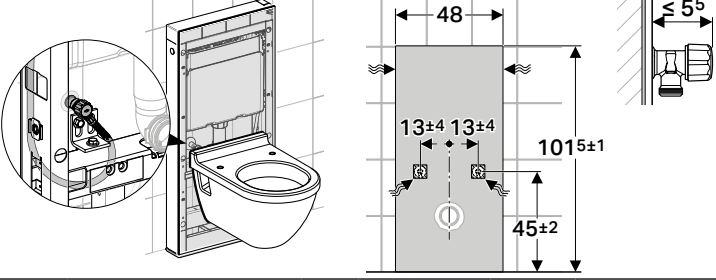
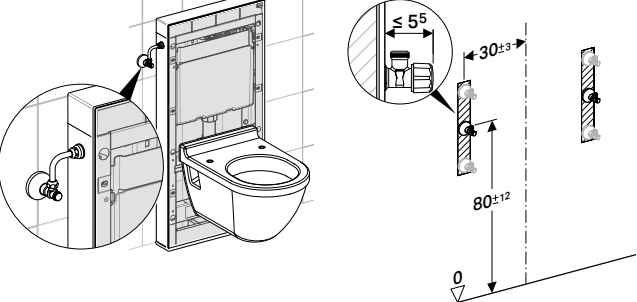
Identification of the existing concealed cistern					Retrofitting	
Actuator plate	Flush valve	Concealed cistern	PA number	Year of manufacture	Conversion set	Actuator plate
Retrofitting by upgrading to stop-and-go flush actuation						
		15.000	PA-I/1115	1964-1967	215.420.00.1	115.222.xx.1
		16.000		1965-1967	215.421.00.1	
		10.500	PA-I/IX1884/I	1970-1974	215.422.00.1	
		10.520	PA-I/IX1885/I	1970-1974		
		10.600	PA-I 1637 PA-I/X1886/I	1967-1971 1971-1974 1974-1978	215.423.00.1	
		10.620	PA-I/IX1887/I	1967-1974		
		10.700		1974-1989	240.028.00.1	
		10.800	PA-I/IX2331/I	1975-1977	240.026.00.1	
	10.400	PA-I/IX2760/I	1978-1986			

Geberit International Sales, version: December 2022

Identification of the existing concealed cistern					Retrofitting	
Actuator plate	Flush valve	Concealed cistern	PA number	Year of manufacture	Conversion set	Actuator plate
Retrofitting by upgrading to dual flush						
		10.800 ¹⁾	PA-I/IX2761/I	1978-1987	240.835.00.1	115.888.xx.1
		110.800 ²⁾	PA-I/IX2761/I PA-I/IX1153/1	1988-1997	240.515.00.1	
		110.800 ²⁾	PA-I/IX2761/I PA-I/IX1153/I	1988-1997	240.515.00.2	
		110.700		1989-1999	240.516.00.1	

¹⁾ Transparent protection plate, fastening screws made of brass
²⁾ White protection plate


System overview Geberit Monolith sanitary module

	Geberit Monolith for wall-hung WC, height 101 cm		
			
Monolith module	131.021.xx.5		
Monolith Plus module	131.221.xx.5		
WC ceramic	Commercial wall-hung ceramic and AquaClean Mera, Sela and Tuma		
Drainage connection			
Wall drainage			
	X1		X2 Z H X1
	24	 0 cm	24 91 42 ±1 24
	25		25 91 43 ±1 25
	26		26 91 44 ±1 26
			27
	21	 3 cm 131.085.11.1	24 91 42 ±1 28
	22		25 91 43 ±1 29
	23		26 91 44 ±1 30
	24		27 93 45 ±1 31
25	28 94 46 ±1 32		
26	29 95 47 ±1 33		
			33
		 7 cm 131.108.11.1	
		X2 Z H	
		24 91 42 ±1	
		25 91 43 ±1	
		26 91 44 ±1	
		27 93 45 ±1	
		28 94 46 ±1	
		29 95 47 ±1	
		33 99 51 ±1	
for "0 cm solution" all accessories in scope of delivery included, for 3 cm and 7 cm, order 131.085.11.1 or 131.108.11.1 separately			
Floor drainage			
	X = 6–34 cm; 131.088.29.1 to be ordered separately		
Water connection			
Bottom connection (invisible) Rear connection (invisible), only for height 114 cm			
			
Side connection (visible)	131.071.21.1 to be ordered separately		

Geberit Monolith for wall-hung WC, height 114 cm


131.031.xx.5
131.231.xx.5

Commercial wall-hung ceramic and AquaClean Mera, Sela and Tuma


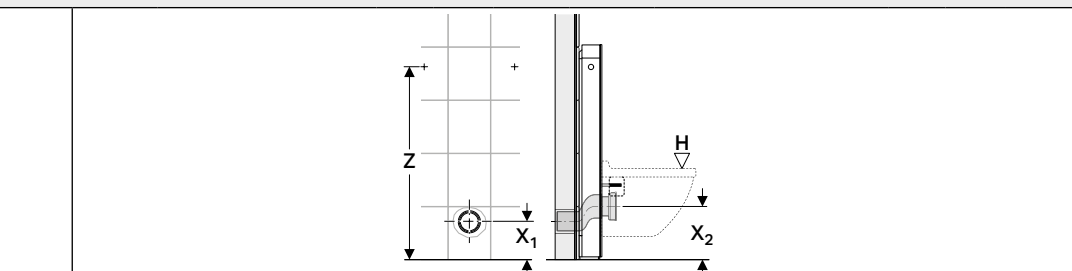


X1		X2	Z	H	X1		X2	Z	H
24	 0 cm	24	91	42 ±1	24	 3 cm 131.085.11.1 7 cm 131.108.11.1	24	91	42 ±1
25		25	91	43 ±1	25		25	91	43 ±1
26		26	91	44 ±1	26		26	91	44 ±1
21	 3 cm 131.085.11.1	24	91	42 ±1	27		27	93	45 ±1
22		25	91	43 ±1	28		28	94	46 ±1
23		26	91	44 ±1	29		29	95	47 ±1
24		27	93	45 ±1	30		30	96	48 ±1
25		28	94	46 ±1	31		31	97	49 ±1
26		29	95	47 ±1	32		32	98	50 ±1
						33	99	51 ±1	






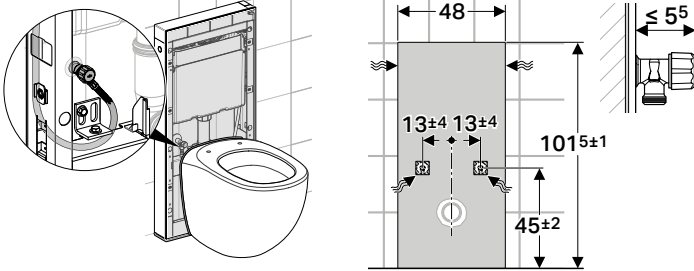
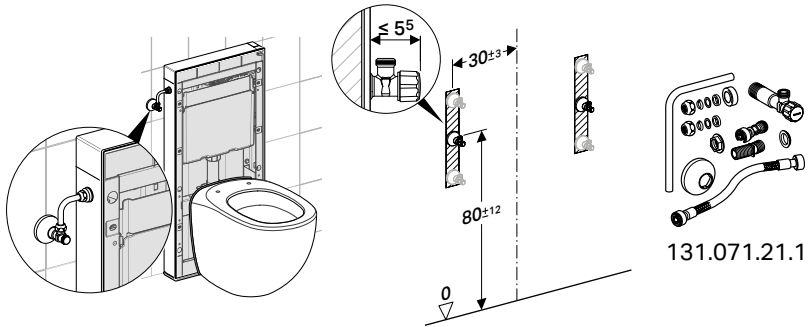
for "0 cm solution" all accessories in scope of delivery included, for 3 cm and 7 cm, order 131.085.11.1 or 131.108.11.1 separately

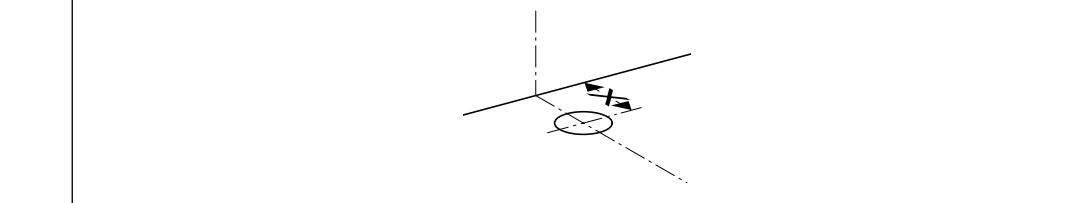


X = 6–34 cm; 131.088.29.1 to be ordered separately

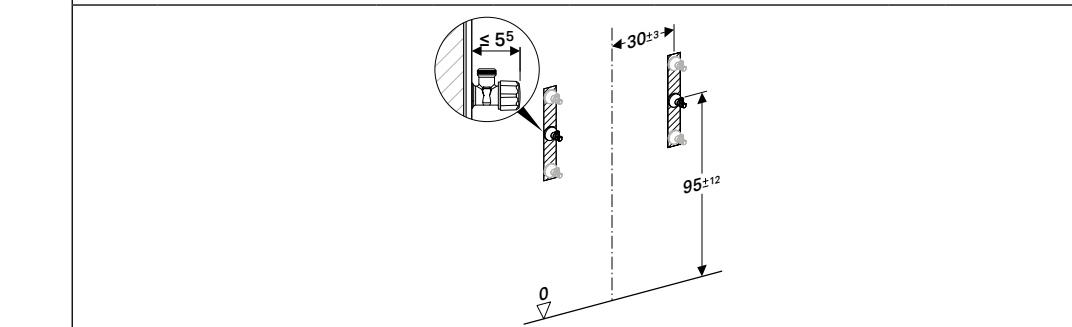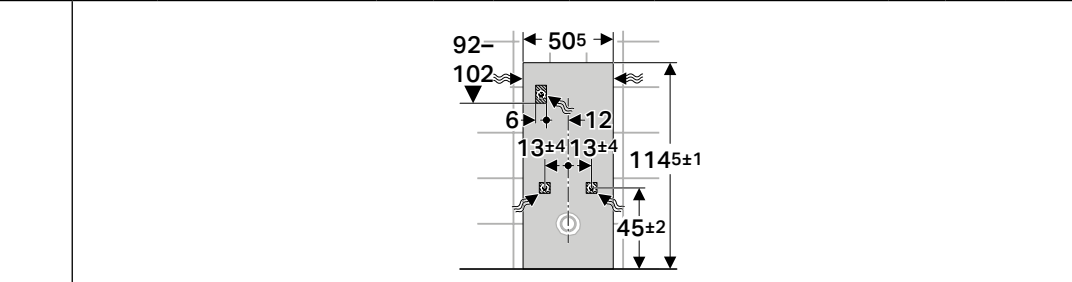

131.071.21.1 to be ordered separately

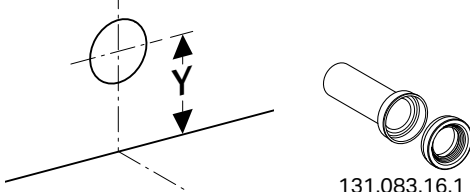
	<p style="text-align: center;">Geberit Monolith for floor-standing WC, back to wall, height 101 cm</p> 
<p>Monolith module</p>	<p style="text-align: center;">131.001.xx.5</p>
<p>Monolith Plus module</p>	<p style="text-align: center;">131.201.xx.5</p>
<p>WC ceramic</p>	
	<p>Required:</p> <ul style="list-style-type: none"> • Flat rear to ensure a closed connection to Monolith • Open rear and floor to enable floor drainage
<p>Drainage connection</p>	
<p>Wall drainage</p>	 <p style="text-align: center;">131.083.16.1</p> <p style="text-align: center;">Y = 18 ± 1 cm, 131.083.16.1 to be ordered separately</p>
<p>Floor drainage</p>	 <p style="text-align: center;">X = 7–15 cm: all accessories included</p>  <p style="text-align: center;">131.081.11.1</p> <p style="text-align: center;">X ≥ 15 cm: 131.081.11.1 to be ordered separately</p>
<p>Water connection</p>	
<p>Bottom connection (invisible) Rear connection (invisible), only for height 114 cm</p>	
<p>Side connection (visible)</p>	 <p style="text-align: center;">131.071.21.1 to be ordered separately</p>

Geberit Monolith for floor-standing WC, back to wall, height 114 cm




131.033.xx.5

131.233.xx.5




- Required:
- Flat rear to ensure a closed connection to Monolith
 - Open rear and floor to enable floor drainage

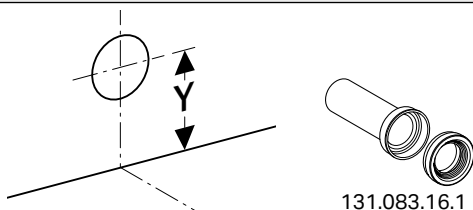

131.083.16.1

Y = 18 ± 1 cm, 131.083.16.1 to be ordered separately




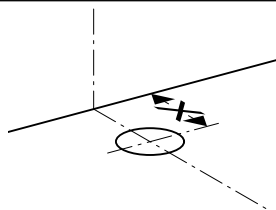


X = 7-15 cm: all accessories included



131.081.11.1

X ≥ 15 cm: 131.081.11.1 to be ordered separately

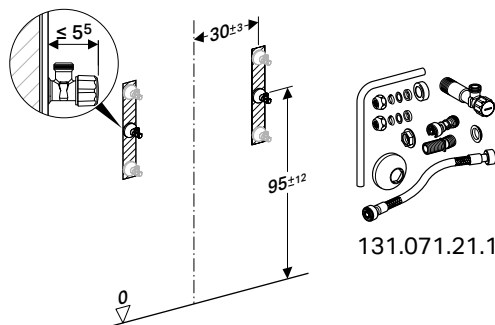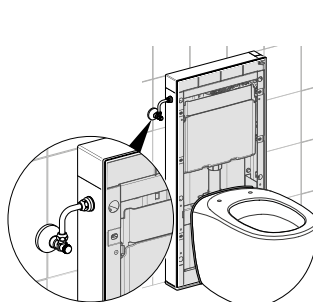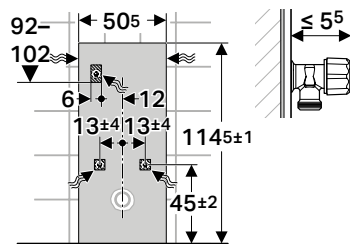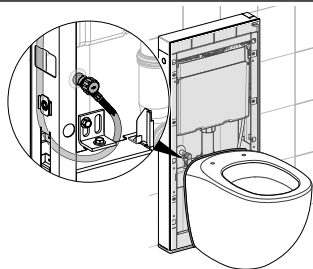

131.071.21.1

131.071.21.1 to be ordered separately

COLOURS / MATERIALS

COLOURS / MATERIALS

IT'S ALL ABOUT YOUR TASTE



WHITE, MATT COATED

ONE body, front
ICON body, front
VARIFORM body, front

SAND GREY, MATT COATED

ACANTO body

GREIGE, MATT COATED

ONE body, front
XENO² body, front

LAVA, MATT COATED


ONE body, front
ACANTO body
ICON body, front, handle
SMYLE body, front
VARIFORM body, front

BLACK, MATT COATED

ONE body, front
ACANTO body



COLOURS / MATERIALS

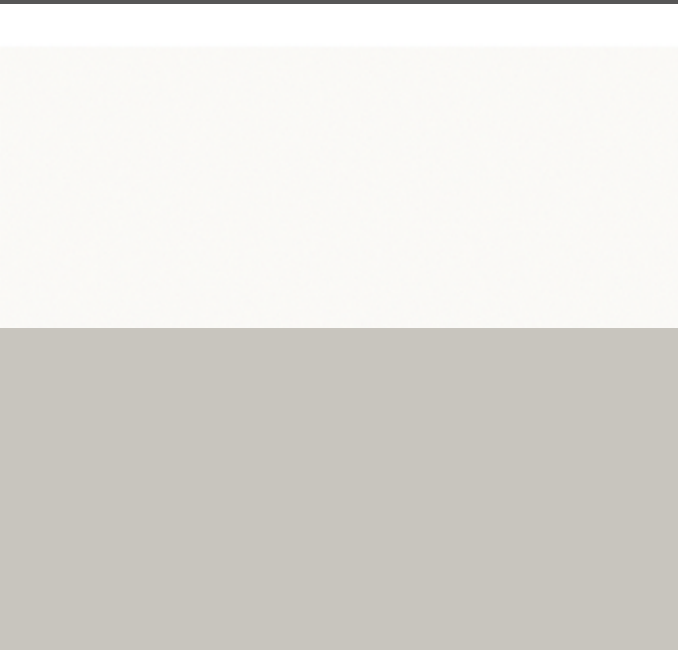

WHITE,
HIGH-GLOSS COATED

ONE body, front
XENO² body, front
ACANTO body
ICON body, front, handle
SMYLE body, front
SELNOVA body, front

SAND GREY,
HIGH-GLOSS COATED

ONE body, front
ICON body, front, handle
SMYLE body, front



CHROME

ICON handle
SELNOVA handle, feet

SCULTURA-GREY,
WOOD-TEXTURED MELAMINE

XENO² body, front

HICKORY,
WOOD-TEXTURED MELAMINE

ONE body, front
ICON body, front,
SMYLE body, front
VARIFORM body, front

MYSTIC OAK

ACANTO body




COLOURS / MATERIALS



OAK,
WOOD-TEXTURED MELAMINE

ONE body, front
ICON body, front
VARIFORM body, front

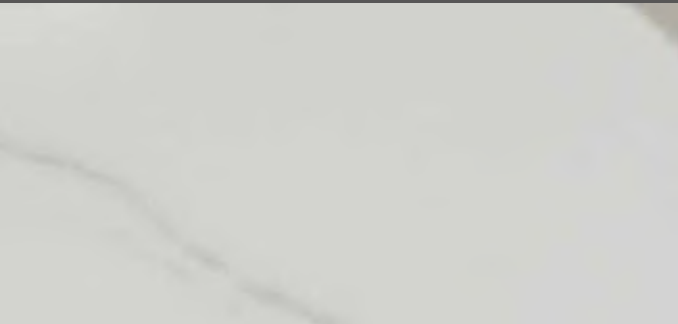

MARBLE WHITE STONEWARE

ONE surface cover



MARBLE BLACK STONEWARE

ONE surface cover

WHITE GLASS

ONE surface cover
ACANTO front

SAND GREY GLASS

ACANTO front

LAVA GLASS

ONE surface cover
ACANTO front

BLACK GLASS

ACANTO front



Abbreviations

Abbreviation	Dimension	Designation
A	cm	Projection
a	cm	Projection, partial dimension
AD	cm	Connecting distance
B	cm	Width
D	cm	Outside diameter
diø	mm	Inside diameter
dø	mm	Outside diameter
d1ø, d2ø	mm	Outside diameter
dia.	mm	Diameter
E	cm	Insertion depth
G	" (inch)	Pipe threads where pressure-tight joints are not made on the threads (ISO 228/1)
H	cm	Height
H1	cm	Part height
h	cm	Height, partial dimension
K	cm	Max. shorting
k	cm	Flange, diameter of bolt circle
L	cm	Length
l, l1	cm	Length part dimension
L(m)	m	Pipe length
m	cm	Diameter of bolt holes
M	mm	Metric threads (ISO 216)
R	" (inch)	Outside thread, tapered, threads where pressure-tight joints are made on the thread
Rp, Rp1	" (inch)	Screw thread joint
s	mm	Wall thickness
SW	mm	Spanner width
Z	cm	Z-Dimension
Z1, Z2	cm	Z-Dimension
X	cm	X-Dimension

Plug	Designation
IEC-83/C6	EU, 230 V
EN 50075 SS I	EU, 230 V
CEE 17 yellow	EU, 230 V
IEC 60884-1 SS XVII-CEE7	EU, 230 V
BS 1363A	GB, 230 V
Nema 1-15P	USA, 125 V

Spare parts availability

The following spare part availabilities are valid for Geberit products as of the last year of production:

	Description	Spare parts ¹⁾
Concealed WC cisterns	All concealed WC cisterns ² for which replacement would require damaging the building structure. Excludes the specific functionalities of electronic products (e.g. DuoFresh, electronic flush controls etc.).	50 years
Concealed (other)	All other concealed products for which replacement would require damaging the building structure (e.g., concealed UR solutions)	25 years
Exposed	All products of which the replacement does not damage the building structure, e.g. exposed cistern	10 years
Tools	Tools for processing products e.g. Geberit Mepla / Geberit Mapress pressing tools	10 years
Installation parts	e.g. Duofix mounting feet	2 years

¹⁾ All components required for restoring the function of the sales article e.g. flat gaskets for flush valves, filling valves, actuator plates.

²⁾ Without Kappa series

For the avoidance of doubt: spare parts are not necessarily identical to the original parts. Optical deviations as well as comfort restrictions may apply. However, the compatibility and basic functionality is ensured in all cases.

For sales articles made of ceramic and ceramic parts of a sales article, the availability of a technically fully functional exchange product is assured for 10 years from the end of the year in which production was discontinued. It is clarified, however, that the exchange product does not necessarily have to be identical to the original (part) product, and that optical deviations may exist.

International sales and delivery conditions

(valid from 1st of April 2026)

1. General

- 1.1 All sales, deliveries and services of the Geberit International Sales AG (hereinafter referred to as "Geberit") are effected exclusively on the basis of the following International Sales and Delivery Conditions. General terms and conditions of the buyer are hereby contradicted. They are also not accepted in case Geberit does not expressly contradict them again after their receipt. These International Sales and Delivery Conditions are considered to have been accepted by the buyer at the latest with the acceptance of the delivered goods.
- 1.2 All contracts, orders and agreements - particularly those purporting to change the conditions set out herein - shall only become binding if expressly accepted by Geberit in writing.

2. Conclusion of contract - Written form

- 2.1 The offers of Geberit are non-binding, unless otherwise agreed in writing.
- 2.2 An order is only accepted by Geberit when it has been confirmed in writing and the order confirmation has been sent to the buyer.
- 2.3 All agreements, declarations and other information are required to be in writing if they are to be valid.

3. Conditions of delivery - Transfer of Risks

- 3.1 The delivery of goods shall be made "Free Carrier" Geberit's respective work or warehouse (FCA - INCOTERMS 2020) unless otherwise agreed and stated on the order confirmation.
- 3.2 Geberit's prices shall be understood as net prices without tax or customs duty. Any taxes, duties, charges, etc. imposed in connection with the sale, delivery, import or export of the goods must be borne by the buyer.
- 3.3 The buyer shall be liable to provide Geberit in due time with all information necessary for Geberit to fulfil its obligations with respect to tax and customs duty. In particular the buyer shall be liable for providing Geberit with a qualified export documentation (e.g. original certificate of export) and/or its correct VAT ID-Number. In case the buyer does not fulfil his obligation to supply all necessary information to Geberit the buyer shall be liable for all claims and damages arising for Geberit out of this default of contract, in particular taxes (VAT, GST, sales tax or similar turnover dependent taxes), customs duty, interest, any administrative cost (e.g. legal and consulting expenses) and penalties.
- 3.4 The risk of loss - including accidental loss - or accidental deterioration of the goods is transferred to the buyer when the goods are handed over to the commissioned freight-forwarder or carrier but no later than the time of leaving the respective work or warehouse of Geberit unless otherwise provided for in the corresponding order confirmation.
- 3.5 Delivery of goods notified as ready for dispatch must be requested immediately, otherwise at its own discretion Geberit shall be entitled to store them at the expense and risk of the buyer and invoice them as delivered ex works. If despatch is delayed for reasons for which Geberit is not responsible, then instead of the point in time according to Section 3.3 the particular date of indication of readiness for despatch applies.
- 3.6 Geberit may arrange, upon buyer's request, for insurance at buyer's cost against damage arising in connection with the storage, delivery or shipment of goods ordered by buyer.

4. Delivery period, delays in delivery, partial delivery

- 4.1 The stated delivery period is non-binding, unless it is specifically agreed in writing to be binding.
- 4.2 The delivery period begins with the sending of the order confirmation to the buyer. It has been met when, by its expiry, the object of the delivery has left Geberit's particular works or the buyer has been informed of the order's readiness for dispatch.
- 4.3 In the event of the occurrence of unforeseeable or inevitable events (force majeure) and in the case of operational stoppages of any kind, in particular damage to machinery, strikes and

employment disputes, delayed supplies to us of important operating media and input materials or administrative measures, Geberit is entitled to withdraw from the contract of sale either wholly or in part or to extend the delivery period appropriately, taking into consideration a start-up period. Geberit shall inform the buyer about any such event in writing.

- 4.4 In cases of delay of delivery the buyer can, following the abortive expiry of an appropriate final deadline, withdraw from the contract; in cases where the performance is impossible, he has this right even without the setting of a final deadline. All claims of the buyer for compensation for damages resulting from a delay of delivery, including but not limited to any consequential damages, are - with reservation of the regulation in the following section 4.5 - excluded; the same applies to the buyer's claim for the reimbursement of expenses.
- 4.5 The exclusion of liability regulated in section 4.4 does not apply in the case of damages caused by wilful intent or gross negligence on Geberit's part. Subject to mandatory law in other cases Geberit's liability is limited to the contractually typical, foreseeable damages not exceeding the amount of the respective order.
- 4.6 Unless otherwise agreed in writing, Geberit is entitled to make partial deliveries.

5. Prices, payment, default

- 5.1 Geberit's prices are based on the respective price lists valid at the date of the order confirmation.
- 5.2 Unless other credit terms have been agreed between Geberit and the buyer, goods must be paid for immediately after the receipt of the order confirmation and before delivery.
- 5.3 If any payment is overdue, interest on the outstanding sum is payable at commercial bank rates but not less than 6 percent p.a.
- 5.4 Bills of exchange and cheques are accepted by Geberit only on account of performance and not as performance. Payments made by bills of exchange or cheques do not constitute fulfilment until the amount in question has been irrevocably credited to Geberit's bank account. Taxes and expenses for bills of exchange are borne exclusively by the buyer.
- 5.5 In the case of buyer's payment default, insolvency or the debts being jeopardised through deterioration of the buyer's creditworthiness Geberit shall be entitled to demand immediate settlement of all debts falling due at the time and in the future or the provision of securities. Geberit shall also be entitled to only make outstanding deliveries if they are paid for in advance or sufficient securities are provided. If this cannot be established by buyer within a reasonable period of time, Geberit may withdraw from the contract of sale.

6. Delay in calling goods

If the specified quantities of goods ordered by buyer are not called for delivery within the agreed timeframe, Geberit is entitled to withdraw from the sale with immediate effect, and/or to adjust the prices accordingly. Buyer is prohibited from claiming any damages.

7. Packaging

Unless otherwise agreed the goods shall be delivered in standard packaging. The buyer will be charged for any special packaging agreed.

8. Defective goods (Warranty)

- 8.1 Buyer must inspect the goods immediately upon receipt. Any defects recognisable in the course of a customary examination must be notified to Geberit in writing within eight (8) days after receipt. Otherwise, the goods purchased are deemed to have been accepted and any defect claims against Geberit are excluded.
- 8.2 To the extent there are defects involved which were not recognisable in the course of a customary examination, written notification of such defects must be given immediately upon

their discovery. Otherwise, the goods purchased are deemed to have been accepted with respect to such defects and any defect claims against Geberit are excluded.

- 8.3 Buyer undertakes to make the defective goods or the defective part of the goods available to Geberit for a reasonable time immediately after discovery of the defect, in unaltered condition, so that the defect can be checked. This obligation does not however release the buyer from his burden of proof of the presence of a defect.
- 8.4 Provided the goods, that have been professionally and duly stored, maintained and used by the buyer, are proven defective and buyer has notified the defects as set out hereinabove, Geberit at its own choice shall be entitled to subsequently fulfil its obligations by repairing the defective goods or by supplying replacements free of cost. Should one or both of these types of subsequent fulfilment be impossible or not reasonable, Geberit is entitled to decline them. Geberit can also decline subsequent fulfilment for as long as the buyer does not fulfil his payment obligations.
- 8.5 Should the subsequent fulfilment according to section 8.4 be declined by Geberit or not have been successful, the buyer has the choice either of demanding a corresponding reduction of the purchase price (price reduction) or of withdrawing from the contract in accordance with the legal regulations (withdrawal).
- 8.6 Defect claims are subject to a period of limitation of one (1) year after delivery of the goods to the buyer and no more than fifteen months after notification of readiness for dispatch.
- 8.7 Defect claims are conditioned upon buyer's prior performance of any and all of buyer's own obligations.
- 8.8 Any claims based on defects of the goods are subject to the limitations of liability named in section 9.
- 8.9 The above provisions apply correspondingly if other goods or smaller quantities are delivered instead of those agreed.

9. Liability of Geberit

- 9.1 Unless otherwise specified, any claims of the buyer against Geberit for whatever legal reason, in particular claims arising from infringement of principal and subsidiary contractual obligations, the reimbursement of expenses or tort are excluded. The exclusion in particular includes claims for damages other than to the purchased goods, claims for loss of profit and claims which do not result from a defect of the delivered goods.
- 9.2 The exclusion of liability in section 9.1 does not apply for damages resulting from culpable injury of life, body or health, from wilful intent or gross negligence. It also does not apply in cases where mandatory liability exists in accordance with product-liability laws for products supplied for private use.
- 9.3 Subject to mandatory law in other cases as said in section 9.2 Geberit's liability is limited to the contractually typical, foreseeable damages not exceeding the amount of the respective order.
- 9.4 Insofar as liability is excluded or limited for Geberit, this also applies for its representatives, employees, subcontractors and commercial agents.

10. Retention of title, securities

- 10.1 Geberit shall retain ownership of the goods supplied until full payment of the corresponding purchase price and the fulfilment of all other outstanding debts owed by the buyer to Geberit has been effected (hereinafter "Retained Goods"). Buyer shall take all necessary measures for the protection of the ownership rights of Geberit.
- 10.2 The buyer processes the Retained Goods for Geberit as manufacturer but without any obligation on the latter's part. The processed Goods are still deemed to be Retained Goods.
- 10.3 Should the buyer process, combine and mix the Retained Goods with other goods Geberit shall become part owner of the new product in the proportion of the invoice value of the Retained Goods to the invoice value of the other goods used. Should Geberit's ownership cease as a result of combination or mixing the buyer hereby agrees to transfer its ownership of the new product in the amount of the invoice value of the Retained Goods

to Geberit. Geberit's part ownership shall be deemed to be Retained Goods.

- 10.4 The buyer is only entitled to resell the Retained Goods in the normal course of business and subject to his normal terms and conditions.
- 10.5 At the time of the conclusion of the sales contract with Geberit, the buyer assigns to Geberit all claims which base / will base on the resale of the Retained Goods. The assigned claims shall be deemed to be security for the Retained Goods. The buyer shall not be entitled to otherwise assign the claims. Insofar as a continuous account relationship is agreed between the buyer and his customers, the assignment refers to the balance at the time. The buyer is still entitled to collect these resale claims from his customers or third parties after they have been assigned; Geberit's authority to collect the claims remains unaffected by this. Geberit is entitled to request that the buyer informs Geberit about the assigned claims and their debtors gives Geberit all information in writing which is necessary for collection, surrenders to Geberit the relevant documents and informs the debtors in writing about the assignment of the claims. However, Geberit does not undertake to collect the claims or requests the abovementioned information as long as the cases specified in section 5.5 do not occur.
- 10.6 In the cases specified in section 5.5 and if the buyer fails to meet the obligations of section 10.4. Geberit shall also be entitled to forbid the processing and the resale of the Retained Goods with immediate effect. A declaration of withdrawal from the contract by Geberit is also deemed to be a withdrawal of the authorisation to resell and to collect the resale claims. In these cases Geberit shall also be entitled to demand the immediate return of the Retained Goods at the expense of the buyer and with exclusion of a right of retention. In the abovementioned cases the buyer hereby authorises Geberit or its agent presenting written authorisation to enter its business premises on foot or in vehicles in order to repossess the Retained Goods.
- 10.7 To the extent that retention of title cannot be agreed with the buyer in accordance with the applicable law, a lien on the goods and on the processed goods and on the purchase price claims of the buyer resulting from the resale of the goods shall be deemed to be agreed. A lien means that the goods serve as a security for Geberit until the purchase price is paid completely and that the buyer is therefore entitled to process or resell the goods only with the agreement of Geberit.
- 10.8 If the value of the securities due to Geberit exceeds the claims to be secured by more than 20% Geberit is obliged, on request of the buyer, to release the securities of Geberit's choice which exceed the above-mentioned excess cover.

11. Re-export

- 11.1 Geberit explicitly draws attention to the fact that Geberit products are protected by various intellectual property rights in other countries. Buyer has therefore to seek advice from Geberit prior to planned exports.
- 11.2 The onward delivery of the goods and any product documentation, including but not limited to the product descriptions and the installation guidelines, to the USA or Canada is expressly prohibited and requires the prior written permission of Geberit.
- 11.3 Buyer shall not sell, export or re-export, directly or indirectly, to the Russian Federation or for use in the Russian Federation any goods supplied under or in connection with these International sales and delivery conditions that fall under the scope of Article 14f of the Swiss Ordinance imposing Measures in Connection with the Situation in Ukraine (SR 946.231.176.72).
- 11.4 The Buyer shall not sell, export or re-export, directly or indirectly, to Belarus or for use in Belarus any goods supplied under or in connection with this contract that fall under the scope of Article 11a of the Swiss Ordinance imposing Measures against Belarus (SR 946.231.116.9).
- 11.5 Buyer shall undertake its best efforts to ensure that the purpose

of paragraph 11.3 and 11.4 is not frustrated by any third parties further down the commercial chain.

11.6 Buyer shall set up and maintain an adequate monitoring mechanism to detect conduct by any third parties further down the commercial chain, that would frustrate the purpose of paragraph 11.3 and 11.4.

11.7 Any violation of paragraphs 11.3, 11.4, 11.5 or 11.6 shall constitute a material breach of an essential element of the contract, and Geberit shall be entitled to seek appropriate remedies, including, but not limited to:

11.7.1 termination of the contract; and

11.7.2 a penalty of CHF 50'000 (in words: CHF fifty thousand) or the price of the goods illegally exported, whichever is higher.

11.8 Buyer shall immediately inform Geberit about any problems in applying paragraphs 11.3, 11.4, 11.5 or 11.6 including any relevant activities by third parties that could frustrate the purpose of 11.3 or 11.4. Buyer shall make available to Geberit information concerning compliance with the obligations under 11.3, 11.4, 11.5 or 11.6 within two weeks as of the request of such information.

12. Prohibition of assignment and offsetting

12.1 The buyer shall only be entitled to assign rights and debts arising from contracts of sale to third parties with the prior agreement of Geberit.

12.2 The buyer is not entitled to offset counterclaims against the purchase price claim, unless in the case of an undisputed or legally established claim.

12.3 The buyer is not entitled to retain the purchase price on the basis of any counterclaims which do not result from the delivery contract concerned.

13. Place of performance, jurisdiction and applicable law

13.1 Place of performance for all obligations resulting from the sales contract shall be the principal place of business of Geberit in Jona, Switzerland.

13.2 All disputes arising out of or in connection with any sales contract shall be resolved, to the exclusion of the ordinary courts, by an arbitral tribunal in accordance with the International Arbitration Rules of the Zurich Chamber of Commerce. The arbitration shall take place in Zurich; the language of the proceedings shall be English.

13.3 The sales contract is subject to the laws of Switzerland. The application of the UN Convention for the International Sale of Goods ("Vienna Sales Convention") and of international private law is expressly excluded.

14. Guarantee

14.1 In addition to the warranty of section 8, Geberit guarantees for the products and periods listed below, that the delivered goods are free from any material or production failures.

Geberit Accessories	2 Years
Geberit Actuator plates	5 Years
Geberit Actuator plates customised finish	2 Years
Geberit AquaClean	2 Years
Geberit Bathroom furniture	2 Years
Geberit Bathtubs	2 Years
Geberit Ceramic products	10 Years
Geberit Cistern fittings	2 Years
Geberit Concealed cisterns and mounting elements	10 Years
Geberit Electronic components	2 Years
Geberit exposed cisterns AP123 and AP128	10 Years
Geberit exposed cisterns AP110, 116 and 117	5 Years
Geberit flushing systems for WC and urinals (electronics)	2 Years

Geberit Monolith	10 Years
Geberit Monolith Plus(electronics)	2 Years
Geberit Pneumatic remote controls	5 Years
Geberit Pneumatic taps	2 Years
Geberit Replacement fill- and flush mechanisms type 333, 340, 240	2 Years
Geberit Replacement fill- and flush mechanisms type 360, 380, 290	5 Years
Geberit Shower enclosures and bathtub screens	2 Years
Geberit Shower trays	2 Years
Geberit Stainless steel products	2 Years
Geberit Taps and mixers	2 Years
Geberit taps for washbasins (electronics)	2 Years
Geberit traps, sinks, bathtub drain assemblies	10 Years
Geberit Varicor products	2 Years
Geberit WC seat and covers	2 Years

14.2 The guarantee periods shall start from date of delivery to the buyer.

If any material or production failures occur during the guarantee period Geberit will fulfil its guarantee obligations by repairing the defective goods or by supplying replacements free of cost. Any further claims against Geberit on the basis of this additional guarantee are expressly excluded, if possible according to the applicable law.

By expiration of the guarantee period all guarantee claims, in particular claims concerning goods that have been repaired or replaced during the guarantee period, are excluded.

14.3 The guarantee is only valid under the following conditions:

- the installation follows the written rules of application technique as issued by Geberit; and
- the goods have been correctly and professionally stored, installed, maintained and used in particular according to the instructions issued by Geberit; and
- the goods have not been modified, in particular no parts have been removed, changed or added; and
- the systems are built only with original parts of Geberit.

15. Severability

The invalidity or unenforceability of any provisions of the conditions above shall not affect the validity or enforceability of any other provision of these conditions.

In such an event both parties commit themselves to compose a legally valid replacement rule which approaches the invalid provision as closely as possible within the economic interpretation of the conditions. This shall apply accordingly to any omissions in the conditions.

Index

Article number	Page	Article number	Page	Article number	Page	Article number	Page
11000000	968	361370000	862	599113000	847	111.044.00.1	92
123260000	1034	367200000	865	653009000	1031	111.045.00.1	92
123261000	1034	402160016	860	819200000	815	111.046.00.1	92
123262000	1034	402170016	860	819220000	816	111.055.00.1	86
123290000	1034	406010016	856	819240000	815	111.056.00.1	87
123291000	1034	407010016	856	819260000	815	111.060.00.2	51
123292000	1034	430010016	838	819270000	815	111.064.00.1	96
124020000	599	430060016	838	16084600000	1020	111.069.00.2	67
124025000	599	430210016	837	00160000000	782	111.079.00.2	37
124053000	596	430310016	837	004.610.00.2	182	111.080.00.1	37
124060000	599	430360016	837	004.610.00.3	182	111.085.00.1	37
124061000	599	431020016	838	004.611.00.2	183	111.086.00.1	37
124062000	599	431030016	839	004.611.00.3	183	111.087.00.1	37
124063000	599	500250000	864	004.780.00.2	277	111.088.00.1	37
124075000	599	500260000	864	004.780.00.3	277	111.089.00.1	41
124078000	599	500740000	1036	004.781.00.2	279	111.221.00.2	95
124090000	599	500750000	1036	004.781.00.3	279	111.266.00.2	57
124093000	599	501410000	1038	004.790.00.2	262	111.271.00.2	83
124120000	602	501470000	1038	004.790.00.3	262	111.274.00.2	64
124153000	596	501480000	1038	004.791.00.2	264	111.350.00.6	46
124560000	604	501535000	1038	004.791.00.3	264	111.434.00.2	59
124575000	604	501550000	1038	004.800.00.2	270	111.480.00.2	61
124590000	604	501635000	1038	004.800.00.3	270	111.489.00.2	63
124729000	598	501735000	1038	004.801.00.2	272	111.490.00.2	62
124730000	598	501825000	1038	004.801.00.3	272	111.520.00.2	68
124736000	596	501885000	1038	109.043.00.1	140	111.524.00.2	69
124836000	596	510010000	516	109.050.00.1	141	111.539.00.2	69
162700000	830	510040000	1039	109.060.00.1	141	111.553.00.2	58
200460000	644	510100000	516	109.175.00.1	143	111.560.00.2	65
201680600	865	510140000	1040	109.212.00.1	142	111.562.00.2	66
201700000	850	521005000	973	109.233.00.2	143	111.563.00.2	60
201950000	641	521095000	839	109.300.00.5	138	111.578.00.1	39
204000000	642	551062000	1035	109.721.00.2	159	111.580.00.2	77
208580000	861	551064000	1035	109.791.00.1	139	111.581.00.2	78
211500000	853	551067000	1036	110.001.00.1	17	111.591.00.2	79
211650000	852	551070000	973	110.011.00.1	18	111.593.00.2	80
211910000	644	551075000	973	110.020.00.1	19	111.616.00.2	72
228950000	647	551081000	1036	110.174.00.1	24	111.665.00.6	76
229420000	647	552003000	866	110.175.00.1	23	111.676.00.2	73
231910000	648	552201000	866	110.212.00.1	20	111.686.00.2	75
231950000	649	554005000	1036	110.231.00.2	22	111.689.00.2	74
236100000	963	554015000	974	110.233.00.2	21	111.747.00.1	96
236400600	967	571410000	847	110.340.00.5	14	111.780.00.2	82
236450600	948	571600000	840	110.350.00.5	13	111.787.00.1	82
238150000	933	571910000	646	110.789.00.1	16	111.788.00.1	88
273240000	1034	573334000	854	110.792.00.1	15	111.790.00.2	84
326060000	830	573338000	855	111.003.00.2	49	111.796.00.2	48
350490000	863	573348000	855	111.013.00.1	90	111.808.00.1	38
355675000	863	573410000	969	111.027.00.1	93	111.815.00.1	89
360050000	864	574120000	646	111.029.00.1	41	111.825.00.2	37
360060000	864	574130000	646	111.030.00.2	50	111.826.00.1	38
360070000	862	574950000	645	111.041.00.1	92	111.827.00.1	38
361350000	862	590153000	1031	111.042.00.1	92	111.835.00.1	90
361360000	862	595723000	974	111.043.00.1	92	111.839.00.2	90

Article number	Page	Article number	Page	Article number	Page	Article number	Page
111.841.00.1	41	115.080.KK.1	200	115.623.21.1	192	115.671.JM.2	190
111.847.00.1	96	115.080.KM.1	200	115.623.QC.1	192	115.671.JV.2	190
111.848.00.2	95	115.081.GH.1	201	115.628.14.1	182	115.671.JX.2	190
111.858.00.1	88	115.081.JK.1	201	115.628.FW.1	182	115.671.QD.2	190
111.859.00.1	89	115.081.JL.1	201	115.628.ID.1	182	115.672.00.2	190
111.868.00.1	94	115.081.SI.1	201	115.628.JK.1	182	115.672.11.2	190
111.869.00.1	94	115.081.SJ.1	201	115.628.JL.1	182	115.672.DW.2	190
111.887.00.1	91	115.082.00.1	202	115.628.JT.1	182	115.672.JM.2	190
111.889.00.1	36	115.082.SI.1	202	115.628.QB.1	182	115.672.JV.2	190
111.891.00.1	40	115.085.01.1	200	115.628.QD.1	182	115.672.JX.2	190
111.900.00.6	44	115.085.11.1	200	115.628.QF.1	182	115.672.QF.2	190
111.923.00.6	47	115.085.14.1	200	115.628.SI.1	182	115.696.00.1	197
111.926.00.1	91	115.085.16.1	200	115.628.SJ.1	182	115.697.00.1	198
111.941.00.1	92	115.085.DW.1	200	115.629.14.1	183	115.702.00.6	221
111.942.00.1	92	115.085.JQ.1	200	115.629.FW.1	183	115.704.00.6	231
111.943.00.1	92	115.085.JT.1	200	115.629.ID.1	183	115.705.16.6	217
111.944.00.1	92	115.085.KH.1	200	115.629.JK.1	183	115.705.SN.6	217
111.945.00.1	92	115.085.KJ.1	200	115.629.JL.1	183	115.706.16.6	233
111.950.00.6	45	115.085.KK.1	200	115.629.JT.1	183	115.706.SN.6	233
111.951.00.1	85	115.085.KM.1	200	115.629.QB.1	183	115.707.00.1	252
111.952.00.1	85	115.086.21.1	202	115.629.QD.1	183	115.708.00.1	253
111.953.00.1	85	115.086.GH.1	202	115.629.QF.1	183	115.751.00.1	196
111.954.00.1	85	115.087.00.1	202	115.629.SI.1	183	115.758.01.5	178
111.955.00.1	85	115.088.00.1	203	115.629.SJ.1	183	115.758.14.5	178
111.979.00.1	36	115.092.FW.1	199	115.650.00.1	185	115.758.16.5	178
115.035.11.1	204	115.093.11.1	199	115.650.JM.1	185	115.758.JQ.5	178
115.035.14.1	204	115.093.14.1	199	115.650.JV.1	185	115.758.JT.5	178
115.035.21.1	204	115.093.21.1	199	115.650.JX.1	185	115.758.KH.5	178
115.035.46.1	204	115.093.46.1	199	115.650.SI.1	185	115.758.KJ.5	178
115.035.QA.1	204	115.093.DW.1	199	115.650.SJ.1	185	115.758.KK.5	178
115.035.QC.1	204	115.093.ID.1	199	115.651.00.1	186	115.758.KM.5	178
115.035.QE.1	204	115.093.QB.1	199	115.651.JM.1	186	115.758.SN.5	178
115.040.11.5	205	115.093.QD.1	199	115.651.JV.1	186	115.764.FW.1	196
115.040.21.5	205	115.093.QF.1	199	115.651.JX.1	186	115.766.00.1	196
115.040.46.5	205	115.202.11.1	967	115.651.SI.1	186	115.766.SI.1	196
115.045.11.5	205	115.205.CD.1	968	115.651.SJ.1	186	115.768.11.1	197
115.045.21.5	205	115.205.TD.1	968	115.652.00.1	187	115.768.21.1	197
115.045.46.5	205	115.211.CD.1	968	115.652.JM.1	187	115.768.46.1	197
115.055.11.1	204	115.211.TD.1	968	115.652.JV.1	187	115.770.11.5	176
115.055.14.1	204	115.211.TF.1	968	115.652.JX.1	187	115.770.21.5	176
115.055.21.1	204	115.335.00.1	206	115.652.SI.1	187	115.770.79.5	176
115.055.46.1	204	115.336.00.1	207	115.652.SJ.1	187	115.770.DT.5	176
115.055.QA.1	204	115.416.11.1	91	115.660.11.1	177	115.770.DW.5	176
115.055.QC.1	204	115.416.21.1	91	115.660.21.1	177	115.770.FY.5	176
115.055.QE.1	204	115.438.00.1	890	115.660.DW.1	177	115.770.JQ.5	176
115.060.11.1	205	115.622.14.1	192	115.660.JQ.1	177	115.770.KA.5	176
115.060.DW.1	205	115.622.FW.1	192	115.670.00.2	189	115.770.LB.5	176
115.080.01.1	200	115.622.ID.1	192	115.670.11.2	189	115.770.SX.5	176
115.080.11.1	200	115.622.JK.1	192	115.670.DW.2	189	115.787.SN.5	179
115.080.14.1	200	115.622.JL.1	192	115.670.JM.2	189	115.788.00.1	191
115.080.16.1	200	115.622.JT.1	192	115.670.JV.2	189	115.788.00.2	188
115.080.DW.1	200	115.622.QB.1	192	115.670.JX.2	189	115.788.11.2	188
115.080.JQ.1	200	115.622.QD.1	192	115.670.QB.2	189	115.788.21.2	188
115.080.JT.1	200	115.622.QF.1	192	115.671.00.2	190	115.788.DW.2	188
115.080.KH.1	200	115.622.SI.1	192	115.671.11.2	190	115.788.GH.2	188
115.080.KJ.1	200	115.622.SJ.1	192	115.671.DW.2	190	115.788.JK.2	188

Article number	Page	Article number	Page	Article number	Page	Article number	Page
115.788.JL.2	188	115.884.SJ.1	184	115.995.21.2	194	116.025.JQ.1	260
115.788.JM.2	188	115.885.00.6	235	115.995.BZ.2	194	116.025.KH.1	260
115.788.JV.2	188	115.889.SN.1	181	115.996.21.2	195	116.025.KJ.1	260
115.788.JX.2	188	115.890.16.6	212	115.996.BZ.2	195	116.025.KK.1	260
115.788.SD.2	188	115.890.DW.6	212	116.003.00.1	288	116.025.KM.1	260
115.801.00.5	290	115.890.SN.6	212	116.004.00.1	289	116.025.SN.1	260
115.805.21.5	285	115.891.16.6	227	116.005.00.1	291	116.031.11.5	266
115.817.11.5	281	115.891.DW.6	227	116.011.11.5	273	116.031.21.5	266
115.817.46.5	281	115.891.SN.6	227	116.011.21.5	273	116.031.DW.5	266
115.818.11.5	282	115.893.14.1	179	116.011.DW.5	273	116.034.14.1	269
115.818.46.5	282	115.893.45.1	179	116.011.JQ.5	273	116.034.FW.1	269
115.848.00.1	286	115.893.JT.1	179	116.014.14.1	276	116.034.ID.1	269
115.849.00.1	287	115.893.KJ.1	179	116.014.FW.1	276	116.034.JK.1	269
115.856.16.6	223	115.893.KX.1	179	116.014.ID.1	276	116.034.JL.1	269
115.856.DW.6	223	115.893.KY.1	179	116.014.JK.1	276	116.034.JT.1	269
115.856.SN.6	223	115.897.00.6	220	116.014.JL.1	276	116.034.QB.1	269
115.861.00.6	248	115.898.00.6	230	116.014.JT.1	276	116.034.QD.1	269
115.862.00.6	219	115.906.16.6	213	116.014.QB.1	276	116.034.QF.1	269
115.863.16.6	215	115.906.DW.6	213	116.014.QD.1	276	116.034.SI.1	269
115.863.SN.6	215	115.906.SN.6	213	116.014.QF.1	276	116.034.SJ.1	269
115.864.16.6	234	115.907.16.6	214	116.014.SI.1	276	116.035.16.1	268
115.864.SN.6	234	115.907.DW.6	214	116.014.SJ.1	276	116.035.DW.1	268
115.867.16.6	216	115.907.JQ.6	214	116.015.16.1	275	116.035.JQ.1	268
115.867.SN.6	216	115.907.KH.6	214	116.015.DW.1	275	116.035.KH.1	268
115.869.16.6	232	115.907.KJ.6	214	116.015.JQ.1	275	116.035.KJ.1	268
115.869.SN.6	232	115.907.KK.6	214	116.015.KH.1	275	116.035.KK.1	268
115.882.01.1	180	115.907.KM.6	214	116.015.KJ.1	275	116.035.KM.1	268
115.882.11.1	180	115.907.SN.6	214	116.015.KK.1	275	116.035.SN.1	268
115.882.14.1	180	115.908.16.6	229	116.015.KM.1	275	116.040.11.1	244
115.882.16.1	180	115.908.DW.6	229	116.015.SN.1	275	116.040.21.1	244
115.882.DW.1	180	115.908.JQ.6	229	116.016.00.1	281	116.040.JQ.1	244
115.882.JQ.1	180	115.908.KH.6	229	116.016.00.5	280	116.041.11.1	245
115.882.JT.1	180	115.908.KJ.6	229	116.016.11.5	280	116.041.21.1	245
115.882.KH.1	180	115.908.KK.6	229	116.016.DW.5	280	116.041.JQ.1	245
115.882.KJ.1	180	115.908.KM.6	229	116.016.GH.5	280	116.042.11.1	237
115.882.KK.1	180	115.908.SN.6	229	116.016.JK.5	280	116.042.21.1	237
115.882.KM.1	180	115.909.16.6	228	116.016.JL.5	280	116.042.JQ.1	237
115.882.SN.1	180	115.909.DW.6	228	116.016.SD.5	280	116.043.11.1	239
115.883.01.1	181	115.909.SN.6	228	116.020.00.1	971	116.043.21.1	239
115.883.11.1	181	115.918.00.1	247	116.021.11.5	258	116.043.JQ.1	239
115.883.14.1	181	115.936.14.6	222	116.021.21.5	258	116.044.11.1	237
115.883.16.1	181	115.936.SN.6	222	116.021.DW.5	258	116.045.11.1	239
115.883.DW.1	181	115.937.14.6	235	116.021.JQ.5	258	116.046.11.1	245
115.883.JQ.1	181	115.937.SN.6	235	116.024.14.1	261	116.047.11.1	246
115.883.JT.1	181	115.943.21.1	247	116.024.FW.1	261	116.048.11.1	238
115.883.KH.1	181	115.947.00.1	246	116.024.ID.1	261	116.049.11.1	240
115.883.KJ.1	181	115.947.21.1	246	116.024.JK.1	261	116.050.11.1	238
115.883.KK.1	181	115.955.00.6	225	116.024.JL.1	261	116.050.21.1	238
115.883.KM.1	181	115.956.14.6	226	116.024.JT.1	261	116.050.JQ.1	238
115.884.00.1	184	115.956.SN.6	226	116.024.QB.1	261	116.051.GH.1	244
115.884.JK.1	184	115.980.21.2	193	116.024.QD.1	261	116.051.KA.1	244
115.884.JL.1	184	115.980.BZ.2	193	116.024.QF.1	261	116.051.KT.1	244
115.884.JM.1	184	115.981.21.2	194	116.024.SI.1	261	116.051.KV.1	244
115.884.JV.1	184	115.981.BZ.2	194	116.024.SJ.1	261	116.052.21.1	243
115.884.JX.1	184	115.985.00.5	290	116.025.16.1	260	116.053.GH.1	243
115.884.SI.1	184	115.993.00.1	248	116.025.DW.1	260	116.053.KA.1	243

Article number	Page	Article number	Page	Article number	Page	Article number	Page
116.053.KT.1	243	116.092.SG.6	224	116.171.SN.1	324	116.194.21.1	332
116.053.KV.1	243	116.092.SM.6	224	116.172.14.1	324	116.194.SN.1	332
116.054.21.1	242	116.093.11.1	259	116.172.21.1	324	116.195.14.1	339
116.055.16.1	240	116.093.21.1	259	116.172.SN.1	324	116.195.21.1	339
116.055.DW.1	240	116.093.DW.1	259	116.173.14.1	331	116.195.SN.1	339
116.055.JQ.1	240	116.093.JQ.1	259	116.173.21.1	331	116.196.14.1	339
116.055.KH.1	240	116.094.11.1	267	116.173.SN.1	331	116.196.21.1	339
116.055.KJ.1	240	116.094.21.1	267	116.174.14.1	331	116.196.SN.1	339
116.055.KK.1	240	116.094.DW.1	267	116.174.21.1	331	116.197.14.1	325
116.055.KM.1	240	116.094.JQ.1	267	116.174.SN.1	331	116.197.21.1	325
116.056.16.1	242	116.096.00.1	249	116.175.14.1	338	116.197.SN.1	325
116.056.DW.1	242	116.098.00.6	250	116.175.21.1	338	116.198.14.1	332
116.056.JQ.1	242	116.119.00.1	969	116.175.SN.1	338	116.198.21.1	332
116.056.KH.1	242	116.130.00.1	355	116.176.14.1	338	116.198.SN.1	332
116.056.KJ.1	242	116.131.21.1	335	116.176.21.1	338	116.207.21.1	841
116.056.KK.1	242	116.132.21.1	335	116.176.SN.1	338	116.207.79.1	841
116.056.KM.1	242	116.133.21.1	328	116.177.14.1	324	116.207.FY.1	841
116.057.16.1	241	116.134.21.1	328	116.177.21.1	324	116.207.SX.1	841
116.057.DW.1	241	116.135.21.1	326	116.177.SN.1	324	116.208.00.5	845
116.057.JQ.1	241	116.136.21.1	327	116.178.14.1	331	116.208.21.5	846
116.057.KH.1	241	116.140.00.1	947	116.178.21.1	331	116.209.00.5	843
116.057.KJ.1	241	116.141.00.1	966	116.178.SN.1	331	116.209.21.1	842
116.057.KK.1	241	116.142.00.1	951	116.181.14.1	323	116.209.21.5	844
116.057.KM.1	241	116.143.00.1	954	116.181.21.1	323	116.217.14.1	278
116.057.SN.1	241	116.144.00.1	957	116.181.SN.1	323	116.217.FW.1	278
116.058.00.1	970	116.145.21.1	326	116.182.14.1	323	116.217.ID.1	278
116.059.00.1	971	116.146.21.1	327	116.182.21.1	323	116.217.JK.1	278
116.059.SN.1	971	116.147.00.1	960	116.182.SN.1	323	116.217.JL.1	278
116.060.00.1	970	116.155.21.1	326	116.183.14.1	330	116.217.JT.1	278
116.062.00.1	971	116.156.21.1	327	116.183.21.1	330	116.217.QB.1	278
116.064.11.1	274	116.161.14.1	322	116.183.SN.1	330	116.217.QD.1	278
116.064.21.1	274	116.161.21.1	322	116.184.14.1	330	116.217.QF.1	278
116.064.DW.1	274	116.161.SN.1	322	116.184.21.1	330	116.217.SI.1	278
116.064.JQ.1	274	116.162.14.1	322	116.184.SN.1	330	116.217.SJ.1	278
116.065.00.1	970	116.162.21.1	322	116.185.14.1	337	116.227.14.1	263
116.066.00.1	969	116.162.SN.1	322	116.185.21.1	337	116.227.FW.1	263
116.067.00.1	971	116.163.14.1	329	116.185.SN.1	337	116.227.ID.1	263
116.068.00.1	973	116.163.21.1	329	116.186.14.1	337	116.227.JK.1	263
116.069.FW.1	292	116.163.SN.1	329	116.186.21.1	337	116.227.JL.1	263
116.070.00.1	945	116.164.14.1	329	116.186.SN.1	337	116.227.JT.1	263
116.071.00.1	965	116.164.21.1	329	116.187.14.1	323	116.227.QB.1	263
116.072.00.1	949	116.164.SN.1	329	116.187.21.1	323	116.227.QD.1	263
116.073.00.1	952	116.165.14.1	336	116.187.SN.1	323	116.227.QF.1	263
116.074.00.1	955	116.165.21.1	336	116.188.14.1	330	116.227.SI.1	263
116.075.00.1	958	116.165.SN.1	336	116.188.21.1	330	116.227.SJ.1	263
116.076.00.1	283	116.166.14.1	336	116.188.SN.1	330	116.235.21.1	333
116.077.00.1	284	116.166.21.1	336	116.191.14.1	325	116.236.21.1	334
116.080.00.1	946	116.166.SN.1	336	116.191.21.1	325	116.237.14.1	271
116.081.00.1	965	116.167.14.1	322	116.191.SN.1	325	116.237.FW.1	271
116.082.00.1	950	116.167.21.1	322	116.192.14.1	325	116.237.ID.1	271
116.083.00.1	953	116.167.SN.1	322	116.192.21.1	325	116.237.JK.1	271
116.084.00.1	956	116.168.14.1	329	116.192.SN.1	325	116.237.JL.1	271
116.085.00.1	959	116.168.21.1	329	116.193.14.1	332	116.237.JT.1	271
116.086.00.1	265	116.168.SN.1	329	116.193.21.1	332	116.237.QB.1	271
116.090.SG.6	218	116.171.14.1	324	116.193.SN.1	332	116.237.QD.1	271
116.090.SM.6	218	116.171.21.1	324	116.194.14.1	332	116.237.QF.1	271

Article number	Page	Article number	Page	Article number	Page	Article number	Page
116.237.SI.1	271	116.281.SN.1	342	116.464.21.1	352	131.031.SJ.6	908
116.237.SJ.1	271	116.282.14.1	342	116.465.14.1	353	131.031.TD.5	908
116.245.21.1	333	116.282.21.1	342	116.465.21.1	353	131.033.00.5	917
116.246.21.1	334	116.282.SN.1	342	118.026.11.1	145	131.033.CD.5	916
116.255.21.1	333	116.283.14.1	346	118.026.21.1	145	131.033.JK.5	916
116.256.21.1	334	116.283.21.1	346	118.100.11.1	156	131.033.JL.5	916
116.261.14.1	342	116.283.SN.1	346	118.200.16.1	154	131.033.JV.5	917
116.261.21.1	342	116.284.14.1	346	118.221.11.1	144	131.033.SI.5	916
116.261.SN.1	342	116.284.21.1	346	118.221.21.1	144	131.033.SJ.6	916
116.262.14.1	342	116.284.SN.1	346	119.060.11.1	156	131.033.TD.5	916
116.262.21.1	342	116.285.14.1	350	119.063.11.1	157	131.071.21.1	920
116.262.SN.1	342	116.285.21.1	350	119.503.11.1	157	131.081.11.1	921
116.263.14.1	346	116.285.SN.1	350	119.504.11.1	155	131.082.16.1	921
116.263.21.1	346	116.286.14.1	350	119.610.11.1	154	131.083.16.1	920
116.263.SN.1	346	116.286.21.1	350	119.611.16.1	154	131.085.11.1	920
116.264.14.1	346	116.286.SN.1	350	119.668.00.1	158	131.088.29.1	922
116.264.21.1	346	116.287.14.1	342	119.675.00.1	158	131.108.11.1	921
116.264.SN.1	346	116.287.21.1	342	119.688.21.1	292	131.201.00.7	915
116.265.14.1	350	116.287.SN.1	342	119.696.11.1	155	131.201.CD.7	914
116.265.21.1	350	116.288.14.1	346	119.698.16.1	144	131.201.JK.7	914
116.265.SN.1	350	116.288.21.1	346	119.702.00.1	972	131.201.JL.7	914
116.266.14.1	350	116.288.SN.1	346	123.105.11.1	150	131.201.JV.7	915
116.266.21.1	350	116.291.14.1	344	123.135.11.1	151	131.201.SI.7	914
116.266.SN.1	350	116.291.21.1	344	123.136.11.1	151	131.201.SJ.7	914
116.267.14.1	342	116.291.SN.1	344	123.700.11.1	149	131.201.TD.7	914
116.267.21.1	342	116.292.14.1	344	123.701.11.1	150	131.221.00.7	907
116.267.SN.1	342	116.292.21.1	344	128.300.11.5	148	131.221.CD.7	906
116.268.14.1	346	116.292.SN.1	344	128.309.11.5	148	131.221.JK.7	906
116.268.21.1	346	116.293.14.1	348	131.001.00.5	913	131.221.JL.7	906
116.268.SN.1	346	116.293.21.1	348	131.001.CD.5	912	131.221.JV.7	907
116.271.14.1	344	116.293.SN.1	348	131.001.JK.5	912	131.221.SI.7	906
116.271.21.1	344	116.294.14.1	348	131.001.JL.5	912	131.221.SJ.7	906
116.271.SN.1	344	116.294.21.1	348	131.001.JV.5	913	131.221.TD.7	906
116.272.14.1	344	116.294.SN.1	348	131.001.SI.5	912	131.231.00.7	911
116.272.21.1	344	116.295.14.1	351	131.001.SJ.6	912	131.231.CD.7	910
116.272.SN.1	344	116.295.21.1	351	131.001.SL.5	912	131.231.JK.7	910
116.273.14.1	348	116.295.SN.1	351	131.001.TD.5	912	131.231.JL.7	910
116.273.21.1	348	116.296.14.1	351	131.021.00.5	905	131.231.JV.7	911
116.273.SN.1	348	116.296.21.1	351	131.021.CD.5	904	131.231.SI.7	910
116.274.14.1	348	116.296.SN.1	351	131.021.JK.5	904	131.231.SJ.7	910
116.274.21.1	348	116.297.14.1	344	131.021.JL.5	904	131.231.TD.7	910
116.274.SN.1	348	116.297.21.1	344	131.021.JV.5	905	131.233.00.7	919
116.275.14.1	351	116.297.SN.1	344	131.021.SI.5	904	131.233.CD.7	918
116.275.21.1	351	116.298.14.1	348	131.021.SJ.6	904	131.233.JK.7	918
116.275.SN.1	351	116.298.21.1	348	131.021.SL.5	904	131.233.JL.7	918
116.276.14.1	351	116.298.SN.1	348	131.021.TD.5	904	131.233.JV.7	919
116.276.21.1	351	116.335.21.1	340	131.030.JK.5	923	131.233.SI.7	918
116.276.SN.1	351	116.336.21.1	341	131.030.JL.5	923	131.233.SJ.7	918
116.277.14.1	344	116.365.21.1	340	131.030.SI.5	923	131.233.TD.7	918
116.277.21.1	344	116.366.21.1	341	131.030.SJ.6	923	136.430.11.1	153
116.277.SN.1	344	116.421.00.1	354	131.031.00.5	909	136.444.11.1	152
116.278.14.1	348	116.422.00.1	356	131.031.CD.5	908	136.530.11.1	152
116.278.21.1	348	116.425.11.1	354	131.031.JK.5	908	136.535.11.1	149
116.278.SN.1	348	116.426.11.1	354	131.031.JL.5	908	136.610.11.1	153
116.281.14.1	342	116.450.00.1	356	131.031.JV.5	909	136.723.00.3	165
116.281.21.1	342	116.464.14.1	352	131.031.SI.5	908	136.724.00.3	165

Article number	Page	Article number	Page	Article number	Page	Article number	Page
136.752.00.1	164	150.265.46.1	422	151.105.21.1	361	152.235.11.1	380
136.753.00.1	163	150.266.11.1	423	151.107.11.1	361	152.235.21.1	380
136.764.21.1	167	150.266.16.1	423	151.116.11.1	365	152.378.11.1	381
136.765.21.1	167	150.266.21.1	423	151.117.11.1	365	152.392.11.1	379
136.909.21.2	166	150.266.KJ.1	423	151.120.11.1	369	152.393.11.1	379
146.070.11.1	878	150.280.11.1	419	151.120.21.1	369	152.400.16.1	299
146.130.11.1	879	150.280.14.1	419	151.121.00.1	369	152.402.16.1	299
146.200.11.1	871	150.280.21.1	419	151.122.21.1	370	152.404.46.1	301
146.200.21.1	871	150.280.46.1	419	152.005.00.1	372	152.408.00.1	855
146.210.11.1	870	150.281.11.1	426	152.013.21.1	373	152.420.46.1	300
146.210.21.1	870	150.281.21.1	426	152.018.00.1	309	152.422.46.1	301
146.220.11.1	872	150.285.21.1	419	152.038.16.1	383	152.424.00.1	304
146.220.21.1	872	150.300.14.1	426	152.039.16.1	383	152.425.46.1	300
146.220.JT.1	872	150.300.21.1	426	152.040.16.1	383	152.426.46.1	301
146.250.01.1	873	150.300.KJ.1	426	152.041.16.1	383	152.428.46.1	300
146.250.21.1	873	150.481.11.1	429	152.042.16.1	383	152.429.46.1	300
146.270.11.1	876	150.481.14.1	429	152.043.16.1	383	152.434.16.1	155
146.270.FW.1	876	150.481.21.1	429	152.044.16.1	383	152.438.46.1	302
146.270.SI.1	876	150.481.KJ.1	429	152.045.16.1	383	152.439.46.1	301
146.270.SJ.1	876	150.501.00.6	424	152.046.16.1	383	152.441.46.1	301
146.290.11.1	874	150.505.00.6	425	152.049.21.1	368	152.465.00.1	304
146.290.FW.1	874	150.520.21.6	424	152.050.14.1	370	152.489.16.1	291
146.290.SI.1	874	150.525.21.6	425	152.050.21.1	370	152.495.00.1	309
146.290.SJ.1	874	150.550.00.1	421	152.051.01.1	369	152.496.00.1	309
146.350.01.1	875	150.551.21.1	420	152.059.21.1	368	152.497.00.1	304
147.020.00.1	886	150.552.00.1	421	152.061.01.1	369	152.550.11.1	376
147.030.11.1	886	150.552.21.1	420	152.072.21.1	367	152.556.11.1	376
147.030.21.1	886	150.581.00.1	421	152.073.21.1	367	152.597.11.1	378
147.031.11.1	887	150.583.21.1	420	152.074.21.1	367	152.607.11.1	306
147.031.21.1	887	150.592.00.1	422	152.075.21.1	367	152.613.11.1	300
147.033.11.1	887	150.592.21.1	421	152.076.21.1	373	152.627.16.1	306
147.033.21.1	887	150.680.00.1	418	152.080.14.1	370	152.647.00.1	299
147.034.00.1	890	150.685.00.1	419	152.080.21.1	370	152.682.00.1	310
147.035.00.1	891	150.700.00.6	427	152.084.21.1	365	152.689.00.1	310
147.036.00.1	891	150.701.00.6	429	152.089.01.1	366	152.690.00.1	310
147.038.SI.1	892	150.702.00.6	428	152.091.21.1	366	152.691.00.1	310
147.038.SJ.1	892	150.710.21.6	427	152.092.21.1	366	152.692.00.1	310
147.039.00.1	889	150.711.21.6	429	152.093.21.1	365	152.693.00.1	310
147.040.00.1	899	150.755.21.6	430	152.099.01.1	366	152.701.11.1	306
147.041.SI.1	892	150.756.21.6	431	152.107.16.1	384	152.702.11.1	379
147.041.SJ.1	892	150.757.21.6	430	152.108.16.1	384	152.704.11.1	379
147.042.11.1	889	150.991.00.1	432	152.113.16.1	384	152.711.11.1	375
147.044.00.1	893	151.016.11.1	307	152.114.16.1	384	152.713.11.1	375
147.045.00.1	897	151.019.01.1	361	152.115.16.1	384	152.715.11.1	377
147.048.00.1	899	151.020.21.1	362	152.121.00.1	386	152.741.11.1	375
147.049.00.1	889	151.021.21.1	362	152.122.00.1	386	152.742.11.1	375
147.072.00.1	900	151.024.14.1	363	152.170.16.1	303	152.767.11.1	379
147.075.00.1	888	151.025.14.1	363	152.175.16.1	384	152.768.11.1	381
147.076.01.1	896	151.034.11.1	364	152.176.16.1	384	152.796.00.1	309
147.077.00.1	887	151.034.14.1	363	152.179.16.1	384	152.818.11.1	377
147.078.00.1	888	151.034.21.1	363	152.180.16.1	384	152.819.11.1	376
147.081.PO.1	888	151.035.11.1	364	152.181.16.1	384	152.821.11.1	378
147.086.01.1	895	151.035.14.1	363	152.184.16.1	384	152.860.11.1	360
150.017.00.6	431	151.035.21.1	363	152.231.11.1	307	152.861.11.1	360
150.265.11.1	422	151.039.21.1	364	152.232.00.1	381	152.885.11.1	376
150.265.21.1	422	151.100.11.1	308	152.234.21.1	380	152.886.11.1	377

Article number	Page	Article number	Page	Article number	Page	Article number	Page
152.910.16.1	382	154.455.00.1	396	242.837.00.1	898	388.012.00.3	438
152.950.11.1	305	154.458.00.1	398	242.839.P0.1	888	388.013.00.2	439
152.951.11.1	305	154.459.00.1	398	243.168.00.1	192	388.015.00.2	436
152.973.00.1	384	154.461.KS.1	396	243.173.00.1	897	388.021.00.1	442
152.974.00.1	384	154.501.KS.1	397	243.275.00.1	293	388.022.00.1	443
152.978.00.1	384	154.501.TE.1	397	243.276.00.1	294	388.023.00.1	441
152.979.00.1	384	154.502.KS.1	397	243.277.00.1	294	388.032.00.1	443
152.981.00.1	384	154.502.TE.1	397	243.312.00.1	972	388.033.00.1	444
153.564.16.1	309	154.503.KS.1	397	243.625.00.1	353	388.100.00.1	445
153.565.16.1	309	154.503.TE.1	397	243.626.21.1	353	388.101.00.1	445
153.566.16.1	309	154.504.KS.1	397	243.635.00.1	353	388.102.00.1	445
154.050.00.1	402	154.504.TE.1	397	243.636.00.1	353	388.104.00.1	446
154.052.00.1	403	156.050.00.1	33	243.637.00.1	353	388.105.00.1	444
154.053.00.1	404	156.051.00.1	97	243.638.00.1	353	388.106.00.1	446
154.150.00.1	393	156.054.00.1	97	243.905.00.1	145	388.107.00.1	446
154.152.00.1	394	167.733.16.1	298	244.120.00.1	195	388.108.00.1	445
154.153.00.1	394	167.734.16.1	298	244.622.00.1	355	388.109.00.1	446
154.159.00.1	395	171.001.01.2	1042	244.999.00.1	251	388.110.00.1	447
154.307.00.1	400	171.005.01.2	1043	245.368.01.1	895	388.111.00.1	447
154.309.00.1	400	171.006.01.2	1042	245.451.11.1	478	388.112.00.1	448
154.310.00.1	405	217.713.11.1	303	245.464.JT.1	645	388.113.00.1	447
154.311.00.1	405	217.713.46.1	303	245.820.01.1	894	388.114.00.1	448
154.312.00.1	405	238.192.00.2	158	245.830.01.1	894	388.115.00.1	447
154.314.00.1	401	240.017.00.1	158	245.840.01.1	893	388.117.00.1	447
154.320.00.1	400	240.396.00.1	890	245.999.01.1	895	388.120.00.1	436
154.322.00.1	400	240.476.00.1	145	246.110.00.1	295	388.121.00.2	437
154.335.11.1	413	240.635.00.1	897	246.191.00.5	162	388.123.00.2	437
154.335.14.1	413	240.648.00.1	371	249.801.00.1	896	388.125.00.1	448
154.335.21.1	413	240.938.00.1	206	250.022.00.1	900	388.132.00.1	444
154.336.FW.1	413	241.154.00.1	251	273.645.21.2	168	388.350.29.1	303
154.337.FW.1	413	241.155.00.1	251	281.004.00.5	164	405.012.00.1	302
154.338.00.1	414	241.502.11.1	374	281.207.00.1	163	405.116.00.1	302
154.339.00.1	414	241.502.21.1	374	281.208.00.1	162	457.430.00.1	25
154.340.FW.1	414	241.507.11.1	158	282.303.21.2	166	457.534.00.1	31
154.341.FW.1	414	241.507.21.1	158	283.313.21.5	168	457.536.00.1	32
154.343.00.1	401	241.508.11.1	158	352.328.08.1	385	457.606.00.1	28
154.344.00.1	415	241.508.21.1	158	352.329.08.1	385	457.608.00.5	26
154.345.00.1	401	241.568.00.1	252	352.331.08.1	387	457.611.00.1	27
154.440.39.1	399	241.631.00.1	356	352.332.08.1	386	457.686.00.1	30
154.440.KS.1	399	241.993.01.1	372	352.333.08.1	387	457.689.00.1	29
154.440.QC.1	399	241.993.11.1	371	352.368.00.1	386	457.801.00.2	32
154.441.39.1	399	241.993.14.1	372	352.377.16.1	382	457.872.26.1	33
154.441.KS.1	399	241.993.21.1	372	352.379.16.1	382	457.888.26.1	33
154.441.QC.1	399	242.018.00.1	158	352.389.08.1	382	457.893.00.1	25
154.442.39.1	399	242.042.00.1	93	359.144.11.1	304	458.212.00.2	52
154.442.KS.1	399	242.126.11.1	374	363.050.00.1	135	458.233.00.3	53
154.442.QC.1	399	242.126.21.1	374	364.052.00.1	135	461.000.25.1	102
154.446.KS.2	398	242.307.21.1	353	365.050.00.1	135	461.002.00.1	102
154.446.QC.2	398	242.309.00.1	97	366.050.00.1	135	461.003.00.1	103
154.447.KS.2	398	242.349.00.1	353	367.050.00.1	135	461.004.00.1	131
154.447.QC.2	398	242.545.00.1	900	388.001.00.1	440	461.006.00.1	132
154.448.KS.2	398	242.546.00.1	898	388.005.00.1	439	461.014.00.1	105
154.448.QC.2	398	242.547.00.1	899	388.007.00.1	440	461.015.00.1	132
154.450.KS.1	396	242.645.21.1	353	388.008.00.1	440	461.022.00.1	103
154.451.KS.1	396	242.758.00.1	206	388.009.00.1	441	461.025.00.1	106
154.453.KS.1	396	242.834.21.1	353	388.011.00.3	438	461.030.00.1	39

Article number	Page	Article number	Page	Article number	Page	Article number	Page
461.031.00.1	39	500.202.01.1	517	500.283.01.1	749	500.350.00.1	676
461.035.00.1	126	500.202.JT.1	517	500.284.01.1	774	500.350.JK.1	676
461.036.00.1	105	500.203.00.1	544	500.285.01.1	746	500.350.JL.1	676
461.037.26.1	132	500.204.00.1	544	500.286.01.1	745	500.350.JR.1	676
461.038.00.1	123	500.205.00.1	819	500.287.01.1	748	500.351.00.1	676
461.058.00.1	107	500.206.00.1	821	500.288.01.1	755	500.351.JK.1	676
461.064.00.1	105	500.207.00.1	820	500.289.01.1	755	500.351.JL.1	676
461.070.00.1	134	500.208.01.1	688	500.290.01.1	701	500.351.JR.1	676
461.074.00.1	108	500.209.01.1	693	500.291.01.1	701	500.352.00.1	678
461.089.00.1	105	500.212.01.1	690	500.292.01.1	768	500.352.JK.1	678
461.140.00.1	104	500.214.01.1	692	500.294.01.1	730	500.352.JL.1	678
461.141.00.2	113	500.221.01.1	692	500.295.01.1	730	500.352.JR.1	678
461.145.00.1	128	500.222.01.1	668	500.297.01.1	732	500.353.00.1	678
461.146.00.1	129	500.223.01.1	670	500.299.01.1	701	500.353.JK.1	678
461.149.00.1	124	500.224.01.1	670	500.300.01.1	701	500.353.JL.1	678
461.163.00.5	106	500.225.01.1	670	500.301.01.1	700	500.353.JR.1	678
461.173.00.1	125	500.226.01.1	670	500.302.01.1	768	500.354.00.1	678
461.185.00.1	104	500.227.01.1	669	500.304.01.1	732	500.354.JK.1	678
461.190.00.1	131	500.228.01.1	669	500.305.01.1	732	500.354.JL.1	678
461.191.00.1	131	500.229.01.1	670	500.306.01.1	702	500.354.JR.1	678
461.194.00.1	105	500.230.01.1	669	500.307.01.1	702	500.355.00.1	678
461.197.00.1	124	500.235.01.1	691	500.310.01.1	700	500.355.JK.1	678
461.200.00.1	102	500.238.01.1	691	500.311.01.1	732	500.355.JL.1	678
461.206.00.2	114	500.239.01.1	691	500.313.01.1	702	500.355.JR.1	678
461.214.00.2	135	500.248.01.1	669	500.315.01.1	732	500.356.00.1	679
461.215.00.2	135	500.249.01.1	670	500.316.01.1	700	500.356.JK.1	679
461.216.00.1	134	500.250.01.1	670	500.318.01.1	764	500.356.JL.1	679
461.221.00.1	125	500.251.01.1	670	500.319.01.1	764	500.356.JR.1	679
461.301.00.6	112	500.252.01.1	670	500.320.01.1	730	500.357.00.1	681
461.311.00.6	111	500.253.01.1	670	500.322.01.1	700	500.357.JK.1	681
461.430.00.1	114	500.254.01.1	694	500.324.01.1	730	500.357.JL.1	681
461.435.00.1	115	500.255.01.1	695	500.326.01.1	731	500.357.JR.1	681
461.445.00.1	126	500.256.01.1	668	500.327.01.1	731	500.358.00.1	682
461.530.00.1	116	500.257.00.1	819	500.328.01.1	704	500.358.JK.1	682
461.606.00.1	121	500.258.00.1	819	500.329.01.1	733	500.358.JL.1	682
461.621.00.1	120	500.259.01.1	670	500.330.01.1	751	500.358.JR.1	682
461.660.00.1	130	500.260.01.1	740	500.331.01.1	752	500.359.00.1	681
461.686.00.1	119	500.261.01.1	772	500.332.01.1	722	500.359.JK.1	681
461.689.00.1	118	500.262.01.1	771	500.333.01.1	752	500.359.JL.1	681
461.734.00.1	122	500.263.01.1	765	500.334.01.1	722	500.359.JR.1	681
461.736.00.1	122	500.264.01.1	754	500.335.01.1	752	500.360.00.1	681
461.742.00.1	124	500.265.01.1	739	500.336.01.1	722	500.360.JK.1	681
464.015.00.1	40	500.266.01.1	724	500.337.01.1	752	500.360.JL.1	681
464.044.00.1	40	500.267.01.1	723	500.338.01.1	722	500.360.JR.1	681
465.029.00.1	41	500.268.01.1	753	500.340.01.1	776	500.361.00.1	680
500.089.00.1	972	500.269.01.1	754	500.341.01.1	733	500.361.JK.1	680
500.121.00.1	1035	500.270.01.1	719	500.342.01.1	703	500.361.JL.1	680
500.122.00.1	1035	500.271.01.1	725	500.343.01.1	758	500.361.JR.1	680
500.133.00.1	774	500.273.00.1	819	500.344.01.1	758	500.362.00.1	682
500.151.01.1	749	500.275.01.1	719	500.346.00.1	541	500.362.JK.1	682
500.152.01.1	721	500.276.00.1	531	500.346.01.1	541	500.362.JL.1	682
500.153.01.1	720	500.277.00.1	531	500.346.43.1	541	500.362.JR.1	682
500.187.01.1	768	500.278.00.1	531	500.347.00.1	541	500.363.00.1	676
500.188.01.1	768	500.279.00.1	531	500.348.00.1	541	500.363.JK.1	676
500.199.21.1	713	500.281.01.1	750	500.348.43.1	541	500.363.JL.1	676
500.201.01.1	517	500.282.01.1	750	500.349.01.1	765	500.363.JR.1	676

Article number	Page	Article number	Page	Article number	Page	Article number	Page
500.364.00.1	676	500.517.01.1	540	500.677.00.1	684	500.777.01.2	796
500.364.JK.1	676	500.517.43.1	540	500.678.00.1	683	500.778.01.2	796
500.364.JL.1	676	500.518.00.1	541	500.681.01.1	802	500.779.01.2	797
500.364.JR.1	676	500.518.01.1	541	500.683.00.2	686	500.780.01.2	797
500.365.00.1	677	500.518.43.1	541	500.683.01.1	687	500.781.01.2	797
500.365.JK.1	677	500.519.00.1	544	500.685.01.1	687	500.782.01.2	802
500.365.JL.1	677	500.520.00.1	543	500.687.01.1	691	500.783.01.2	802
500.365.JR.1	677	500.521.00.1	544	500.688.01.1	691	500.785.00.1	768
500.366.00.1	677	500.522.00.1	544	500.690.01.1	518	500.786.00.1	768
500.366.JK.1	677	500.523.00.1	545	500.690.JT.1	518	500.787.01.1	768
500.366.JL.1	677	500.524.00.1	545	500.693.01.2	770	500.788.01.1	768
500.366.JR.1	677	500.525.00.1	545	500.694.01.2	741	500.789.01.1	768
500.367.00.1	579	500.526.00.1	544	500.700.01.2	798	500.790.01.1	768
500.379.01.1	688	500.527.00.1	545	500.702.01.2	798	500.791.01.1	772
500.393.01.1	744	500.528.01.1	528	500.704.01.2	798	500.792.01.1	773
500.409.01.1	647	500.529.01.1	528	500.706.01.2	798	500.793.01.1	775
500.480.01.1	744	500.530.01.1	529	500.708.01.2	799	500.794.01.1	777
500.483.01.1	726	500.531.01.1	529	500.710.01.2	799	500.835.01.1	645
500.489.01.1	720	500.532.01.1	529	500.712.01.2	799	500.837.01.1	646
500.502.00.1	536	500.533.01.1	530	500.714.01.2	799	500.840.00.1	689
500.502.01.1	536	500.534.01.1	530	500.716.01.2	799	500.841.00.1	693
500.502.43.1	536	500.535.01.1	530	500.718.01.2	799	500.993.00.1	703
500.503.00.1	542	500.536.01.1	530	500.720.01.2	799	500.994.00.1	703
500.503.01.1	542	500.550.01.1	529	500.722.01.2	799	500.995.00.1	703
500.503.43.1	542	500.551.01.1	529	500.724.01.2	799	500.997.00.1	703
500.504.00.1	543	500.552.01.1	529	500.726.01.2	799	501.216.00.1	709
500.504.01.1	543	500.575.01.1	671	500.728.01.2	800	501.220.00.1	709
500.504.43.1	543	500.576.01.1	671	500.730.01.2	800	501.224.00.1	709
500.505.00.1	537	500.582.00.1	819	500.732.01.2	800	501.228.00.1	709
500.505.01.1	537	500.583.00.1	819	500.734.01.2	800	501.264.00.1	712
500.505.43.1	537	500.592.00.1	822	500.736.01.2	801	501.268.00.1	712
500.506.00.1	537	500.593.00.1	821	500.738.01.2	801	501.272.00.1	710
500.506.01.1	537	500.594.00.1	822	500.740.01.2	801	501.276.00.1	711
500.506.43.1	537	500.602.01.2	582	500.742.01.2	801	501.280.00.1	713
500.507.00.1	542	500.603.01.2	584	500.744.01.2	803	501.545.01.1	738
500.507.01.1	542	500.605.01.2	582	500.746.01.2	803	501.546.01.1	718
500.507.43.1	542	500.620.01.2	553	500.748.01.2	803	501.547.01.1	725
500.508.00.1	537	500.622.01.2	554	500.750.01.2	803	501.555.01.1	723
500.508.01.1	537	500.623.01.2	554	500.752.01.2	803	501.556.01.1	723
500.508.43.1	537	500.624.01.2	554	500.754.01.2	803	501.557.01.1	723
500.509.00.1	537	500.627.01.2	556	500.756.01.2	804	501.558.01.1	776
500.509.01.1	537	500.628.01.2	556	500.758.01.2	804	501.559.01.1	775
500.509.43.1	537	500.631.01.2	555	500.760.01.2	804	501.578.01.1	724
500.513.00.1	538	500.632.01.2	555	500.762.01.2	804	501.603.00.1	780
500.513.01.1	538	500.635.01.2	552	500.764.01.2	804	501.604.00.1	780
500.513.43.1	538	500.636.01.2	552	500.766.01.2	804	501.605.00.1	782
500.514.00.1	538	500.649.01.2	576	500.767.01.2	804	501.606.00.5	782
500.514.01.1	538	500.649.16.1	576	500.768.01.2	794	501.607.00.1	784
500.514.43.1	538	500.649.JK.2	576	500.769.01.2	794	501.608.00.1	784
500.515.00.1	539	500.649.JL.2	576	500.770.01.2	794	501.612.00.1	780
500.515.01.1	539	500.657.00.2	579	500.771.01.2	795	501.649.00.1	785
500.515.43.1	539	500.658.00.2	579	500.772.01.2	795	501.655.00.1	944
500.516.00.1	539	500.660.01.2	582	500.773.01.2	795	501.660.01.1	645
500.516.01.1	539	500.670.01.1	646	500.774.01.2	796	501.661.00.1	639
500.516.43.1	539	500.673.00.1	975	500.775.01.2	796	501.663.JT.1	639
500.517.00.1	540	500.676.00.1	684	500.776.01.2	796	501.664.00.1	638

Article number	Page	Article number	Page	Article number	Page	Article number	Page
501.666.00.1	760	501.841.00.3	602	502.302.JL.1	613	502.310.JL.1	614
501.676.00.1	759	501.841.00.5	602	502.302.JR.1	613	502.310.JR.1	614
501.679.00.1	787	501.841.00.7	602	502.303.01.1	616	502.311.01.1	614
501.681.00.1	787	501.842.00.1	602	502.303.01.2	616	502.311.01.2	614
501.682.00.1	787	501.842.00.3	602	502.303.01.3	616	502.311.01.3	614
501.683.00.1	788	501.842.00.5	602	502.303.JH.1	616	502.311.JH.1	614
501.686.00.5	786	501.842.00.7	602	502.303.JK.1	616	502.311.JK.1	614
501.737.00.5	781	501.843.00.1	605	502.303.JL.1	616	502.311.JL.1	614
501.738.00.5	781	501.843.00.3	605	502.303.JR.1	616	502.311.JR.1	614
501.739.00.5	783	501.844.00.1	605	502.304.01.1	616	502.312.01.1	614
501.751.00.1	739	501.844.00.3	605	502.304.01.2	616	502.312.01.2	614
501.752.00.1	740	501.845.00.1	605	502.304.01.3	616	502.312.01.3	614
501.753.00.1	746	501.845.00.3	605	502.304.JH.1	616	502.312.JH.1	614
501.754.00.1	747	501.846.00.1	605	502.304.JK.1	616	502.312.JK.1	614
501.769.00.5	785	501.846.00.3	605	502.304.JL.1	616	502.312.JL.1	614
501.830.00.1	597	501.847.00.1	604	502.304.JR.1	616	502.312.JR.1	614
501.830.00.3	597	501.847.00.3	604	502.305.01.1	616	502.313.01.1	614
501.830.JT.1	597	501.847.00.5	604	502.305.01.2	616	502.313.01.2	614
501.831.00.1	597	501.847.00.7	604	502.305.01.3	616	502.313.01.3	614
501.831.00.3	597	501.847.JT.1	604	502.305.JH.1	616	502.313.JH.1	614
501.831.JT.1	597	501.848.00.1	604	502.305.JK.1	616	502.313.JK.1	614
501.832.00.1	598	501.848.00.3	604	502.305.JL.1	616	502.313.JL.1	614
501.832.00.3	598	501.848.00.5	604	502.305.JR.1	616	502.313.JR.1	614
501.832.JT.1	598	501.848.00.7	604	502.306.01.1	616	502.314.01.1	619
501.833.00.1	598	501.848.JT.1	604	502.306.01.2	616	502.314.01.2	619
501.833.00.3	598	501.880.00.1	553	502.306.01.3	616	502.314.01.3	619
501.833.JT.1	598	501.880.00.3	553	502.306.JH.1	616	502.314.JH.1	619
501.834.00.1	600	501.880.00.5	553	502.306.JK.1	616	502.314.JK.1	619
501.834.00.3	600	501.880.00.7	553	502.306.JL.1	616	502.314.JL.1	619
501.834.00.5	600	501.898.00.1	648	502.306.JR.1	616	502.314.JR.1	619
501.834.00.7	600	501.898.JT.1	648	502.307.01.1	618	502.315.01.1	624
501.835.00.1	600	501.941.00.5	789	502.307.01.2	618	502.315.01.2	624
501.835.00.3	600	501.960.00.1	786	502.307.01.3	618	502.315.01.3	624
501.835.00.5	600	501.961.00.1	718	502.307.JH.1	618	502.315.JH.1	624
501.835.00.7	600	502.031.00.1	506	502.307.JK.1	618	502.315.JK.1	624
501.836.00.1	600	502.032.00.1	506	502.307.JL.1	618	502.315.JR.1	624
501.836.00.3	600	502.035.00.1	738	502.307.JR.1	618	502.316.01.1	492
501.836.00.5	600	502.300.01.1	612	502.308.01.1	618	502.316.01.2	492
501.836.00.7	600	502.300.01.2	612	502.308.01.2	618	502.316.01.3	492
501.837.00.1	600	502.300.01.3	612	502.308.01.3	618	502.316.JH.1	492
501.837.00.3	600	502.300.JH.1	612	502.308.JH.1	618	502.316.JK.1	492
501.837.00.5	600	502.300.JK.1	612	502.308.JK.1	618	502.316.JK.2	492
501.837.00.7	600	502.300.JL.1	612	502.308.JL.1	618	502.316.JR.1	492
501.838.00.1	603	502.300.JR.1	612	502.308.JR.1	618	502.317.01.1	493
501.838.00.3	603	502.301.01.1	612	502.309.01.1	620	502.317.01.2	493
501.838.00.5	603	502.301.01.2	612	502.309.01.2	620	502.317.01.3	493
501.838.00.7	603	502.301.01.3	612	502.309.01.3	620	502.317.JH.1	493
501.839.00.1	601	502.301.JH.1	612	502.309.JH.1	620	502.317.JK.1	493
501.839.00.3	601	502.301.JK.1	612	502.309.JK.1	620	502.317.JK.2	493
501.839.00.5	601	502.301.JL.1	612	502.309.JL.1	620	502.317.JL.1	493
501.839.00.7	601	502.301.JR.1	612	502.309.JR.1	620	502.317.JR.1	493
501.840.00.1	601	502.302.01.1	613	502.310.01.1	614	502.318.01.1	495
501.840.00.3	601	502.302.01.2	613	502.310.01.2	614	502.318.01.2	495
501.840.00.5	601	502.302.01.3	613	502.310.01.3	614	502.318.01.3	495
501.840.00.7	601	502.302.JH.1	613	502.310.JH.1	614	502.318.JH.1	495
501.841.00.1	602	502.302.JK.1	613	502.310.JK.1	614	502.318.JK.1	495

Article number	Page	Article number	Page	Article number	Page	Article number	Page
502.318.JK.2	495	502.328.JK.1	505	502.772.00.1	783	502.972.FY.1	855
502.318.JL.1	495	502.328.JL.1	505	502.773.00.1	783	502.972.PL.1	855
502.318.JR.1	495	502.349.00.1	505	502.774.00.1	581	502.973.00.1	831
502.319.01.1	495	502.350.00.1	505	502.780.00.1	816	502.973.79.1	831
502.319.01.2	495	502.351.00.1	505	502.780.14.1	816	502.973.FY.1	831
502.319.01.3	495	502.352.00.1	505	502.781.00.1	816	502.973.SX.1	831
502.319.JH.1	495	502.353.00.1	505	502.781.14.1	816	502.974.00.1	832
502.319.JK.1	495	502.354.00.1	505	502.782.00.1	816	502.974.79.1	832
502.319.JK.2	495	502.356.00.1	578	502.782.14.1	816	502.974.FY.1	832
502.319.JL.1	495	502.356.01.1	578	502.783.00.1	816	502.974.SX.1	832
502.319.JR.1	495	502.356.14.1	578	502.783.14.1	816	502.975.00.1	833
502.320.01.1	496	502.356.JK.1	578	502.784.00.1	816	502.975.79.1	833
502.320.01.3	496	502.356.JL.1	578	502.784.14.1	816	502.975.FY.1	833
502.320.JH.1	496	502.357.00.1	578	502.785.00.1	816	502.975.SX.1	833
502.320.JK.1	496	502.357.01.1	578	502.785.14.1	816	502.976.00.1	834
502.320.JL.1	496	502.357.14.1	578	502.786.00.1	816	502.976.79.1	834
502.320.JR.1	496	502.357.JK.1	578	502.786.14.1	816	502.976.FY.1	834
502.321.01.1	497	502.357.JL.1	578	502.787.00.1	816	502.976.SX.1	834
502.321.01.3	497	502.358.00.1	578	502.787.14.1	816	502.977.00.1	835
502.321.JH.1	497	502.358.01.1	578	502.793.00.1	737	502.977.79.1	835
502.321.JK.1	497	502.358.14.1	578	502.796.00.1	817	502.977.FY.1	835
502.321.JL.1	497	502.358.JK.1	578	502.797.00.1	817	502.977.SX.1	835
502.321.JR.1	497	502.358.JL.1	578	502.798.00.1	817	502.978.00.1	836
502.322.01.1	497	502.359.00.1	578	502.799.00.1	817	502.978.79.1	836
502.322.01.3	497	502.359.01.1	578	502.800.00.1	818	502.978.FY.1	836
502.322.JH.1	497	502.359.14.1	578	502.803.00.1	814	502.978.SX.1	836
502.322.JK.1	497	502.359.JK.1	578	502.804.00.1	814	503.001.01.1	562
502.322.JL.1	497	502.359.JL.1	578	502.805.00.1	814	503.001.01.2	562
502.322.JR.1	497	502.360.00.1	578	502.806.00.1	814	503.001.01.3	562
502.323.01.1	496	502.360.01.1	578	502.807.00.1	814	503.001.JH.1	562
502.323.01.3	496	502.360.14.1	578	502.808.00.1	814	503.001.JK.1	562
502.323.JH.1	496	502.360.JK.1	578	502.809.00.1	814	503.001.JK.2	562
502.323.JK.1	496	502.360.JL.1	578	502.810.00.1	814	503.001.JR.1	562
502.323.JL.1	496	502.361.00.1	578	502.811.00.1	814	503.002.01.1	563
502.323.JR.1	496	502.361.01.1	578	502.812.00.1	814	503.002.01.2	563
502.324.01.1	625	502.361.14.1	578	502.813.00.1	814	503.002.01.3	563
502.324.01.3	625	502.361.JK.1	578	502.814.00.1	814	503.002.JH.1	563
502.324.JH.1	625	502.361.JL.1	578	502.815.00.1	814	503.002.JK.1	563
502.324.JK.1	625	502.362.00.1	578	502.816.00.1	814	503.002.JK.2	563
502.324.JL.1	625	502.362.01.1	578	502.825.00.1	583	503.002.JR.1	563
502.324.JR.1	625	502.362.14.1	578	502.860.00.1	711	503.003.01.1	564
502.325.01.1	625	502.362.JK.1	578	502.959.00.1	850	503.003.01.2	564
502.325.01.3	625	502.362.JL.1	578	502.965.00.1	852	503.003.01.3	564
502.325.JH.1	625	502.380.00.1	640	502.966.00.1	851	503.003.JH.1	564
502.325.JK.1	625	502.381.00.1	640	502.969.01.1	853	503.003.JK.1	564
502.325.JL.1	625	502.381.JT.1	640	502.969.79.1	853	503.003.JK.2	564
502.325.JR.1	625	502.382.00.1	643	502.969.FY.1	853	503.003.JR.1	564
502.326.01.3	504	502.384.00.1	649	502.969.SX.1	853	503.004.01.1	564
502.326.JK.1	504	502.387.00.1	788	502.970.01.1	853	503.004.01.2	564
502.326.JL.1	504	502.388.00.1	789	502.970.79.1	853	503.004.01.3	564
502.327.01.3	504	502.717.00.1	581	502.970.FY.1	853	503.004.JH.1	564
502.327.JK.1	504	502.718.00.1	580	502.970.SX.1	853	503.004.JK.1	564
502.327.JL.1	504	502.719.01.1	583	502.971.01.1	854	503.004.JK.2	564
502.328.00.1	505	502.730.00.1	708	502.971.79.1	854	503.004.JR.1	564
502.328.01.3	505	502.734.00.1	708	502.971.FY.1	854	503.005.01.1	564
502.328.14.1	505	502.738.00.1	708	502.971.SX.1	854	503.005.01.2	564

Article number	Page	Article number	Page	Article number	Page	Article number	Page
503.005.01.3	564	503.046.JT.1	637	505.020.01.5	464	505.073.00.3	484
503.005.JH.1	564	503.048.00.1	637	505.020.01.6	460	505.073.00.4	484
503.005.JK.1	564	503.049.JT.1	638	505.021.01.1	464	505.073.00.5	484
503.005.JK.2	564	503.081.00.1	642	505.021.01.2	464	505.073.00.6	484
503.005.JR.1	564	503.105.00.1	756	505.021.01.3	464	505.073.00.7	484
503.006.01.1	564	503.125.00.1	757	505.021.01.4	464	505.073.00.8	484
503.006.01.2	564	503.135.00.1	757	505.021.01.5	464	505.074.00.1	484
503.006.01.3	564	503.159.00.1	736	505.021.01.6	460	505.074.00.2	484
503.006.JH.1	564	503.160.00.1	736	505.022.01.5	464	505.074.00.3	484
503.006.JK.1	564	503.171.00.1	686	505.023.00.1	476	505.074.00.4	484
503.006.JK.2	564	504.051.01.1	662	505.024.00.1	476	505.074.00.5	484
503.006.JR.1	564	504.052.01.1	662	505.025.00.1	476	505.074.00.6	484
503.007.01.1	567	504.053.01.1	662	505.026.00.1	476	505.074.00.7	484
503.007.01.2	567	504.055.00.1	661	505.030.01.6	477	505.074.00.8	484
503.007.01.3	567	504.056.00.1	662	505.031.01.6	477	505.075.00.1	484
503.007.JH.1	567	504.057.00.1	663	505.033.00.1	461	505.075.00.2	484
503.007.JK.1	567	504.058.00.2	658	505.034.00.1	461	505.075.00.3	484
503.007.JK.2	567	504.058.00.3	658	505.035.00.1	461	505.075.00.4	484
503.007.JR.1	567	504.058.01.1	658	505.036.00.1	461	505.075.00.5	484
503.008.01.1	566	504.058.JH.1	658	505.037.00.1	461	505.075.00.6	484
503.008.01.2	566	504.058.JK.1	658	505.038.00.1	461	505.075.00.7	484
503.008.01.3	566	504.059.00.2	659	505.039.00.1	462	505.075.00.8	484
503.008.JH.1	566	504.059.00.3	659	505.040.01.6	475	505.076.00.1	488
503.008.JK.1	566	504.059.01.1	659	505.041.01.6	475	505.076.00.2	488
503.008.JK.2	566	504.059.JH.1	659	505.042.00.1	462	505.076.00.3	488
503.008.JR.1	566	504.059.JK.1	659	505.043.00.1	463	505.076.00.4	488
503.009.01.1	566	505.001.00.1	465	505.044.00.1	463	505.076.00.5	488
503.009.01.2	566	505.002.00.1	465	505.045.00.1	461	505.076.00.6	488
503.009.01.3	566	505.003.00.1	465	505.046.00.1	461	505.076.00.7	488
503.009.JH.1	566	505.004.00.1	465	505.047.00.1	461	505.076.00.8	488
503.009.JK.1	566	505.005.00.1	465	505.048.00.1	461	505.077.00.1	491
503.009.JK.2	566	505.006.00.1	465	505.049.00.1	461	505.077.00.2	491
503.009.JR.1	566	505.007.00.1	466	505.050.00.1	474	505.077.00.3	491
503.010.01.1	569	505.008.00.1	466	505.051.00.1	474	505.077.00.4	491
503.010.01.2	569	505.009.00.1	467	505.052.00.1	474	505.077.00.5	491
503.010.01.3	569	505.010.01.1	468	505.053.00.1	474	505.077.00.6	491
503.010.JH.1	569	505.010.01.2	468	505.058.01.1	478	505.077.00.7	491
503.010.JK.1	569	505.010.01.3	468	505.058.21.1	478	505.077.00.8	491
503.010.JK.2	569	505.010.01.4	468	505.071.00.1	484	505.078.00.1	490
503.010.JR.1	569	505.010.01.5	468	505.071.00.2	484	505.078.00.2	490
503.011.01.1	494	505.011.01.1	468	505.071.00.3	484	505.078.00.3	490
503.011.01.2	494	505.011.01.2	468	505.071.00.4	484	505.078.00.4	490
503.011.01.3	494	505.011.01.3	468	505.071.00.5	484	505.078.00.5	490
503.011.JH.1	494	505.011.01.4	468	505.071.00.6	484	505.078.00.6	490
503.011.JK.1	494	505.011.01.5	468	505.071.00.7	484	505.078.00.7	490
503.011.JK.2	494	505.013.00.1	467	505.071.00.8	484	505.078.00.8	490
503.011.JR.1	494	505.014.00.1	465	505.072.00.1	484	505.079.00.1	491
503.012.01.1	505	505.015.00.1	465	505.072.00.2	484	505.079.00.2	491
503.012.14.1	505	505.016.00.1	465	505.072.00.3	484	505.079.00.3	491
503.012.21.1	505	505.017.00.1	465	505.072.00.4	484	505.079.00.4	491
503.012.JK.1	505	505.018.00.1	460	505.072.00.5	484	505.079.00.5	491
503.016.00.1	1041	505.019.00.1	460	505.072.00.6	484	505.079.00.6	491
503.017.00.1	1041	505.020.01.1	464	505.072.00.7	484	505.079.00.7	491
503.023.00.1	737	505.020.01.2	464	505.072.00.8	484	505.079.00.8	491
503.045.00.1	636	505.020.01.3	464	505.073.00.1	484	505.080.00.1	507
503.046.00.1	637	505.020.01.4	464	505.073.00.2	484	505.082.00.1	507

Article number	Page	Article number	Page	Article number	Page	Article number	Page
505.082.00.2	507	505.264.00.2	486	505.275.00.6	498	505.294.00.6	498
505.082.14.1	478	505.264.00.3	486	505.275.00.7	498	505.294.00.7	498
505.082.21.1	478	505.264.00.4	486	505.276.00.1	498	505.295.00.1	498
505.082.GH.1	478	505.264.00.5	486	505.276.00.2	498	505.295.00.2	498
505.083.00.7	492	505.264.00.6	486	505.276.00.3	498	505.295.00.3	498
505.083.00.8	492	505.264.00.7	486	505.276.00.4	498	505.295.00.4	498
505.090.00.2	506	505.264.00.8	486	505.276.00.5	498	505.295.00.5	498
505.105.00.1	500	505.265.00.1	486	505.276.00.6	498	505.295.00.6	498
505.105.00.2	500	505.265.00.2	486	505.276.00.7	498	505.295.00.7	498
505.110.01.1	655	505.265.00.3	486	505.282.00.1	502	505.303.00.1	502
505.110.01.2	655	505.265.00.4	486	505.282.00.2	502	505.303.00.2	502
505.110.01.3	655	505.265.00.5	486	505.282.00.3	502	505.303.00.3	502
505.110.01.5	655	505.265.00.6	486	505.282.00.4	502	505.303.00.4	502
505.111.01.1	655	505.265.00.7	486	505.282.00.5	502	505.303.00.5	502
505.111.01.2	655	505.265.00.8	486	505.282.00.6	502	505.303.00.6	502
505.111.01.3	655	505.266.00.1	489	505.282.00.7	502	505.303.00.7	502
505.111.01.5	655	505.266.00.2	489	505.283.00.1	502	505.304.00.1	502
505.115.00.1	504	505.266.00.3	489	505.283.00.2	502	505.304.00.2	502
505.115.00.2	504	505.266.00.4	489	505.283.00.3	502	505.304.00.3	502
505.125.00.1	500	505.266.00.5	489	505.283.00.4	502	505.304.00.4	502
505.125.00.2	500	505.266.00.6	489	505.283.00.5	502	505.304.00.5	502
505.135.00.1	504	505.266.00.7	489	505.283.00.6	502	505.304.00.6	502
505.135.00.2	504	505.266.00.8	489	505.283.00.7	502	505.304.00.7	502
505.145.00.1	500	505.271.00.1	498	505.284.00.1	502	505.305.00.1	502
505.145.00.2	500	505.271.00.2	498	505.284.00.2	502	505.305.00.2	502
505.155.00.1	504	505.271.00.3	498	505.284.00.3	502	505.305.00.3	502
505.155.00.2	504	505.271.00.4	498	505.284.00.4	502	505.305.00.4	502
505.165.00.1	504	505.271.00.5	498	505.284.00.5	502	505.305.00.5	502
505.165.00.2	504	505.271.00.6	498	505.284.00.6	502	505.305.00.6	502
505.175.00.1	500	505.271.00.7	498	505.284.00.7	502	505.305.00.7	502
505.175.00.2	500	505.272.00.1	498	505.285.00.1	502	505.313.00.1	498
505.261.00.1	486	505.272.00.2	498	505.285.00.2	502	505.313.00.2	498
505.261.00.2	486	505.272.00.3	498	505.285.00.3	502	505.313.00.3	498
505.261.00.3	486	505.272.00.4	498	505.285.00.4	502	505.313.00.4	498
505.261.00.4	486	505.272.00.5	498	505.285.00.5	502	505.313.00.5	498
505.261.00.5	486	505.272.00.6	498	505.285.00.6	502	505.313.00.6	498
505.261.00.6	486	505.272.00.7	498	505.285.00.7	502	505.313.00.7	498
505.261.00.7	486	505.273.00.1	498	505.286.00.1	502	505.314.00.1	498
505.261.00.8	486	505.273.00.2	498	505.286.00.2	502	505.314.00.2	498
505.262.00.1	486	505.273.00.3	498	505.286.00.3	502	505.314.00.3	498
505.262.00.2	486	505.273.00.4	498	505.286.00.4	502	505.314.00.4	498
505.262.00.3	486	505.273.00.5	498	505.286.00.5	502	505.314.00.5	498
505.262.00.4	486	505.273.00.6	498	505.286.00.6	502	505.314.00.6	498
505.262.00.5	486	505.273.00.7	498	505.286.00.7	502	505.314.00.7	498
505.262.00.6	486	505.274.00.1	498	505.293.00.1	498	505.315.00.1	498
505.262.00.7	486	505.274.00.2	498	505.293.00.2	498	505.315.00.2	498
505.262.00.8	486	505.274.00.3	498	505.293.00.3	498	505.315.00.3	498
505.263.00.1	486	505.274.00.4	498	505.293.00.4	498	505.315.00.4	498
505.263.00.2	486	505.274.00.5	498	505.293.00.5	498	505.315.00.5	498
505.263.00.3	486	505.274.00.6	498	505.293.00.6	498	505.315.00.6	498
505.263.00.4	486	505.274.00.7	498	505.293.00.7	498	505.315.00.7	498
505.263.00.5	486	505.275.00.1	498	505.294.00.1	498	505.323.00.1	502
505.263.00.6	486	505.275.00.2	498	505.294.00.2	498	505.323.00.2	502
505.263.00.7	486	505.275.00.3	498	505.294.00.3	498	505.323.00.3	502
505.263.00.8	486	505.275.00.4	498	505.294.00.4	498	505.323.00.4	502
505.264.00.1	486	505.275.00.5	498	505.294.00.5	498	505.323.00.5	502

Article number	Page	Article number	Page	Article number	Page	Article number	Page
505.323.00.6	502	505.814.00.1	513	510.054.00.1	653	510.074.01.1	660
505.323.00.7	502	505.814.00.2	513	510.054.00.5	653	510.074.JH.1	660
505.324.00.1	502	505.815.00.1	513	510.055.00.1	653	510.074.JK.1	660
505.324.00.2	502	505.815.00.2	513	510.056.00.1	654	510.075.00.2	660
505.324.00.3	502	505.820.00.1	510	510.057.00.1	654	510.075.00.3	660
505.324.00.4	502	505.820.00.2	510	510.058.00.1	654	510.075.01.1	660
505.324.00.5	502	505.820.00.7	510	510.059.00.1	655	510.075.JH.1	660
505.324.00.6	502	505.821.00.1	510	510.060.00.1	655	510.075.JK.1	660
505.324.00.7	502	505.821.00.2	510	510.061.00.1	652	510.076.00.2	660
505.325.00.1	502	505.821.00.7	510	510.061.00.5	652	510.076.00.3	660
505.325.00.2	502	505.822.00.1	511	510.062.00.1	652	510.076.01.1	660
505.325.00.3	502	505.822.00.2	511	510.063.00.1	652	510.076.JH.1	660
505.325.00.4	502	505.822.00.7	511	510.064.00.1	652	510.076.JK.1	660
505.325.00.5	502	505.823.00.1	511	510.065.00.1	652	510.077.00.2	660
505.325.00.6	502	505.823.00.2	511	510.066.00.2	657	510.077.00.3	660
505.325.00.7	502	505.823.00.7	511	510.066.00.3	657	510.077.01.1	660
505.335.00.1	498	505.824.00.1	511	510.066.01.1	657	510.077.JH.1	660
505.335.00.2	498	505.824.00.2	511	510.066.JH.1	657	510.077.JK.1	660
505.335.00.3	498	505.824.00.7	511	510.066.JK.1	657	510.078.00.2	660
505.335.00.4	498	505.825.00.1	511	510.067.00.2	657	510.078.00.3	660
505.335.00.5	498	505.825.00.2	511	510.067.00.3	657	510.078.01.1	660
505.335.00.6	498	505.825.00.7	511	510.067.01.1	657	510.078.JH.1	660
505.335.00.7	498	505.830.00.1	514	510.067.JH.1	657	510.078.JK.1	660
505.345.00.1	502	505.830.00.2	514	510.067.JK.1	657	550.083.00.1	1021
505.345.00.2	502	505.831.00.1	514	510.068.00.2	657	550.570.00.1	1002
505.345.00.3	502	505.831.00.2	514	510.068.00.3	657	550.571.00.1	1002
505.345.00.4	502	505.832.00.1	515	510.068.01.1	657	550.572.00.1	1003
505.345.00.5	502	505.832.00.2	515	510.068.JH.1	657	550.573.00.1	1003
505.345.00.6	502	505.833.00.1	515	510.068.JK.1	657	550.574.00.1	1003
505.345.00.7	502	505.833.00.2	515	510.069.00.2	657	550.575.00.1	1003
505.800.00.1	508	505.834.00.1	515	510.069.00.3	657	550.576.00.1	1003
505.800.00.2	508	505.834.00.2	515	510.069.01.1	657	550.577.00.1	1003
505.800.00.7	508	505.835.00.1	515	510.069.JH.1	657	550.578.00.1	1003
505.801.00.1	508	505.835.00.2	515	510.069.JK.1	657	550.590.00.1	1002
505.801.00.2	508	505.841.00.1	516	510.070.00.2	657	550.591.00.1	1002
505.801.00.7	508	505.841.00.2	516	510.070.00.3	657	550.592.00.1	1003
505.802.00.1	509	505.842.00.1	516	510.070.01.1	657	550.593.00.1	1003
505.802.00.2	509	505.842.00.2	516	510.070.JH.1	657	550.594.00.1	1003
505.802.00.7	509	505.843.00.1	516	510.070.JK.1	657	550.595.00.1	1003
505.803.00.1	509	505.843.00.2	516	510.071.00.2	656	550.596.00.1	1003
505.803.00.2	509	505.844.00.1	516	510.071.00.3	656	550.597.00.1	1003
505.803.00.7	509	505.844.00.2	516	510.071.01.1	656	550.598.00.1	1003
505.804.00.1	509	505.845.00.1	516	510.071.JH.1	656	550.750.00.1	1000
505.804.00.2	509	505.845.00.2	516	510.071.JK.1	656	550.751.00.1	1000
505.804.00.7	509	510.050.00.1	653	510.072.00.2	656	550.752.00.1	1000
505.805.00.1	509	510.050.00.3	653	510.072.00.3	656	550.754.00.1	1001
505.805.00.2	509	510.050.00.5	653	510.072.01.1	656	550.755.00.1	1001
505.805.00.7	509	510.050.00.7	653	510.072.JH.1	656	550.757.00.1	1001
505.810.00.1	512	510.051.00.1	653	510.072.JK.1	656	550.759.00.1	1001
505.810.00.2	512	510.051.00.3	653	510.073.00.2	656	550.760.00.1	1001
505.811.00.1	512	510.051.00.5	653	510.073.00.3	656	550.761.00.1	1001
505.811.00.2	512	510.051.00.7	653	510.073.01.1	656	550.763.00.1	1001
505.812.00.1	513	510.052.00.1	653	510.073.JH.1	656	550.764.00.1	1001
505.812.00.2	513	510.052.00.5	653	510.073.JK.1	656	550.765.00.1	1001
505.813.00.1	513	510.053.00.1	653	510.074.00.2	660	550.766.00.1	1001
505.813.00.2	513	510.053.00.5	653	510.074.00.3	660	550.768.00.1	1001

Article number	Page	Article number	Page	Article number	Page	Article number	Page
550.769.00.1	1001	551.016.DM.1	992	551.108.29.1	984	551.502.00.1	1004
550.770.00.1	1001	551.017.00.1	988	551.108.DM.1	986	551.503.00.1	1004
550.771.00.1	1001	551.017.29.1	990	551.109.00.1	982	551.504.00.1	1004
550.773.00.1	1001	551.017.DM.1	992	551.109.29.1	984	551.505.00.1	1005
550.774.00.1	1001	551.018.00.1	988	551.109.DM.1	986	551.506.00.1	1005
550.775.00.1	1001	551.018.29.1	990	551.110.00.1	982	551.507.00.1	1005
550.776.00.1	1001	551.018.DM.1	992	551.110.29.1	984	551.508.00.1	1007
550.777.00.1	1001	551.019.00.1	988	551.110.DM.1	986	551.509.00.1	1007
550.778.00.1	1001	551.019.29.1	990	551.111.00.1	982	551.510.00.1	1007
550.779.00.1	1001	551.019.DM.1	992	551.111.29.1	984	551.511.00.1	1004
550.790.00.1	1001	551.020.00.1	988	551.111.DM.1	986	551.512.00.1	1004
550.950.00.1	1009	551.020.29.1	990	551.112.00.1	982	551.513.00.1	1005
551.002.00.1	988	551.020.DM.1	992	551.112.29.1	984	551.514.00.1	1005
551.002.29.1	990	551.021.00.1	988	551.112.DM.1	986	551.515.00.1	1005
551.002.DM.1	992	551.021.29.1	990	551.113.00.1	982	551.516.00.1	1007
551.003.00.1	988	551.021.DM.1	992	551.113.29.1	984	551.517.00.1	1007
551.003.29.1	990	551.022.00.1	988	551.113.DM.1	986	551.518.00.1	1007
551.003.DM.1	992	551.022.29.1	990	551.114.00.1	982	551.519.00.1	1007
551.004.00.1	988	551.022.DM.1	992	551.114.29.1	984	551.520.00.1	1004
551.004.29.1	990	551.023.00.1	988	551.114.DM.1	986	551.521.00.1	1005
551.004.DM.1	992	551.023.29.1	990	551.115.00.1	982	551.522.00.1	1005
551.005.00.1	988	551.023.DM.1	992	551.115.29.1	984	551.523.00.1	1005
551.005.29.1	990	551.024.00.1	988	551.115.DM.1	986	551.524.00.1	1007
551.005.DM.1	992	551.024.29.1	990	551.116.00.1	982	551.525.00.1	1007
551.006.00.1	988	551.024.DM.1	992	551.116.29.1	984	551.526.00.1	1006
551.006.29.1	990	551.025.00.1	988	551.116.DM.1	986	551.550.00.1	1012
551.006.DM.1	992	551.025.29.1	990	551.117.00.1	982	551.552.00.1	1013
551.007.00.1	988	551.025.DM.1	992	551.117.29.1	984	551.554.00.1	1013
551.007.29.1	990	551.026.00.1	988	551.117.DM.1	986	551.556.00.1	1014
551.007.DM.1	992	551.026.29.1	990	551.118.00.1	982	551.557.00.1	1014
551.008.00.1	988	551.026.DM.1	992	551.118.29.1	984	551.558.00.1	1015
551.008.29.1	990	551.100.00.1	982	551.118.DM.1	986	551.559.00.1	1015
551.008.DM.1	992	551.100.29.1	984	551.119.00.1	982	551.560.00.1	1016
551.009.00.1	988	551.100.DM.1	986	551.119.29.1	984	551.561.00.1	1016
551.009.29.1	990	551.101.00.1	982	551.119.DM.1	986	551.562.00.1	1017
551.009.DM.1	992	551.101.29.1	984	551.120.00.1	982	551.563.00.1	1017
551.010.00.1	988	551.101.DM.1	986	551.120.29.1	984	551.564.00.1	1018
551.010.29.1	990	551.102.00.1	982	551.120.DM.1	986	551.565.00.1	1018
551.010.DM.1	992	551.102.29.1	984	551.121.00.1	982	551.566.00.1	1019
551.011.00.1	988	551.102.DM.1	986	551.121.29.1	984	551.567.00.1	1019
551.011.29.1	990	551.103.00.1	982	551.121.DM.1	986	551.580.00.1	1010
551.011.DM.1	992	551.103.29.1	984	551.122.00.1	982	551.581.00.1	1010
551.012.00.1	988	551.103.DM.1	986	551.122.29.1	984	551.582.00.1	1011
551.012.29.1	990	551.104.00.1	982	551.122.DM.1	986	551.585.00.1	1011
551.012.DM.1	992	551.104.29.1	984	551.123.00.1	982	551.586.00.1	1021
551.013.00.1	988	551.104.DM.1	986	551.123.29.1	984	551.590.00.1	1020
551.013.29.1	990	551.105.00.1	982	551.123.DM.1	986	551.590.29.1	1020
551.013.DM.1	992	551.105.29.1	984	551.124.00.1	982	551.590.DM.1	1020
551.014.00.1	988	551.105.DM.1	986	551.124.29.1	984	551.591.29.1	1020
551.014.29.1	990	551.106.00.1	982	551.124.DM.1	986	551.591.DM.1	1020
551.014.DM.1	992	551.106.29.1	984	551.125.00.1	982	554.001.01.1	1026
551.015.00.1	988	551.106.DM.1	986	551.125.29.1	984	554.002.01.1	1026
551.015.29.1	990	551.107.00.1	982	551.125.DM.1	986	554.003.01.1	1027
551.015.DM.1	992	551.107.29.1	984	551.126.00.1	982	554.004.01.1	1027
551.016.00.1	988	551.107.DM.1	986	551.126.29.1	984	554.005.01.1	1027
551.016.29.1	990	551.108.00.1	982	551.126.DM.1	986	554.014.01.1	1026

Article number	Page
554.015.01.1	1026
554.070.01.1	1029
554.071.01.1	1029
554.072.01.1	1029
554.073.01.1	1029
554.074.01.1	1029
554.100.01.1	1028
554.101.01.1	1028
554.102.01.1	1028
554.103.01.1	1028
554.104.01.1	1028
554.105.01.1	1029
554.106.01.1	1028
554.107.01.1	1028
554.108.01.1	1028
554.910.00.1	1030
554.911.00.1	1030
554.952.00.1	1009
554.952.00.2	1009
554.953.00.1	1009
554.953.00.2	1009
554.955.00.1	1008
554.955.00.2	1008
554.956.00.1	1008
554.956.00.2	1008
554.958.00.1	1008
554.958.00.2	1008
554.959.00.1	1008
554.959.00.2	1008
554.961.00.1	1008
554.961.00.2	1008
554.962.00.1	1008
554.962.00.2	1008
554.964.00.1	1008
554.964.00.2	1008
610.089.21.1	99
610.090.21.1	99
616.042.00.1	98
616.043.00.1	98
854.187.11.1	308
854.188.11.1	308
854.909.11.1	158
894.094.11.1	158

Geberit International Sales AG

CH-8640 Rapperswil
Switzerland

sales@geberit.com

www.geberit-global.com

